

EKCO - A160

CAPACITORS		Values	Locations
C1	I.F. filter tuning	68pF	H4
C2	Aerial coupling	0.002μF	A2
C3	M.W. aerial shunt	0.001μF	A1
C4	L.W. aerial shunt	0.001μF	A2
C5	L.W. aerial trim	56pF	A2
C6	V1 C.G.	100pF	H3
C7	V1 S.G. decoup.	0.1μF	H4
C8	1st I.F. trans.	100pF	B2
C9	tuning	100pF	B2
C10	V1 osc. C.G.	68pF	H3
C11	A.G.C. decoupling	0.1μF	G4
C12	S.W. osc. tracker	0.0047μF	G3
C13	M.W. osc. tracker	607pF	G3
C14	L.W. osc. tracker	230pF	G3
C15	L.W. osc. trimmer	110pF	G3
C16	V2 S.G. decoup.	0.1μF	G4
C17	V2 anode decoup.	0.1μF	G4
C18	2nd I.F. trans.	100pF	C2
C19	tuning	100pF	C2
C20	I.F. by-pass	82pF	F4
C21	P.U. coupling	0.05μF	G4
C22	Parts tone control	470pF	D1
C23	Neg. feed-back	0.02μF	D1
C24	A.F. coupling	4.7pF	F4
C25	A.G.C. coupling	0.01μF	F4
C26	I.F. by-pass	15pF	F4
C27	A.F. coupling	0.001μF	F4
C28	Gram tone corrector	0.002μF	F4
C29	H.T. smoothing	8μF	E4
C30*	Part tone corrector	0.02μF	F3
C31	H.T. smoothing	50μF	C1
C32*	G.B. by-pass	50μF	C1
C33*	S.W. aerial trim	—	A2
C35†	M.W. aerial trim	—	A1
C36†	L.W. aerial trim	—	A2
C38†	Aerial tuning	—	B1
C39†	S.W. osc. trim	—	H4
C40†	M.W. osc. trim	—	G4
C41†	L.W. osc. trim	—	G4
C42†	Oscillator tuning	—	B1

* Electrolytic. † Variable.

‡ Pre-set.

Intermediate Frequency 460 k/cs.

RESISTORS		Values	Locations
R1	Aerial shunt	1MΩ	H4
R2	V1 C.G.	680kΩ	H4
R3	V1 screen grid	18kΩ	H4
R4	potential divider	27kΩ	H4
R5	Osc. C.G. stopper	220Ω	H4
R6	V1 osc. C.G.	47kΩ	H4
R7	Osc. anode feeds	22kΩ	H4
R8	—	68kΩ	H4
R9	V2 S.G. feed	47kΩ	F4
R10	V2 anode decoup.	2.2kΩ	F4
R11	Signal diode load	680kΩ	F4
R12	I.F. stopper	47kΩ	F4
R13	Tone control	1MΩ	D1
R14	Part tone control	220kΩ	D1
R15	Volume control	1MΩ	E3
R16	V3 C.G.	10MΩ	F4
R17	V3 anode load	220kΩ	F4
R18	A.G.C. decoupling	1MΩ	F4
R19	A.G.C. diode load	1MΩ	F4
R20	V4 C.G.	680kΩ	F3
R21	H.T. smoothing	10kΩ	F4
R22	Part tone corrector	4.7MΩ	F3
R23	Neg. feed-back	220Ω	F4
R24	Part tone corrector	10Ω	E4
R25	—	3.3kΩ	E3
R26	H.T. smoothing	680Ω	F3
R27	G.B. potential	33Ω	E3
R28*	divider	84Ω	E3
R29	V5 surge limiter	100Ω	E4


* Two resistors, 190Ω and 150Ω, in parallel.

Valve	Anode		Screen	Cath.
	V	mA	V	mA
V1UCH42	{ 174 Oscillator	2.9 62 1.7	88	2.4
V2UF41	162	5.5	88	1.7
V3UBC41	62	0.23	—	—
V4UL41	160	34.0	110	6.0
V5UY41	200*	—	—	200†

* A.C. reading.

† Cathode current, 55mA

OTHER COMPONENTS		Approx. Values (ohms)	Locations
L1	I.F. filter coil	15	H4
L2	Aerial coupling coils	6.5	A1
L3	—	15.0	A2
L4	—	—	A2
L5	Aerial tuning coils	3.0	A1
L6	—	23.0	A2
L7	—	—	A2
L8	Oscillator reaction coils	0.8	H3
L9	—	3.0	G3
L10	—	—	G3
L11	Oscillator tuning coils	2.3	H3
L12	—	7.5	G3
L13	—	—	G3
L14	1st I.F. trans. { Pri.	12.0	B2
L15	Sec.	12.0	B2
L16	2nd I.F. trans. { Pri.	12.0	C2
L17	Sec.	12.0	C2
L18	Speech coil	2.5	—
T1	O.P. trans. { a	400.0	F3
T2	b	40.0	—
S1-S12	Mains { a	40.0	D2
S13	b	85.0	—
S14	c, total	40.0	—
Waveband switches		—	H3
Speaker switch		—	G4
Mains sw., g'd R15		—	E3

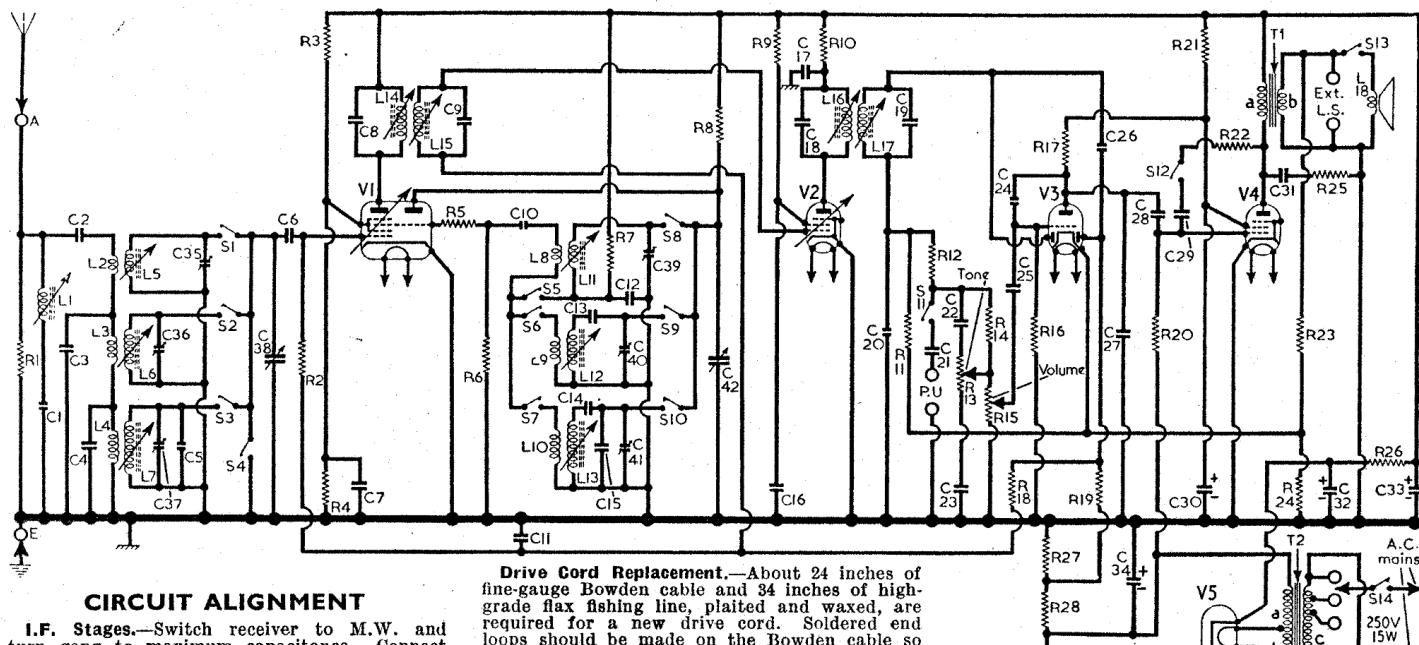

CIRCUIT ALIGNMENT

I.F. Stages.—Switch receiver to M.W. and turn gang to maximum capacitance. Connect output of signal generator, via an 0.1μF capacitor in each lead, to control grid (pin 6) of V1 and chassis. Feed in a 460kc/s (652.1 m) signal and adjust the cores of L17 (location reference C2), L16 (F4), L15 (B2) and L14 (G4) for maximum output.

R.F. and Oscillator Stages.—Check that with the gang at maximum capacitance, the cursor coincides with the vertical lines at the high wavelength ends of the S.W. and L.W. tuning scales. Transfer signal generator to A and E.


I.F. Filter.—Feed in a 460 kc/s signal and adjust the core of L1 for minimum output.

S.W.—Switch receiver to S.W., tune to 16.67 m, feed in a 16.67 m (18 Mc/s) signal and adjust C39 (H4) and C35 (A2) for maximum output. Tune receiver to 33.34 m, feed in a 33.34 m (9 Mc/s) signal and adjust cores of L11 (H3) and L5 (A2) for maximum output.


M.W.—Switch receiver to M.W., tune to 214.3 m, feed in a 214.3 m (1,400 kc/s) signal and adjust C40 (G4) and C36 (A1) for maximum output. Tune receiver to 333.4 m, feed in a 333.4 m (800 kc/s) signal and adjust the cores of L12 (G3) and L6 (A1) for maximum output.

L.W.—Switch receiver to L.W., tune to 1,000 m, feed in a 1,000 m (300 kc/s) signal and adjust C41 (G4) and C37 (A2) for maximum output. Tune receiver to 1,429 m, feed in a 1,429 m (210 kc/s) signal and adjust the cores of L13 (G3) and L7 (A2) for maximum output.

Drive Cord Replacement.—About 24 inches of fine-gauge Bowden cable and 34 inches of high-grade flax fishing line, plaited and waxed, are required for a new drive cord. Soldered end loops should be made on the Bowden cable so that it measures 21½ inches overall. One end of the length of drive cord should be tied to one of these soldered loops, and the complete drive then run as shown in the sketch beneath the plan view on this page.

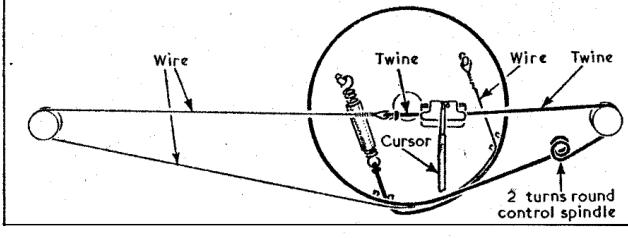

Left: Sketch of the drive cord system with gang at maximum.

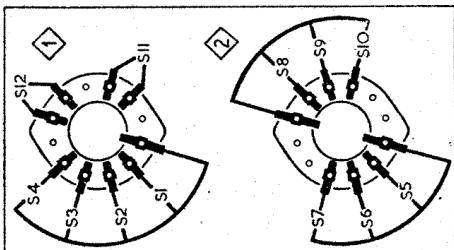

Waveband switches.