

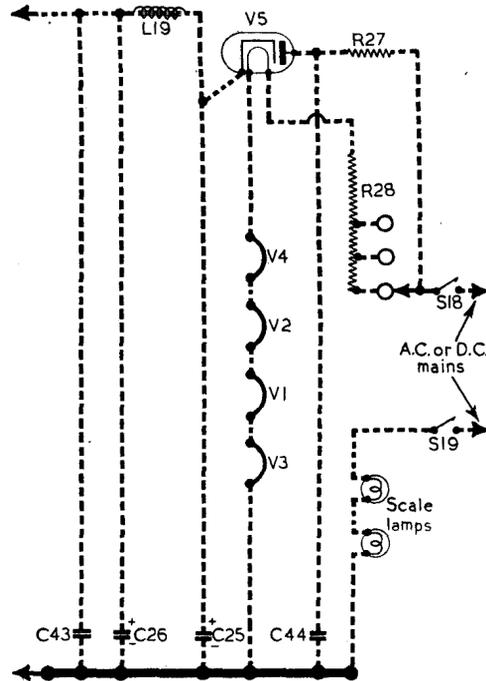
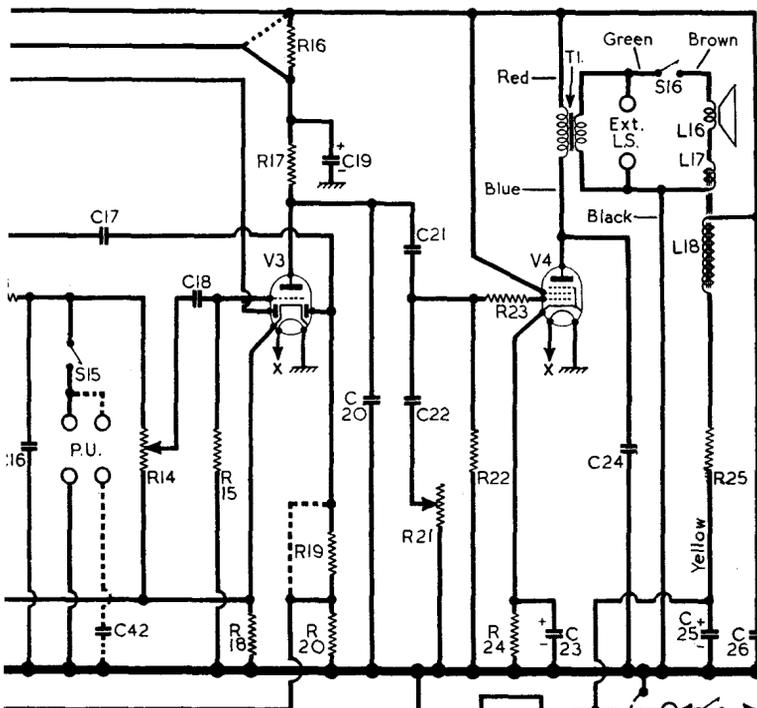


FERGUSON - 259

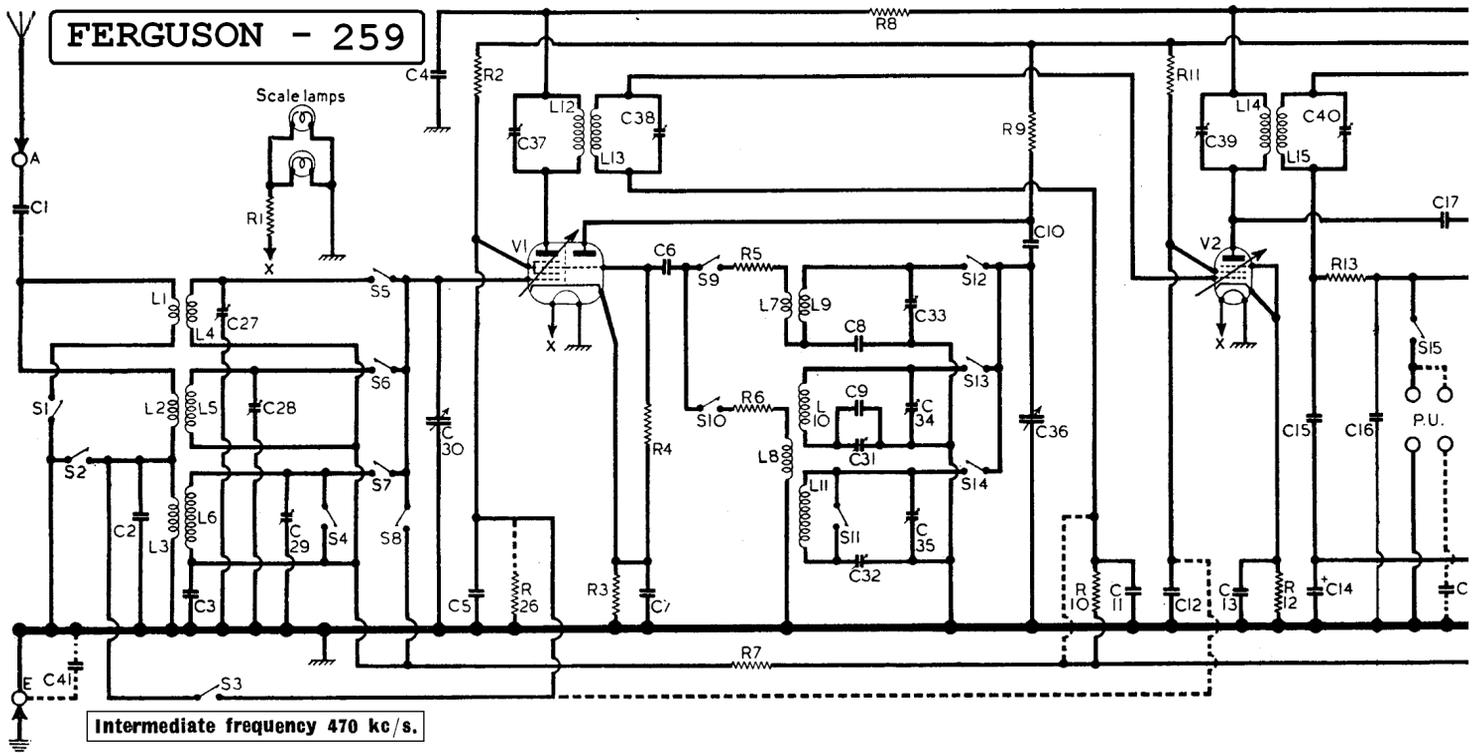



The tuning drive system in the radio-gram, seen from front right when the gang is at maximum.

DRIVE CORD REPLACEMENT

Two separate drive cords are used in the table receivers; the gang drive cord and the cursor drive cord. A single cord is used in the radio-gram for both functions. The cords are made of good quality plaited flax waxed fishing twine.

Table Model.—Where both cords are to be replaced it is advisable to fit the cursor drive first. In any case, it is important to see that both sides of the gang drive cord are in front of, or behind, the cursor drive cord, as otherwise the two will bind.

Cursor Drive.—About five feet of cord is required, both ends of which are tied to opposite ends of the tension spring to form a complete loop. The overall length of the cord when thus tied was 30½ inches in our sample, and the overall length of the spring was 3½ in when relaxed.

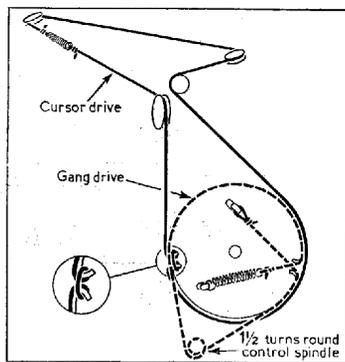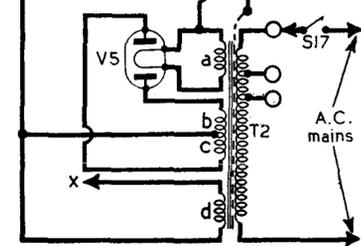

The tuning drive system in the table models, seen from front right when the gang is at maximum. The cursor drive is shown solid, and the gang drive dotted.

Valve	Anode		Screen		Cath.
	V	mA	V	mA	
V1 ECH35	A.C. Model				
	242	2.4	90	2.5	2.2
	Oscillator				
	108	3.9			
	V2 EF39	258	7.3	105	2.2
V3 EBC33	105	2.2	—	—	2.0
V4 EL33	245	38.0	258	4.0	4.2
V5 AZ31	330†	—	—	—	340.0
V1 CCH35	A.C./D.C. Model				
	182	1.8	75	2.3	1.8
	Oscillator				
	105	3.9			
	V2 EF39	205	4.2	75	1.2
V3 EBC33	70	0.9	—	—	1.7
V4 CL33	195	44.0	205	5.0	7.2
V5 CY31	207†	—	—	—	223.0

† A.C.

Having made the large loop, measure off 16in from one end of the spring and fold the cord into a small loop, turn the gang to maximum, and pass the small loop through the hole in the drum groove as shown in the sketch below, hooking it over the two little claws just inside the rim of the drum as shown inset. It is then a simple matter to run the cord round the pulleys as shown, commencing by passing the short cord over the large pulley on the front of the scale assembly, so that the spring is beneath the scale backing plate.

Gang Drive.—Take about 30 inches of cord, pass one end into the drum through the second hole in the groove, tie a small loop in it, and hook it over one of the anchor tags as shown in our sketch. Run the cord as shown, taking care not to cross the cursor cord, pass the end into the drum again and tie to the spring, which should expand to something approaching twice its length when hooked to its anchor.

Radio-gram Drive.—A single length of cord, 50 inches long between its terminating knots, is run as shown in the sketch in col. 4.


Resistors	A.C.		A.C./D.C.	
	Values	Locations	Values	Locations
R1	2Ω	C4	—	C4
R2	100kΩ	E4	25kΩ	E4
R3	220Ω	F4	220Ω	F4
R4	47kΩ	F4	47kΩ	F4
R5	47Ω	E3	47Ω	E3
R6	2kΩ	E4	2kΩ	E4
R7	1MΩ	D4	1MΩ	D4
R8	4.7kΩ	E4	4.7kΩ	E4
R9	22kΩ	F4	22kΩ	F4
R10	1MΩ	D4	—	—
R11	100kΩ	E4	100kΩ	E4
R12	220Ω	E4	220Ω	E4
R13	100kΩ	D4	100kΩ	D4
R14	500kΩ	C3	500kΩ	C3
R15	2.2MΩ	D4	2.2MΩ	D4
R16	3kΩ	E4	10kΩ	E4
R17	47kΩ	D4	100kΩ	D4
R18	1kΩ	E3	1kΩ	E3
R19	680kΩ	D4	—	—
R20	680kΩ	D4	1MΩ	D4
R21	100kΩ	C4	100kΩ	C4
R22	680kΩ	D4	470kΩ	D4
R23	4.7kΩ	D4	4.7kΩ	D4
R24	100Ω	C3	150Ω	C3
R25	500Ω†	Spkr.	—	—
R26	—	—	33kΩ	F4
R27	—	—	100Ω	C4
R28	—	—	860Ω‡	B1

† Value depends on resistance of L18.
‡ Tapped at 680Ω + 90Ω + 90Ω.

Capacitors	A.C.		A.C./D.C.	
	Values	Locations	Values	Locations
C1	100pF	F3	100pF	F3
C2	150pF	F3	150pF	F3
C3	0.05μF	F3	0.05μF	F3
C4	0.1μF	E4	0.1μF	F4
C5	0.1μF	F3	0.1μF	F3
C6	100pF	F4	100pF	F4
C7	0.1μF	F3	0.1μF	F3
C8	3,550pF	E3	3,550pF	E3
C9	250pF	E3	250pF	E3
C10	100pF	F4	100pF	F4
C11	0.05μF	D3	0.05μF	D3
C12	0.1μF	E3	0.1μF	E3
C13	0.1μF	E4	0.1μF	E4
C14*	25μF	D3	25μF	D3
C15	100pF	D4	100pF	D4
C16	100pF	D4	100pF	D4
C17	100pF	D4	100pF	D4
C18	0.02μF	D4	0.02μF	D4
C19*	8μF	B2	8μF	B2
C20	100pF	D4	—	—
C21	0.02μF	D4	0.02μF	D4
C22	0.01μF	C4	0.01μF	C4
C23*	25μF	C3	25μF	C3
C24	0.005μF	C4	0.005μF	C4
C25*	16μF	B2	16μF	B2
C26*	24μF	B2	24μF	B2
C27†	40pF	F3	40pF	F3
C28†	40pF	F3	40pF	F3
C29†	80pF	F3	80pF	F3
C30†	528pF	A2	528pF	A2
C31†	300pF	E3	300pF	E3
C32†	300pF	E3	300pF	E3
C33†	40pF	E3	40pF	E3
C34†	40pF	E3	40pF	E3
C35†	80pF	E3	80pF	E3
C36†	528pF	A2	528pF	A2
C37†	180pF	A2	180pF	A2
C38†	180pF	A2	180pF	A2
C39†	180pF	A2	180pF	A2
C40†	180pF	A2	180pF	A2
C41	—	—	0.005μF	F4
C42	—	—	0.1μF	D4
C43	—	—	0.1μF	D3
C44	—	—	0.01μF	C4

* Electrolytic. † Variable. ‡ Pre-set.

Waveband Switch Units and Diagrams

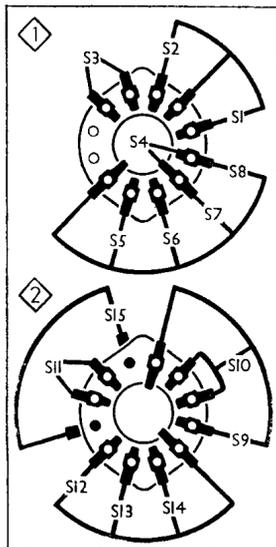

Diagrams of the two waveband switch units (left) as seen in the direction of the arrows in the under-chassis view. On the right is the associated table.

Switch	S.W.	M.W.	L.W.	Gram.
S1	C	—	—	—
S2	—	C	—	—
S3	—	—	—	C
S4	—	C	—	C
S5	C	—	—	—
S6	—	C	—	—
S7	—	—	C	—
S8	—	—	—	C
S9	C	—	—	—
S10	—	C	C	—
S11	—	C	—	—
S12	C	—	—	—
S13	—	C	—	—
S14	—	—	C	—
S15	—	—	—	C

CIRCUIT ALIGNMENT

If the bottom cover is removed, the complete alignment can be performed without removing the chassis from the cabinet.

I.F. Stages.—Switch set to M.W. and turn gang and volume control to maximum. Connect signal generator leads, via a 0.01 μF capacitor in each lead, to control grid (top cap) of V1 and chassis, removing the existing top cap connector and connecting instead a 500 kΩ resistor between the valve cap and chassis.

Feed in a 470 kc/s (638.3 m) signal, and adjust C40, C39, C38 and C37 (location reference A2) for maximum output, keeping the input low to avoid A.G.C. action.

R.F. and Oscillator Stages.—With the gang at maximum capacitance the cursor should be vertical and coincident with the high wavelength ends of the tuning scales. It may be adjusted in position by rotating the drive drum on its spindle, after slackening the two fixing screws. Transfer "live" signal generator lead to "A" socket, via a suitable dummy aerial. Replace V1 top cap and remove the 500 kΩ resistor.

OTHER COMPONENTS		Approx. Values (ohms)	Locations
L1	Aerial coupling coils ...	4.0	F3
L2		4.0	F3
L3		7.0	F3
L4	Aerial tuning coils	Very low	F3
L5		3.5	F3
L6		32.0	F3
L7	Oscillator reaction coils ...	Very low	E3
L8		4.5	E3
L9	Oscillator tuning coils ...	Very low	E3
L10		3.0	E3
L11		7.0	E3
L12	1st I.F. trans. { Pri. ...	8.5	A2
L13		8.5	A2
L14	2nd I.F. trans. { Pri. ...	8.5	A2
L15		8.5	A2
L16	Speech coil ...	1.5	—
L17	Hum neut. coil ...	0.3	—
L18	Field coil ...	1,100Ω†	—
L19	Smoothing choke ...	130.0	D3
T1	Output trans. { Pri. ...	360.0	Spk'r
		0.3	Spk'r
		29.0	—
		0.2	B2
T2	Mains trans. { Pri. (total) ...	615.0	—
		0.2	—
		0.2	—
		0.2	—
S1-S14	W/band switches ...	—	F4
S15	P.U. switch ...	—	F4
S16	Speaker muting ...	—	C4
S17	Mains sw.; g'd R21	—	C4
S18-S19	Mains sw's., g'd R21	—	C4

† See "Chassis Divergencies"

S.W.—Switch set to S.W., tune to 20 m on scale, feed in a 20 m (15 Mc/s) signal, and adjust C33 (E3) and C27 (F3) for maximum output. Tune to 50 m on scale, feed in a 50 m (6 Mc/s) signal, and check calibration. Adjustments to the tracking may be made by moving the top turn of L9. This should, however, not normally be necessary.

M.W.—Switch set to M.W., tune to 210 m on scale, feed in a 210 m (1,429 kc/s) signal, and adjust C34 (E3) and then C28 (F3) for maximum output. Tune to 500 m on scale, feed in a 500 m (600 kc/s) signal, and adjust C31 (E3) for maximum output. Repeat these adjustments until no improvement results.

L.W.—Switch set to L.W., tune to 850 m on scale, feed in an 850 m (352.9 kc/s) signal, and adjust C35 (E3) and C29 (F3) for maximum output. Tune to 1,875 m on scale, feed in a 1,875 m (160 kc/s) signal, and adjust C32 (E3) for maximum output. Repeat these adjustments until no improvement results.

Chassis Divergencies.—The speaker field L19 varies in D.C. resistance between 1,000 Ω and 1,500 Ω, the balance in the cases of lower values being made up by a series resistor R25. The value of R25 should be 500 Ω for a 1,000 Ω or 1,100 Ω field, and 200 Ω for a 1,200 Ω or 1,300 Ω field. In the 269 RG the field is always 1,500 Ω, and R25 is omitted.

Model 259L has tapings on the mains transformer primary for 110-130 V and 200-250 V. In order to accommodate the heavier primary winding, the separate rectifier heater winding is omitted in the 259L transformer and an indirectly heated rectifier, an EZ35, is used in place of the AZ31, its heater being connected to the common heater winding for the other valves in the receiver. The total D.C. resistance of the primary winding becomes 30 Ω.