

FERGUSON - 321U

Valve	Anode		Screen	Cath.	
	V	mA	V	mA	V
V1 UCH42	{ 184 Oscillator	{ 2.3 75 4.4	75	4.7	—
V2 UBF80	184	3.7	82	1.5	—
V3 UF41	*	0.16	*	*	0.25
V4 UL41	228	40.0	212	7.0	12.5
V5 UY41	220†	—	—	—	232.0

* Readings very low.

† A.C. voltage.

OTHER COMPONENTS		Approx. Values (ohms)	Locations
L1	Aerial coupling coils	2.3	A1
L2		28.0	A2
L3		—	A1
L4	Aerial tuning coils	2.6	A2
L5		30.0	A2
L6	Oscillator tuning coils	3.4	G3
L7		2.5	G3
L8	Osc. reaction coil ...	15.0	G3
L9		1.0	G3
L10	1st I.F. trans. {Pri.	8.0	A2
L11	{Sec.	8.0	A2
L12	2nd I.F. trans. {Pri.	8.0	B2
L13	{Sec.	6.0	B2
L14	Speech coil	2.5	B2
L15	Mains R.F. chokes	3.4	D3
L16		3.4	D3
T1	O.P. trans. {a-b... {c-d... {e-f...	290.0 13.0	B2
S1-S17	Waveband switches	—	F3
S18	Int. L.S. switch ...	—	E4
S19, S20	Mains sw., g'd R17	—	D3

RESISTORS		Values	Locations
R1	M.W. aerial shunt...	3.3kΩ	F3
R2	V1 C.G. ...	1MΩ	G3
R3	{ V1 H.T. pot. divider	18kΩ	G4
R4		27kΩ	G3
R5	V1 osc. C.G. ...	47kΩ	G3
R6	Tracker shunt ...	3.3kΩ	G3
R7	Osc. anode feed ...	22kΩ	G4
R8	Osc. stabilizer ...	220Ω	F3
R9	V2 S.G. feed ...	68kΩ	G4
R10	A.G.C. diode load ...	470kΩ	F4
R11	I.F. stopper ...	100kΩ	B2
R12	P.U. shunt ...	47kΩ	F4
R13	{ A.G.C. diode load ...	470kΩ	E4
R14		470kΩ	E4
R15	Volume control ...	500kΩ	E3
R16	V3 C.G. ...	3.3MΩ	F4
R17	Tone control ...	2.5kΩ	D8
R18	{ Part tone control ...	47kΩ	E4
R19		10kΩ	E4
R20	H.T. decoupling ...	100kΩ	E4
R21	V3 anode load ...	1MΩ	E4
R22	V3 S.G. feed ...	4.7MΩ	E4
R23	V4 C.G. ...	1MΩ	E4
R24	270Ω	E4
R25	{ H.T. smoothing ...	68Ω	D4
R26		1.5kΩ	E3
R27	Ballast resistor ...	1,230Ω	C2
R28	V1, V2 G.B. ...	33Ω	D3
R29	V4 lamp shunt ...	330Ω	E3
R30	Brimistor CZ1 ...	—	E3


¶ Tapped at 130Ω + 700Ω + 200Ω + 200Ω from V5 anode.

* Electrolytic. † Variable. § Pre-set.

§ "Swing" value, min. to max.

CAPACITORS		Values	Locations
C1	Aerial Series	0.001μF	F3
C2	Chassis isolator	0.005μF	G4
C3	Aerial coupling	500pF	F3
C4	V1 C.G. ...	200pF	G3
C5	V1 S.G. decoup. ...	0.1μF	G3
C6	1st I.F. trans. tun-	100pF	A2
C7	ing ...	130pF	A2
C8	V1 osc. C.G. ...	50pF	G4
C9	A.G.C. decoup. ...	0.1μF	G4
C10	S.W. osc. trimmer	30pF	F3
C11	L.W. osc. trimmer	560pF	G3
C12	{ Oscillator trackers	500pF	G3
C13		200pF	F4
C14		0.1μF	F4
C15	Osc. anode coupling	50pF	F4
C16	V2 S.G. decoup. ...	100pF	B2
C17	A.G.C. feed ...	180pF	B2
C18	2nd I.F. trans. tun-	100pF	B2
C19	ing ...	100pF	B2
C20	{ I.F. by-passes ...	100pF	B2
C21		0.05μF	F4
C22	P.U. isolators ...	0.1μF	F4
C23		0.1μF	D4
C24	G.B. decoupling ...	0.1μF	D4
C25	A.F. coupling	0.005μF	F4
C26	H.T. decoupling ...	0.1μF	E3
C27	A.F. coupling	0.003μF	E4
C28	Part tone control ...	0.01μF	E4
C29	Tone corrector ...	0.05μF	E4
C30*	V4 cath. by-pass ...	50μF	E4
C31	Tone corrector ...	115pF	B2
C32*		32μF	D4
C33*	H.T. smoothing ...	24μF	C2
C34*		24μF	C2
C35	Mains R.F. filter ...	0.01μF	E4
C36†	S.W. arial trim ...	40pF	F3
C37	M.W. aerial trim ...	40pF	F3
C38	L.W. aerial trim ...	40pF	F3
C39	Aerial tuning ...	\$528pF	B1
C40	Oscillator tuning ...	\$528pF	B2
C41	S.W. osc. trim. ...	40pF	F4
C42	M.W. osc. trim. ...	40pF	F4
C43	L.W. osc. trim. ...	40pF	F4
C44†	L.W. osc. tracker ...	350pF	G4

Intermediate frequency 470 kc/s.

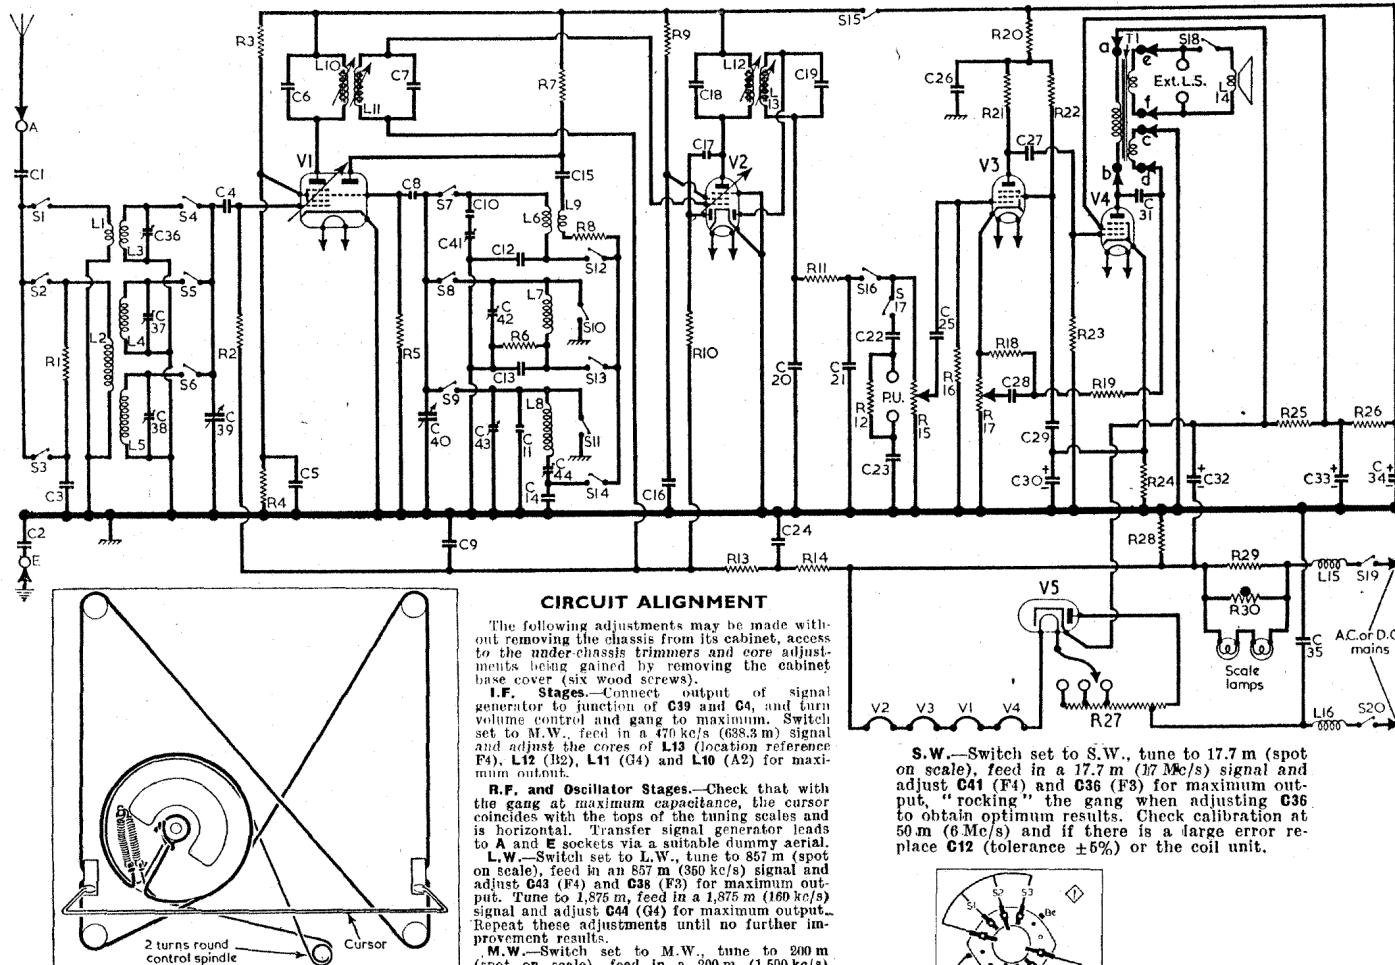

Drive cord system, as seen from the front.

Switches	Gram.	L.W.	M.W.	S.W.
S1	—	—	—	C
S2	C	—	—	—
S3	—	—	—	—
S4	—	—	C	—
S5	—	—	—	—
S6	—	—	—	—
S7	—	—	C	—
S8	—	—	—	—
S9	—	—	C	—
S10	—	—	—	—
S11	—	—	—	—
S12	—	—	C	—
S13	—	—	—	—
S14	—	C	—	—
S15	—	—	—	—
S16	—	C	—	—
S17	C	—	—	—

Diagram of switch units.

