


TABLEAU DES SEMI-CONDUCTEURS D'EQUIPEMENT ET DE REMPLACEMENT

REPERE HEMA	TYPE PIECE GEREE	Br	CODE PIECE GEREE	PIECES DE REMPLACEMENT												AUTR.FOURNIS ^R	
				I.T.T.		MOTOROLA		S.G.S.		TEXAS		SESCO		SILEC			
				TYPE	Br	TYPE	Br	TYPE	Br	TYPE	Br	TYPE	Br	TYPE	Br	TYPE	Br
TRANSISTORS																	
HA101	BC 307 B	2	270TX0517	BC 307 B	2	BC 307 B	2			BC 307 B	2	BC 307 B	2			NATIONAL BC 307 B	2
HA201	ESM 213	15	270TX0990			BD 897 A	15	BDW 23 A	15			ESM 213	15				
HA201	ESM 113	11	270TX0532			MS 1000	11					ESM 113	11				
HH401	BC337-25	20	270TX0544	BC 337-25	20	BC 337-25	20			BC 337-25	20	BC 337-25	20				
HH402	BC 307 B	2	270TX0517	BC 307 B	2	BC 307 B	2			BC 307 B	2	BC 307 B	2			NATIONAL BC 307 B	2
HI101	BF 198	1	270TX0128									BF 198	1				
HI102	BF 199	1	270TX0127	BF 199	1	BF 199	1					BF 199	1			TFK BF 199	1
HI103	BF 199	1	270TX0127	BF 199	1	BF 199	1					BF 199	1			TFK BF 199	1
HL201	BD169TH	18	270TX0749			BD 169 TH	18									TFK BD169-16L	18
HL202	BU 406 D	15	270TX0876			BU 406 D	15	BU 406 D	15			BU104DPTH	15				
HS101	BF 199	1	270TX0127	BF 199	1	BF 199	1					BF 199	1			TFK BF 199	1
HS102	BF 198	1	270TX0128									BF 198	1				
HS103	BF 199	1	270TX0127	BF 199	1	BF 199	1					BF 199	1			TFK BF 199	1
HS104	BC 307 B	2	270TX0517	BC 307 B	2	BC 307 B	2			BC 307 B	2	BC 307 B	2			NATIONAL BC 307 B	2
HT101	BC 237 B	2	270TX0518	BC 237 B	2	BC 237 B	2			BC 237 B	2	BC 237 B	2			NATIONAL BC 237 B	2
HT301	BC 337-16	20	270TX0522	BC 337-16	20	BC 337-16	20			BC 337-16	20	BC 337-16	20				
HT302	BC 337-16	20	270TX0522	BC 337-16	20	BC 337-16	20			BC 337-16	20	BC 337-16	20				
HV101	BC 237 B	2	270TX0518	BC 237 B	2	BC 237 B	2			BC 237 B	2	BC 237 B	2			NATIONAL BC 237 B	2
HV102	BC 337-16	20	270TX0522	BC 337-16	20	BC 337-16	20			BC 337-16	20	BC 337-16	20				
HV501	BF 258	5	270TX0112			BF 758	17					BF 259 BF 258	5 5				
DIODES																	
DA101	BY 251		273TX0407											BA 251			SEMIKRON SKE 2,5/0,2
DA102	BY 251		273TX0407											BA 251			SEMIKRON SKE 2,5/0,2
DA103	BY 251		273TX0407											BA 251			SEMIKRON SKE 2,5/0,2
DA104	BY 251		273TX0407											BA 251			SEMIKRON SKE 2,5/0,2
DA105	BZX46C8V2		273TX0093	BZX46C8V2		BZX46C8V2						BZX46C8V2		BZX46C8V2			
DA106	1 N 4148		273TX0200									1 N 4148					
DA107	1 N 4148		273TX0200									1 N 4148					
DI101	SFD 104		273TX0060									SFD 104					
DI102	1 N 4148		273TX0200									1 N 4148					
DL301	ESM181-500R		273TX0203									ESM181-500R					
DL302	ESM181-500R		273TX0203									ESM181-500R					
DL303	TV18SL		273TX0087														SIEMENS TV 18 SL
DL304	PLR 15 T		273TX0141											PLR 15 T			
DL305	PLR 8 T		273TX0140											PLR 8 T			
DL306	PLR 2 T		273TX0205											PLR 2 T			
DL307	PLR 8 T		273TX0140											PLR 8 T			
DL308	BZX 46C12		273TX0031	BZX46C12		BZX46C12						BZX46C12		BZX46C12			
DS101	1N4148		273TX0200									1 N 4148					
DS102	SFD 104		273TX0060									SFD 104					
DT201	1 N 4002		273TX0034	1 N 4002		1 N 4002				1 N 4002				1 N 4002			
DV101	BZX 85C12		273TX0010	BZX85C12		1 N 4742 A						BZX 85C12		1 N 4742 A			
DV102	1 N 4148		273TX0200									1 N 4148					
DV103	1 N 4148		273TX0200									1 N 4148					
DV104	1 N 4148		273TX0200									1 N 4148					
DV105	1 N 4148		273TX0200									1 N 4148					
C - INTEGRES																	
DH301	TDA1057	8	276TX0103									TDA 1057	8				
JL101	TBA920	2	276TX0131									TBA 920	2				RTC- SIEMENS TBA 920
JS201	TBA 800 A	12	276TX0130					TBA 800	12			TBA 800 A	12				
JT201	TDA 1170 H	12	276TX0234					TBA 800 A	12								
								TDA 1170 H	12								

BROCHAGE DES TRANSISTORS (côté soudures)

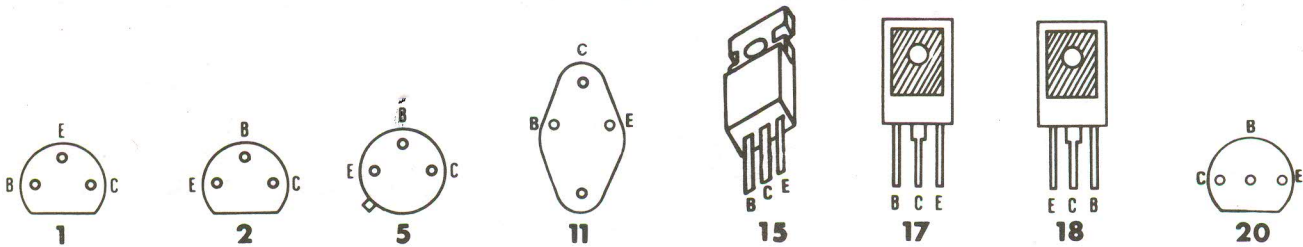

BROCHAGE DES CIRCUITS INTEGRES (côté éléments)

