


Service
Service
Service

AA

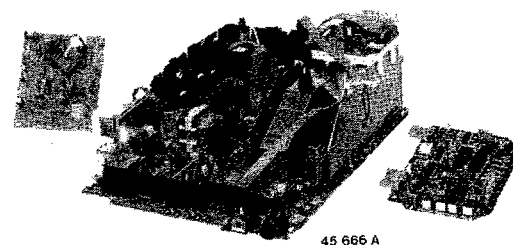


Service Manual

Contents

Page

1.	Block diagram and technical data	1.2
2.	Connection facilities	2.1
3.	Warnings and notes	3.1
4.	Mechanical instructions	4.1
5.	Detailed block diagram	5.1
6.	Electrical diagrams and PCB layouts	
	Operation (Diagram A)	6.1
	Tuner, IF and sound (Diagram B)	6.5
	Video processing (Diagram C)	6.9
	Power supply, synchronization, raster and line (Diagram D)	6.16
	Picture tube module (Diagram F)	6.23
	Mono IF/sound module (Diagram G)	6.30
	Stereo IF/sound module (Diagram H)	6.35
	NICAM IF/sound module (Diagram I)	6.41
	Teletext module (Diagram J)	6.27
	PIP module (Diagram K)	6.47
7.	Electrical settings	7.1
8.	List of fault messages and repair tips	8.1
9.	Directions for use and menus	9.1
10.	Electrical parts lists	10.1

Block diagram

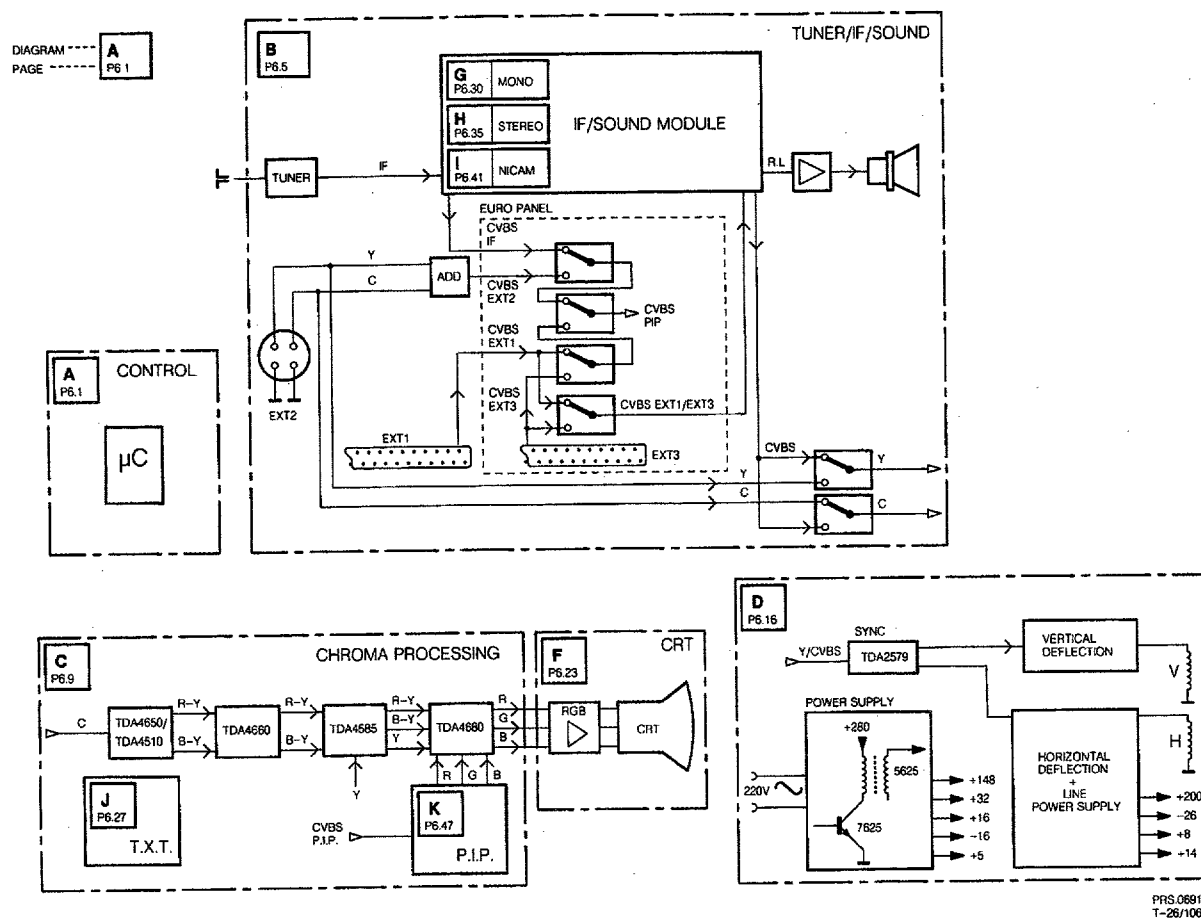

Technical data

Mains voltage	: 220 - 240 V ($\pm 10\%$)
Mains frequency	: 50 Hz ($\pm 10\%$)
Aerial input impedance	: 75 Ω - coax
Minimum aerial voltage	: 40 μ V
Maximum aerial voltage	: 32mV
Pull-in range colour synchronization	: ± 300 Hz
Pull-in range horizontal synchronization	: ± 300 Hz

Local operation functions:

P +; P -; $\triangle$ +; $\triangle$ -; install

Programmes: 0-59

VCR operation on programmes: 0-59

Indications:

- On Screen Display (OSD)
- LED: - standby (red)
 - operation (green)
 - RC5 reception (flashing yellow)
 - internal fault in μP (flashing)

1. Specification of the terminal sockets

EXT1

- 1 - Audio $\rightarrow$ R ($0.5 V_{RMS}; \leq 1 k\Omega$)
- 2 - Audio $\rightarrow$ R ($0.2-2 V_{RMS}; 0.5 V_{nom}; \geq 10 k\Omega$)
- 3 - Audio $\rightarrow$ L ($0.5 V_{RMS}; \leq 1 k\Omega$)
- 4 - Audio $\perp$
- 5 - Blue $\perp$
- 6 - Audio $\rightarrow$ L ($0.2-2 V_{RMS}; 0.5 V_{nom}; \geq 10 k\Omega$)
- 7 - Blue $\rightarrow$ ($0.7 V_{pp}; 75 \Omega$)
- 8 - RC5 $\rightarrow$ (500-800 mV_{pp}) + CVBS status 1 $\rightarrow$ (0-2 V: int.; 9.5-12 V: ext.)
- 9 - Green $\perp$
- 10 - -
- 11 - Green $\rightarrow$ ($0.7 V_{pp}; 75 \Omega$)
- 12 - -
- 13 - Red $\perp$
- 14 - -
- 15 - Red $\rightarrow$ ($0.7 V_{pp}; 75 \Omega$)
- 16 - RGB status $\rightarrow$ (0-0.4 V: int.; 1-3 V: ext.; 75Ω)
- 17 - CVBS $\rightarrow$ $\perp$
- 18 - CVBS $\rightarrow$ $\perp$
- 19 - CVBS $\rightarrow$ ($1 V_{pp}; 75 \Omega$)
- 20 - CVBS $\rightarrow$ ($1 V_{pp}; 75 \Omega$)
- 21 - Earth screen

EXT2

- 1 - $\perp$
- 2 - $\perp$
- 3 - Y $\rightarrow$ ($1 V_{pp}; 75 \Omega$)
- 4 - C $\rightarrow$ ($1 V_{pp}; 75 \Omega$)

2x $\odot$ CINCH Audio $\rightarrow$ L + R ($0.2-2 V_{RMS}; 0.5 V_{nom}; \geq 10 k\Omega$)

Audio out

2x $\odot$ CINCH Audio $\rightarrow$ L + R ($0.5 V_{RMS}; \leq 1 k\Omega$)

Front

$\odot$ d/ϕ 3,5 mm
 $\geq 8 \Omega$

EXT3

- 1 - Audio $\rightarrow$ R ($0.5 V_{RMS}; \leq 1 k\Omega$)
- 2 - Audio $\rightarrow$ R ($0.2-2 V_{RMS}; 0.5 V_{nom}; \geq 10 k\Omega$)
- 3 - Audio $\rightarrow$ L ($0.5 V_{RMS}; \leq 1 k\Omega$)
- 4 - Audio $\perp$
- 5 - -
- 6 - Audio $\rightarrow$ L ($0.2-2 V_{RMS}; 0.5 V_{nom}; \geq 10 k\Omega$)
- 7 - -
- 8 - CVBS status 3 $\rightarrow$ (0-2 V: int.; 9.5-12 V: ext.)
- 9 - -
- 10 - -
- 11 - -
- 12 - -
- 13 - -
- 14 - -
- 15 - -
- 16 - -
- 17 - CVBS $\rightarrow$ $\perp$
- 18 - CVBS $\rightarrow$ $\perp$
- 19 - CVBS $\rightarrow$ ($1 V_{pp}; 75 \Omega$)
- 20 - CVBS $\rightarrow$ ($1 V_{pp}; 75 \Omega$)
- 21 - Earth screen

2. Connecting equipment

Depending on the type of TV set, a variety of equipment can be connected. The exact number of pieces of equipment depends on the number of connectors on the back of the TV set (EXT1, 2 or 3). The wiring diagram in Fig. 2.1 shows which kinds of equipment can be connected. The wiring diagram shows the TV set with the maximum number of connectors possible for the GR2.1 chassis.

An RGB source (e.g. laserdisc player) can only be connected to EXT1. In order to switch the TV set to RGB operation, this RGB source must generate both a CVBS status signal at pin 8 and an RGB status signal at pin 16 of the euroconnector. It is not possible to switch the equipment to EXT1 in RGB operation using the remote control.

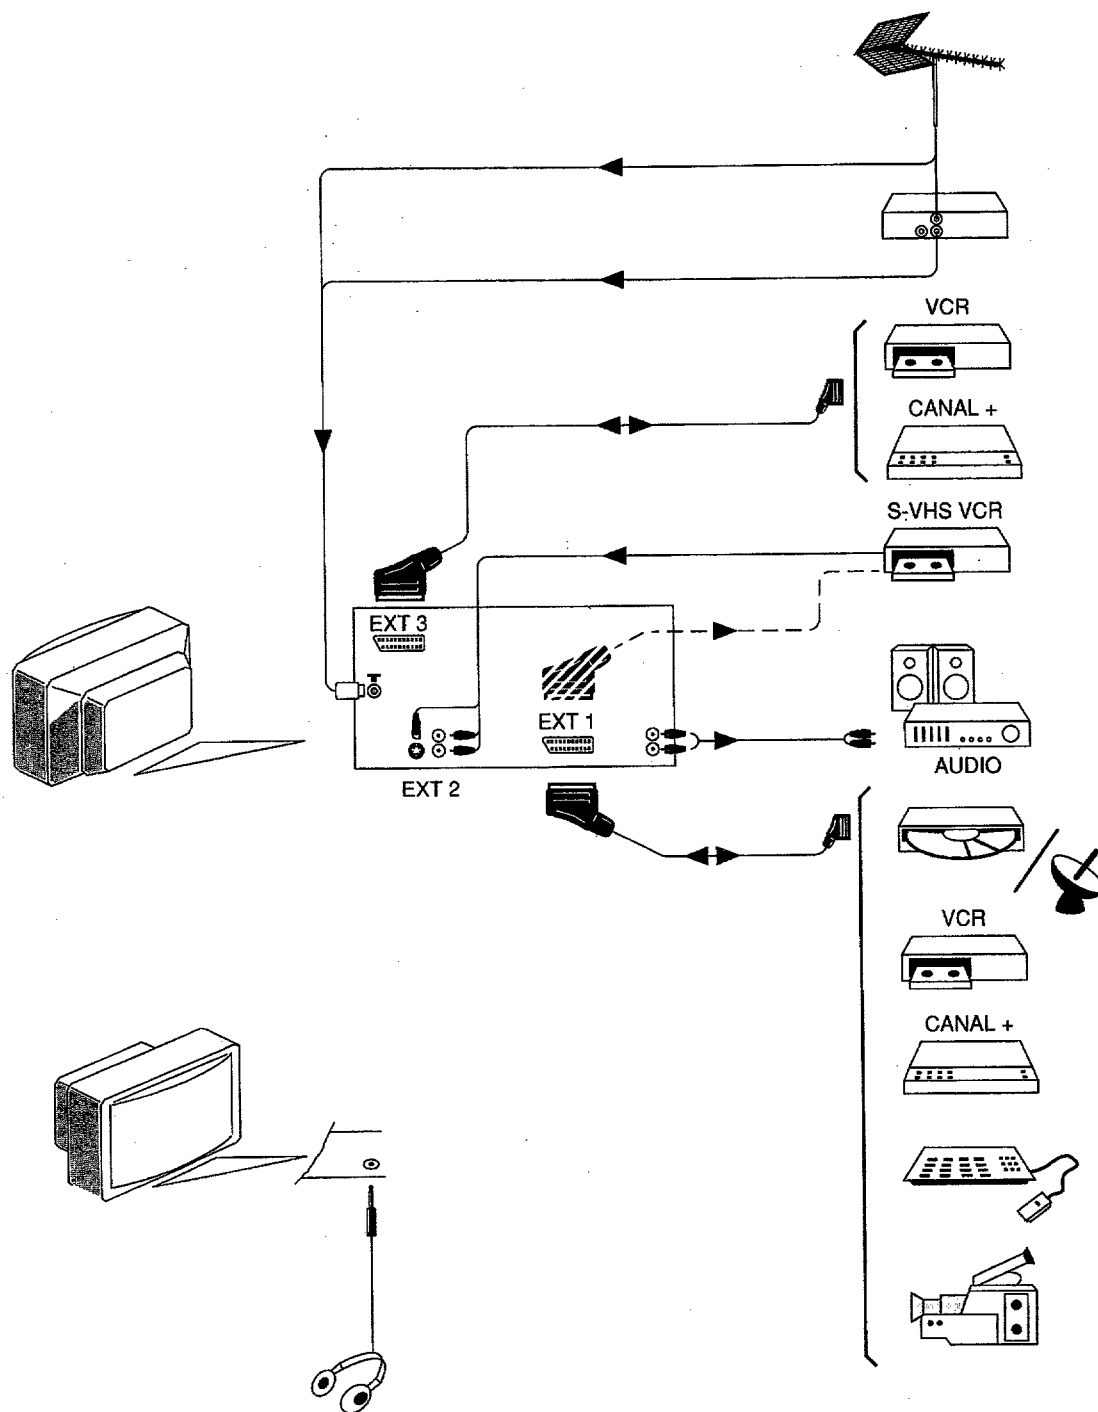


Fig. 2.1

Warnings

1. Safety regulations require that the unit should be returned in its original condition and that components identical to the original components are used. The safety components are indicated by the symbol .
2. In order to prevent damage to ICs and transistors, all high-voltage flashovers must be avoided. In order to prevent damage to the picture tube, it should be discharged using the method shown in Fig.3.1. Use a high-voltage probe and a multimeter (position DC-V). Discharge until the meter reading is OV (after approx. 30s).
3. **ESD** 
All ICs and many other semiconductors are sensitive to electrostatic discharges (ESD). Careless handling during repair can drastically shorten their life. Make sure that during repair you are connected by a pulse band with resistance to the same potential as the earth of the unit. Keep components and tools also at this same potential.
4. When repairing a unit, always connect it to the mains voltage via an isolating transformer.
5. Be careful when taking measurements in the high-voltage section and on the picture tube.
6. Never replace modules or other components while the unit is switched on.
7. It is recommended that safety goggles are worn when replacing the picture tube.
8. When making settings, use plastic rather than metal tools. This will prevent any short circuits and the danger of a circuit becoming unstable.
9. After repair the wiring should be fastened once more in the cable clamps for this purpose.
10. In order to prevent measuring errors, the heat sinks should not be used as reference points for measurements.
The heat sink for the sound output amplifier (next to the channel selector) is connected to the -16 or -12 volts.
11. Together with the deflection unit and any multipole unit, the flat square picture tubes used form an integrated unit. The deflection and the multipole units are set optimally at the factory. Adjustment of this unit during repair is therefore not recommended.
12. The high-voltage cable in 21" units is glued in the line output transformer. This can therefore not be replaced.

Notes

CHASSIS GR2.1 3.1

1. The direct voltages and oscillograms should be measured with regard to the tuner earth ($\perp$), or hot earth ($\perp$ ) as this is called.
2. The direct voltages and oscillograms given in the diagrams should be measured in the service default mode (see section 9). A colour bar signal, modulated on a picture carrier wave of 475.25 MHz, should be used as the video signal. A 1 kHz signal should be used for the sound (for all systems).
3. Where necessary, the oscillograms and direct voltages are measured with () and without aerial signal (). Voltages in the power supply section are measured both for normal operation ($\textcircled{D}$) and in standby ($\textcircled{D}$). These values are indicated by means of the appropriate symbols.
4. The picture tube PCB has printed spark gaps. Each spark gap is connected between an electrode of the picture tube and the Aquadag coating.
5. The semiconductors indicated in the circuit diagram and in the parts lists are completely interchangeable per position with the semiconductors in the unit, irrespective of the type indication on these semiconductors.
6. The connectors used for the modules (board to board) are gold-plated and should only be replaced by the same type.
7. In the case of fault finding and/or repair to the teletext module, the accessibility of the circuit and the components can be increased by using extension cards.
The order numbers of these extension cards are:
* 6 times: 4822 395 30259
* 8 times: 4822 214 31402
8. Both multisystem and single system units are discussed in this documentation.
The term multisystem unit is used to refer to a unit that is suitable for the reception of PAL BGI and SECAM BGLL' systems.
The term single system unit is used to refer to all other units (such as PAL BG, PAL/SECAM BG and PAL I units).
9. Blackline units can be recognized by the thick, protected high-voltage cable. Non-blackline units have a thin, unprotected high-voltage cable.

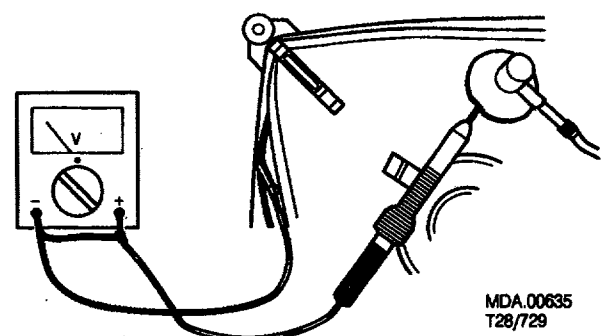


Fig. 3.1

MDA.00635
T28/729

CS 35 555 GB

1. Removing the back plate

It is only possible to remove the back plate after removing the screws on the top, side, possibly on the underneath and possibly under the EXT 3 connection (see Fig. 4.1). In the case of subwoofer units, the subwoofer speaker on the carrier panel should also be unplugged.

2. Service position 1

Service position for module service and to measure test points

Unlock the chassis after the cables of the degaussing coil and any PIP module have been disconnected, and pull it backwards until all test points are accessible (see Fig. 4.2).

In order to make the tuner and the IF/sound module accessible, the bracket above these modules can be removed (see Fig. 4.3). With the exception of one fault message, the unit continues to function normally when the PIP module is not connected.

3. Service position 2

Service position for repair

Place the chassis on the heat sink on the tuner side after service position 1 is reached (see Fig. 4.4).

Warning: make sure that the heat sink of the sound output amplifier does not form a short circuit with the raster/line heat sink if the bracket of the euromodule has been removed!

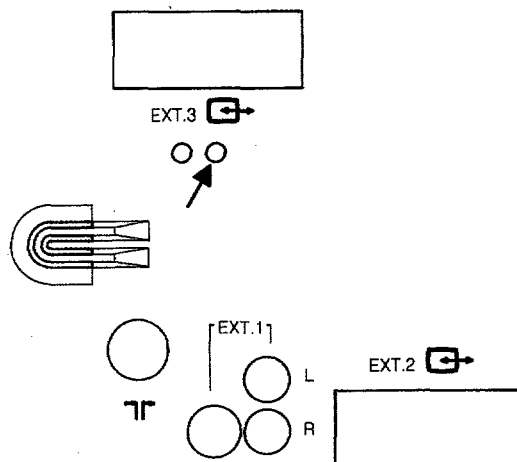


Fig. 4.1

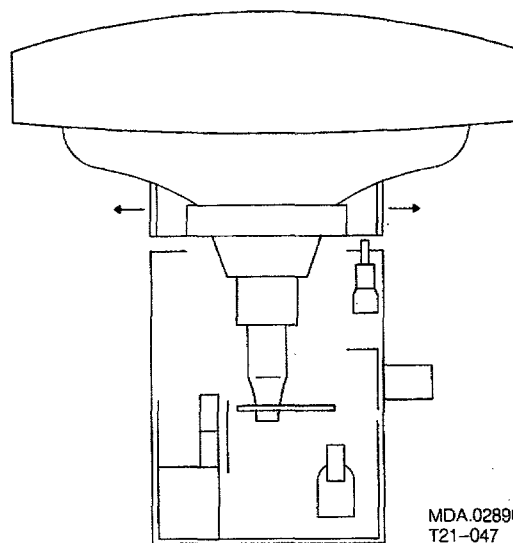
MDA.
02956
T19/106

Fig. 4.2

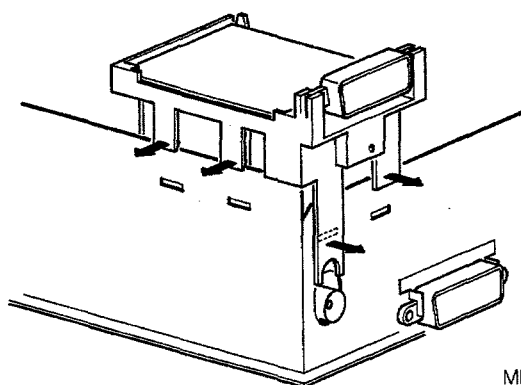
MDA.02890
T21-047

Fig. 4.3




MDA.02955
T19/106


Fig. 4.4



MDA.02889
T21-047

5.1




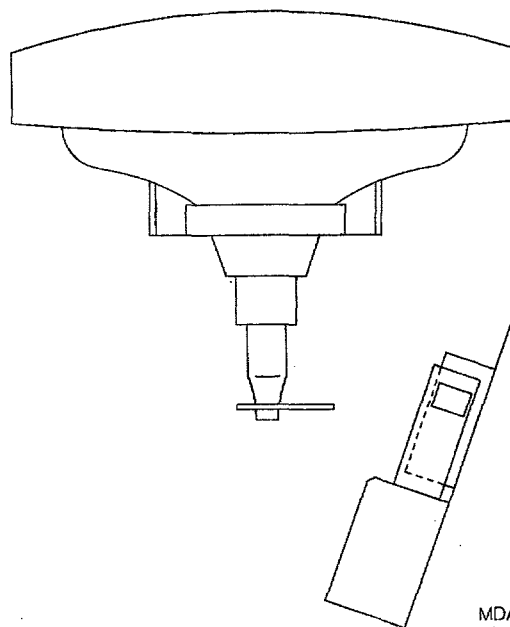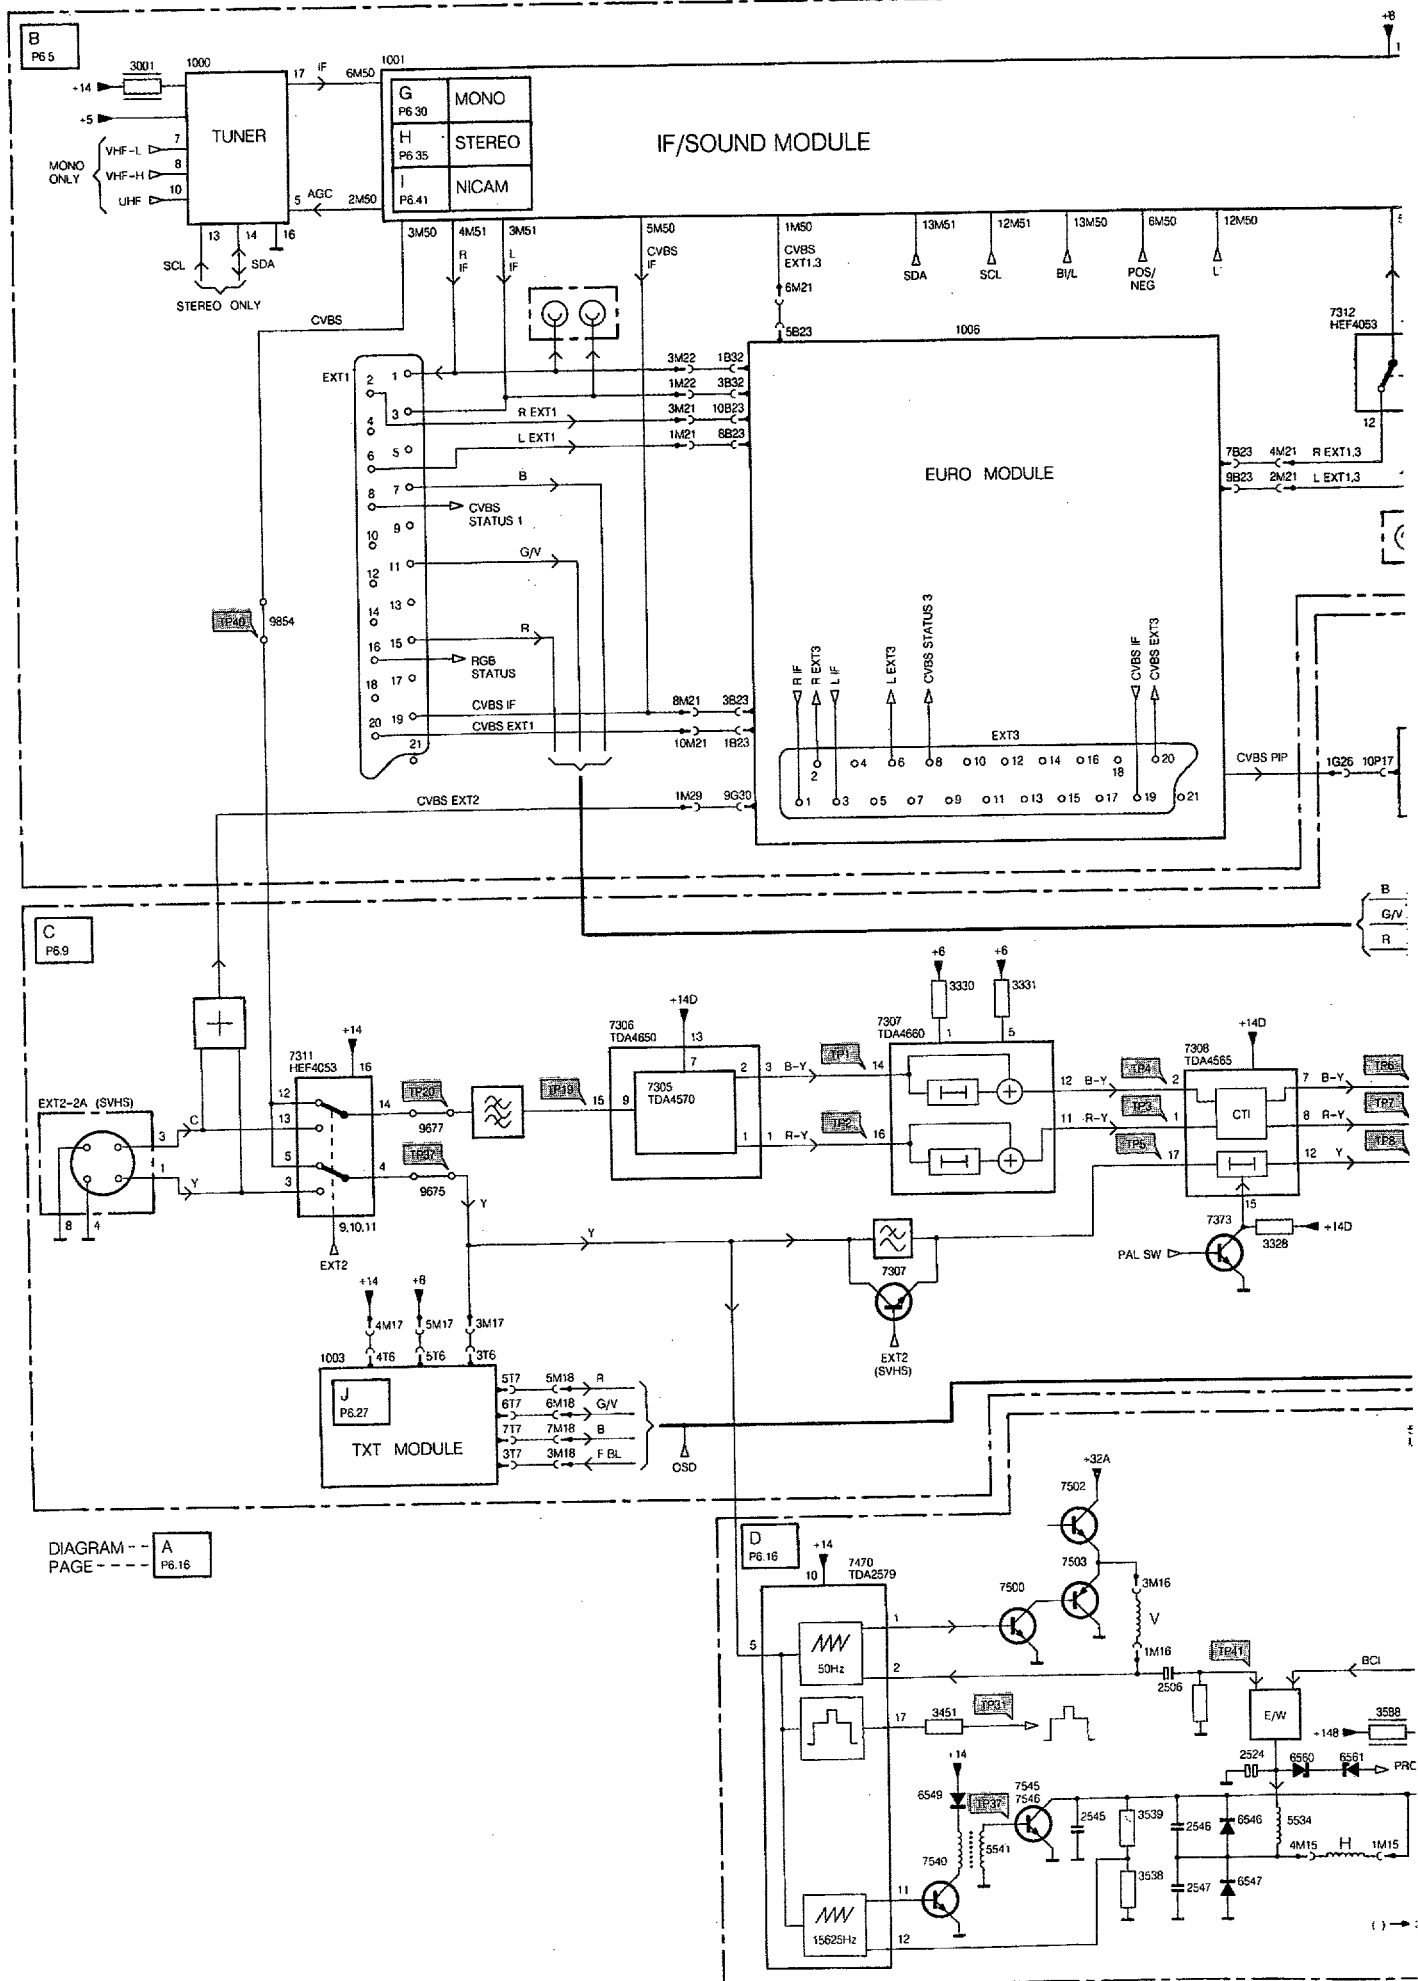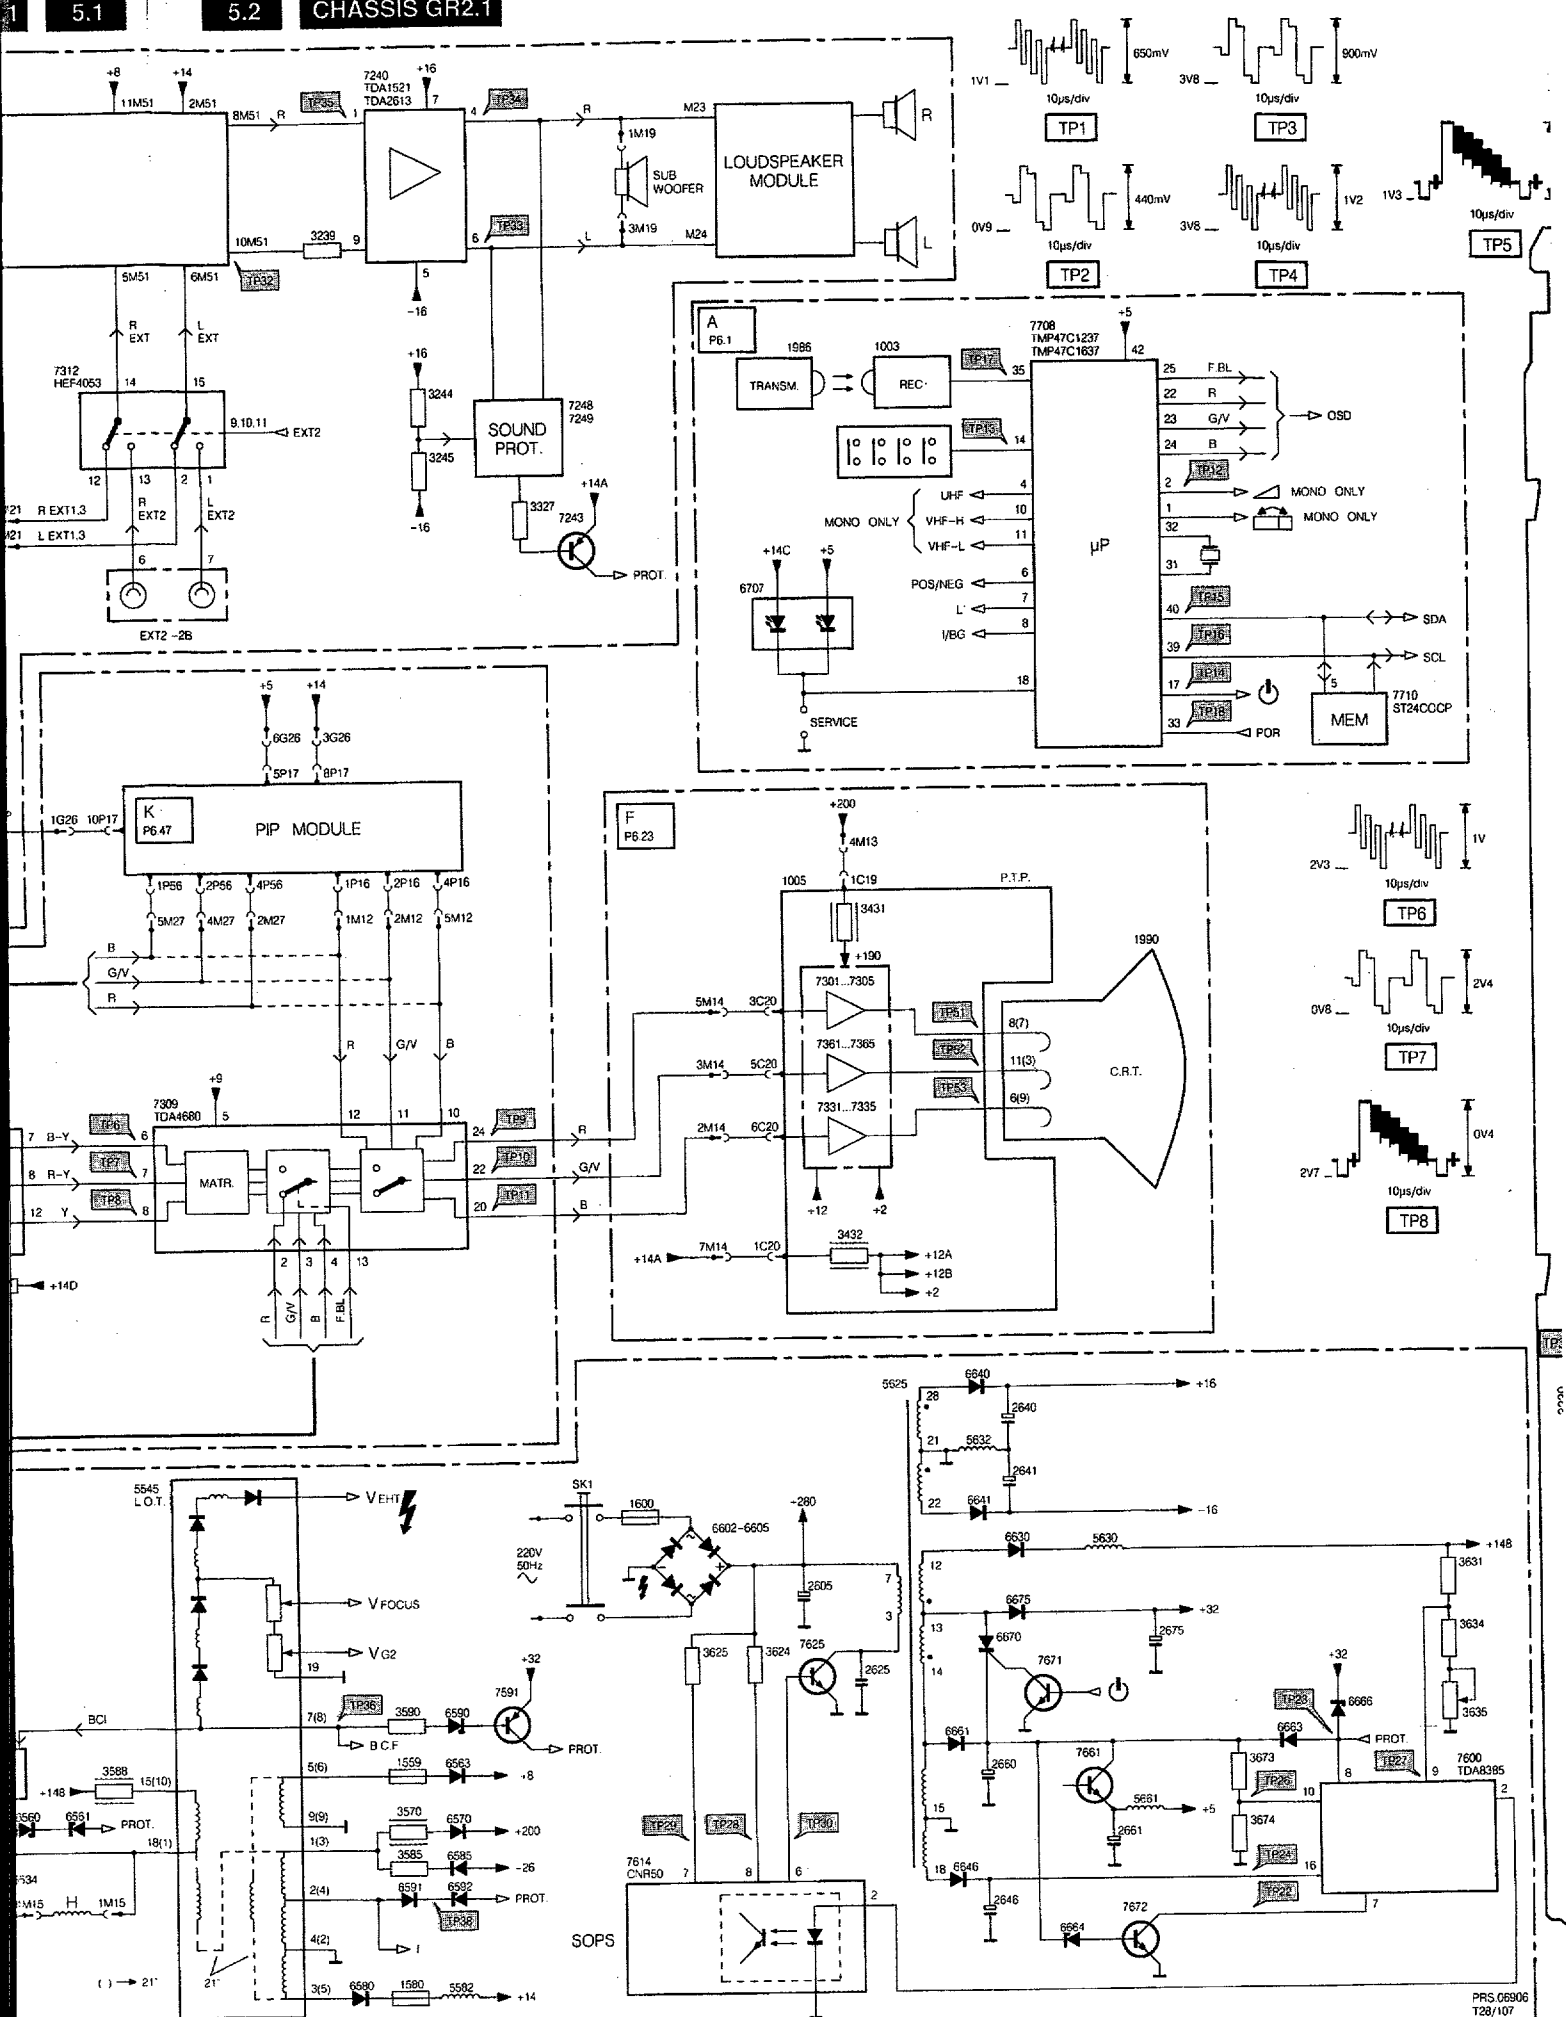


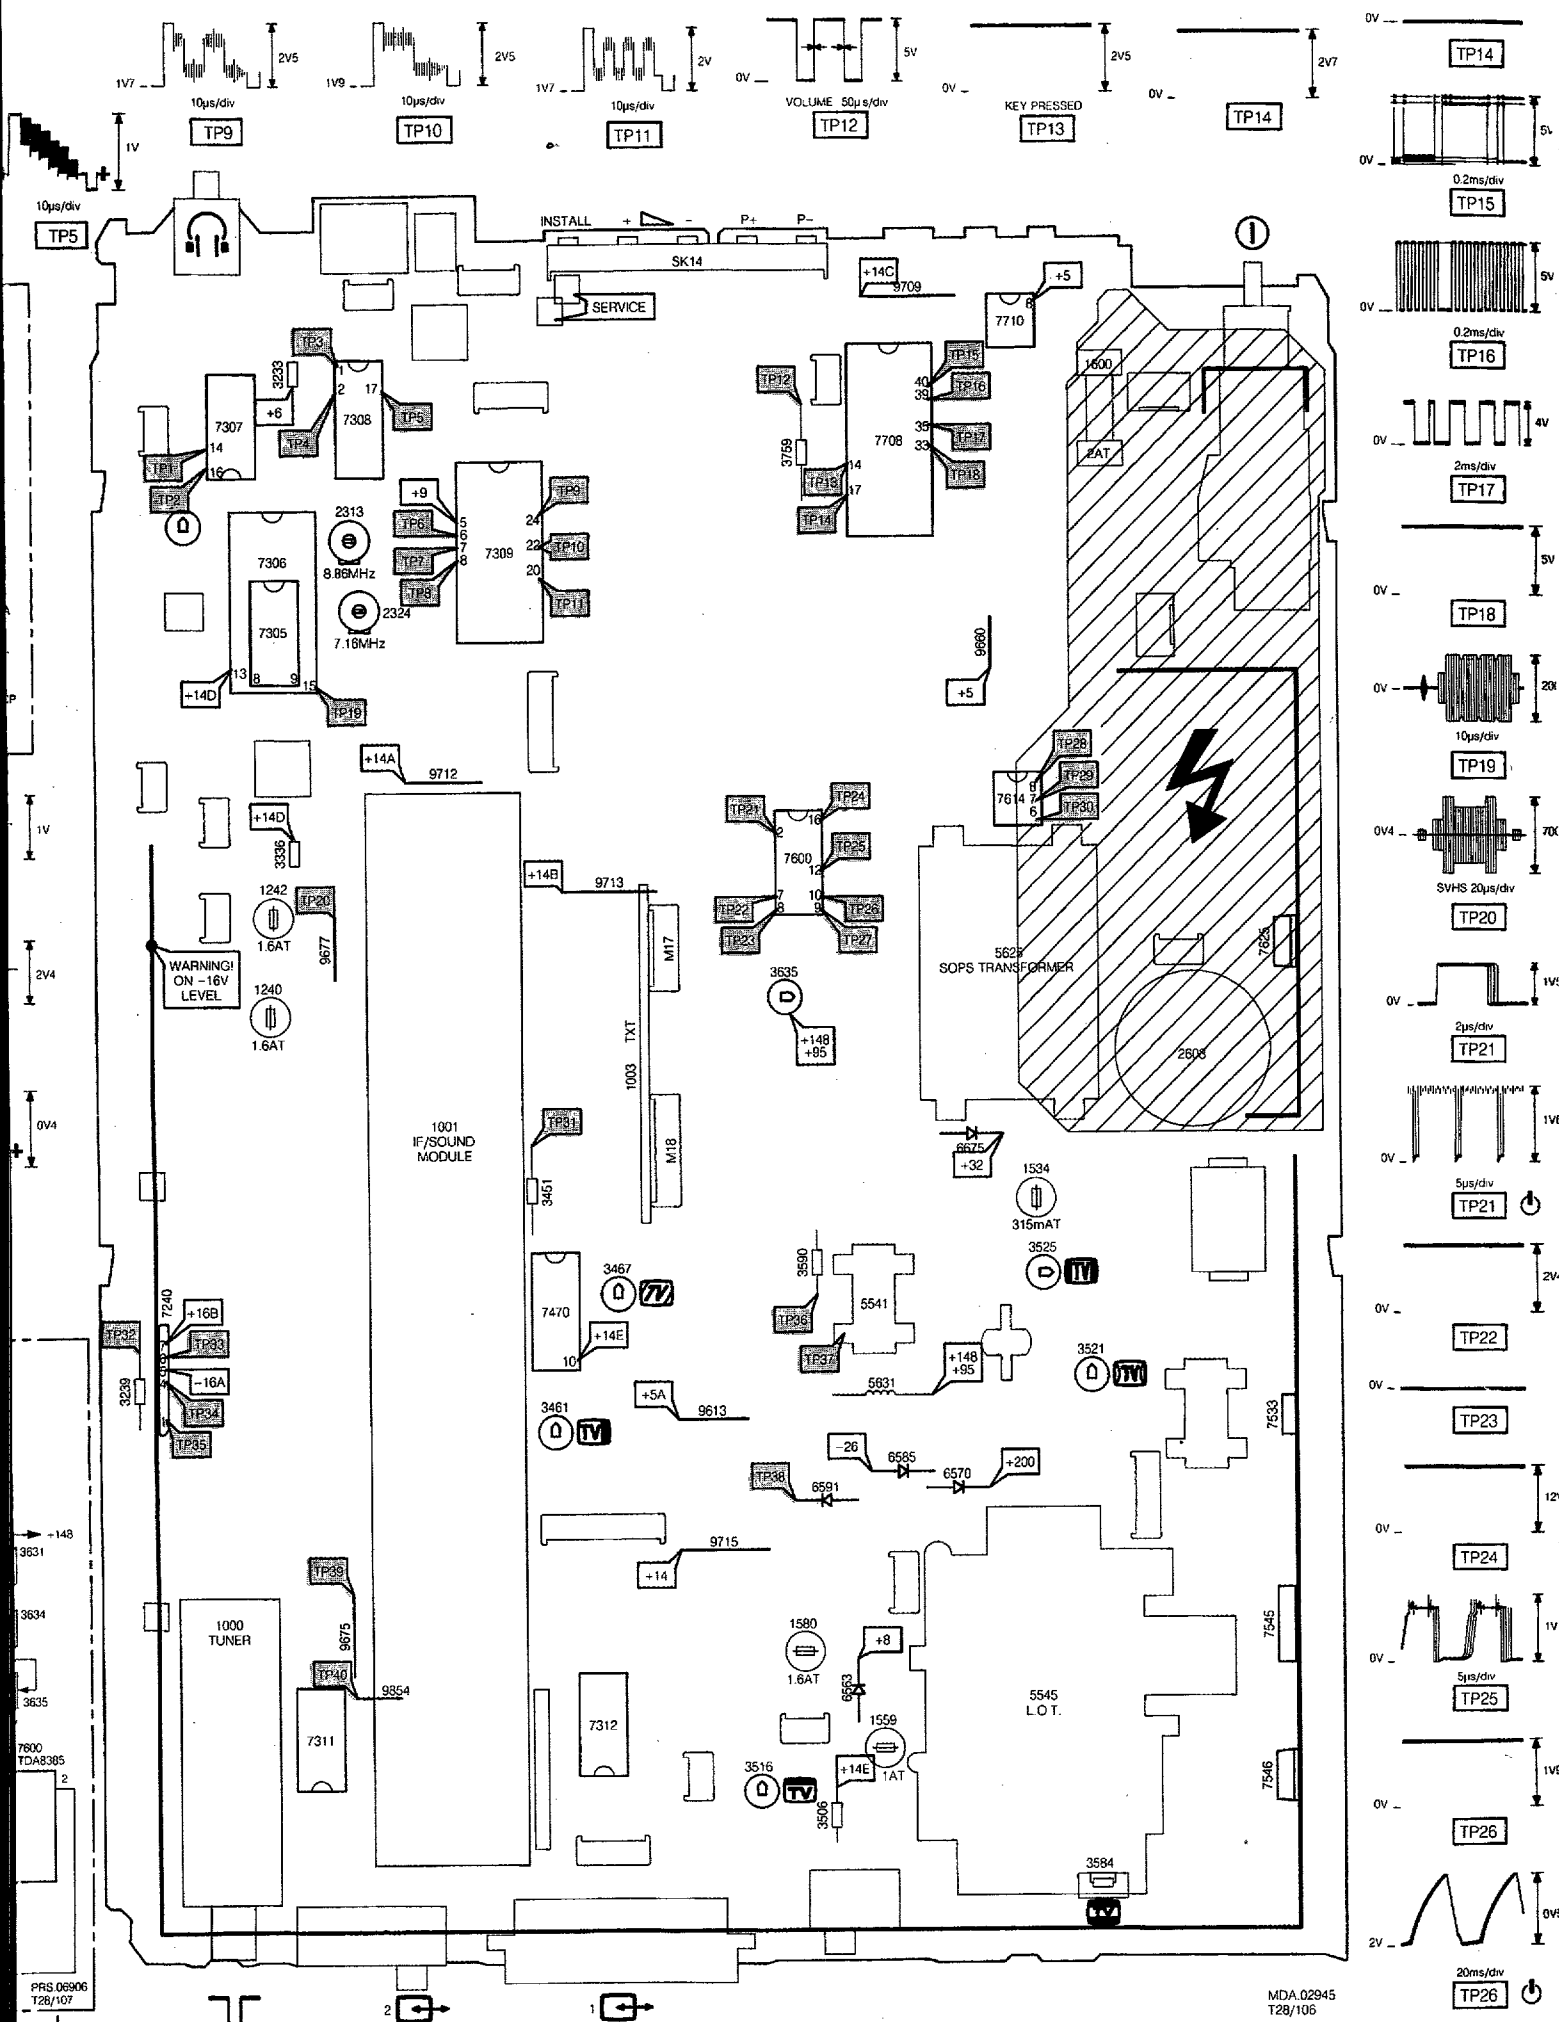

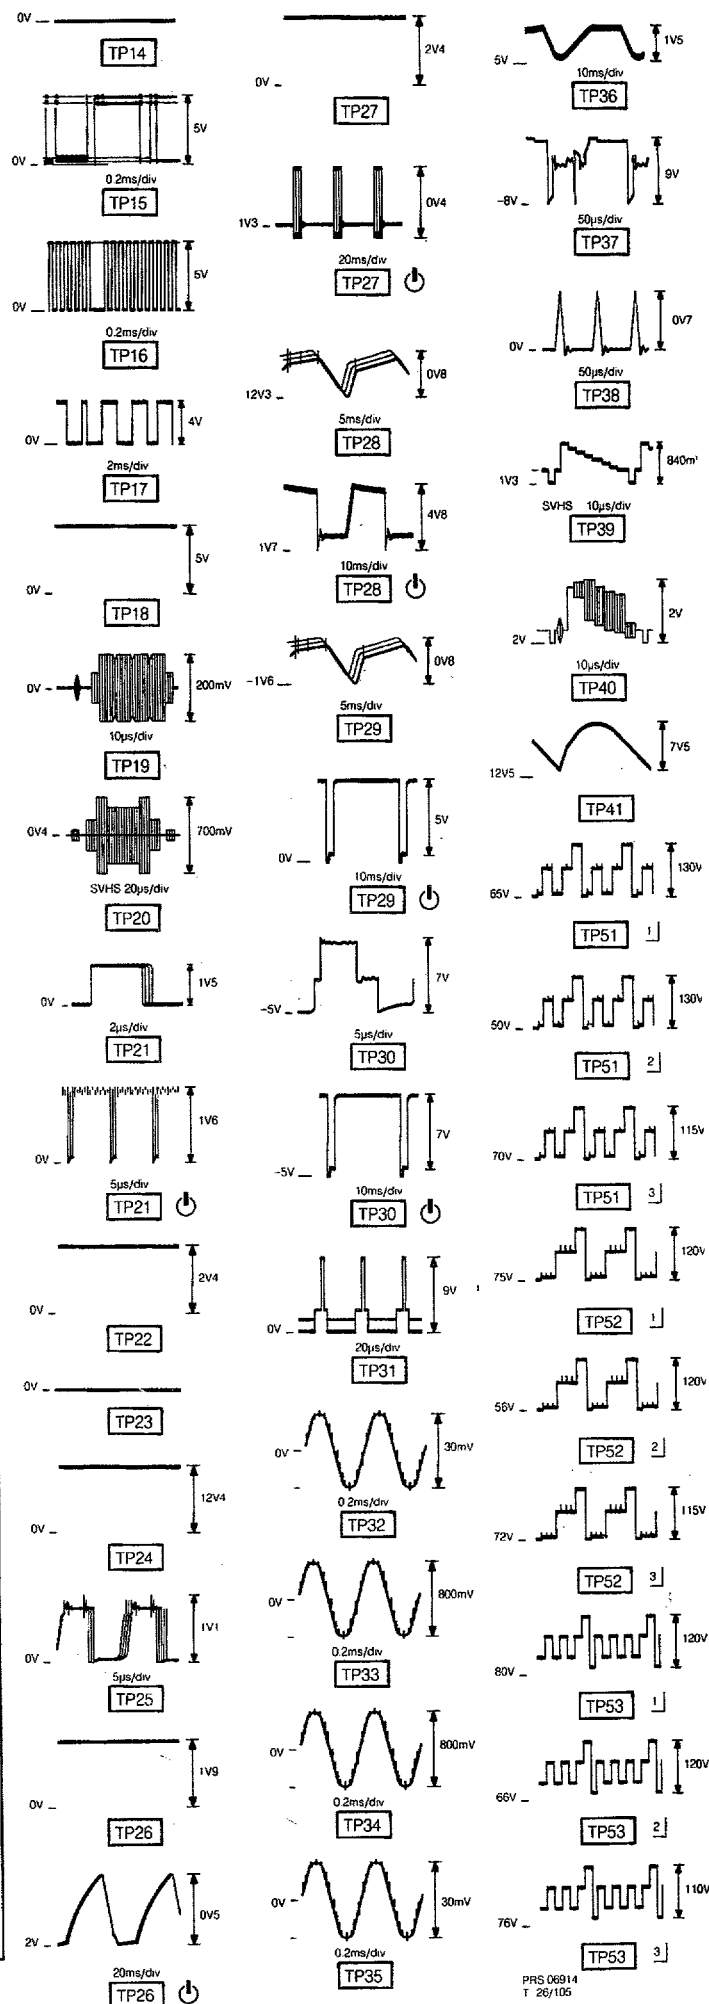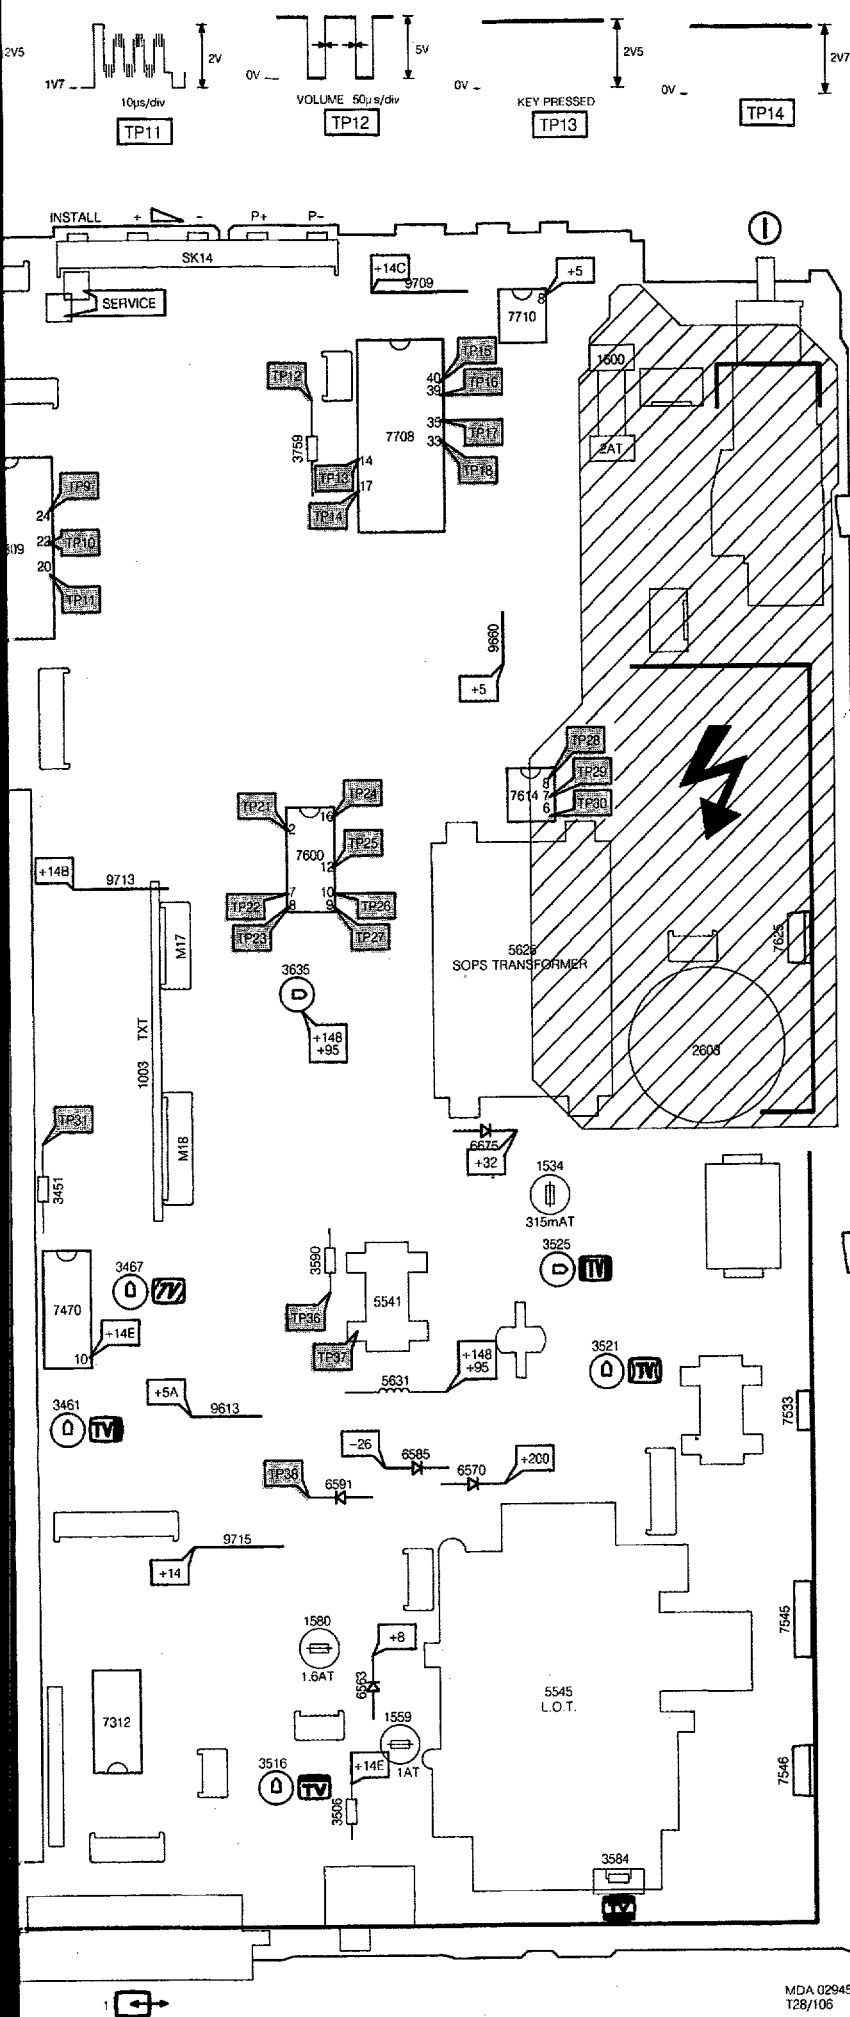

PRS 06914
T. 26/105


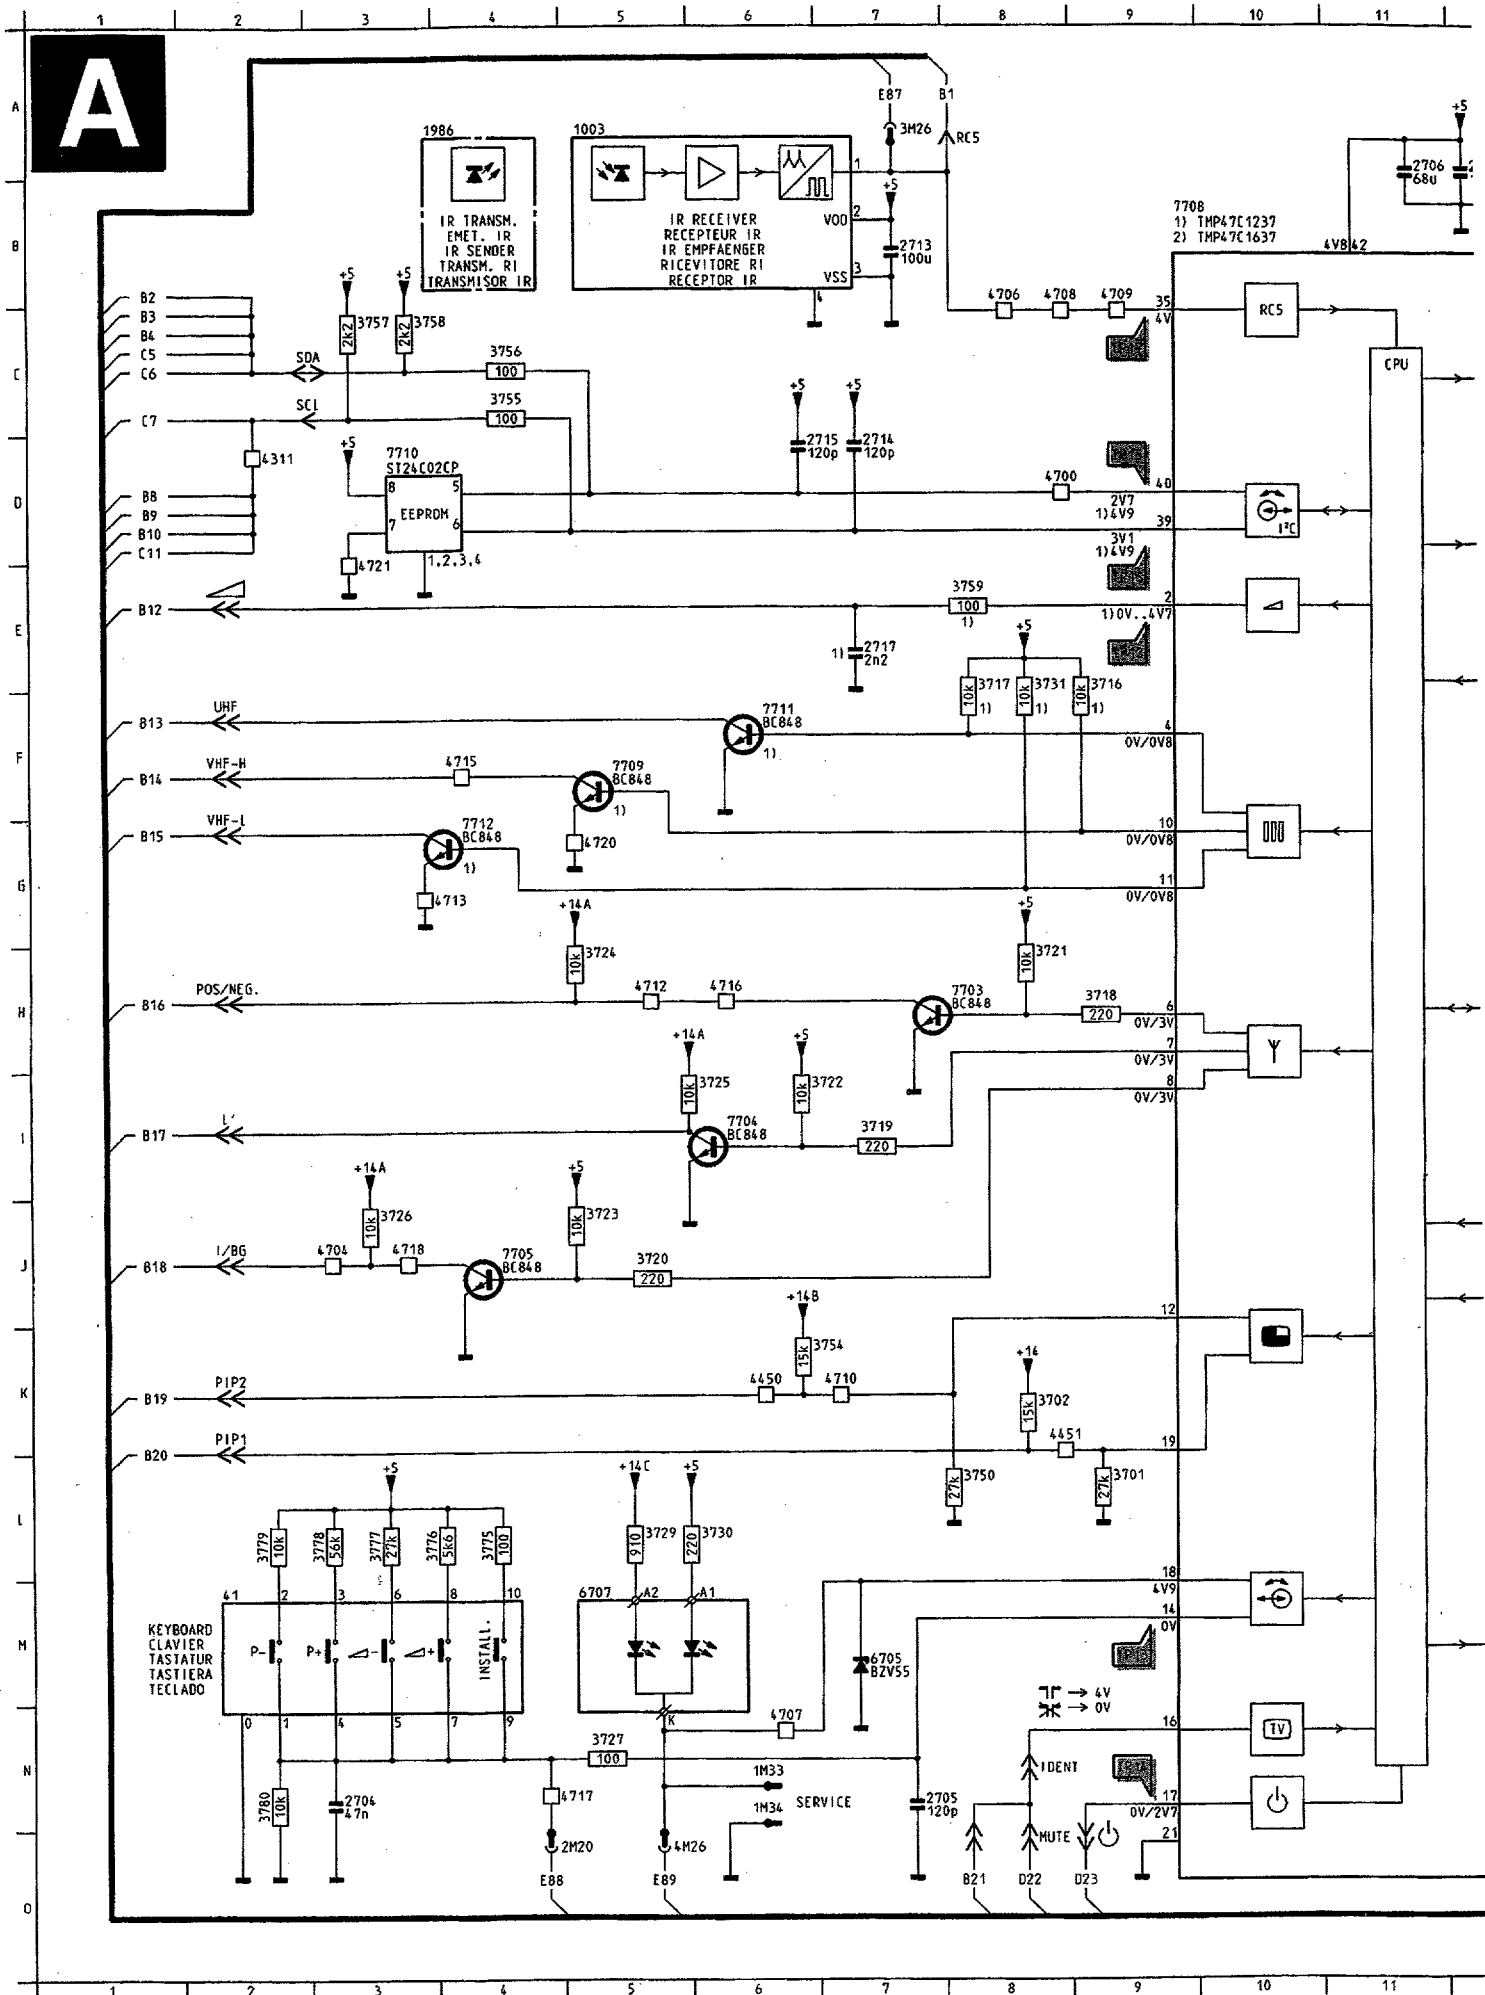


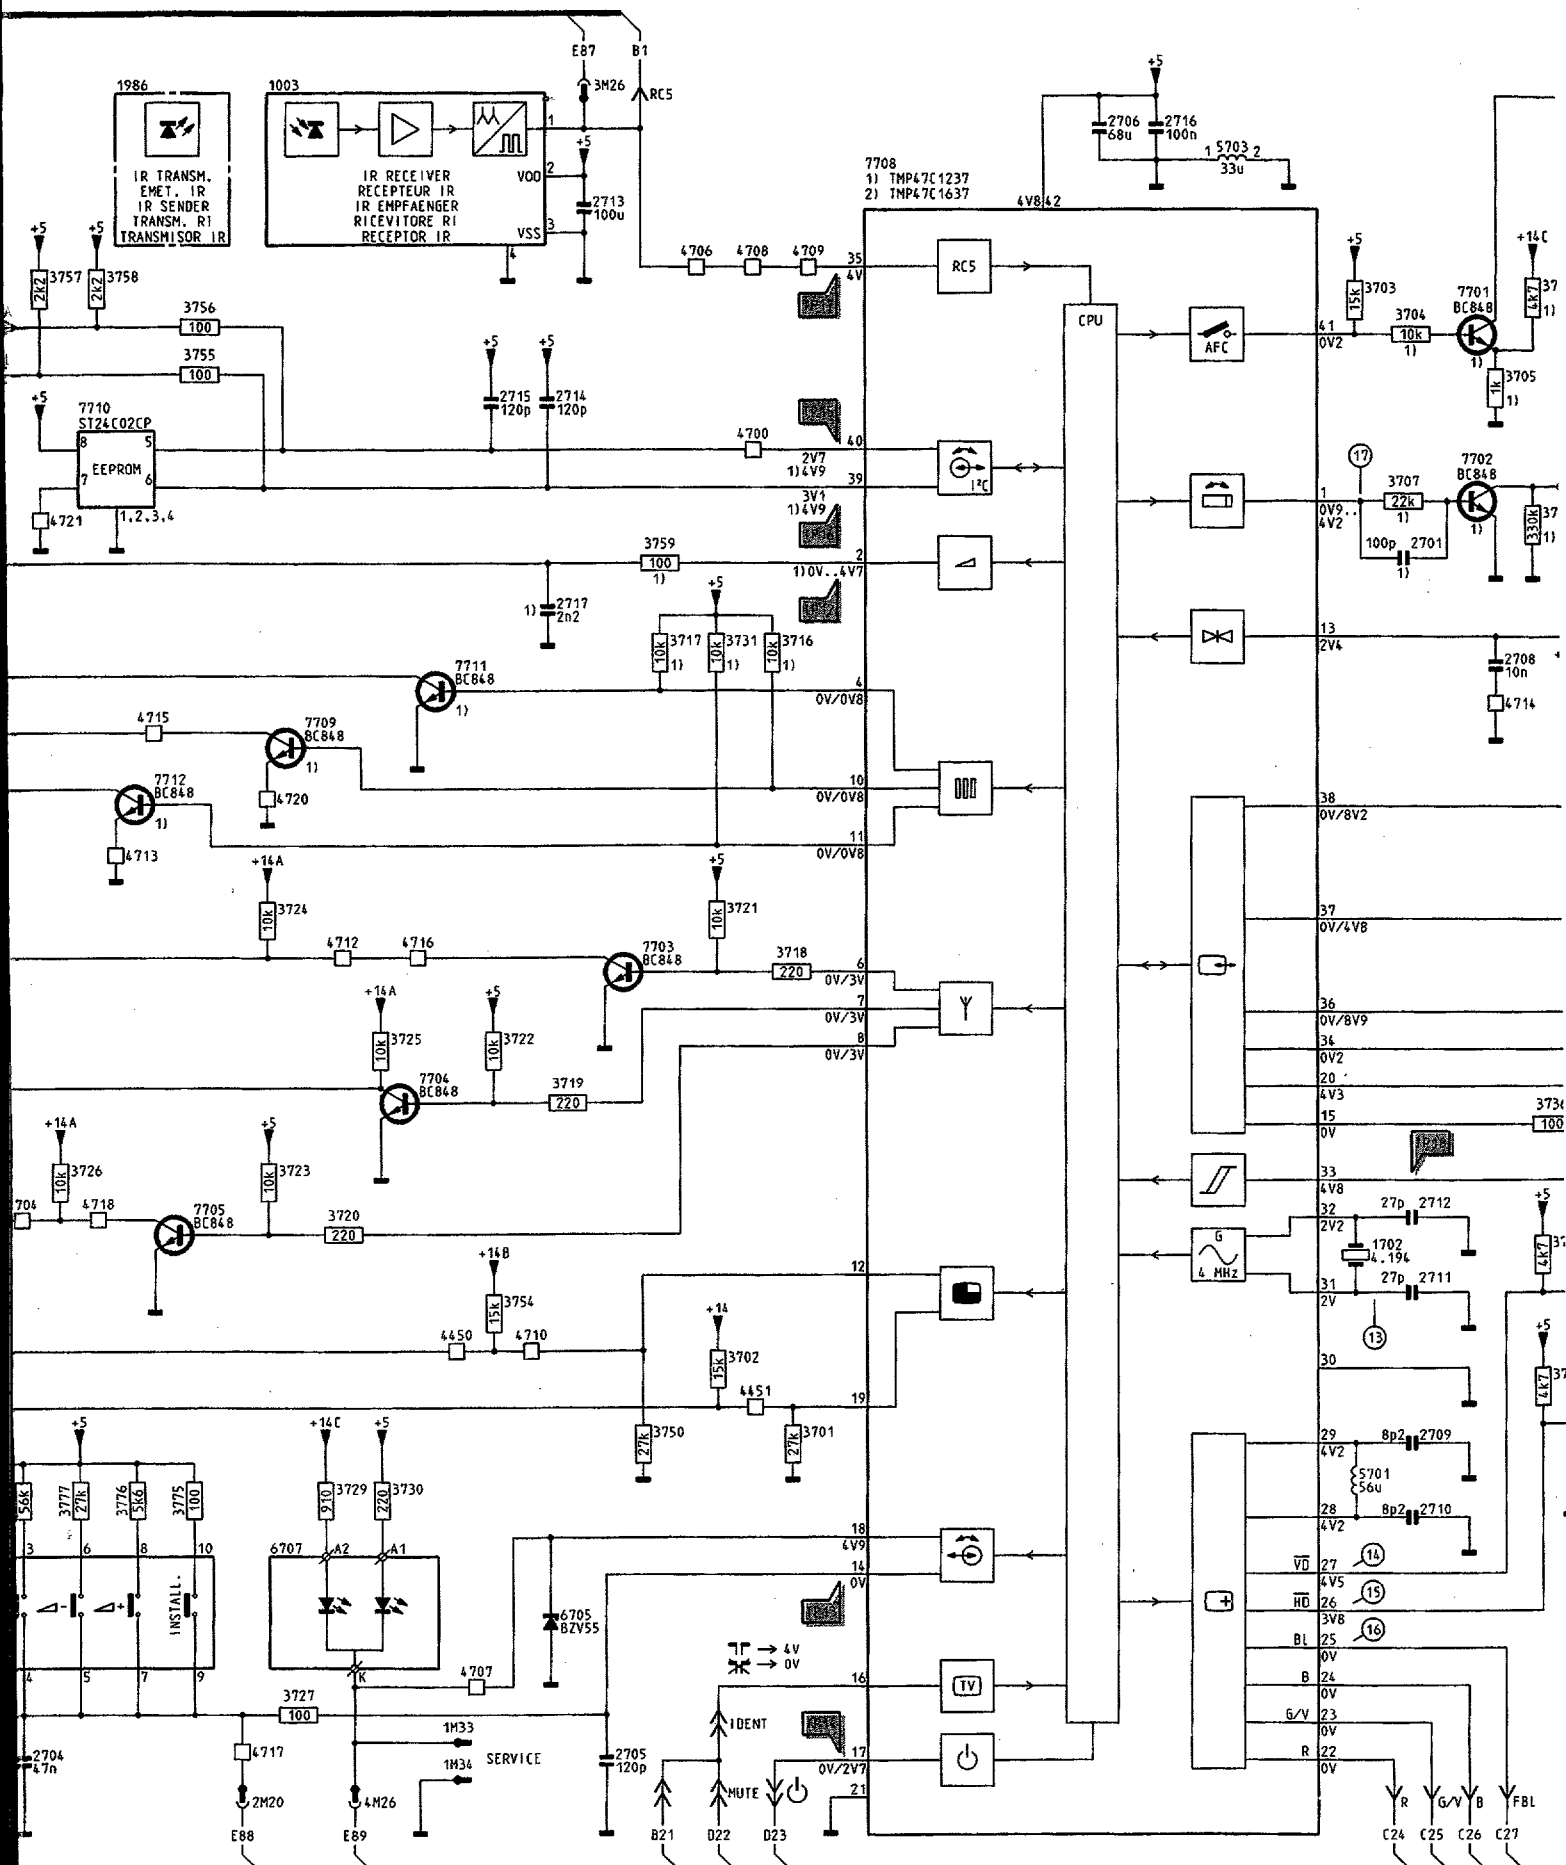

Loudspeaker module

Lautsprecher-Platte

Module haut parleur

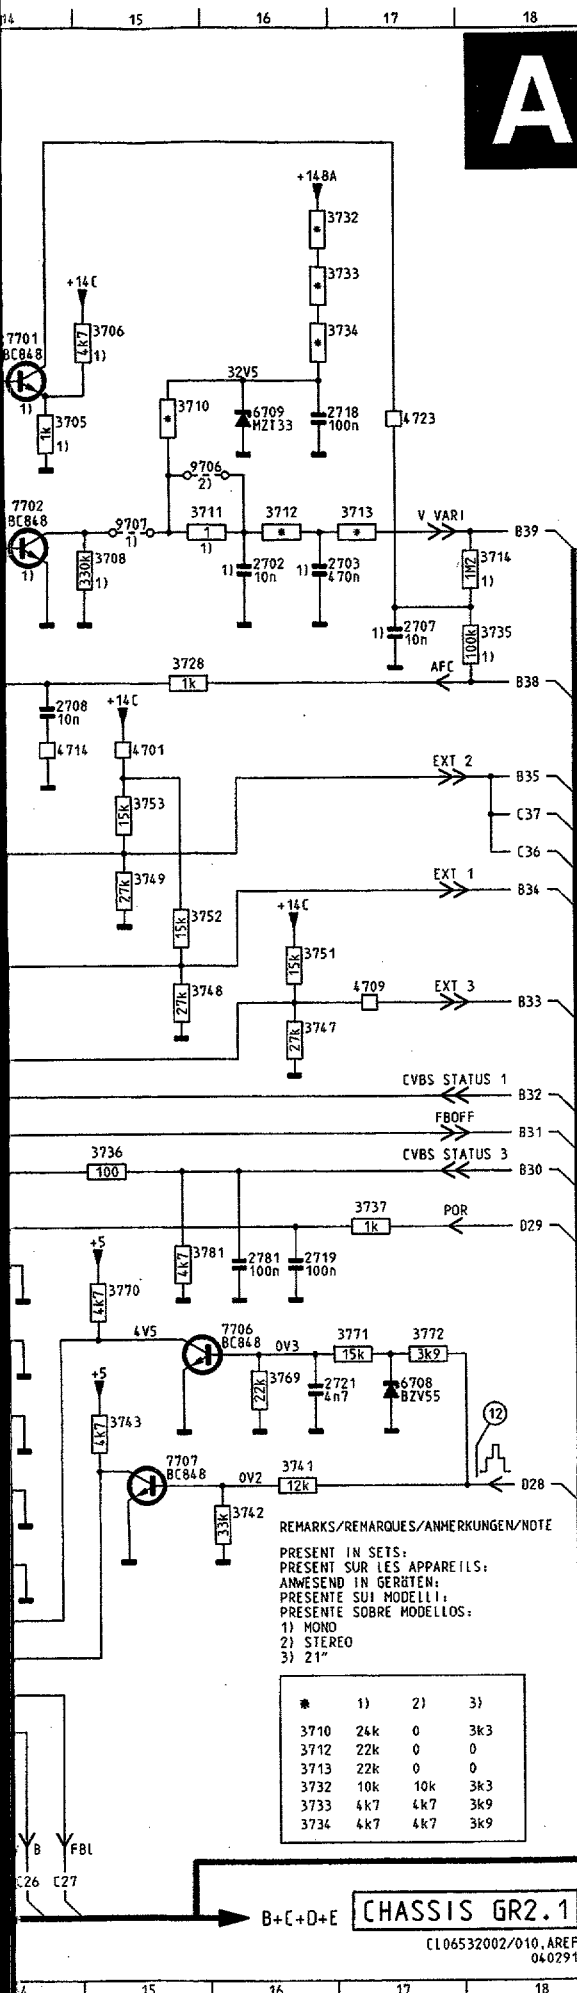PCB 03166
128/104

1003 A 5 7703 H 8
1702 J13 7704 I 6
1986 A 3 7705 J 4
2701 E14 7706 K16
2702 E16 7707 L15
2703 E17 7708 B 9
2704 N 3 7709 F 5
2705 N 7 7710 D 3
2706 A11 7711 F 6
2707 E17 7712 G 4
2708 F14 9706 D16
2709 L14 9707 D15

B

2710 L14
2711 K14
2712 J14
2713 B 7
2714 D 7
2715 D 6
2716 A12
2717 E 7
2718 C17
2719 J16
2721 K16
2781 J16
3701 L 9
3702 K 8
3703 C13
3704 C14
3705 C14
3706 C15
3707 D14
3708 D15
3710 C15
3711 D16
3712 D16
3713 D17
3714 D18
3716 E 9
3717 E 8
3718 H 9
3719 I 7
3720 J 5
3721 H 8
3722 I 6
3723 J 5
3724 H 5
3725 I 6
3726 J 3
3727 N 5
3728 E15
3729 L 5
3730 L 6
3731 E 8
3732 B17
3733 B17
3734 C17
3735 E18
3736 I15
3737 J17
3741 L16
3742 L16
3743 K15
3747 H16
3748 H15
3749 G15
3750 L 8
3751 H16
3752 G15
3753 F15
3754 K 6
3755 C 4
3756 C 4
3757 C 3
3758 C 3
3759 E 8
3769 K16
3770 J15
3771 K17
3772 K17
3775 L 4
3776 L 4
3777 L 3
3778 L 3
3779 L 3
3780 N 3
3781 J15
4104 M 2
4311 D 2
4450 K 6
4451 K 8
4700 D 8
4701 F15
4704 J 3
4706 C 8
4707 N 6
4708 C 8
4709 C 9
4710 K 7
4712 H 5
4713 G 4
4714 F14
4715 F 4
4716 H 6
4717 N 5
4718 J 3
4720 G 5
4721 E 3
4723 C17
5701 L13
5703 B12
6705 M 7
6707 M 5
6708 K17
6709 C16
7701 C14
7702 D14

C

VOLUME 50µs/div
TP12

D

KEY PRESSED
TP13

E

TP14

F

TP14

G

TP15

H

TP16

I

TP17

J

TP18

K

TP18

L

TP18

M

TP18


N

TP18


O

TP18

Euro module
Euro-AV-Platte
Module Prise Péri-télévision



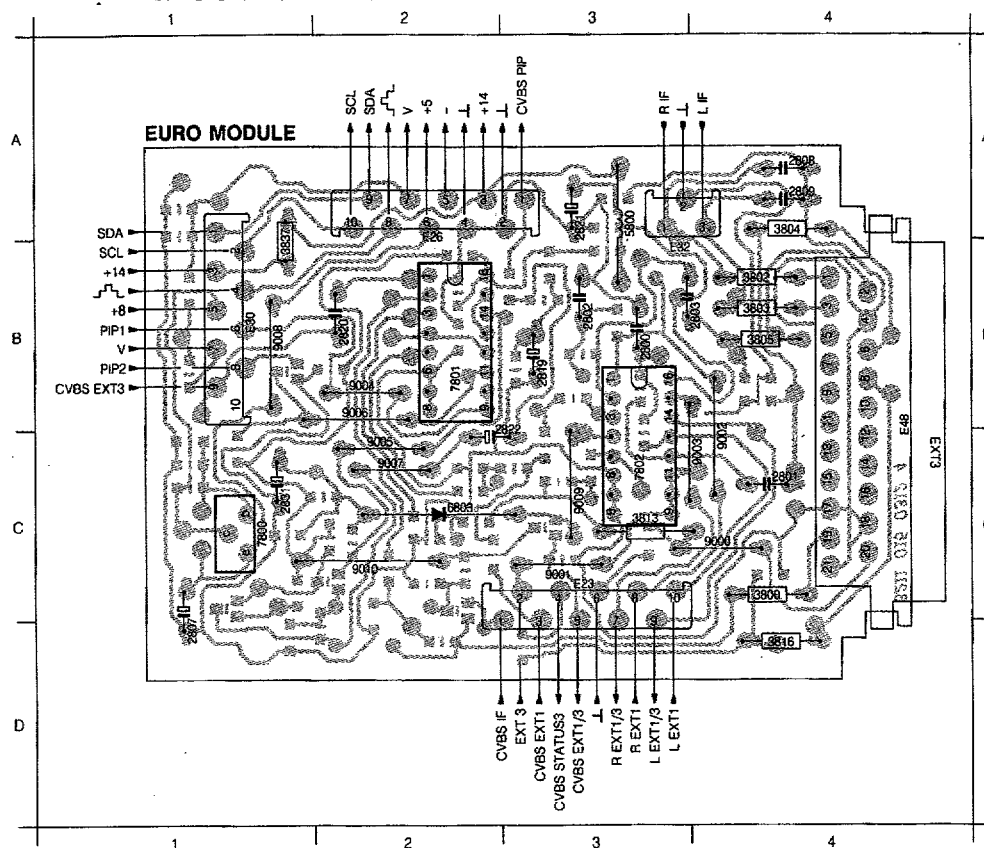


- | | |
|------|----|
| E23 | C3 |
| E25 | B2 |
| E30 | B1 |
| E32 | B3 |
| E48 | C4 |
| 2800 | B3 |
| 2801 | B3 |
| 2802 | B3 |
| 2803 | B4 |
| 2804 | C2 |
| 2805 | C2 |
| 2806 | C2 |
| 2807 | D1 |
| 2808 | B3 |
| 2809 | A4 |
| 2810 | A4 |
| 2811 | B4 |
| 2812 | C1 |
| 2813 | A1 |
| 2814 | B2 |
| 2815 | B2 |
| 2816 | A4 |
| 2817 | A3 |
| 2818 | B2 |
| 2819 | B3 |
| 2820 | B3 |
| 2821 | C2 |
| 2822 | C2 |
| 2823 | C2 |
| 2831 | C1 |
| 2833 | C3 |
| 2834 | B3 |
| 2835 | B3 |
| 2840 | B3 |
| 2841 | C4 |
| 2842 | B4 |
| 2843 | B4 |
| 2844 | A4 |
| 2845 | B4 |
| 2846 | B4 |
| 2847 | B4 |
| 2848 | B3 |
| 2849 | B3 |
| 2850 | B3 |
| 2851 | B3 |
| 2852 | C1 |
| 2853 | C2 |
| 2854 | C2 |
| 2855 | B2 |
| 2856 | B2 |
| 2857 | B2 |
| 2858 | A3 |
| 2859 | A3 |
| 2860 | A3 |
| 2861 | B3 |
| 2862 | C2 |
| 2863 | C2 |
| 2864 | C2 |
| 2865 | C2 |
| 2866 | C2 |
| 2867 | C2 |
| 2868 | C2 |
| 2869 | C2 |
| 2870 | C2 |
| 2871 | C2 |
| 2872 | C2 |
| 2873 | C2 |
| 2874 | C2 |
| 2875 | C2 |
| 2876 | C2 |
| 2877 | C2 |
| 2878 | C2 |
| 2879 | C2 |
| 2880 | C2 |
| 2881 | C2 |
| 2882 | C2 |
| 2883 | C2 |
| 2884 | C2 |
| 2885 | C2 |
| 2886 | C2 |
| 2887 | C2 |
| 2888 | C2 |
| 2889 | C2 |
| 2890 | C2 |
| 2891 | C2 |
| 2892 | C2 |
| 2893 | C2 |
| 2894 | C2 |
| 2895 | C2 |
| 2896 | C2 |
| 2897 | C2 |
| 2898 | C2 |
| 2899 | C2 |
| 2900 | C2 |

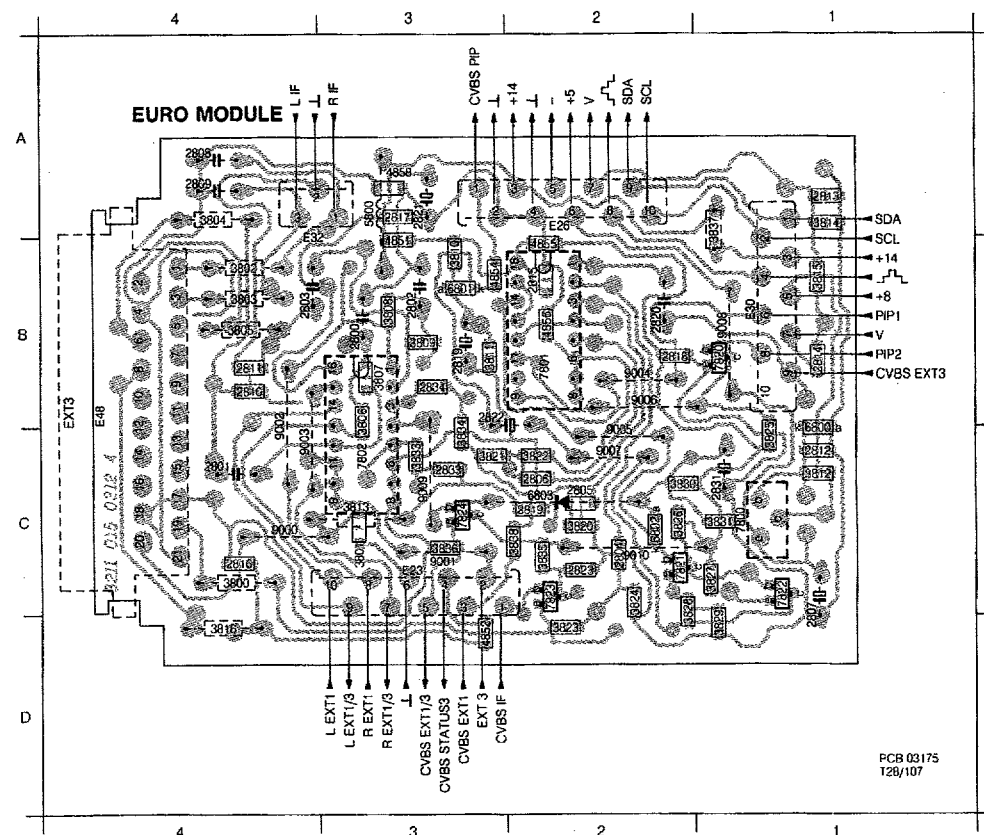


PCB 03175
T28/107

B

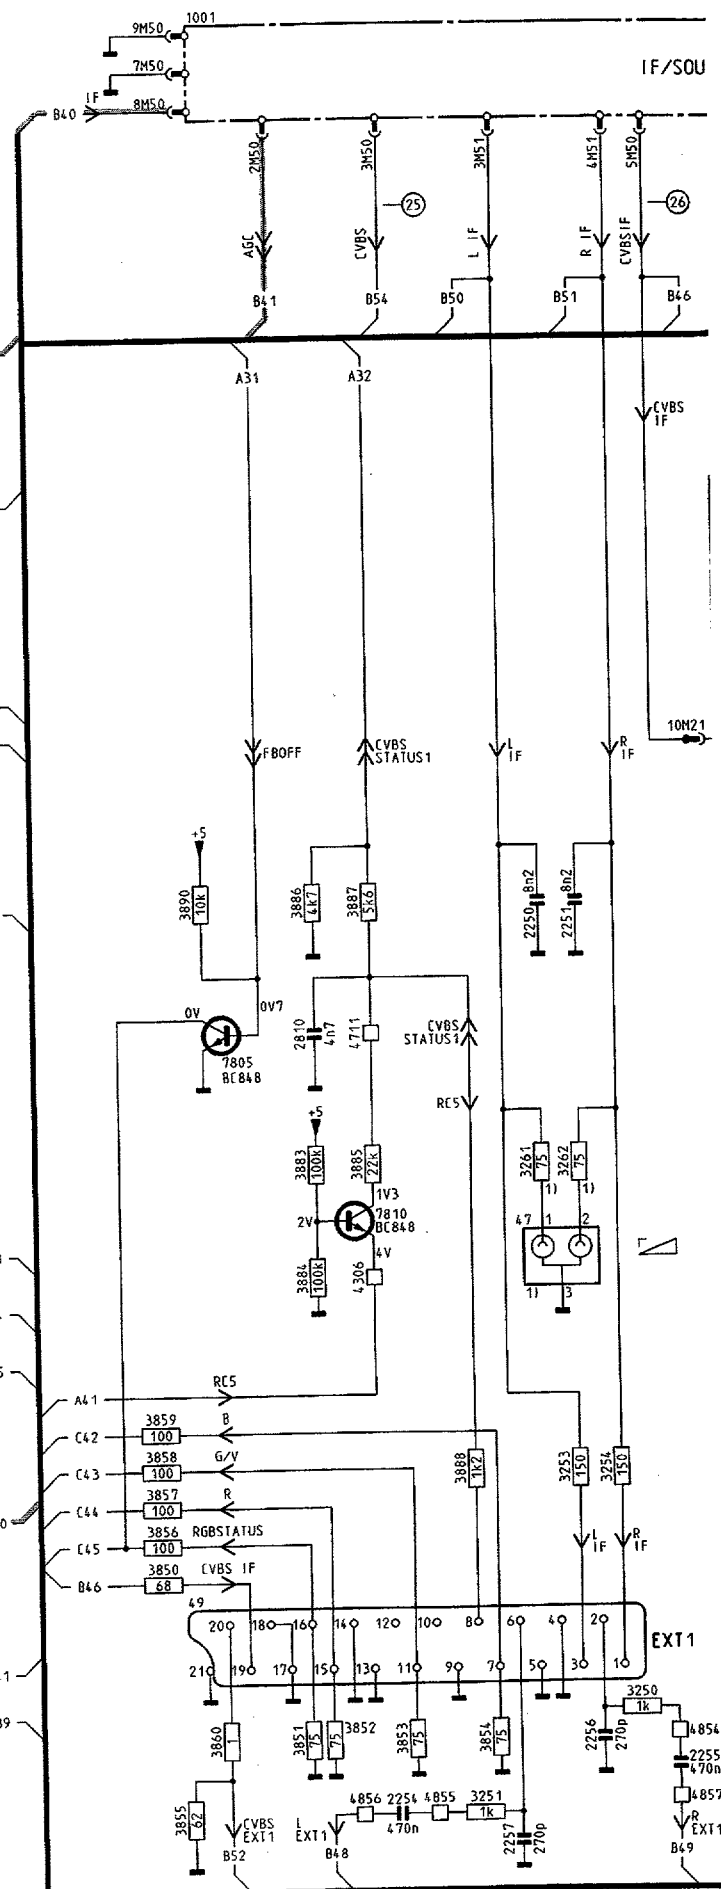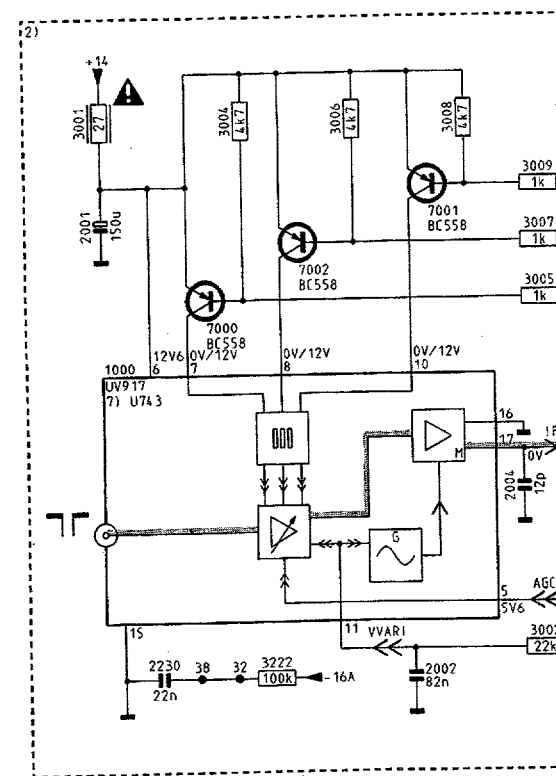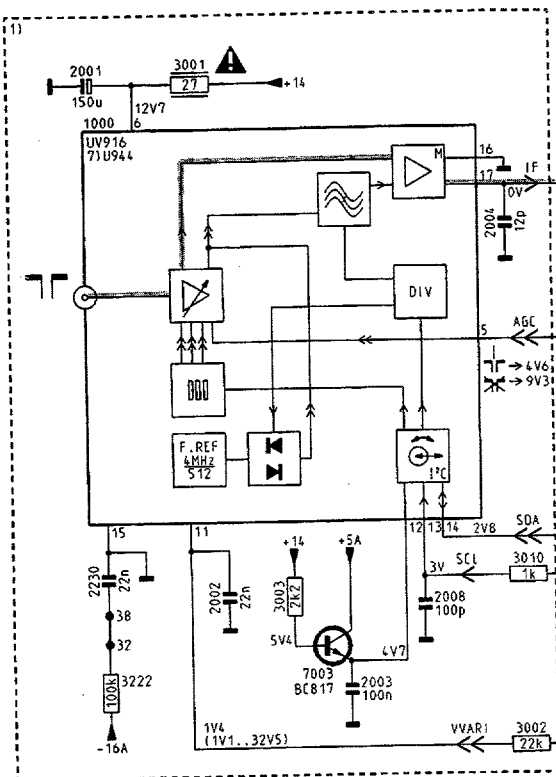

IF/SOUND MODULE ZF/TON MODUL MODULE FI/SON


G: MONO
H: STEREO/ESTEREO
I: NICAM

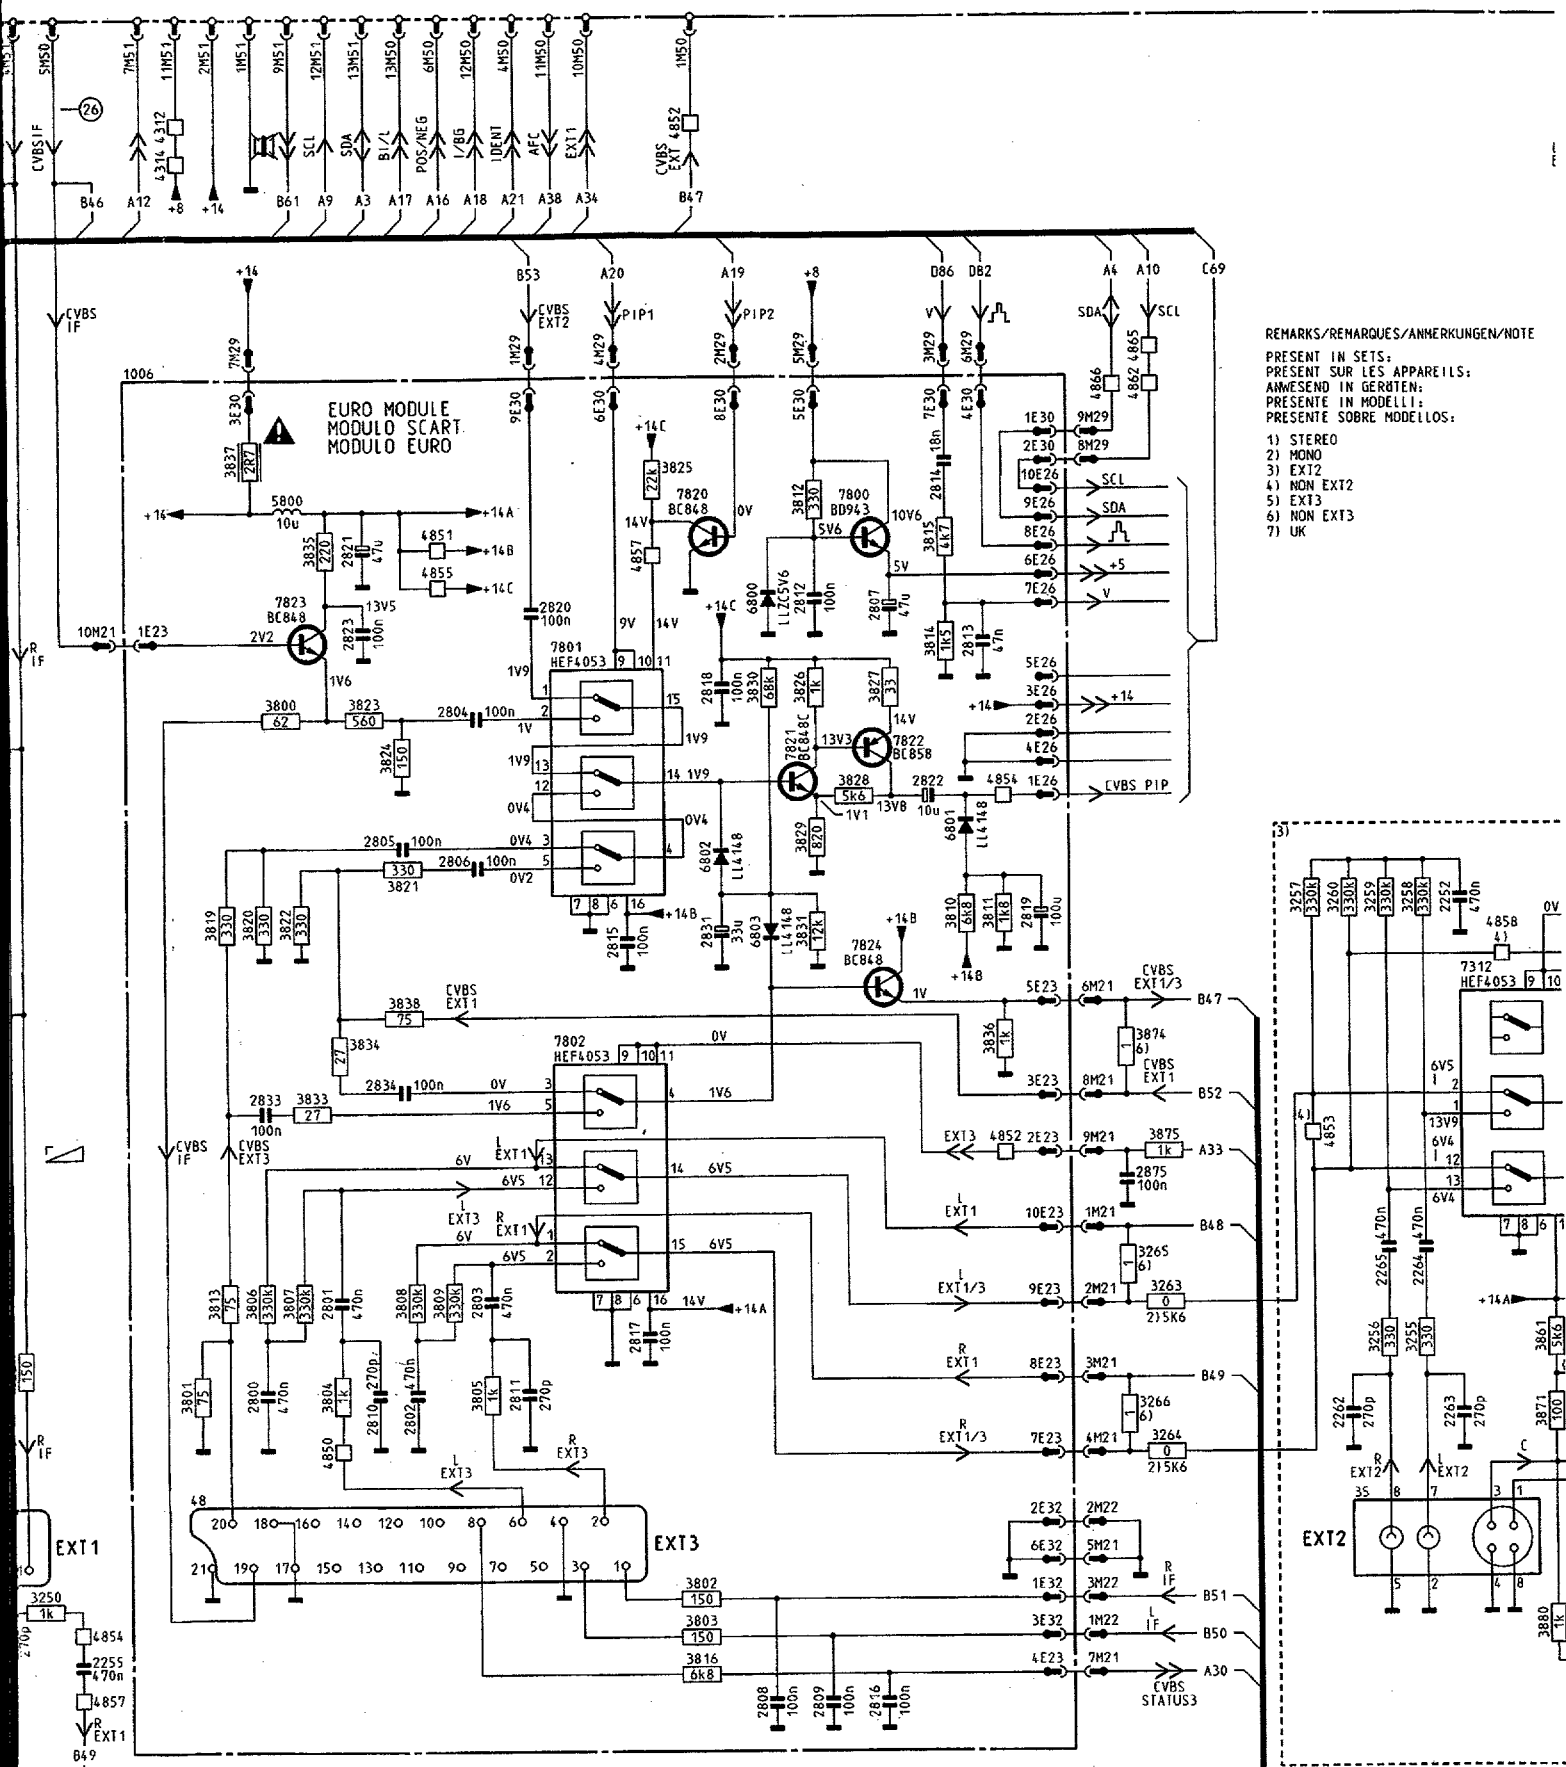

REMARKS/REMARQUES/ANMERKUNGEN/NOTE


PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERÄTEN:
PRESENTE IN MODELLI:
PRESENTE SOBRE MODELOS:



- 1) STEREO
2) MONO
3) EXT2
4) NON EXT2
5) EXT3
6) NON EXT3
7) UK

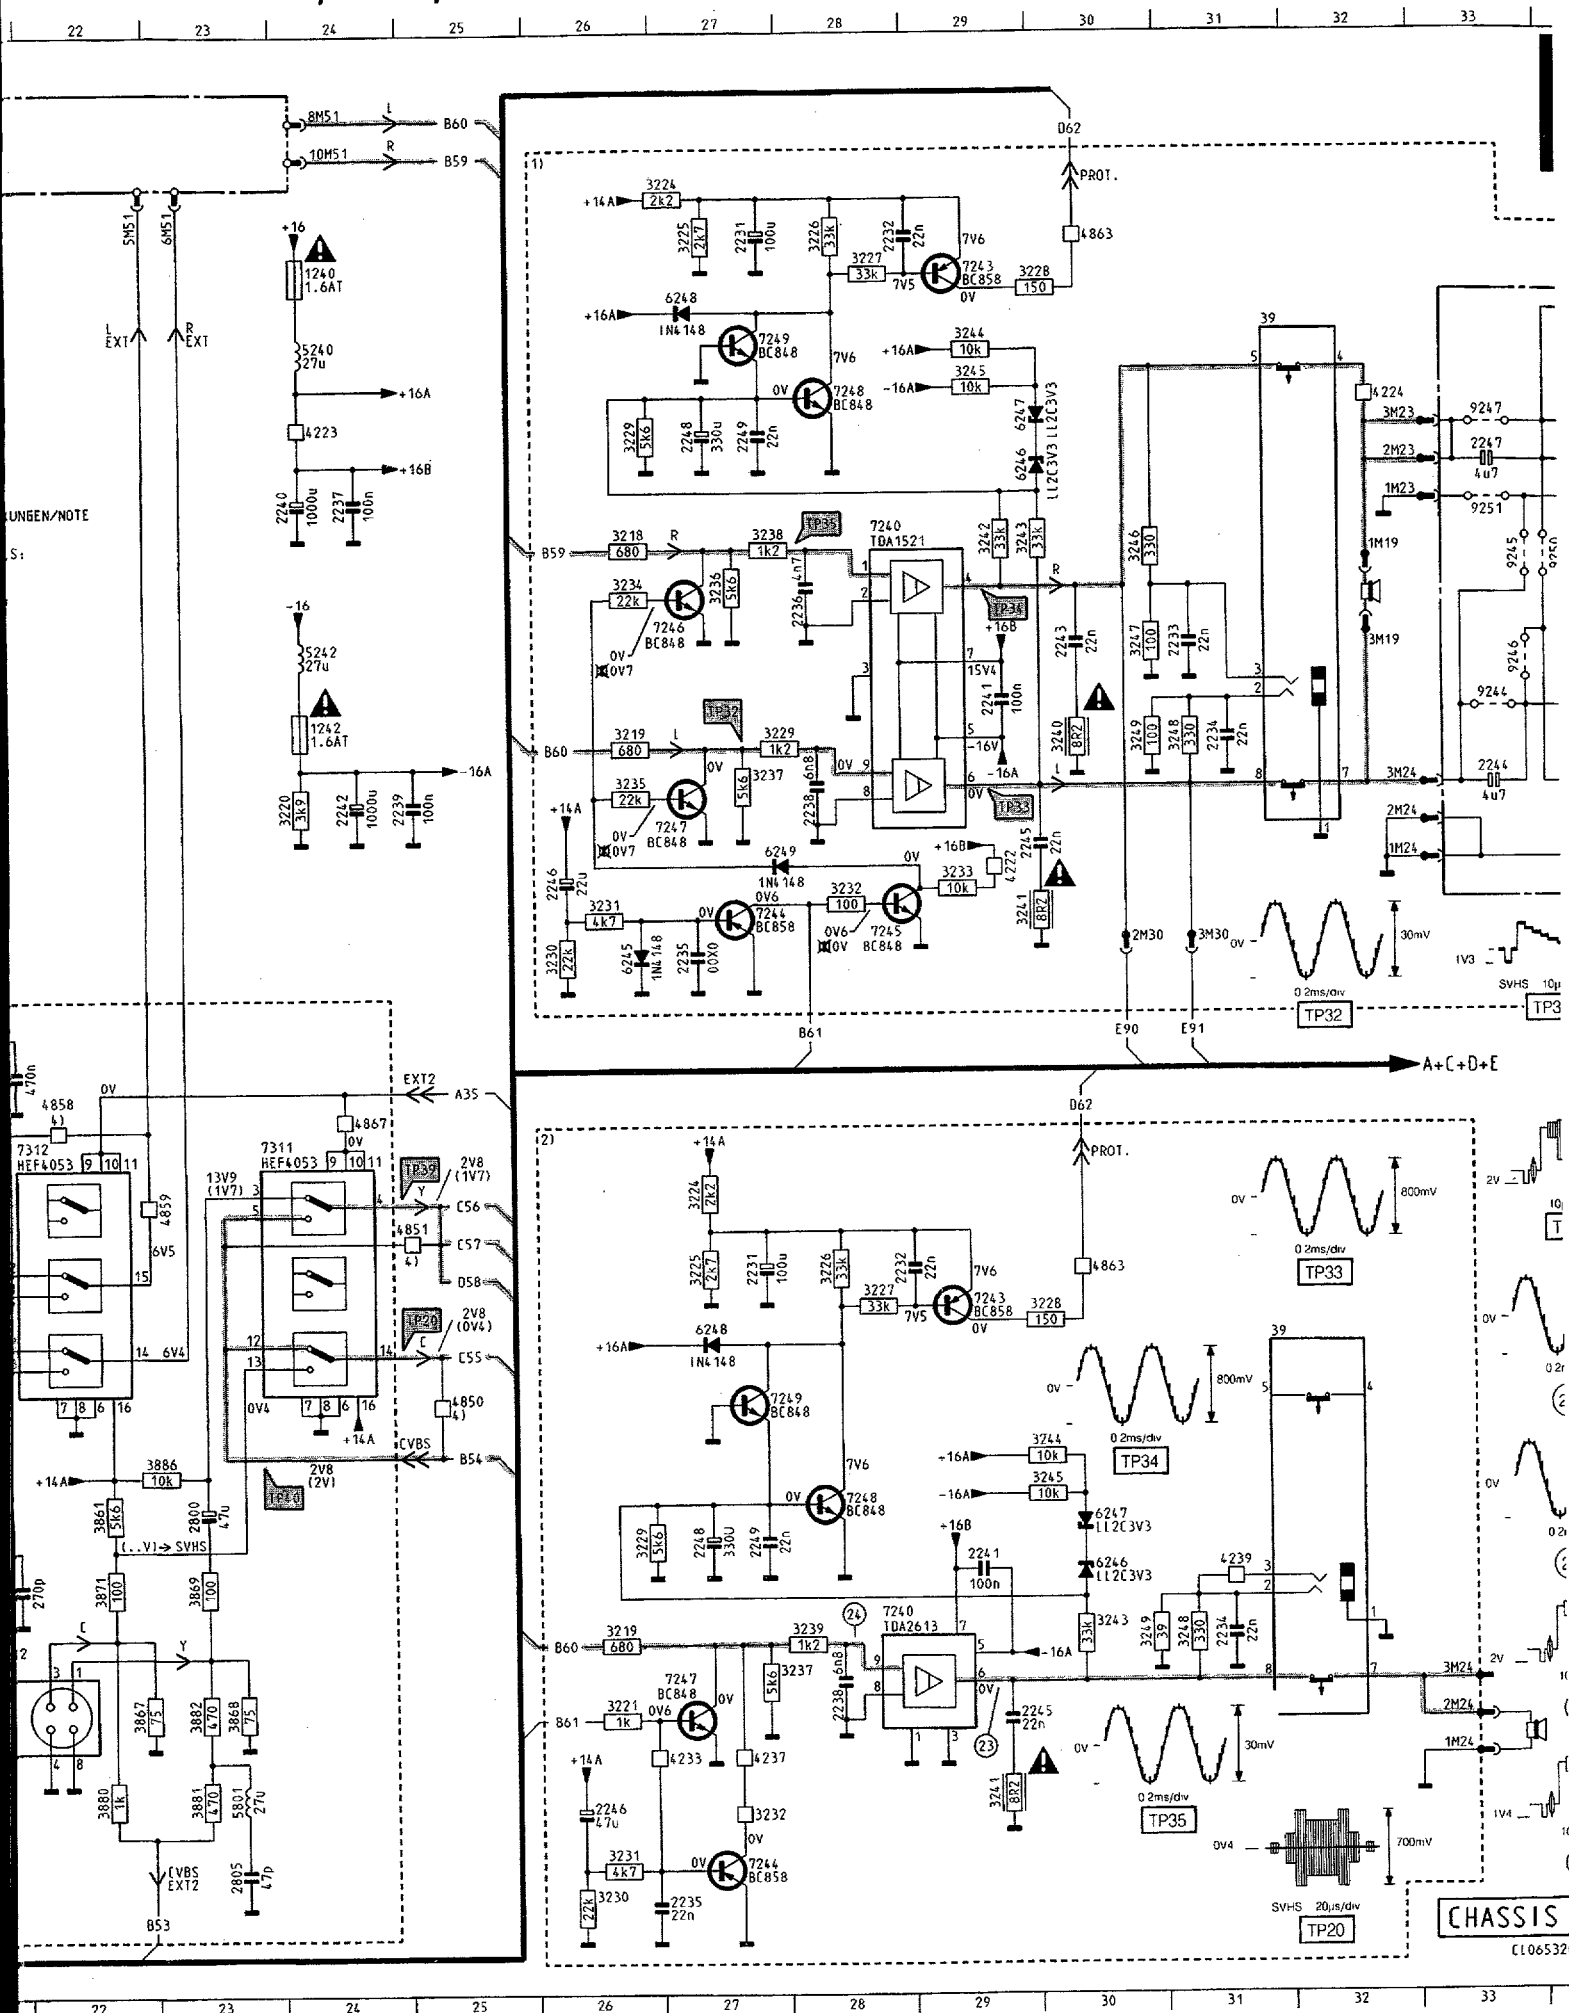





1000	L	1	3229	L26	4222	G29
1000	C	1	3229	F28	4223	C24
1001	A	7	3229	C26	4224	C32
1006	D11	3230	G26	4233	N27	
1240	B24	3230	H26	4237	N27	
1242	F24	3231	G26	4239	L31	
2001	K	1	3231	G26	4306	K
2001	B	1	3232	N27	4312	B11
2002	N	4	3232	G28	4314	C11
2002	F	2	3233	G29	4711	I
2003	G	3	3234	E26	4759	J
2004	M	4	3235	F26	4800	M11
2004	D	4	3236	E27	4850	M13
2008	G	4	3237	M27	4850	K25
2230	N	2	3237	F27	4851	F13
2230	F	1	3238	M27	4851	J25
2231	J27	3238	M28	4852	B15	
2231	B27	3240	F30	4852	J18	
2232	J29	3241	N29	4853	J20	
2232	B29	3241	G30	4854	H18	
2233	E31	3242	D29	4854	N11	
2234	M31	3243	D30	4855	O	9
2234	F31	3243	M30	4855	F13	
2235	O27	3244	K30	4856	O	1
2235	H27	3244	C29	4857	F15	
2236	E28	3245	L30	4857	O11	
2237	D24	3245	C29	4858	I22	
2238	M28	3246	D30	4859	I23	
2238	F28	3247	E30	4862	D30	
2239	F25	3248	M31	4863	J19	
2240	D24	3248	F31	4863	B19	
2241	L29	3249	M30	4865	D30	
2241	F29	3249	F30	4866	D19	
2242	F24	3250	N10	4867	I24	
2243	E30	3251	O	9	4900	M
2244	F33	3253	L10	5240	C24	
2245	M29	3254	L10	5242	E24	
2245	G30	3255	L21	5800	N12	
2246	M26	3256	L21	5801	E23	
2246	G26	3257	H20	6245	H26	
2247	D33	3258	H20	6246	L30	
2248	L27	3259	H21	6246	D30	
2248	C27	3260	H21	6247	L30	
2249	L27	3261	J	6	6247	C
2249	C27	3262	J10	6248	B27	
2250	H	1	3263	L19	6248	K18
2251	H10	3264	M19	6249	G28	
2252	H21	3265	K19	6800	F14	
2254	O	8	3266	L19	6801	K
2255	N11	3800	G12	6802	F14	
2256	N10	3801	L11	6803	I14	
2257	O	9	3802	N15	7000	K
2262	L21	3803	N15	7001	K	2
2263	L21	3804	L13	7002	K	2
2264	K21	3805	L14	7003	G	3
2265	K21	3806	L12	7240	N29	
2800	L12	3807	L12	7240	D29	
2800	L23	3808	L13	7243	J20	
2801	L13	3809	L13	7243	B29	
2802	L13	3810	L18	7244	O27	
2803	L14	3811	L18	7244	G27	
2804	G14	3812	E16	7245	G27	
2805	H13	3813	L12	7246	E27	
2805	O23	3814	F17	7247	M21	
2806	H14	3815	F17	7247	F27	
2807	F17	3816	N15	7248	L21	
2808	O16	3819	L12	7248	K21	
2809	O16	3820	L12	7249	C27	
2810	I	8	3821	H13	7249	C27
2810	L13	3822	L12	7311	I21	
2811	L14	3823	G13	7312	I21	
2812	F16	3824	G13	7800	E18	
2813	F18	3825	E15	7801	F14	
2814	E17	3826	G16	7802	J1	
2815	I15	3827	G17	7805	I	
2816	O17	3828	H17	7810	J	
2817	L15	3829	H16	7820	E1	
2818	G16	3830	G16	7821	G1	
2819	I18	3831	L16	7822	G1	
2820	F14	3833	J12	7823	F1	
2821	F13	3834	L13	7824	I1	
2822	H17	3835	F12	9244	F3	
2823	F13	3836	L18	9245	O30	
2831	I16	3837	E12	9246	C3	
2833	J12	3838	L13	9247	E30	
2834	J13	3850	M	6	9250	O30
2875	K19	3851	N	8	9251	O30
3001	J	1	3852	N	8	
3001	B	2	3853	N	8	
3002	N	5	3854	N	9	
3002	H	5	3855	O	7	
3003	F	3	3856	M	6	
3004	J	2	3857	L	6	
3005	K	5	3858	L	6	
3006	J	3	3859	L	6	
3007	K	5	3860	N	7	
3008	J	4	3861	L22		
3009	J	5	3867	M22		
3010	F	5	3868	M23		
3218	D26	3869	L23			
3219	M26	3871	L22			
3219	F26	3874	I19			
3220	F24	3875	J19			
3221	M26	3880	N22			
3222	G	1	3881	N23		
3222	N	3	3882	M23		
3224	I27	3883	J	8		
3224	B27	3884	K	8		
3225	I27	3885	J	8		
3225	B27	3886	H	8		
3226	J28	3886	L23			
3226	B28	3887	H	8		
3227	J28	3888	L	9		
3227	B28	3890	H	7		
3228	J30	3963	C31			
3228	B30	3963	K31			

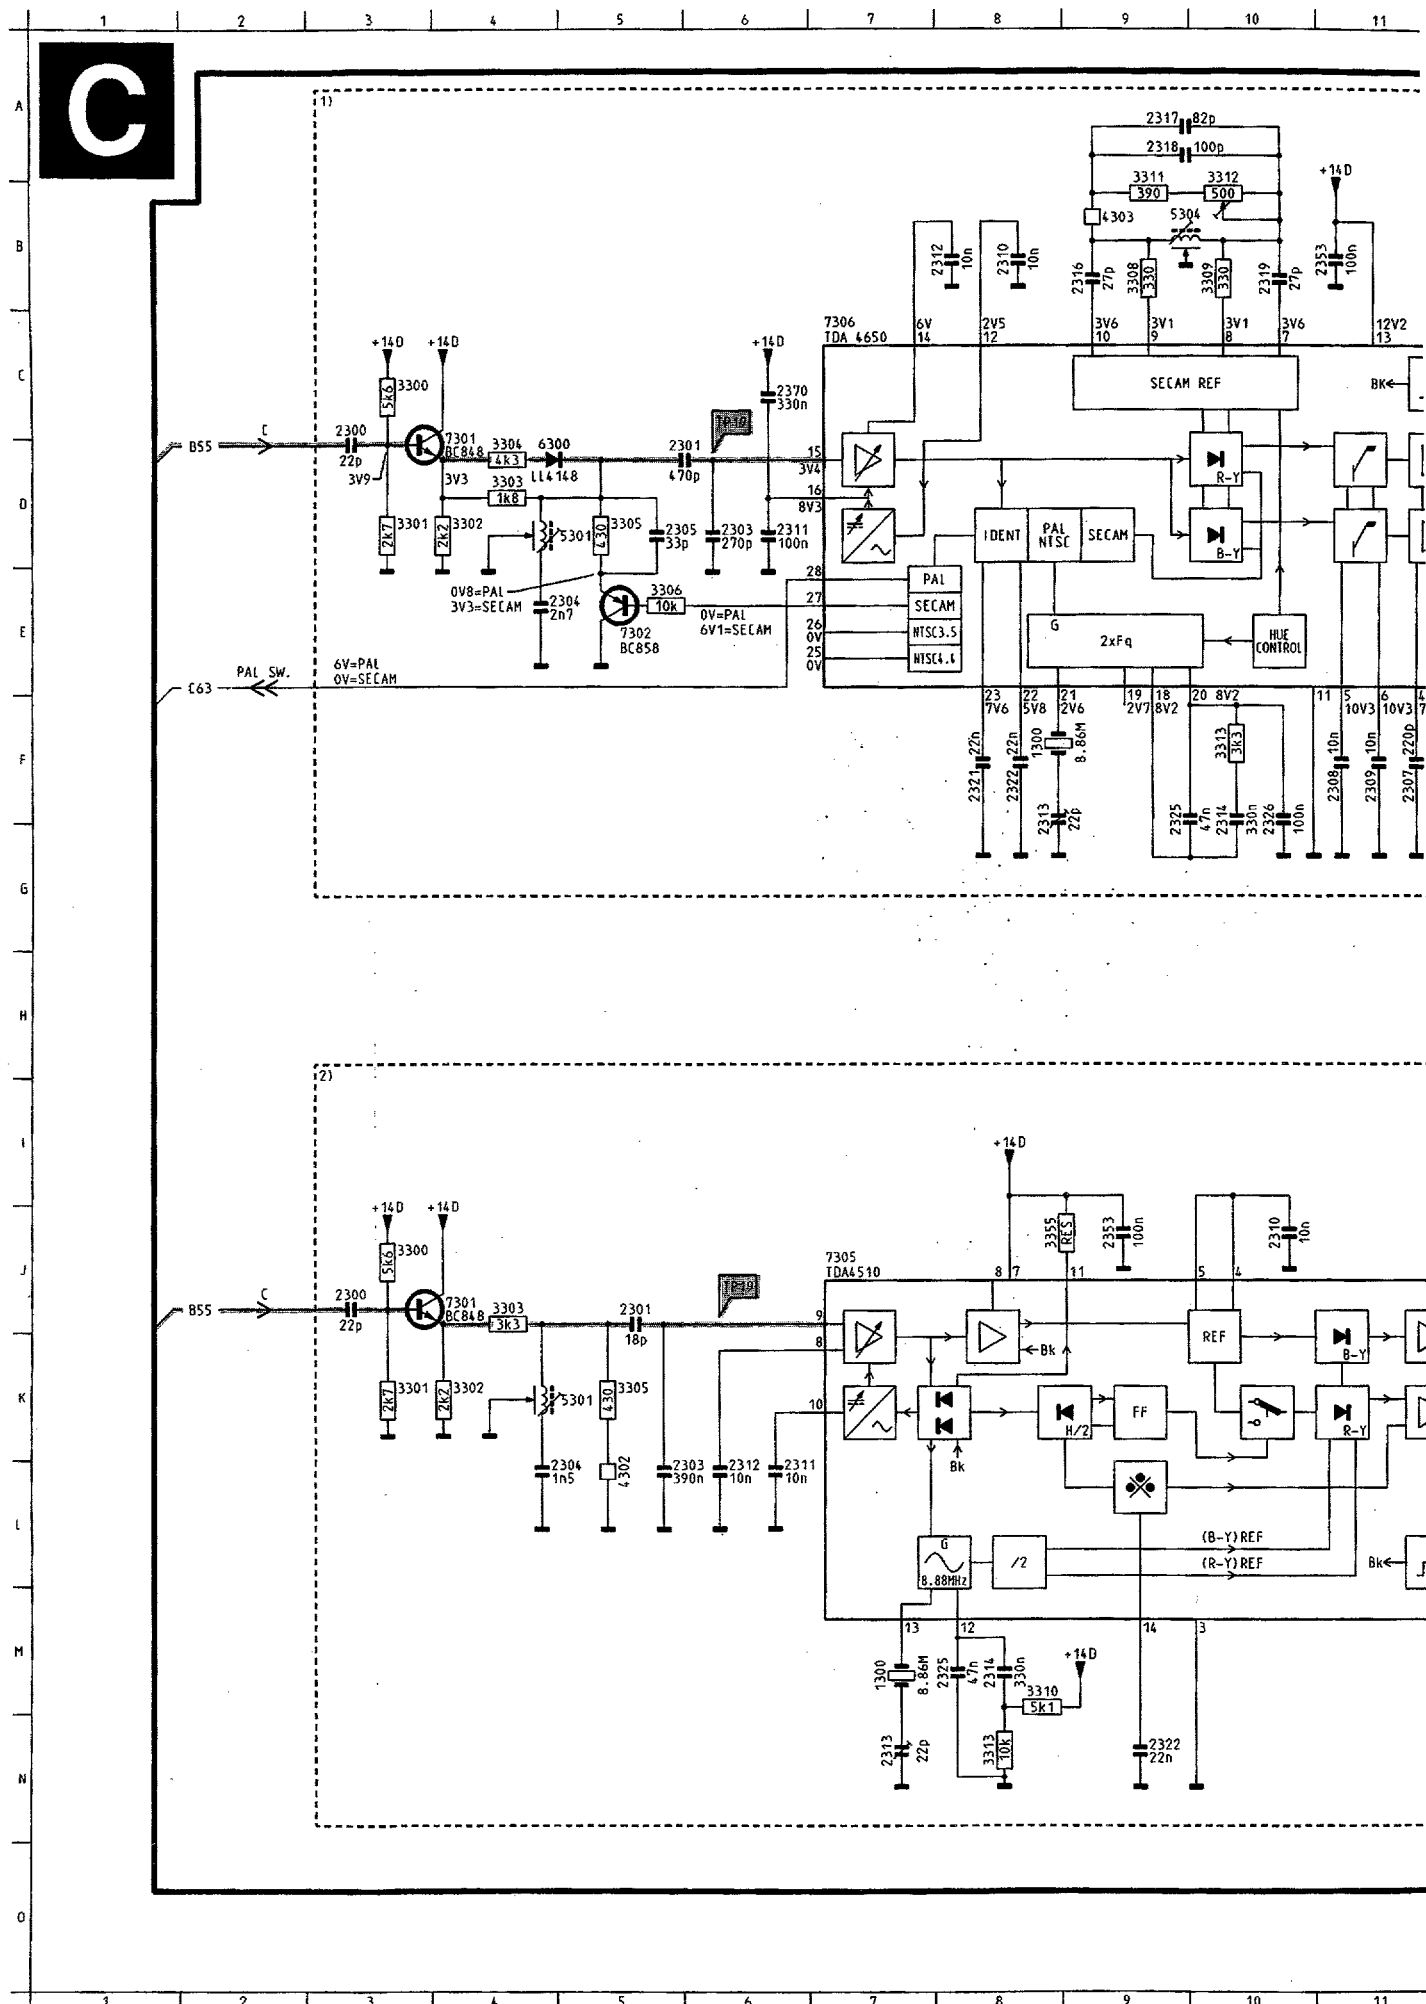


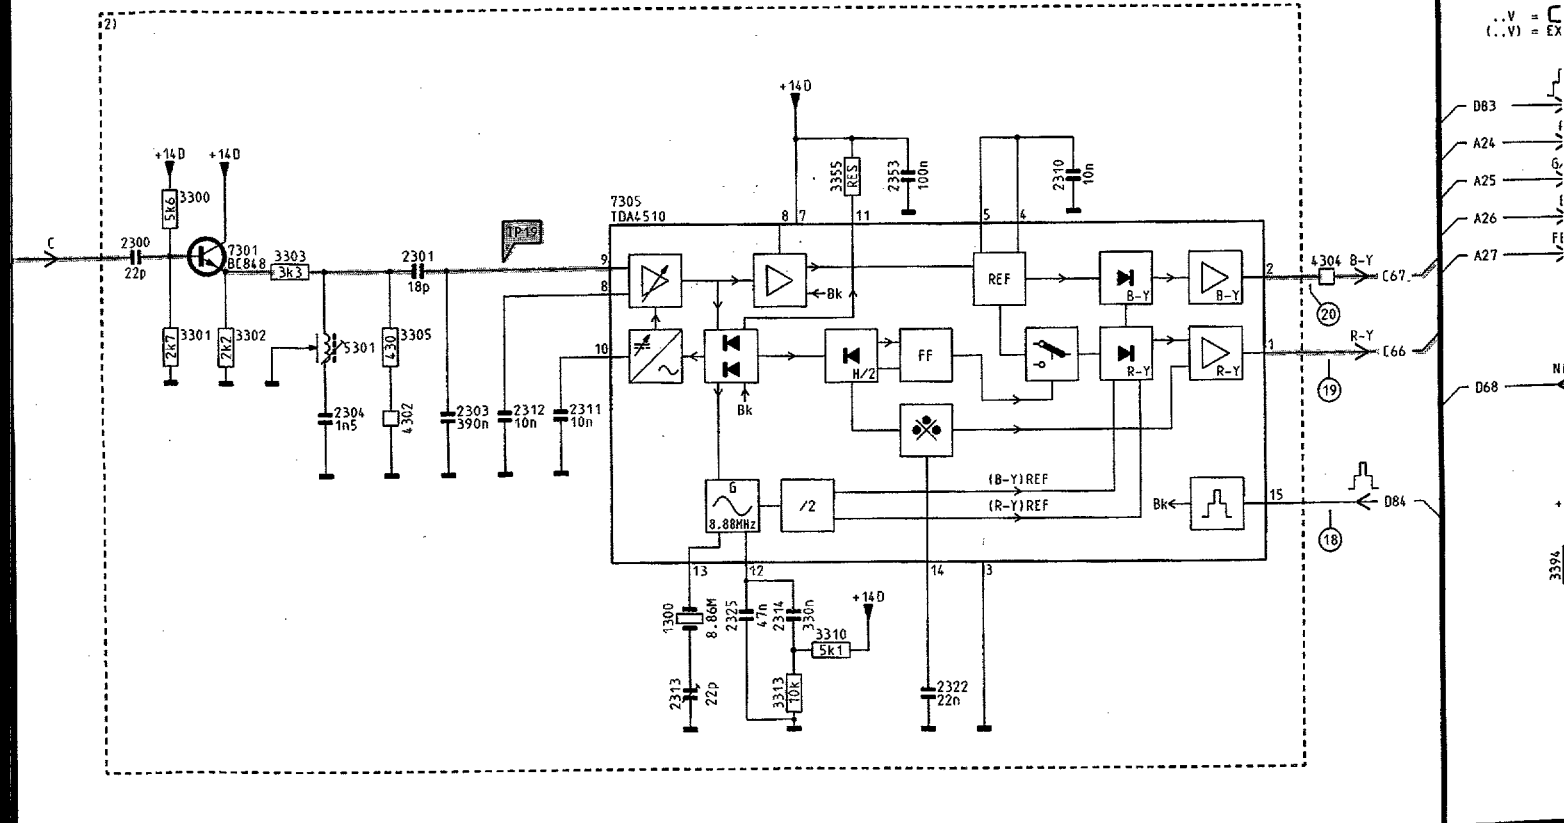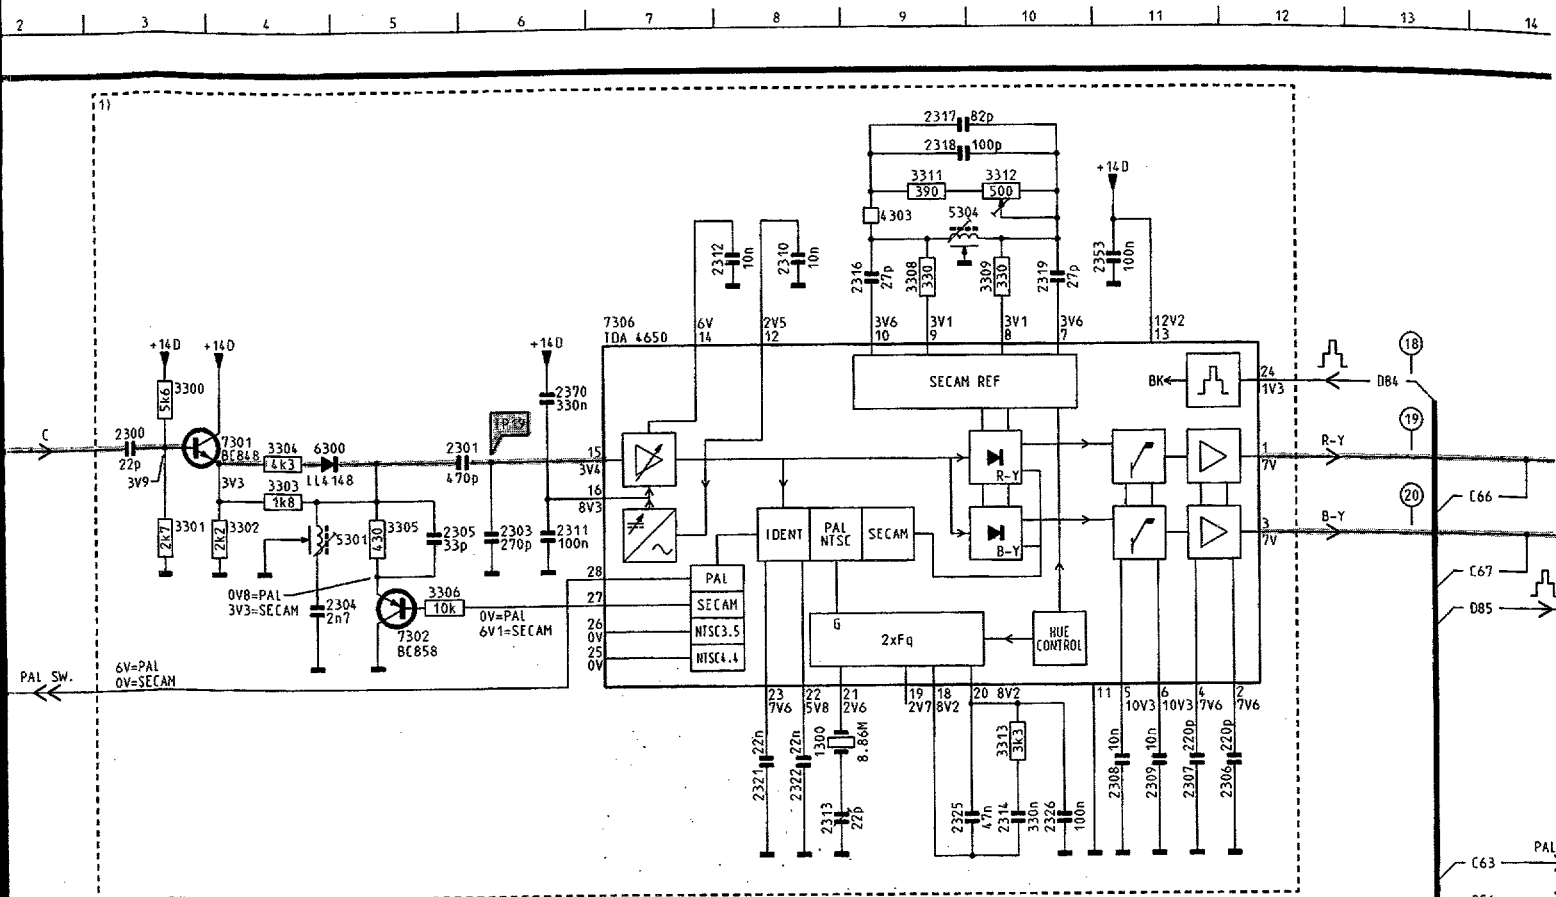


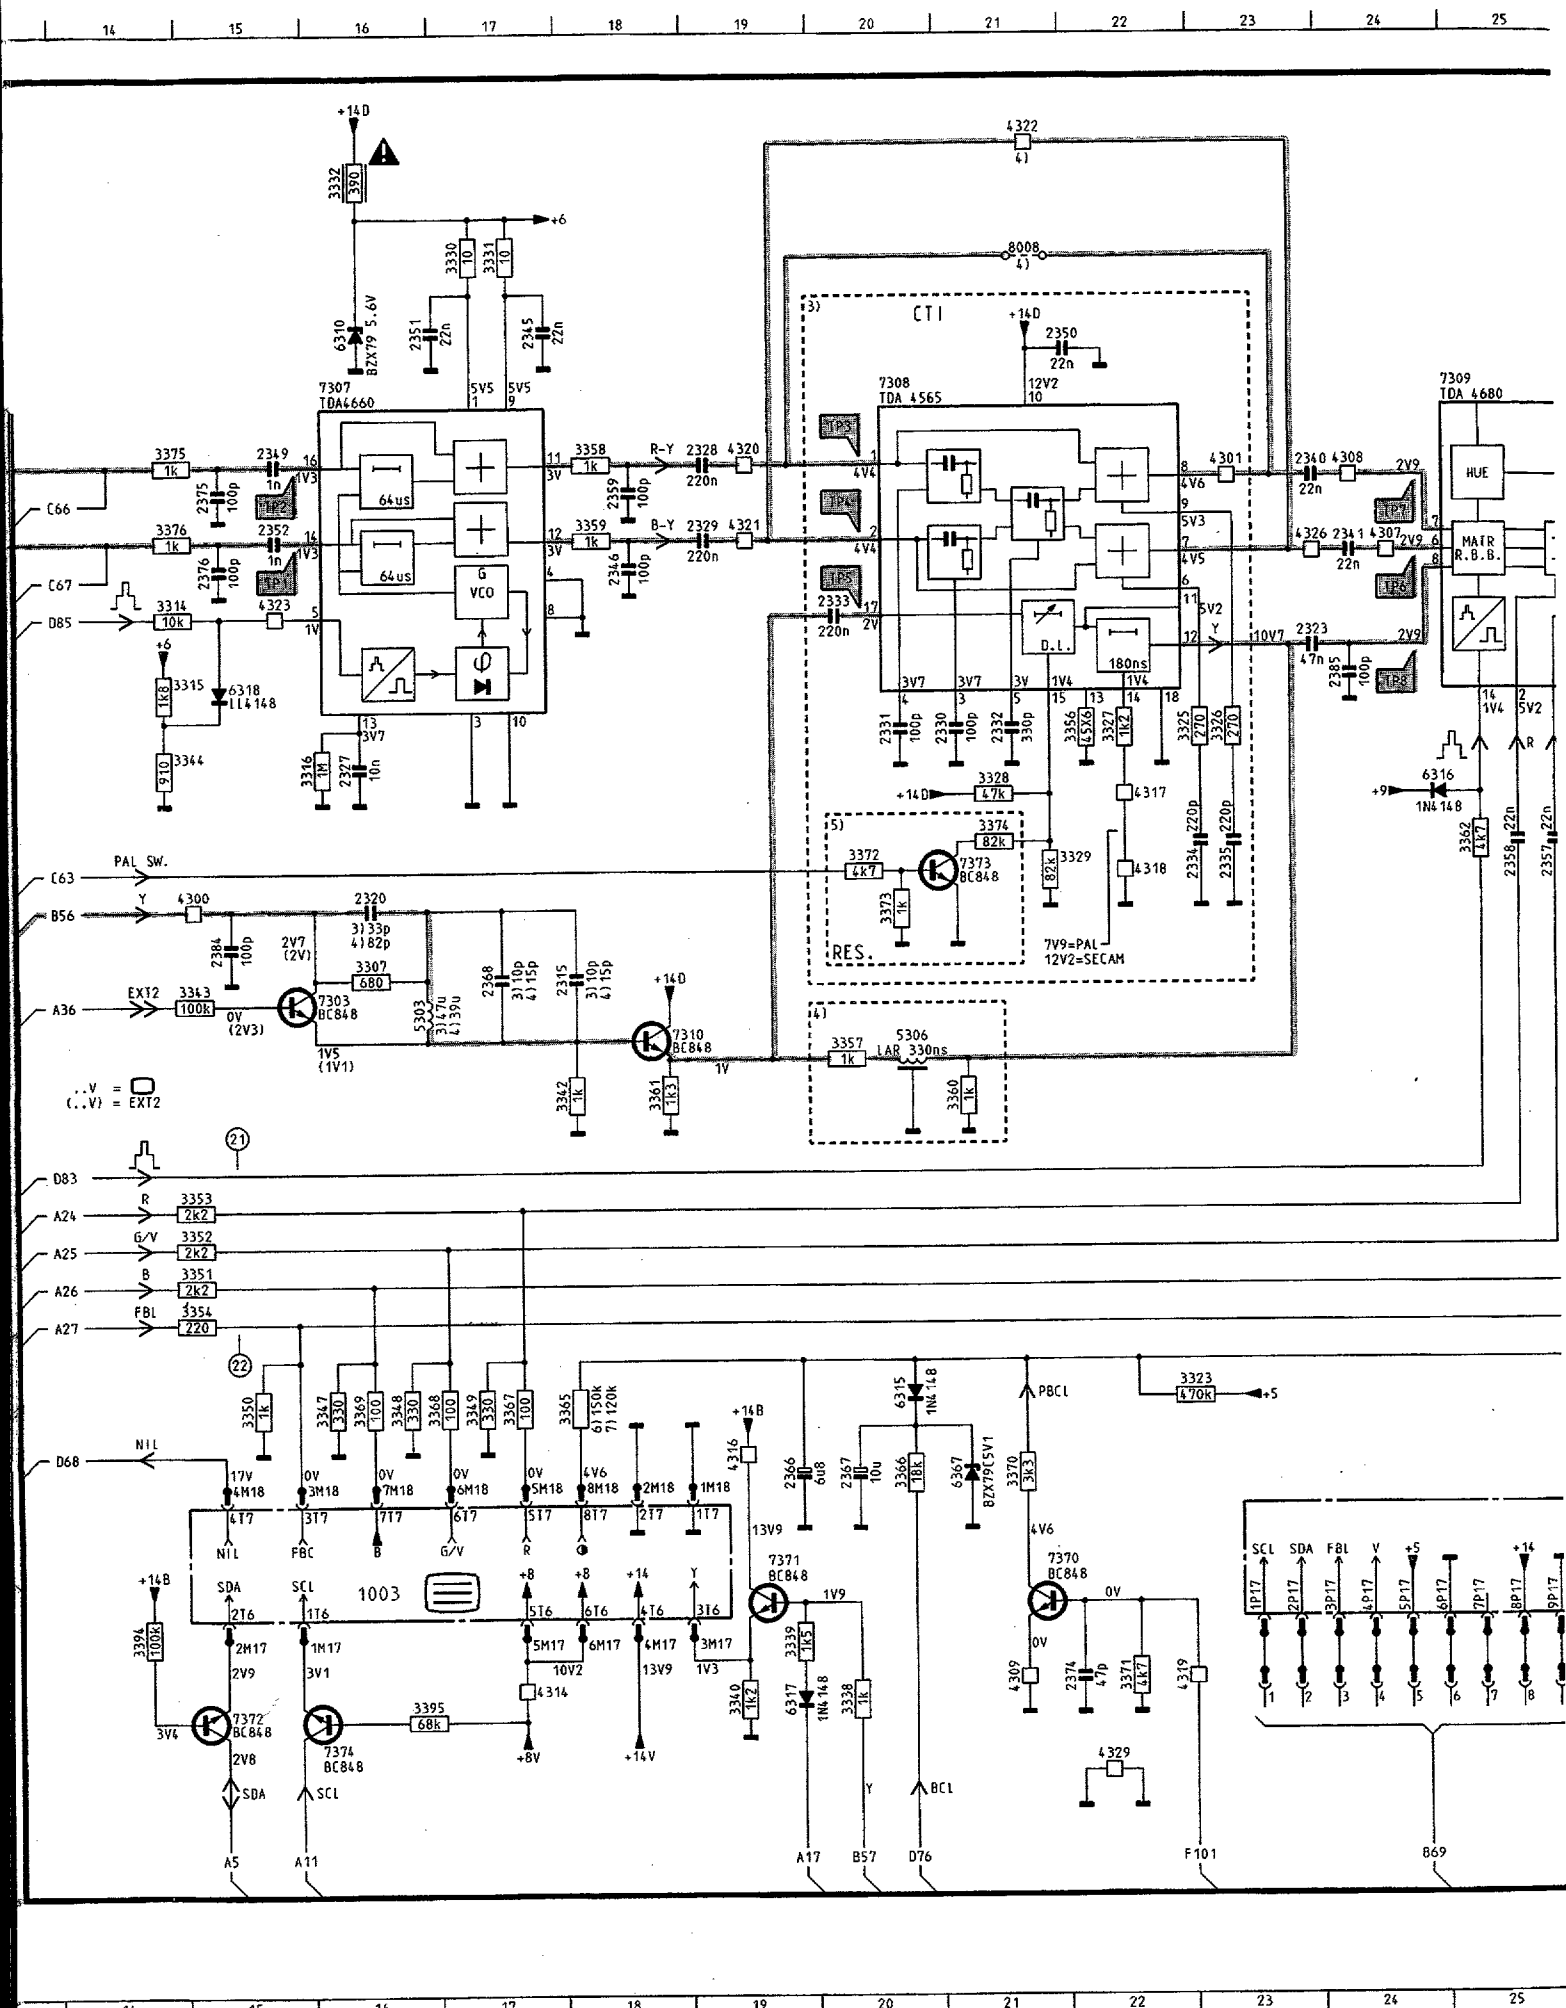


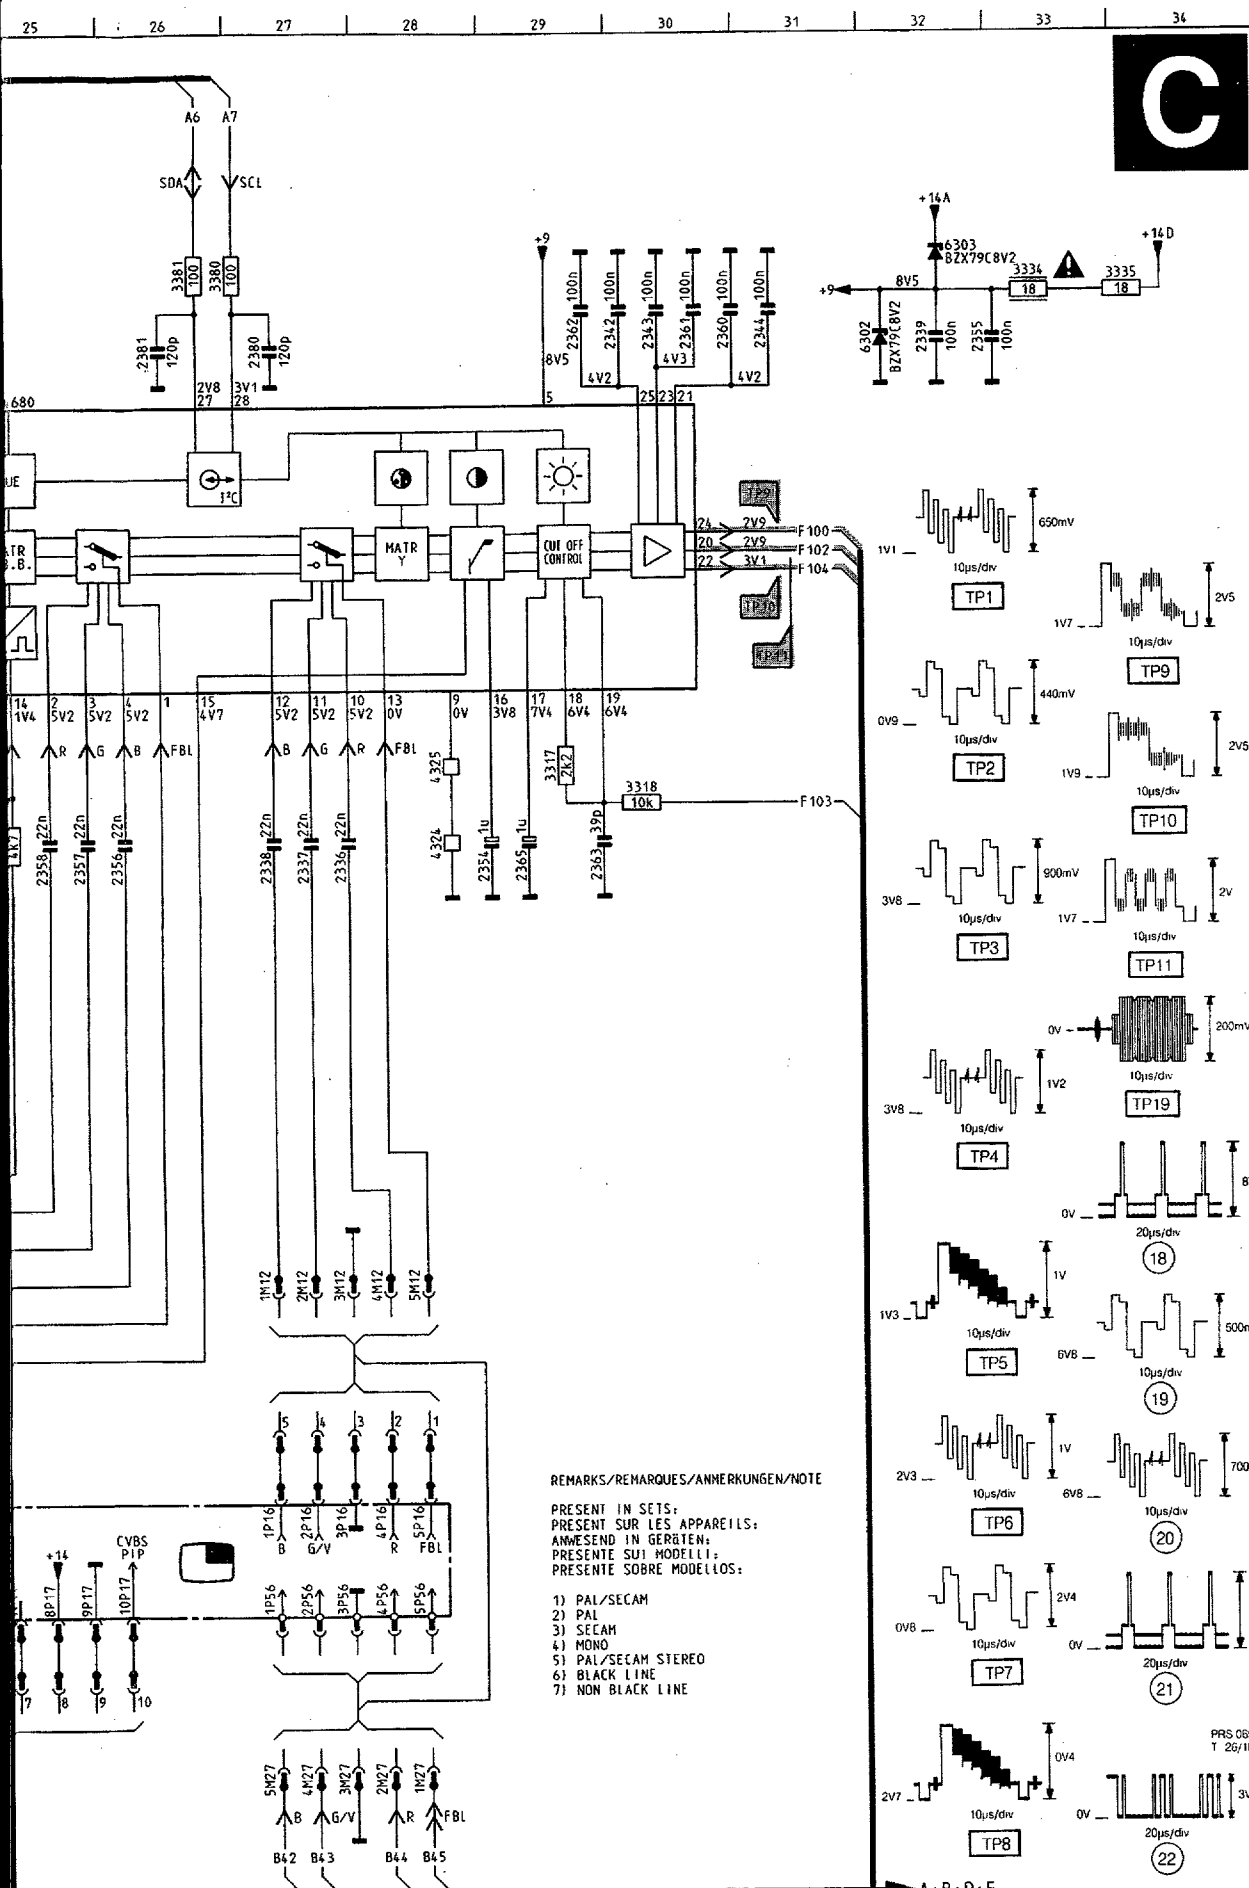


1300	F 8	3329	G22
1300	H 7	3330	B17
2300	D 3	3331	B17
2300	J 3	3332	A16
2301	D 6	3334	B33
2301	J 5	3335	B34
2303	D 6	3338	M20
2303	L 5	3339	M19
2304	E 4	3340	M19
2304	L 4	3342	I18
2305	D 5	3343	H15
2306	F12	3344	F15
2307	F11	3347	K16
2308	F11	3348	K16
2309	F11	3349	K17
2310	B 8	3350	K15
2310	J10	3351	J15
2311	D 6	3352	J15
2311	L 6	3353	I15
2312	B 8	3354	J15
2312	L 6	3355	J 9
2313	G 8	3356	F22
2313	N 7	3357	H20
2314	G10	3358	D18
2314	M 8	3359	D18
2315	H18	3360	I21
2316	B 9	3361	I18
2317	A 9	3362	G25
2318	A 9	3365	K18
2319	B10	3366	L20
2320	G16	3367	K17
2321	F 8	3368	K17
2322	N 9	3369	K16
2322	F 8	3370	L21
2323	F24	3371	M22
2325	G 9	3372	G20
2325	M 8	3373	G20
2326	G10	3374	G21
2327	F16	3375	D15
2328	D19	3376	D15
2329	D19	3380	B27
2330	F21	3381	B26
2331	F20	3394	M14
2332	F21	3395	M16
2333	G20	4300	G15
2334	G23	4301	D23
2335	G23	4303	B 9
2336	G27	4304	K12
2337	G27	4307	D24
2338	G27	4308	D24
2339	C32	4309	H21
2340	D24	4314	M17
2341	D24	4316	K19
2342	C30	4317	F22
2343	C30	4318	G22
2344	C31	4319	M22
2345	C17	4320	D19
2346	E18	4321	D19
2349	D15	4322	A21
2350	C22	4323	E15
2351	C17	4324	G28
2352	D15	4325	F28
2353	B11	4326	D24
2353	J 9	4329	M22
2354	G29	5301	D 5
2355	C33	5301	K 5
2356	G26	5303	H16
2357	G25	5304	B 1
2358	G25	5306	H20
2359	D18	6300	D 5
2360	C31	6302	C32
2361	C30	6303	B32
2362	C29	6310	C16
2363	G29	6315	K20
2365	G29	6316	F25
2366	L19	6317	M19
2367	L20	6318	E15
2368	H17	6367	L21
2370	C 6	7301	D 4
2374	M22	7301	J 4
2375	D15	7302	E 5
2376	E15	7303	H16
2380	C27	7305	J 7
2381	C26	7306	C 7
2384	G15	7307	C16
2385	E24	7308	C20
3300	C 3	7309	C25
3300	J 3	7310	H18
3301	D 3	7310	L21
3301	K 3	7371	L19
3302	D 4	7372	N15
3302	K 4	7373	G21
3303	D 4	7374	N16
3303	J 4	8008	B21
3304	D 4		
3305	D 5		
3305	K 5		
3306	E 5		
3307	H16		
3308	B 9		
3309	B10		
3310	M 8		
3311	B 9		
3312	B10		
3313	F10		
3313	N 8		
3314	E15		
3315	E15		
3316	F16		
3317	F29		
3318	F30		
3323	K23		
3325	F23		
3326	F23		
3327	F22		
3328	F21		

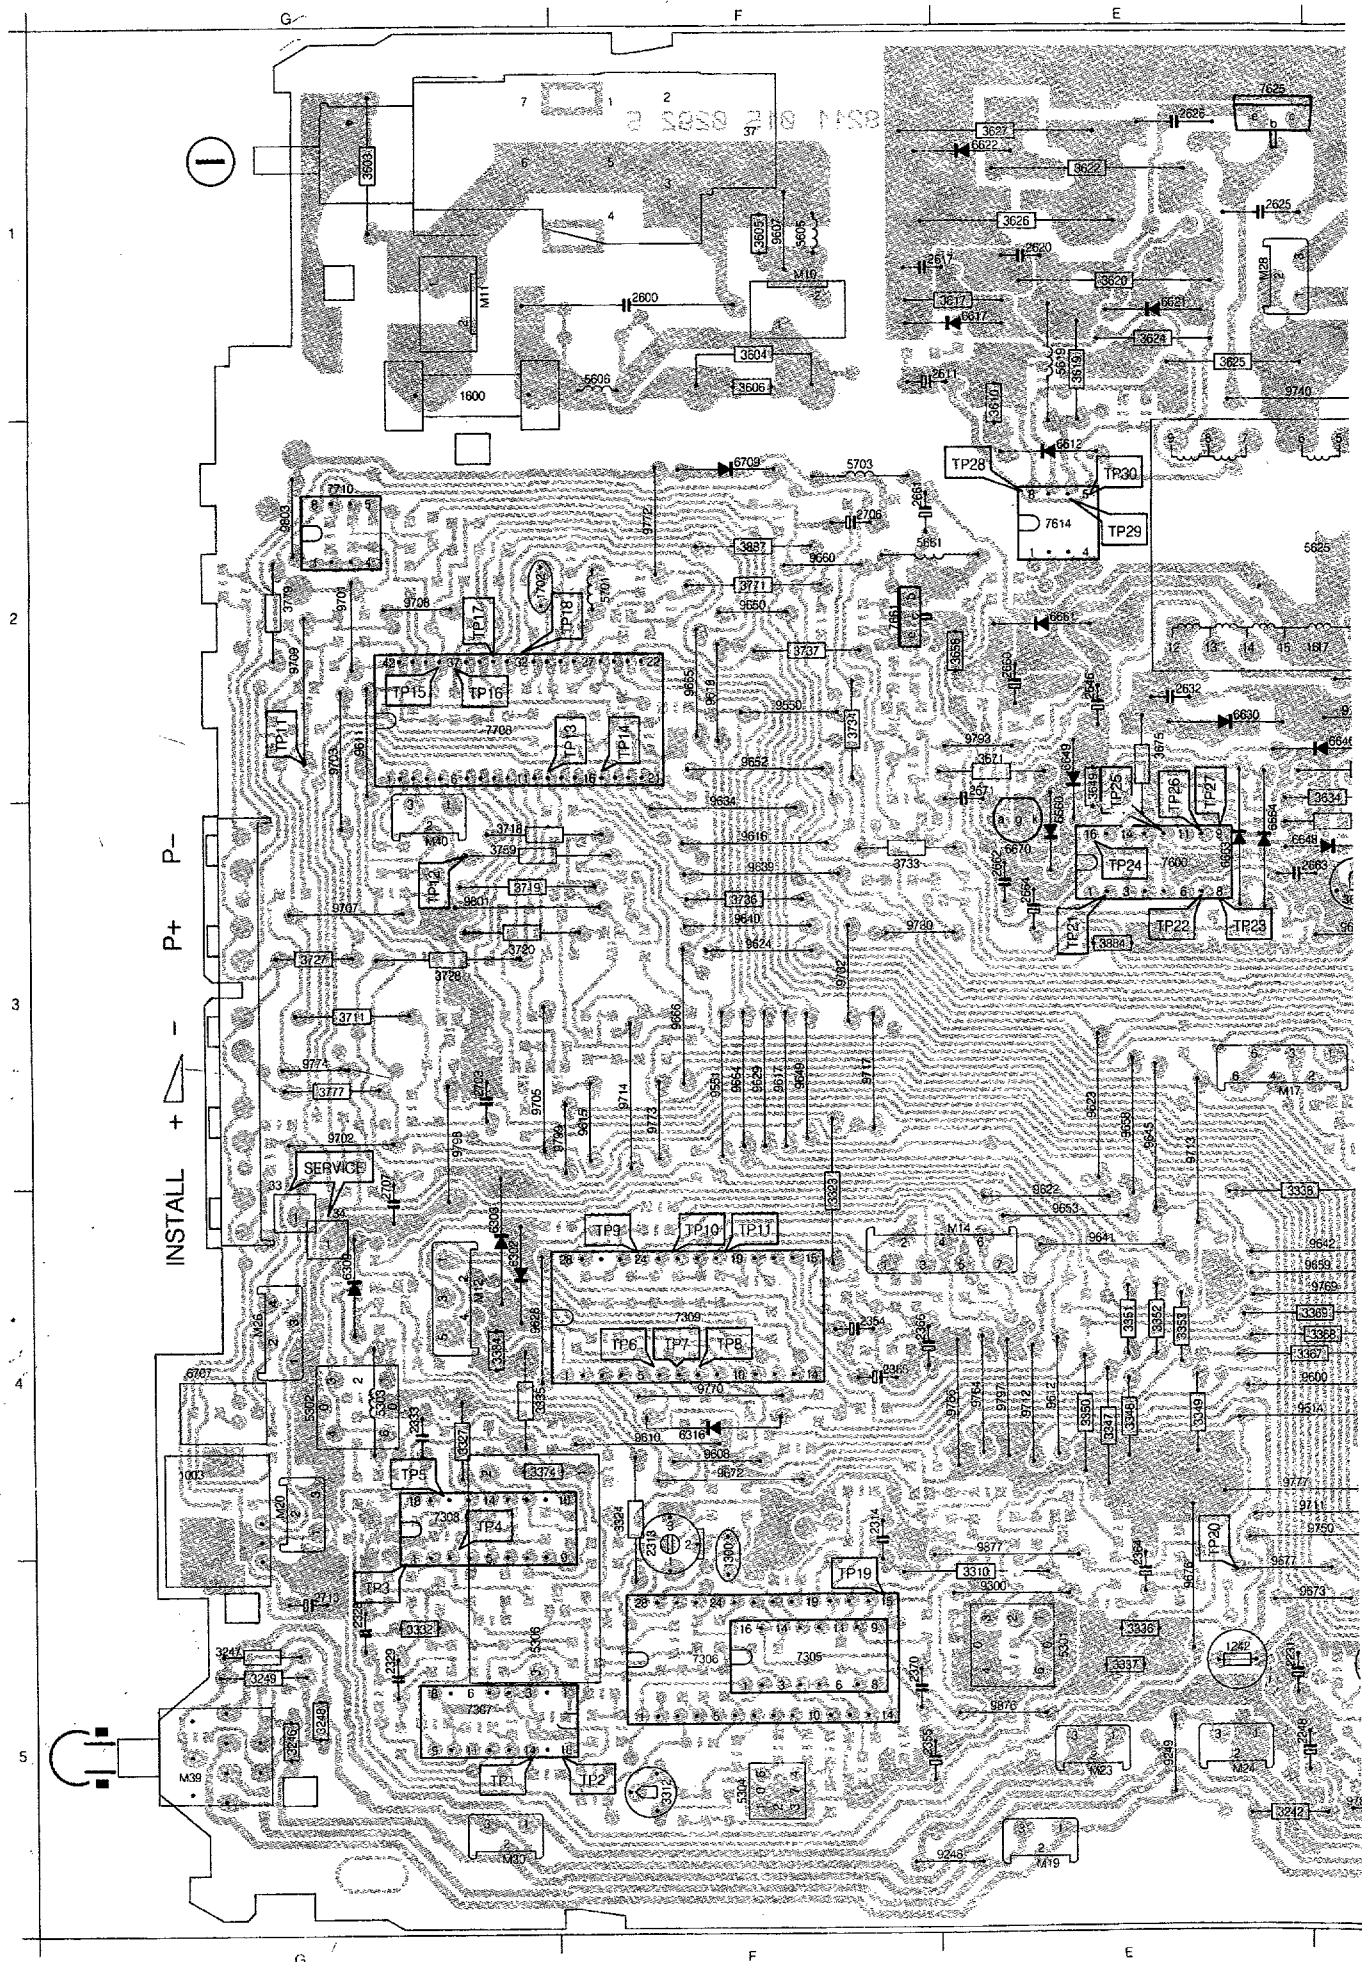


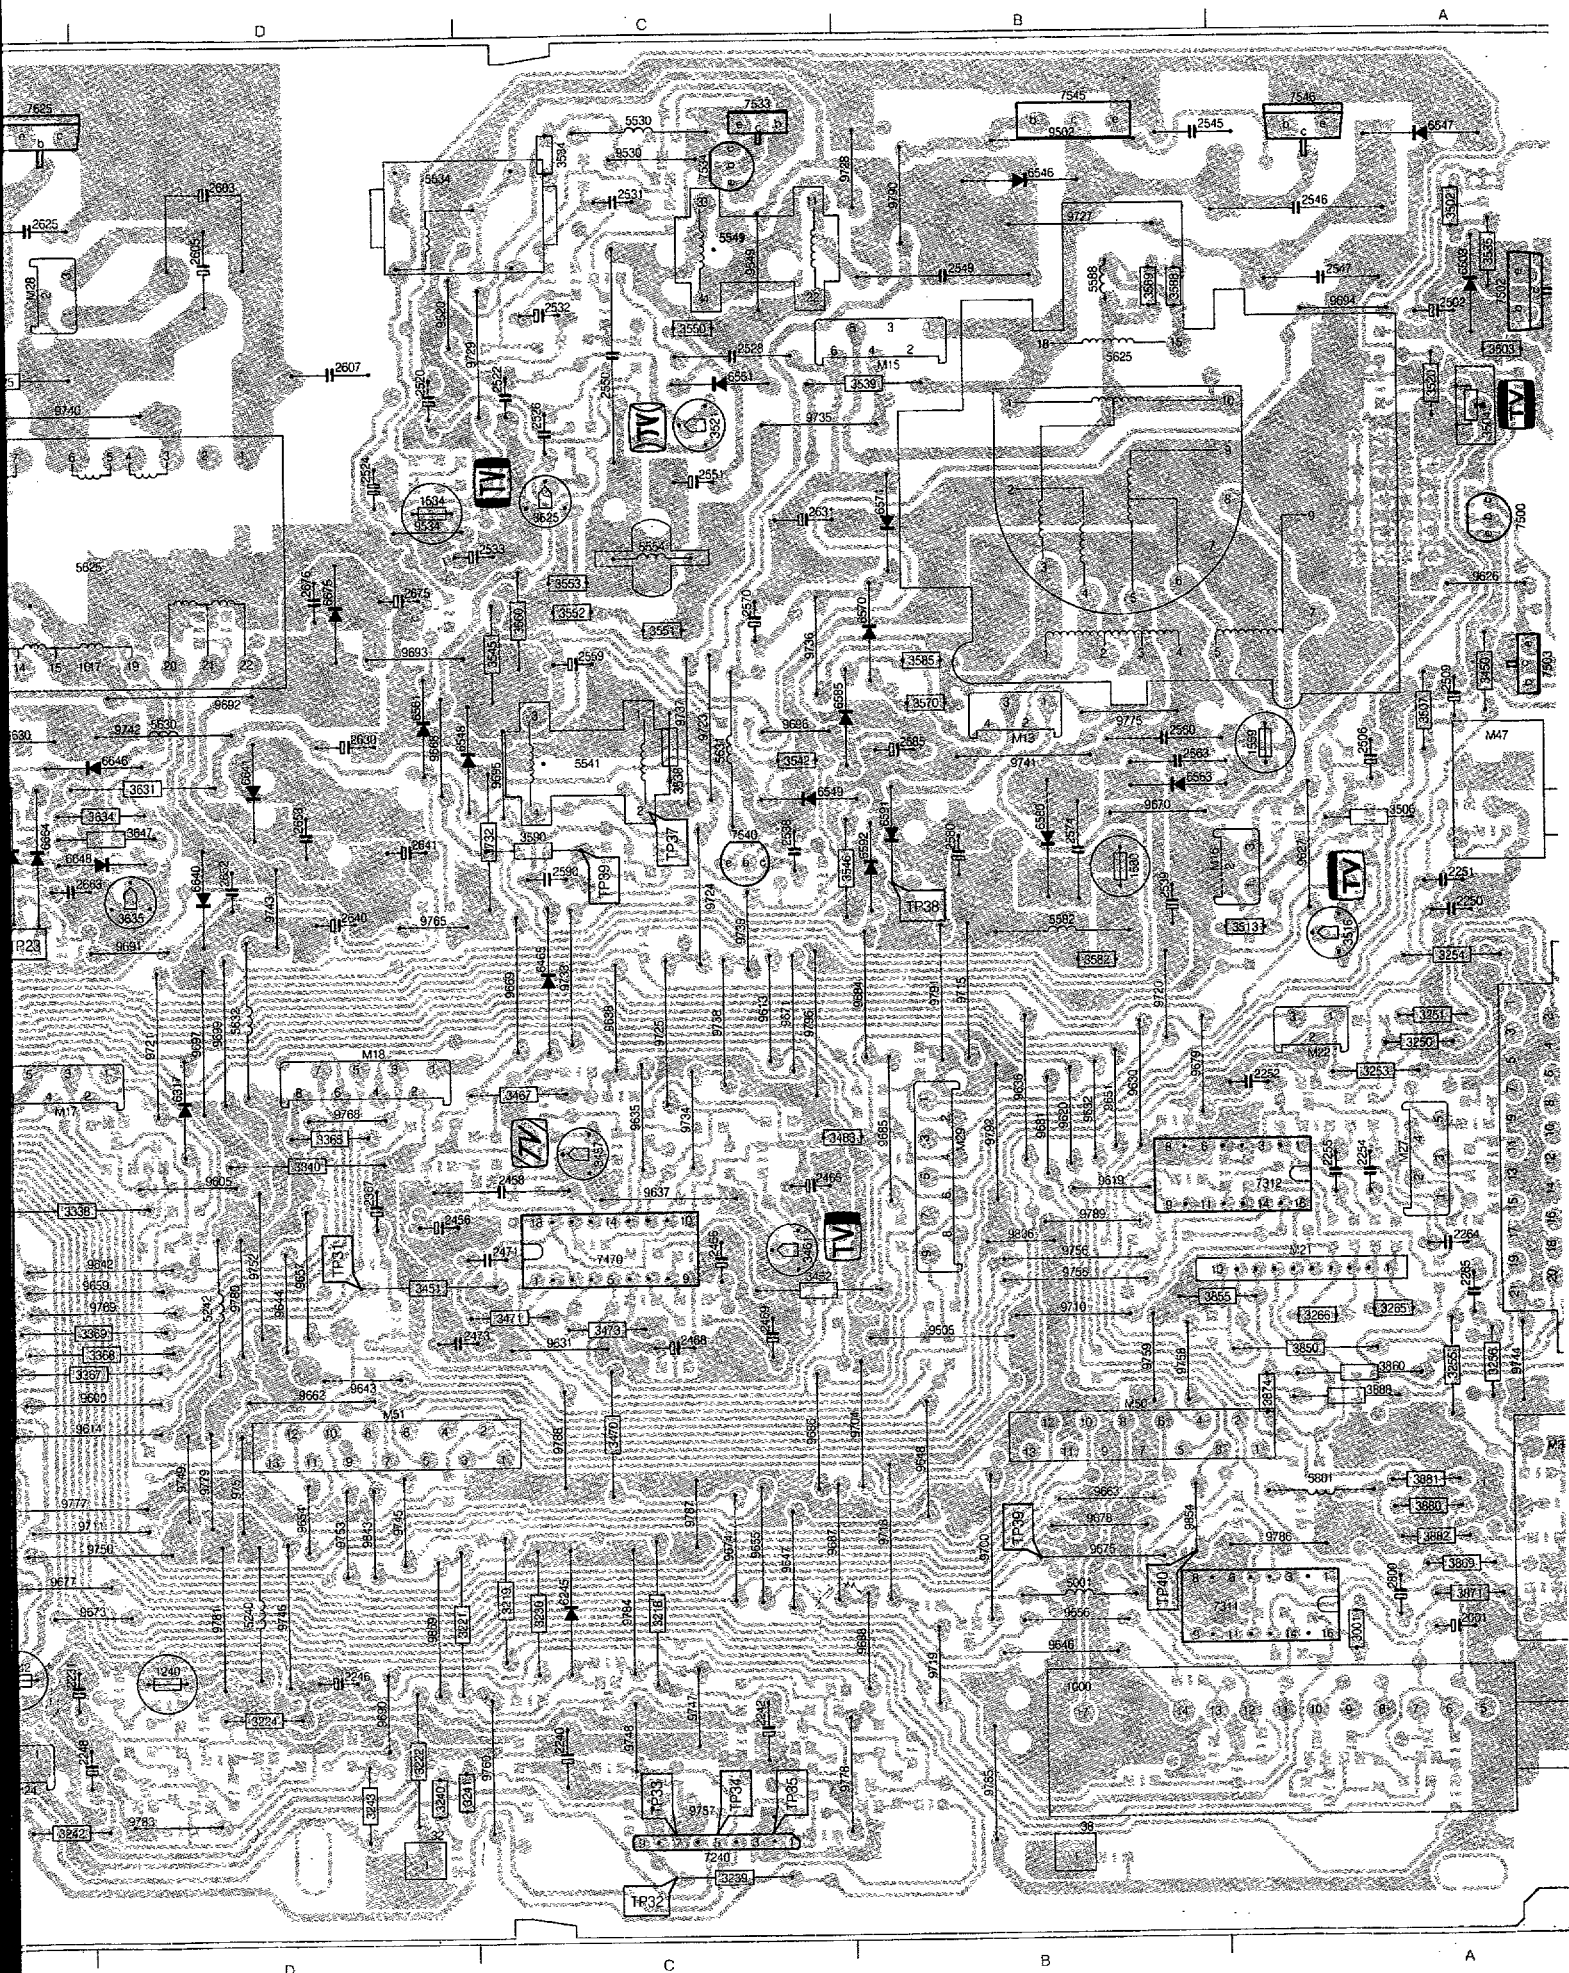

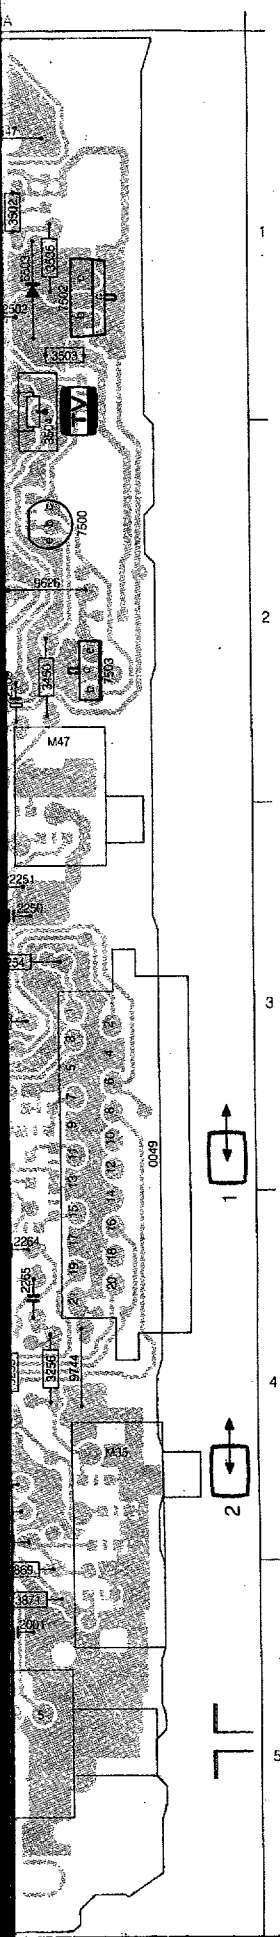

32 5D	3243 5D	5625 2E	9673 5E
33 3G	3246 5G	5630 2D	9674 4C
34 4G	3247 5G	5631 2C	9675 4B
37 1F	3248 5G	5632 3D	9676 5E
38 5B	3249 5G	5681 2F	9677 5E
M10 1F	3250 3A	5701 2F	9678 4B
M11 1G	3251 3A	5703 2F	9679 3B
M12 4G	3253 3A	5801 4A	9681 3B
M13 2B	3254 3A	6245 5C	9684 3B
M14 4E	3255 4A	6302 4G	9685 3B
M15 1B	3256 4A	6303 4G	9686 4C
M16 3A	3255 4A	6309 4G	9687 4C
M17 5E	3256 4A	6316 4F	9688 5B
M18 3D	3310 5E	6317 3D	9690 5D
M19 5E	3312 5F	6465 3C	9691 3D
M20 4G	3323 4F	6503 1A	9692 2D
M21 4A	3324 4F	6546 1B	9693 2D
M22 3A	3327 4G	6547 1A	9694 1A
M23 5E	3332 5G	6548 2C	9695 2C
M24 5E	3334 4G	6549 2C	9696 2C
M26 4G	3335 4G	6551 1C	9697 3D
M27 3A	3336 5E	6551 2D	9699 3D
M28 1E	3337 5E	6553 2B	9700 4B
M29 3B	3338 4E	6570 2B	9701 2G
M30 5G	3340 3D	6571 2B	9702 3G
M35 4A	3347 4E	6580 3B	9703 2G
M39 5G	3348 4E	6585 2B	9704 4B
M40 3G	3349 4E	6591 3B	9705 3G
M47 2A	3350 4E	6592 3B	9707 3G
M50 4B	3351 4E	6612 2E	9708 2G
M51 4D	3352 4E	6617 1E	9709 2G
0049 3A	3353 4E	6621 1E	9710 4B
1000 5B	3365 3D	6622 1E	9711 4E
1003 4G	3367 4E	6630 2E	9712 4E
1240 5D	3368 4D	6640 3D	9713 3E
1242 5E	3369 4E	6641 2D	9714 3F
1300 5F	3374 4G	6646 2D	9715 3B
1534 2D	3450 2A	6648 3E	9717 3F
1559 2A	3451 4D	6649 2E	9718 4B
1580 3B	3452 4C	6650 3E	9719 5B
1600 1G	3457 3C	6661 2E	9720 3B
1702 2G	3461 4C	6663 3E	9721 3D
2001 5A	3467 3C	6664 3E	9723 2C
2231 5E	3470 4C	6670 3E	9724 3C
2240 5C	3471 4C	6675 2D	9725 3C
2242 5C	3473 4C	6707 4G	9727 1B
2246 5D	3483 3C	6709 2F	9728 1B
2248 5E	3502 1A	7240 5C	9729 1C
2250 3A	3503 1A	7305 5F	9730 3F
2251 3A	3504 2A	7306 5F	9732 3F
2252 3A	3506 3A	7307 5G	9733 3C
2254 3A	3507 2A	7308 4G	9734 3C
2255 3A	3513 3A	7309 4F	9735 1C
2264 4A	3516 3A	7311 5B	9736 2C
2265 4A	3520 1A	7312 4A	9737 2C
2313 4F	3521 2C	7470 4C	9738 3C
2314 4F	3525 2C	7500 2A	9739 3C
2328 5G	3534 1C	7502 1A	9740 1E
2329 5G	3535 1A	7503 2A	9741 2B
2333 4G	3538 2C	7533 1C	9742 2D
2354 4F	3539 1B	7534 1C	9743 3D
2355 5F	3542 2C	7540 3C	9744 4A
2364 5E	3545 2C	7545 1B	9745 4D
2365 4F	3546 3B	7546 1A	9746 5D
2366 4F	3550 1C	7600 3E	9747 5C
2367 4D	3551 2C	7614 2E	9748 5C
2370 5F	3552 2C	7625 1E	9749 4D
2456 4D	3553 2C	7661 2F	9750 4E
2458 3C	3560 2C	7708 2G	9751 4D
2465 3C	3570 2B	7710 2G	9752 4D
2466 4C	3582 3B	9248 5F	9753 4D
2468 4C	3585 2B	9249 5E	9755 4B
2469 4C	3588 1B	9300 5E	9756 4B
2471 4C	3589 1B	9502 1B	9757 5C
2473 4D	3590 3C	9505 4B	9758 4B
2502 1A	3603 1G	9520 1D	9759 4B
2506 2A	3604 1F	9530 1C	9760 5C
2509 2A	3605 1F	9534 2D	9764 4E
2520 1D	3606 1F	9549 1C	9765 3D
2522 1C	3610 2E	9550 2F	9766 4E
2524 2D	3617 1E	9551 3F	9768 3D
2526 2C	3619 1E	9600 4E	9769 4D
2528 1C	3620 1E	9605 3D	9770 4F
2531 1C	3622 1E	9607 1F	9772 2F
2532 1C	3624 1E	9608 4F	9773 3F
2533 2C	3625 1E	9610 4F	9774 3G
2538 3C	3626 1E	9611 2G	9775 2B
2539 3B	3627 1E	9612 4E	9777 4E
2545 1B	3631 2D	9613 3C	9778 5C
2546 1A	3634 3D	9614 4E	9779 4D
2547 1A	3635 3D	9615 3F	9780 4D
2549 1B	3647 3D	9616 3F	9781 5D
2550 1C	3649 3E	9617 3F	9783 5D
2551 2C	3658 2E	9618 2F	9784 5C
2559 2C	3671 2E	9619 3B	9785 5B
2560 2B	3675 2E	9620 3B	9786 4A
2563 2B	3711 3G	9622 4E	9787 4C
2570 2C	3718 3G	9623 3E	9788 4C
2574 3B	3719 3G	9624 3F	9789 4B
2580 3B	3720 3G	9626 2A	9790 1B
2585 2B	3727 3G	9627 3A	9791 3B
2590 3C	3728 3G	9628 4G	9792 3B
2600 1F	3732 3C	9629 3F	9793 2E
2603 1D	3733 3F	9630 3B	9796 3C
2605 1D	3734 2F	9631 4C	9797 4E
2607 1D	3736 3F	9632 3B	9798 3G
2611 1F	3737 2F	9634 3F	9799 3F
2617 1F	3759 3G	9635 3C	9801 3G
2620 1E	3771 2F	9636 3B	9803 2G
2625 1E	3777 3G	9637 4C	9806 4B
2626 1E	3779 2G	9638 3C	9843 4D
2630 2D	3850 4A	9639 3F	9854 4B
2631 2C	3855 4B	9640 3F	9859 5D
2632 2E	3860 4A	9641 4E	9876 5E
2640 3D	3869 5A	9642 4D	9877 4E
2641 3D	3871 5A	9643 4D	
2646 2E	3874 4A	9644 4D	
2652 3D	3880 4A	9645 3E	
2653 3D	3881 4A	9646 5B	
2660 2E	3882 4A	9647 5C	
2661 2F	3884 3E	9648 4B	
2662 3E	3887 2F	9649 3F	
2663 3E	3888 4A	9650 2F	
2664 3E	5001 5B	9651 3B	
2671 2E	5240 5D	9652 2F	
2675 2D	5242 4D	9653 4E	
2676 2D	5301 5E	9654 4D	
2703 3G	5302 4G	9655 4C	
2706 2F	5303 4G	9656 5B	
2707 4G	5304 5F	9657 4D	
2713 5G	5306 5G	9658 3E	
2800 5A	5530 1C	9659 4E	
3001 5A	5534 1D	9660 2F	
3218 5C	5541 1C	9662 4D	
3219 5C	5541 2C	9663 4B	
3221 5D	5549 1C	9664 3F	
3222 5D	5554 2C	9665 2F	
3224 5D	5582 3B	9666 3F	
3230 5C	5588 1B	9668 2D	
3239 5C	5605 1F	9669 3C	
3240 5D	5606 1F	9670 3B	
3241 5D	5619 1E	9671 3C	
3242 5E	5625 1B	9672 4F	

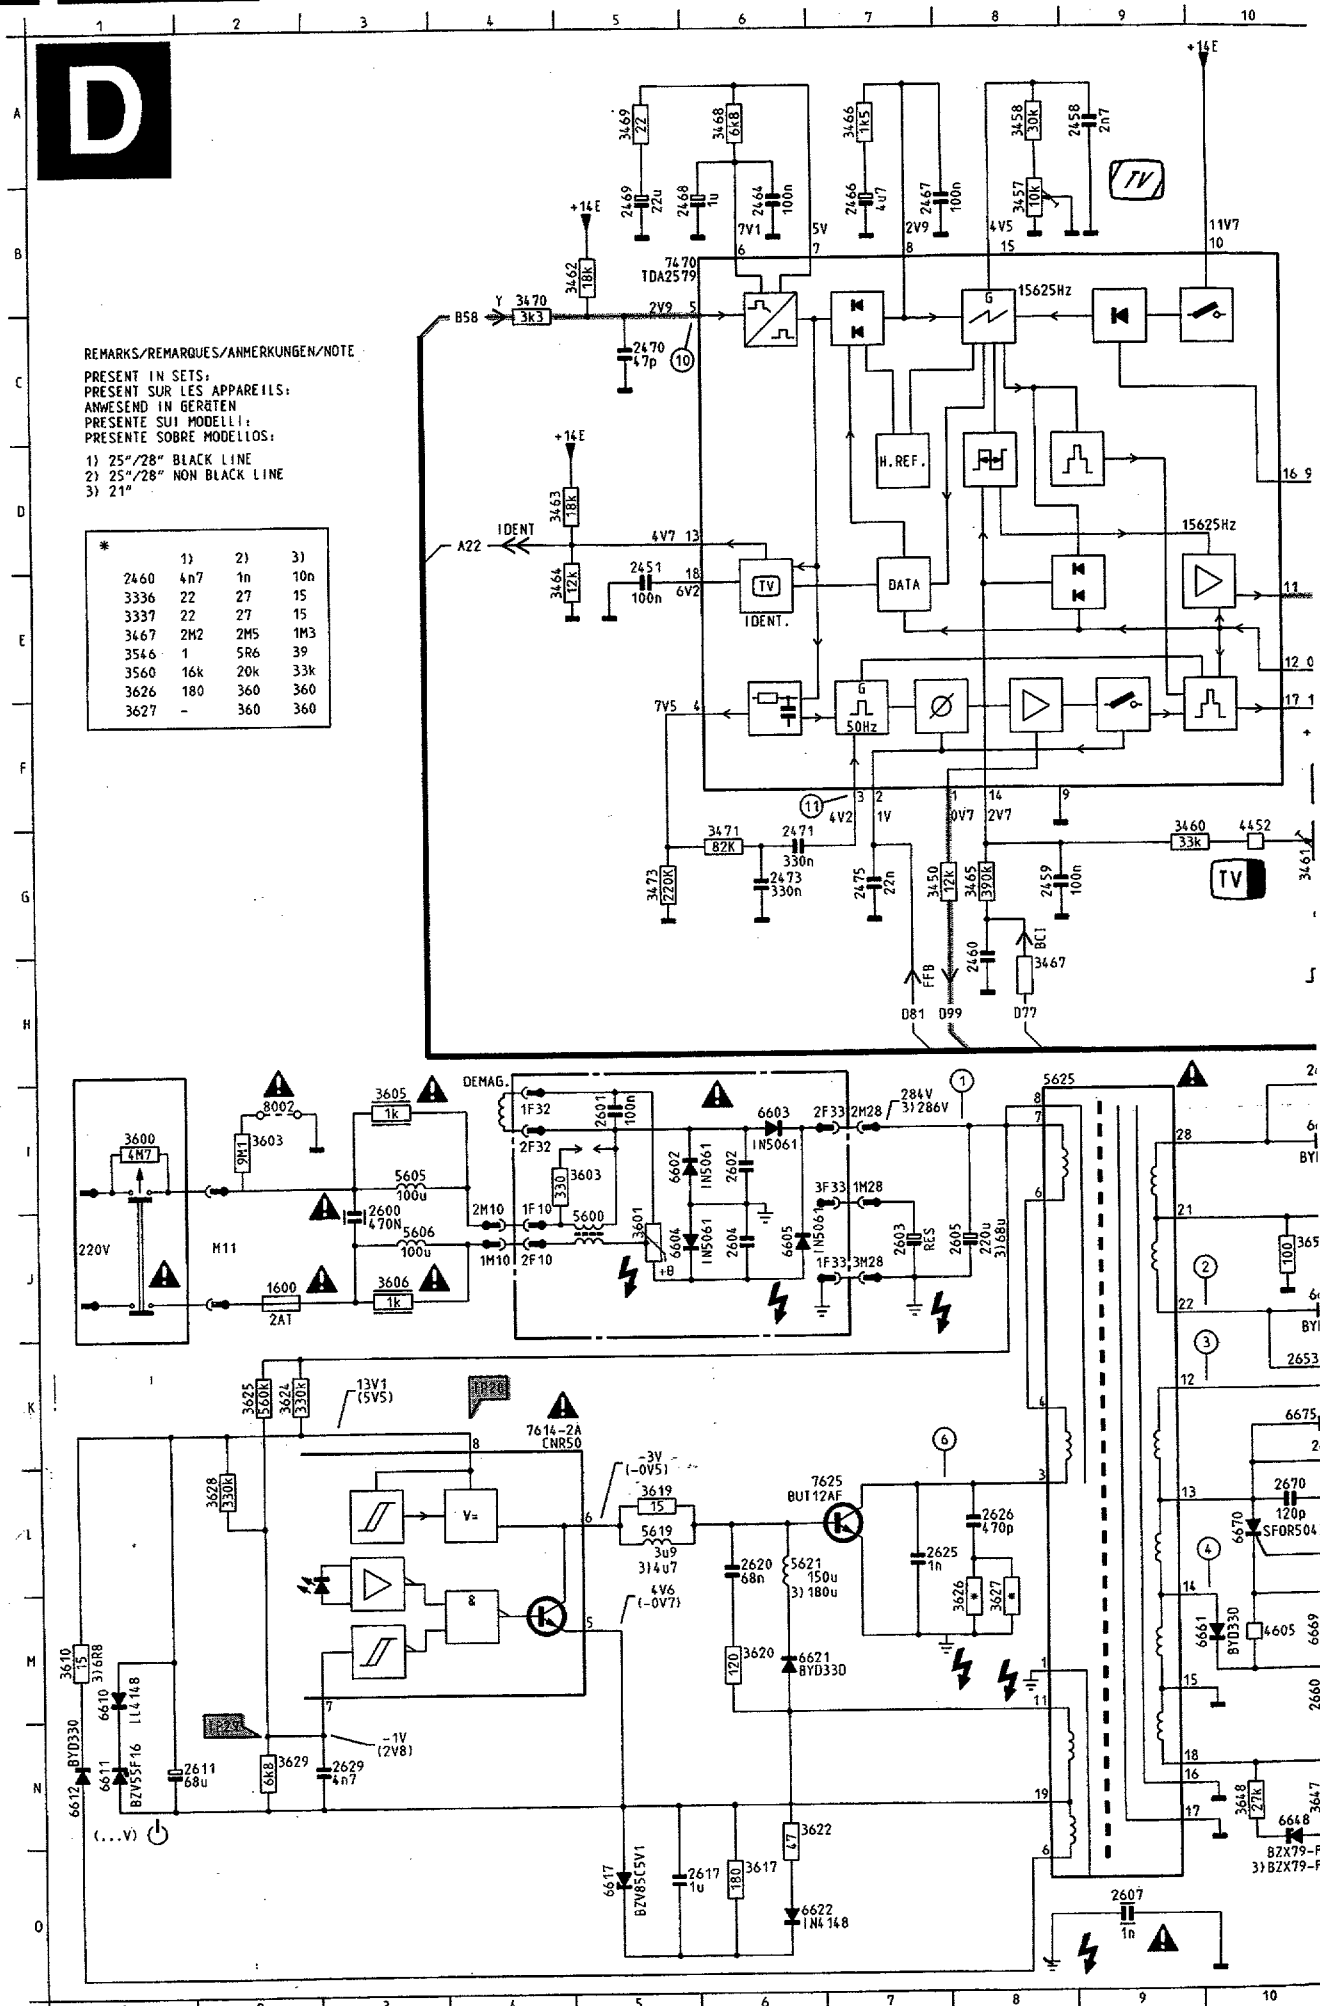

































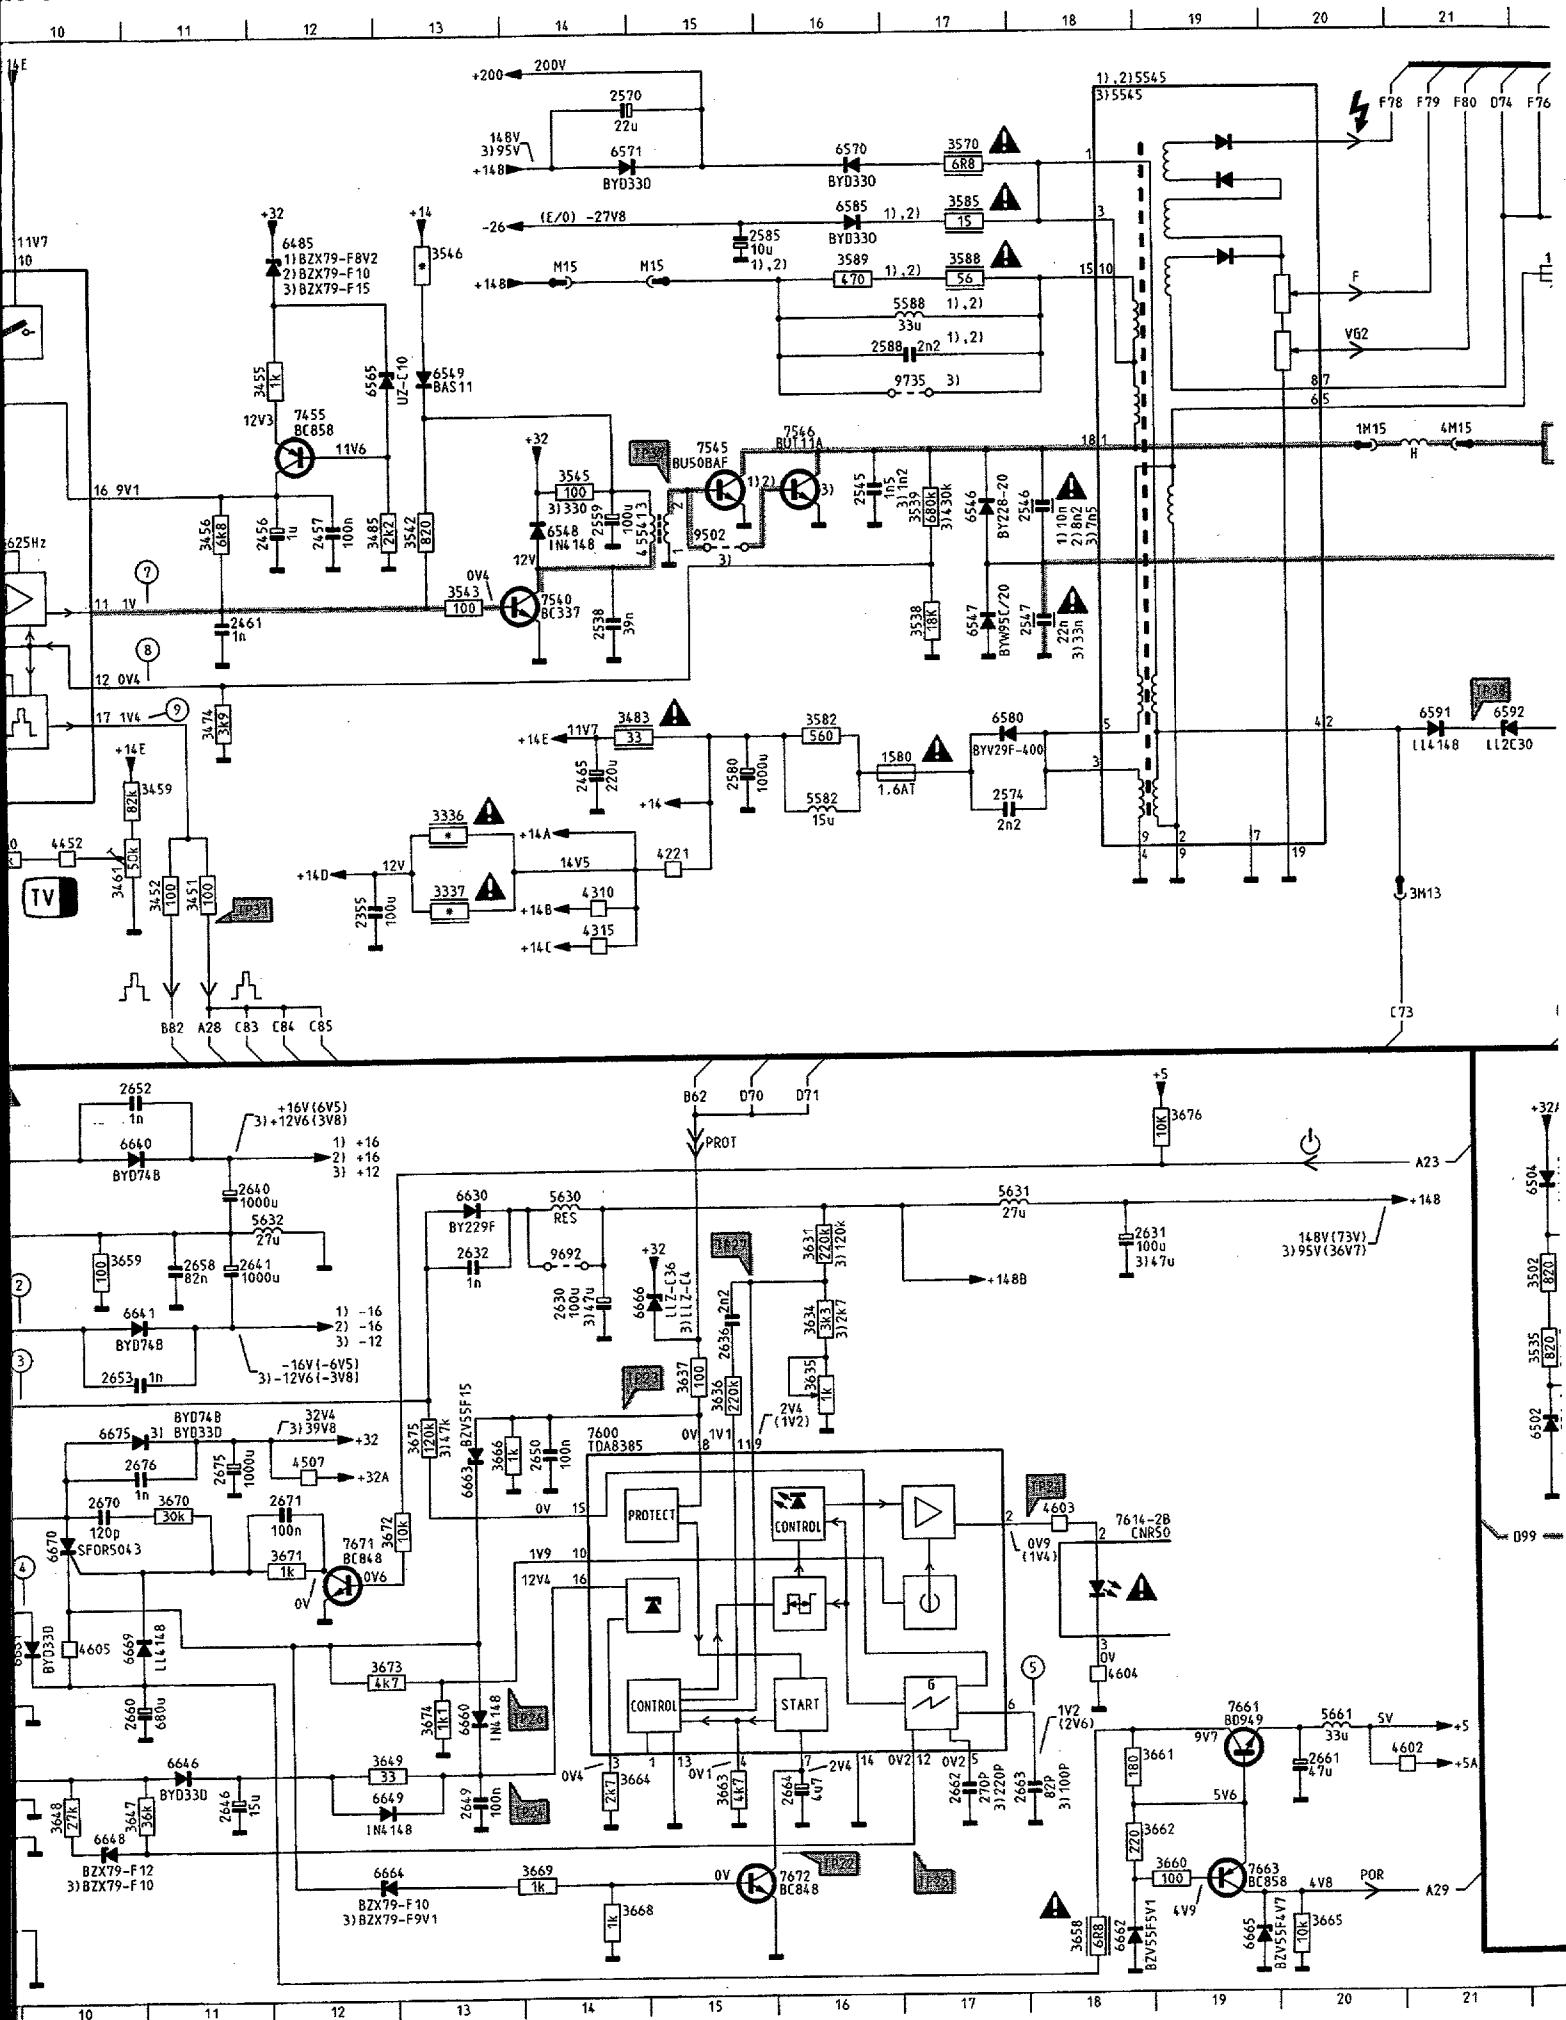



D


1534	F27	3503	K23	5554	D23
1559	B27	3504	L26	5582	F16
1580	F17	3505	K24	5588	C17
1600	J 2	3506	K26	5600	J 5
2355	G12	3507	L26	5605	I 3
2451	E 5	3508	L25	5606	J 3
2456	D12	3509	L25	5619	L 6
2457	D12	3510	M25	5621	L 8
2458	A 9	3511	M25	5625	I 1
2459	G 8	3512	N24	5630	I14
2460	H 8	3513	J25	5631	I17
2461	E11	3514	J25	5632	J12
2464	B 6	3515	M26	5661	N20
2465	F14	3516	J27	6485	B16
2466	B 7	3517	L24	6502	K22
2467	B 8	3518	N24	6503	J23
2468	B 6	3519	N24	6504	I22
2469	B 5	3520	N24	6518	N24
2470	C 5	3521	M25	6519	N24
2471	B 6	3522	M26	6546	D10
2473	G 6	3523	L25	6547	E17
2475	G 7	3524	N26	6548	O14
2500	L22	3525	N27	6549	C13
2502	J23	3526	L28	6551	O24
2505	J24	3527	L28	6560	F23
2506	125	3528	N29	6561	F22
2507	123	3529	M25	6563	B23
2509	L27	3530	N28	6565	C13
2520	M25	3531	N29	6570	A16
2521	M27	3532	N28	6571	A15
2522	M25	3533	M28	6580	F17
2524	F26	3534	K28	6585	B16
2526	L29	3535	F22	6590	B26
2528	L27	3536	M27	6591	F21
2531	M28	3538	E17	6592	F21
2532	M30	3539	J17	6602	I 5
2533	F28	3540	M26	6603	I 6
2538	E14	3542	J13	6604	J 5
2539	C23	3543	E13	6605	J 6
2545	D16	3545	D14	6610	M 1
2546	D18	3546	E13	6611	N 1
2547	E18	3550	D24	6612	N 1
2549	D26	3551	C22	6617	O 5
2550	D24	3552	C23	6621	M 6
2551	D24	3553	C23	6622	O 6
2559	014	3560	B24	6630	I 13
2560	B24	3570	A17	6640	I11
2563	C23	3582	F16	6641	J11
2570	A15	3585	B17	6646	N11
2574	F17	3588	B17	6648	N10
2580	F15	3589	B16	6649	N12
2585	B15	3590	B25	6660	N13
2588	C17	3591	B26	6661	M10
2590	B25	3592	B27	6662	O18
2600	J 3	3600	I 1	6663	I13
2601	I 5	3601	J 5	6664	O12
2602	I 6	3603	I 2	6665	O19
2603	J 7	3603	I 5	6666	J15
2604	J 6	3605	I 3	6669	M10
2605	J 9	3606	J 3	6670	I10
2607	O 9	3610	M 1	6675	K10
2611	N 1	3617	O 6	7455	C12
2617	O 5	3619	I 5	7470	B 6
2620	L 6	3620	M 6	7500	L23
2625	L 7	3622	N 6	7502	I23
2626	L 8	3624	K 2	7503	L23
2629	N 3	3625	K 2	7504	J26
2630	J14	3626	M 8	7505	J26
2631	J18	3627	M 8	7530	N29
2632	J13	3628	L 2	7533	N29
2636	J15	3629	N 2	7534	N30
2640	I11	3631	J16	7540	C14
2641	J11	3634	J16	7545	D15
2646	N11	3635	K16	7546	D16
2649	N13	3636	K15	7591	B27
2650	K14	3637	K15	7600	K14
2652	I11	3647	N10	7614	K 5
2653	K10	3648	N10	7614	L 9
2658	J11	3649	L12		

CL06532002/013.DREF
040291


Mains module
Netzteil
Module secteur

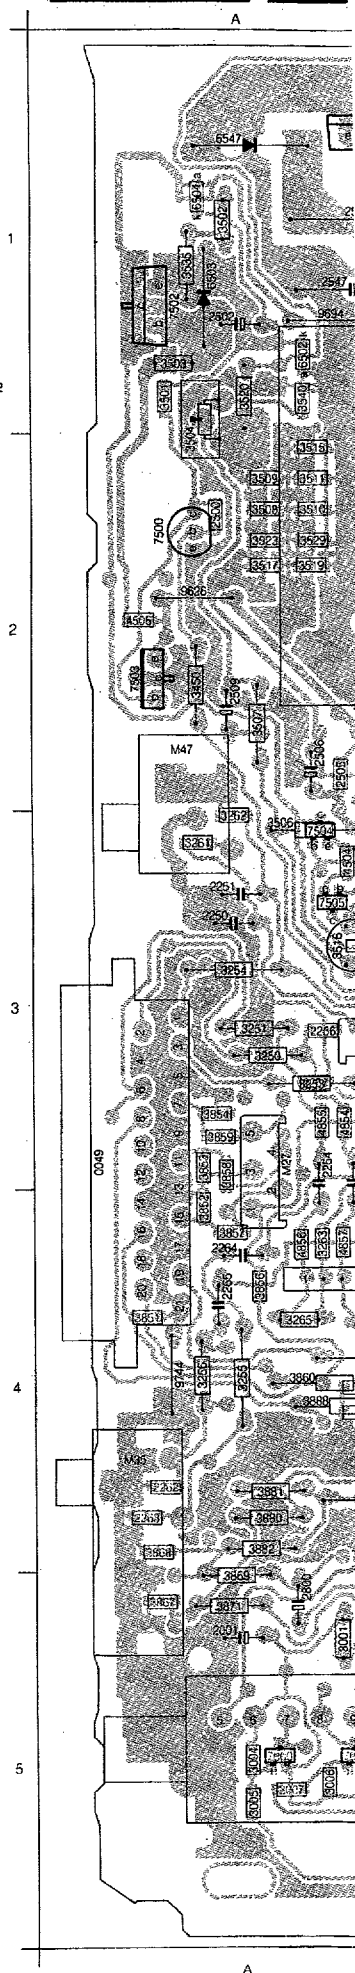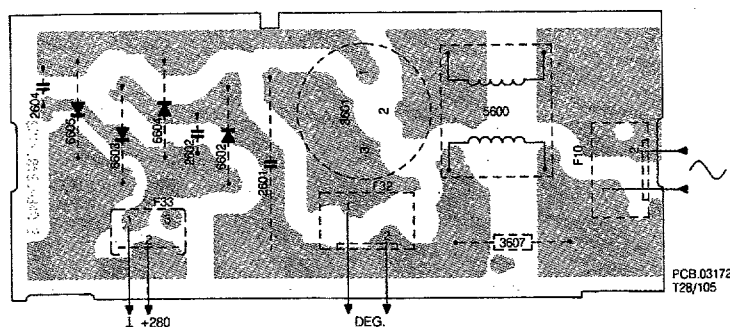

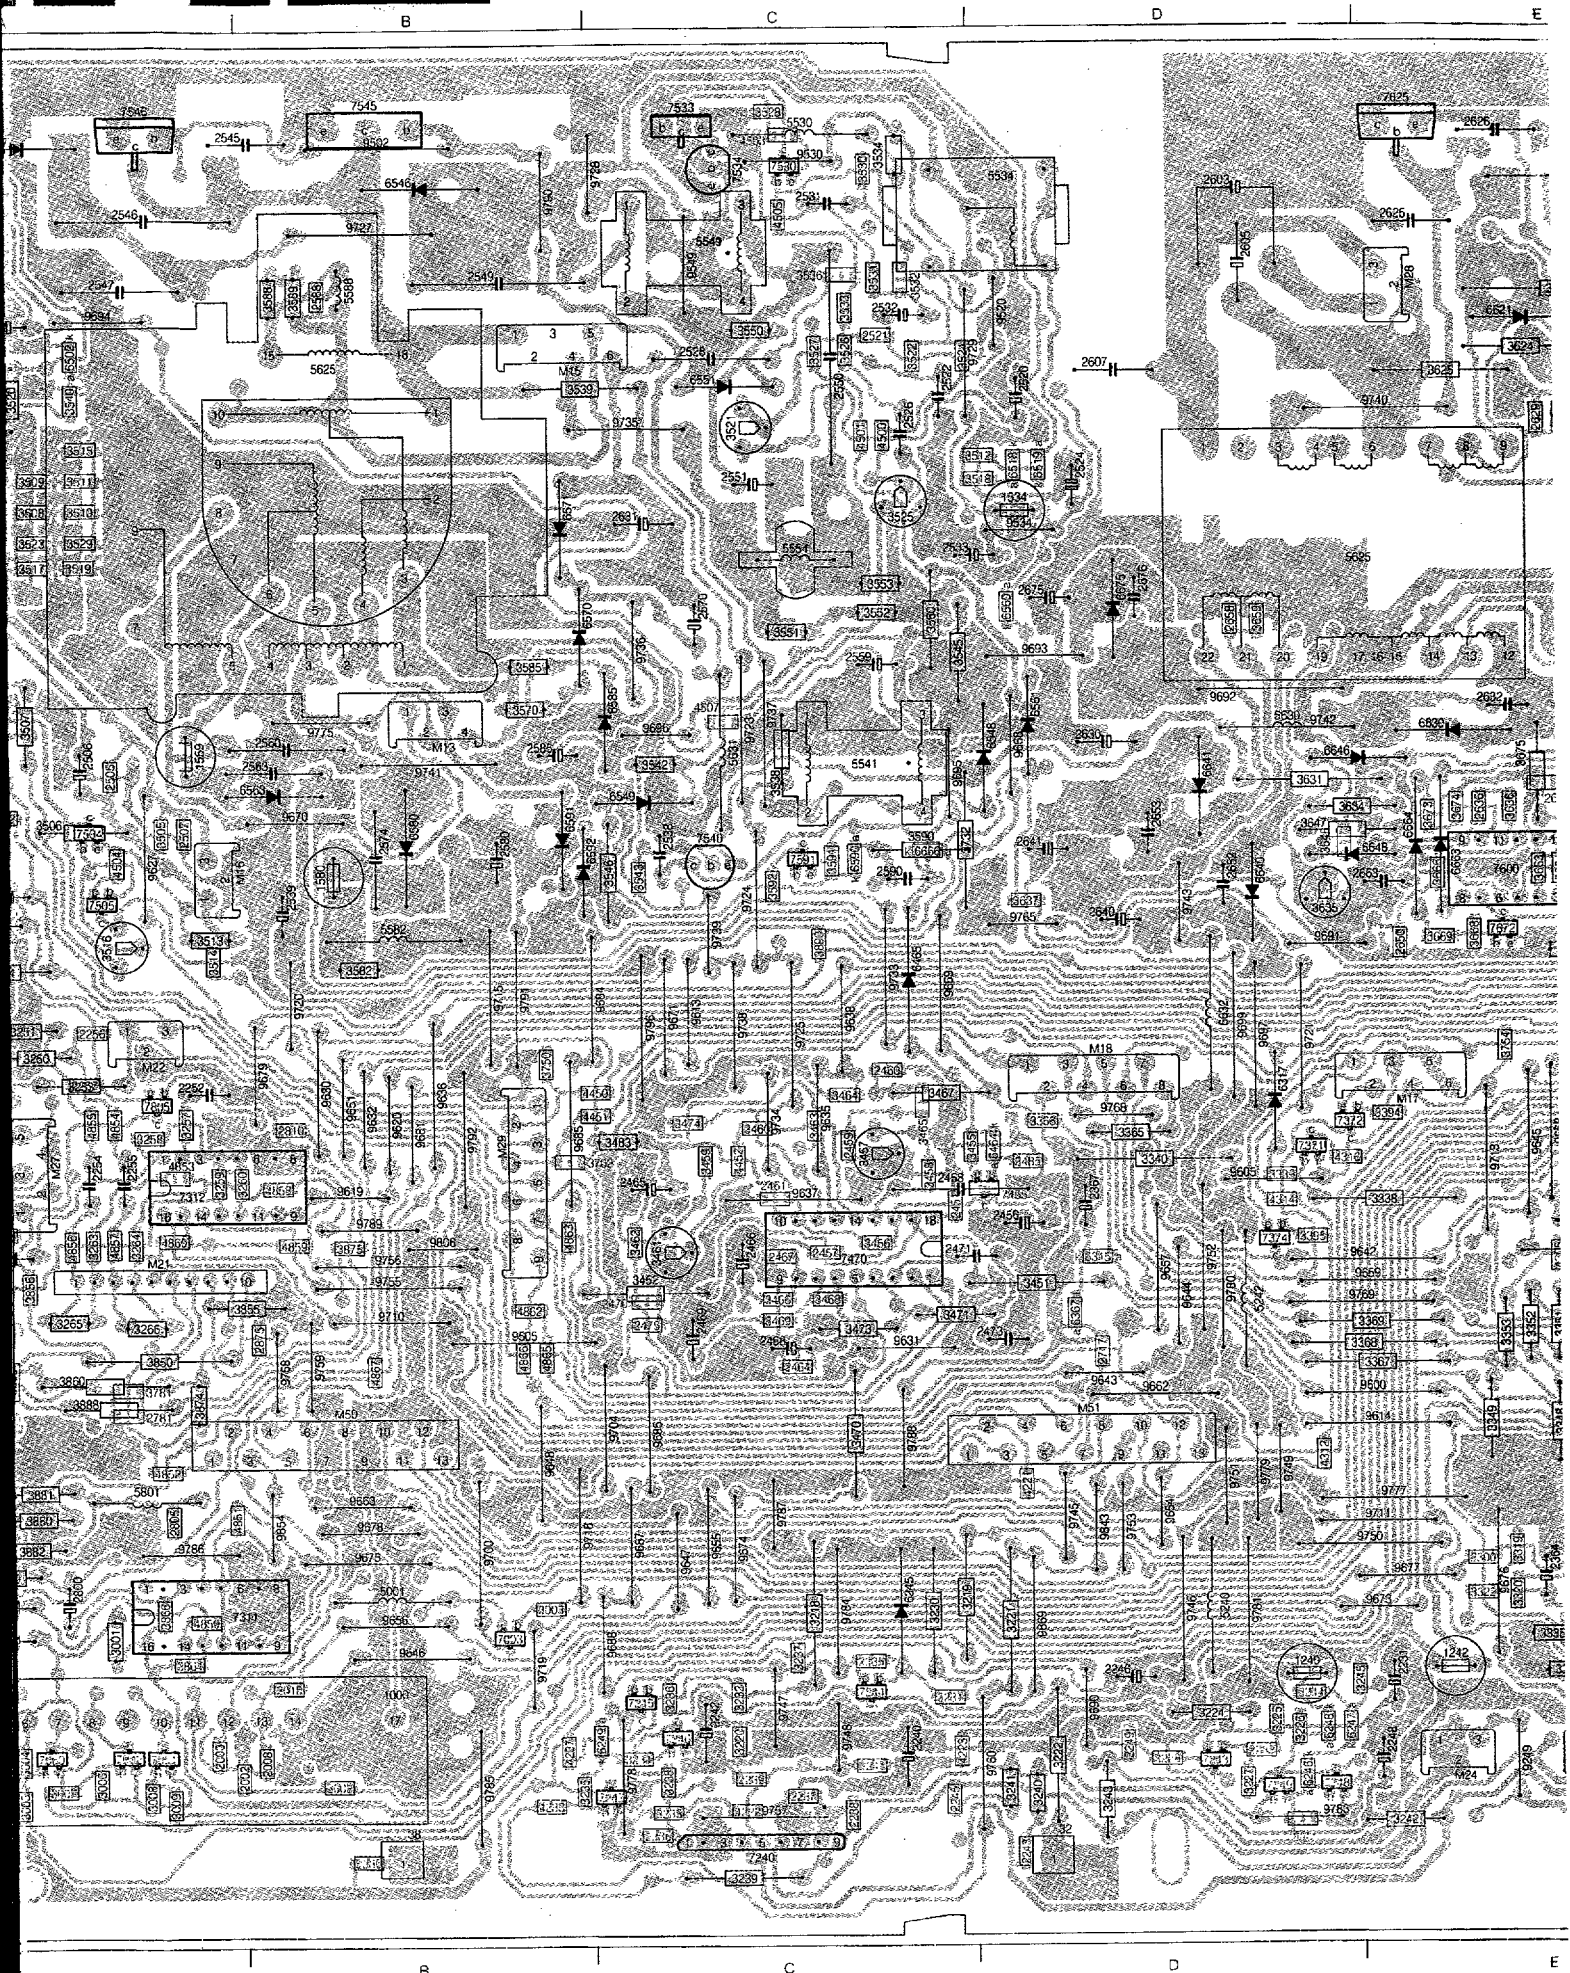




32	5G	2371	4G	3237	5G	35
33	4A	2372	4A	3238	5G	35
34	4A	2373	4G	3239	5G	35
37	1G	2374	4G	3240	5G	35
38	5G	2375	5G	3241	5G	35
M10	1G	2376	5G	3242	5G	35
M11	1A	2380	4A	3243	5G	35
M12	4A	2381	4G	3244	5G	35
M13	2G	2382	4A	3245	5G	35
M14	4G	2385	4G	3246	5A	35
M15	1G	2451	4G	3247	5A	35
M16	3G	2456	4G	3248	5A	35
M17	3G	2457	4G	3249	5A	35
M18	3G	2458	3G	3250	3G	35
M19	5G	2459	3G	3251	3G	35
M20	4G	2460	3G	3252	3G	35
M21	4G	2461	4G	3254	3G	35
M22	3G	2464	4G	3255	4G	35
M23	5G	2465	3G	3256	4G	35
M24	5G	2466	4G	3257	3G	35
M26	4A	2467	4G	3258	3G	35
M27	3G	2468	4G	3259	3G	35
M28	1G	2469	2G	3260	4G	35
M29	3G	2470	4G	3261	3G	35
M30	5A	2471	4G	3262	3G	35
M35	4G	2473	4G	3263	4G	35
M39	5A	2475	4G	3264	4G	35
M40	3A	2500	2G	3265	4G	35
M47	2G	2502	4G	3266	5G	35
M50	4G	2503	2G	3268	5G	35
M6	4G	2506	2G	3301	4G	35
0049	3G	2507	3G	3302	4G	35
1000	5G	2509	2G	3303	4G	35
1003	4A	2520	1G	3304	4G	35
1240	5G	2521	1G	3305	4G	35
1242	5G	2522	1G	3306	4G	35
1029	4G	2523	2G	3307	4A	35
1534	2G	2526	1G	3308	5G	35
1559	2G	2528	1G	3309	5G	35
1580	3G	2531	1G	3310	5G	35
1600	1A	2532	1G	3311	5G	35
1702	2A	2533	2G	3312	5G	36
2001	5G	2538	3G	3313	5G	36
2004	5G	2539	3G	3314	5G	36
2003	5G	2545	1G	3315	5G	36
2008	5G	2546	1G	3316	5A	36
2230	5G	2547	1G	3317	4G	36
2231	5G	2549	1G	3318	4G	36
2232	5G	2550	1G	3319	4G	36
2233	5A	2551	2G	3320	4G	36
2234	5A	2559	3G	3321	5G	36
2235	5G	2560	2G	3322	5G	36
2236	5G	2563	2G	3323	4G	36
2237	5G	2570	2G	3324	4G	36
2238	5G	2574	3G	3325	5A	36
2239	5G	2580	3G	3326	4A	36
2240	5G	2582	2G	3327	4A	36
2241	5G	2585	1G	3328	4A	36
2242	5G	2590	3G	3329	4A	36
2243	5G	2600	1G	3330	5A	36
2245	5G	2603	1G	3331	5A	36
2246	5G	2605	1G	3332	5A	36
2248	5G	2607	1G	3334	4A	36
2249	5G	2610	1G	3335	4A	36
2250	5G	2617	1G	3336	5G	36
2251	3G	2620	1G	3337	5G	36
2252	3G	2625	1G	3338	4G	36
2254	3G	2626	1G	3339	3G	36
2255	3G	2629	2G	3340	3G	36
2256	3G	2630	2G	3342	4A	36
2257	3G	2631	2G	3343	4A	36
2262	4G	2632	2G	3344	5G	36
2263	4G	2636	3G	3347	4G	36
2264	4G	2640	3G	3348	4G	36
2265	4G	2641	3G	3349	4G	36
2300	4G	2646	2G	3350	4G	36
2301	4G	2650	3G	3351	5G	36
2304	5G	2652	3G	3353	4G	36
2304	5G	2653	3G	3354	4G	36
2305	4G	2658	2G	3355	5G	36
2306	5G	2660	2G	3356	4A	36
2307	5G	2661	2G	3357	4G	36
2308	5G	2662	2G	3358	5A	36
2309	5G	2663	3G	3359	5A	37
2310	5G	2664	3G	3360	4A	37
2311	5G	2670	2G	3361	4A	37
2312	5G	2671	2G	3362	4G	37
2313	4G	2675	2G	3365	3G	37
2314	4G	2676	2G	3366	3G	37
2315	4A	2700	3A	3373	4G	37
2316	5G	2702	3A	3368	4G	37
2317	5G	2703	3A	3369	4G	37
2318	5G	2704	2A	3370	4G	37
2319	5G	2705	2A	3371	4G	37
2320	4A	2706	2G	3372	5G	37
2321	5G	2707	2G	3373	5G	37
2322	4G	2708	3A	3374	4A	37
2323	4G	2709	2G	3375	5G	37
2325	4G	2710	2G	3376	5G	37
2326	5G	2711	2A	3380	4G	37
2327	5A	2712	2A	3381	4G	37
2328	5A	2713	5A	3384	3G	37
2329	4A	2714	2G	3385	4G	37
2330	4A	2715	2A	3390	2G	37
2331	5A	2716	2A	3451	4G	37
2332	4A	2717	4G	3452	4G	37
2333	4A	2718	2G	3453	3G	37
2334	5A	2719	2G	3456	4G	37
2335	4A	2720	2G	3457	4G	37
2336	5G	2780	4G	3458	4G	37
2337	4G	2801	5G	3459	3G	37
2338	4G	2805	4G	3460	3G	37
2339	4G	2810	3G	3461	4G	37
2340	4G	2875	4G	3462	4G	37
2341	5G	3001	1G	3463	3G	37
2342	4G	3002	5G	3464	3G	37
2343	4G	3003	5G	3465	3G	37
2344	4G	3004	5G	3466	4G	37
2345	5A	3005	5G	3467	3G	37
2346	5A	3006	5G	3468	4G	37
2349	5G	3007	5G	3469	4G	37
2350	5A	3008	5G	3470	4G	37
2351	5A	3009	5G	3471	4G	37
2352	5A	3010	5G	3473	4G	37
2353	5G	3218	5G	3474	3G	37
2354	4G	3219	5G	3483	3G	37
2355	5G	3220	5G	3485	3G	37
2356	4G	3221	5G	3502	1G	37
2357	4G	3222	5G	3503	1G	37
2358	4G	3224	5G	3503	1G	37
2359	5A	3225	5G	3504	2G	37
2360	4G	3226	5G	3505	3G	37
2361	4G	3227	5G	3506	3G	37
2362	4G	3228	5G	3507	3G	37
2363	4G	3229	5G	3508	2G	37
2364	5G	3230	5G	3509	2G	37
2365	4G	3231	5G	3510	2G	37
2366	4G	3232	5G	3511	2G	37
2367	4G	3233	5G	3512	2G	37
2368	4G	3234	5G	3513	2G	37
2369	4A	3235	5G	3514	3G	37
2370	5G	3236	5G	3515	2G	37

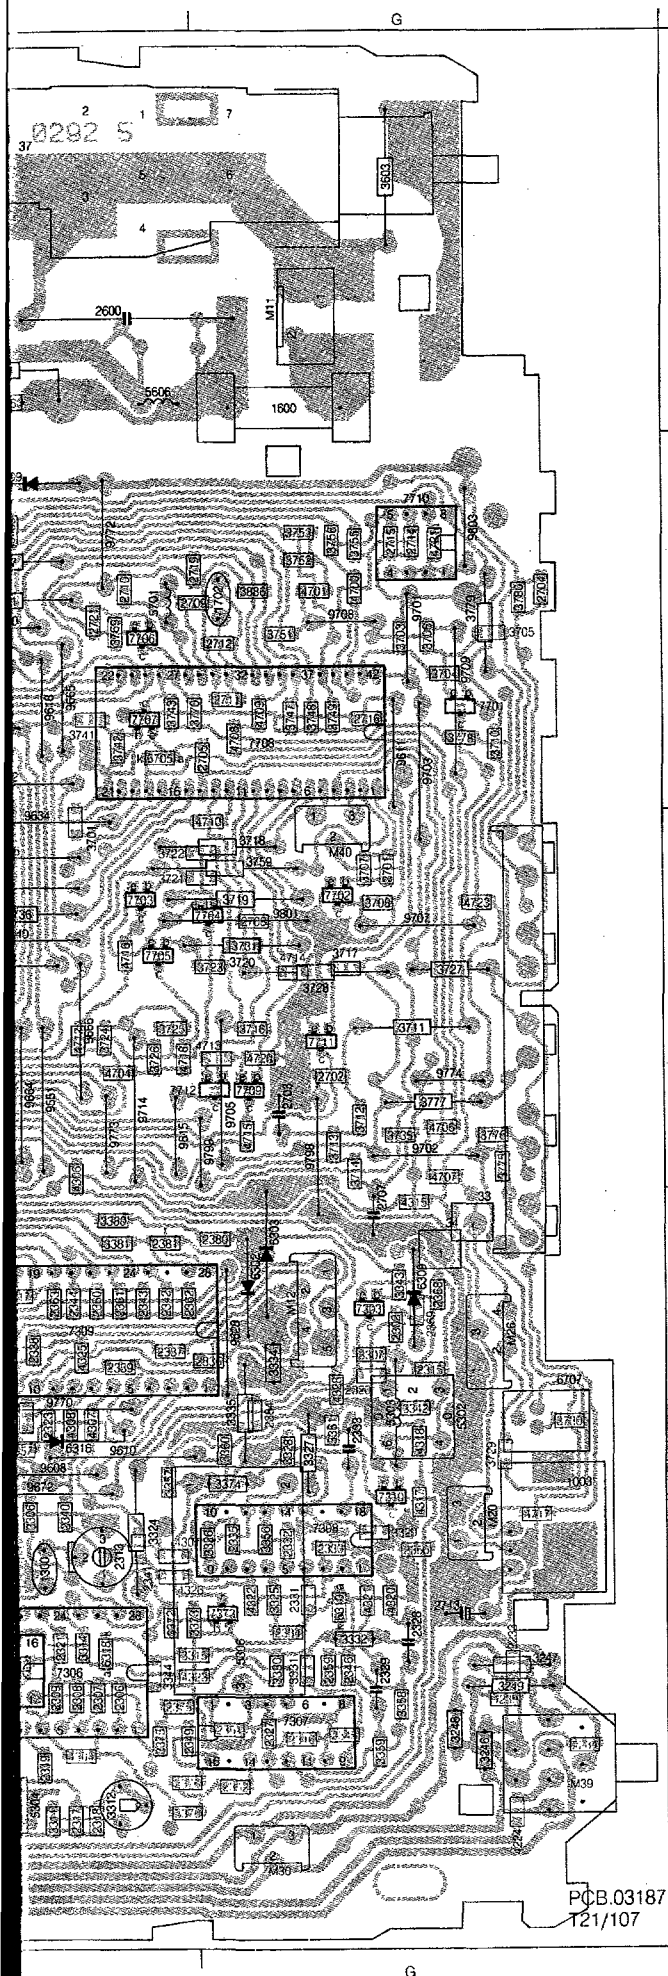


32 5G	2371 4G	3237 5G	3516 3G	3780 2A	6247 5G	9614 4G	9779 4G
33 4A	2372 4G	3238 5G	3517 2G	3781 4G	6248 5G	9615 3G	9780 4G
34 4A	2373 4G	3239 5G	3518 2G	3850 4G	6249 5G	9616 3G	9781 5G
37 1G	2374 4G	3240 5G	3519 2G	3851 4G	6300 5G	9617 3G	9783 5G
38 5G	2375 5G	3241 5G	3520 1G	3852 4G	6301 5G	9618 3G	9784 5G
M10 1G	2376 5G	3242 5G	3521 2G	3853 4G	6302 5G	9619 3G	9785 5G
M11 1A	2380 4A	3243 5G	3522 1G	3854 3G	6309 4A	9620 3G	9786 4G
M12 4A	2381 4G	3244 5G	3523 2G	3855 4G	6310 5A	9622 4G	9787 4G
M13 2G	2384 4A	3245 5G	3524 1G	3856 4G	6315 4G	9623 3G	9788 4G
M14 4G	2385 4G	3246 5A	3525 2G	3857 4G	6316 4G	9624 3G	9789 4G
M15 1G	2451 4G	3247 5A	3526 1G	3858 3G	6317 3G	9626 2G	9790 1G
M16 3G	2456 4G	3248 5A	3527 1G	3859 3G	6318 3G	9627 3G	9791 3G
M17 3G	2457 4G	3249 5A	3528 1G	3860 4G	6367 4G	9628 4G	9792 3G
M18 3G	2458 3G	3250 3G	3529 2G	3861 5G	6434 3G	9629 3G	9793 2G
M19 5G	2459 3G	3251 3G	3530 1G	3866 5G	6465 3G	9630 3G	9796 3G
M20 4A	2460 3G	3253 3G	3531 1G	3867 5G	6502 1G	9631 4G	9797 4G
M21 4G	2461 4G	3254 3G	3532 1G	3868 4G	6503 1G	9632 3G	9798 3A
M22 3G	2464 4G	3255 4G	3533 1G	3869 5G	6504 1G	9634 3G	9799 3A
M23 5G	2465 3G	3256 4G	3534 1G	3871 5G	6518 2G	9635 3G	9801 3A
M24 5G	2466 4G	3257 3G	3535 1G	3874 4G	6519 2G	9636 3G	9803 2A
M25 4A	2467 4G	3258 3G	3536 1G	3875 4G	6546 1G	9637 4G	9806 4G
M27 3G	2468 4G	3259 4G	3538 2G	3880 4G	6547 1G	9638 3G	9843 4G
M28 1G	2469 4G	3260 4G	3539 1G	3881 4G	6548 2G	9639 3G	9854 4G
M29 3G	2470 4G	3261 3G	3540 1G	3882 4G	6549 2G	9640 3G	9865 5G
M30 5A	2471 4G	3262 3G	3542 2G	3883 3G	6551 1G	9641 4G	9869 5G
M35 4G	2473 4G	3263 3G	3543 3G	3884 3G	6552 1G	9642 4G	9877 4G
M39 5A	2475 4G	3264 4G	3545 2G	3885 3G	6561 2G	9643 4G	
M40 3A	2500 2G	3265 4G	3546 3G	3886 2A	6563 2G	9644 4G	
M47 2G	2502 1G	3266 4G	3550 1G	3887 2G	6570 2G	9645 3G	
M50 4G	2505 2G	3300 5G	3551 2G	3888 4G	6571 2G	9646 5G	
M51 4G	2506 2G	3301 4G	3552 2G	3890 3G	6580 3G	9647 5G	
0049 3G	2507 3G	3302 4G	3553 2G	4221 4G	6585 1G	9648 4G	
1000 5G	2509 2G	3303 4G	3554 2G	4222 4G	6586 1G	9649 3G	
1003 1A	2520 1G	3304 4G	3570 2G	4223 5G	6591 3G	9650 2G	
1240 5G	2521 1G	3305 4G	3582 3G	4224 5A	6592 3G	9651 3G	
1242 5G	2522 1G	3306 4G	3585 2G	4233 5G	6610 1G	9652 2G	
1300 5G	2524 2G	3307 4A	3588 1G	4237 5G	6611 1G	9653 4G	
1534 2G	2526 1G	3308 5G	3589 1G	4239 5A	6612 2G	9654 4G	
1559 2G	2528 1G	3309 5G	3590 3G	4300 4G	6617 1G	9655 4G	
1580 3G	2531 1G	3310 3G	3591 3G	4301 4G	6621 1G	9656 5G	
1600 1A	2532 1G	3311 5G	3592 3G	4302 4G	6622 1G	9657 4G	
1702 2A	2533 2G	3312 5G	3603 1A	4303 5G	6630 2G	9658 3G	
2001 5G	2538 3G	3313 4G	3604 1G	4304 5G	6640 3G	9659 4G	
2002 5G	2539 3G	3314 5G	3605 1G	4305 4G	6641 2G	9660 2G	
2003 5G	2545 1G	3315 5G	3606 1G	4306 3G	6646 2G	9662 4G	
2008 5G	2546 1G	3316 5A	3610 1G	4307 4G	6648 2G	9663 3G	
2237 5G	2547 1G	3317 4G	3617 1G	4318 4A	6649 2G	9664 3G	
2231 5G	2549 1G	3318 4G	3619 1G	4310 4G	6660 3G	9665 2G	
2232 5G	2550 1G	3319 4G	3620 1G	4312 4G	6661 2G	9666 3G	
2233 5A	2551 2G	3320 5G	3622 1G	4314 4G	6662 2G	9668 2G	
2234 5A	2559 2G	3321 5G	3624 1G	4315 4A	6663 3G	9669 3G	
2235 5G	2560 2G	3322 5G	3625 1G	4318 3G	6664 3G	9670 3G	
2236 5G	2563 2G	3323 4G	3626 1G	4317 4A	6665 3G	9671 3G	
2237 5G	2570 2G	3324 4G	3627 1G	4318 4A	6666 3G	9672 4G	
2238 5G	2574 3G	3325 5A	3628 1G	4319 4G	6669 2G	9673 5G	
2239 5G	2580 3G	3326 4A	3629 2G	4320 5A	6670 2G	9674 4G	
2240 5G	2585 2G	3327 4A	3631 2G	4321 5A	6675 2G	9675 4G	
2241 5G	2588 1G	3328 4A	3634 3G	4322 5A	6676 2G	9676 5G	
2242 5G	2590 3G	3329 4A	3635 3G	4323 5G	6677 4A	9677 5G	
2243 5G	2600 1G	3330 5A	3636 3G	4324 4G	6678 4G	9678 5G	
2244 5G	2603 3G	3331 5A	3637 3G	4325 4G	6679 2G	9679 3G	
2246 5G	2605 1G	3332 5A	3647 3G	4326 5G	6680 5G	9681 3G	
2248 5G	2607 1G	3334 4A	3648 3G	4328 4A	6681 5G	9682 3G	
2249 5G	2611 1G	3335 4A	3649 3G	4329 5G	6682 5G	9683 3G	
2250 3G	2617 1G	3336 5G	3658 2G	4330 5G	6683 3G	9684 3G	
2251 3G	2620 1G	3337 5G	3659 2G	4331 5G	6684 3G	9685 3G	
2252 3G	2621 1G	3338 5G	3660 2G	4332 5G	6685 3G	9686 3G	
2253 3G	2622 1G	3339 3G	3661 2G	4333 5G	6686 3G	9687 3G	
2254 3G	2623 1G	3340 3G	3662 2G	4334 5G	6687 3G	9688 3G	
2255 3G	2624 1G	3341 3G	3663 3G	4335 5G	6688 3G	9689 3G	
2256 3G	2625 1G	3342 4A	3664 3G	4336 5G	6689 3G	9690 3G	
2257 3G	2626 1G	3343 4A	3665 3G	4337 5G	6690 3G	9691 3G	
2258 3G	2627 1G	3344 5G	3666 3G	4338 5G	6691 3G	9692 2G	
2259 3G	2628 1G	3345 5G	3667 3G	4339 5G	6692 2G	9693 2G	
2260 3G	2629 1G	3346 5G	3668 3G	4340 5G	6693 2G	9694 2G	
2261 3G	2630 2G	3347 4G	3669 3G	4341 5G	6694 2G	9695 2G	
2262 4G	2631 2G	3348 4G	3670 2G	4342 5G	6695 2G	9696 2G	
2263 4G	2632 2G	3349 4G	3671 2G	4343 5G	6696 2G	9697 2G	
2264 4G	2633 2G	3350 4G	3672 2G	4344 5G	6697 2G	9698 2G	
2265 4G	2634 2G	3351 4G	3673 2G	4345 5G	6698 2G	9699 2G	
2266 4G	2635 2G	3352 4G	3674 2G	4346 5G	6699 2G	9700 2G	
2267 4G	2636 2G	3353 4G	3675 2G	4347 5G	6700 2G	9701 2A	
2268 4G	2637 2G	3354 4G	3676 2G	4348 5G	6701 2A	9702 2A	
2269 4G	2638 2G	3355 4G	3677 2G	4349 5G	6702 2A	9703 2A	
2270 4G	2639 2G	3356 4A	3678 2G	4350 5G	6703 2A	9704 4G	
2271 4G	2640 2G	3357 4G	3679 2G	4351 5G	6704 2A	9705 3A	
2272 4G	2641 2G	3358 5A	3680 2G	4352 5G	6705 3A	9706 3A	
2273 4G	2642 2G	3359 5A	3681 2G	4353 5G	6706 3A	9707 3A	
2274 4G	2643 2G	3360 5A	3682 2G	4354 5G	6707 3A	9708 2A	
2275 4G	2644 2G	3361 5A	3683 2G	4355 5G	6708 3A	9709 2A	
2276 4G	2645 2G	3362 5G	3684 2G	4356 5G	6709 3A	9710 2A	
2277 4G	2646 2G	3363 5G	3685 2G	4357 5G	6710 3A	9711 4G	
2278 4G	2647 2G	3364 5G	3686 2G	4358 5G	6711 3A	9712 4G	
2279 4G	2648 2G	3365 5G	3687 2G	4359 5G	6712 3A	9713 3G	
2280 4G	2649 2G	3366 5G	3688 2G	4360 2G	6713 3A	9714 3G	
2281 4G	2650 2G	3367 5G	3689 2G	4361 2G	6714 3A	9715 3G	
2282 4G	2651 2G	3368 5G	3690 2G	4362 2G	6715 3A	9716 3G	
2283 4G	2652 2G	3369 5G	3691 2G	4363 2G	6716 3A	9717 3G	
2284 4G	2653 2G	3370 5G	3692 2G	4364 2G	6717 3A	9718 4G	
2285 4G	2654 2G	3371 5G	3693 2G	4365 2G	6718 3A	9719 5G	
2286 4G	2655 2G	3372 5G	3694 2G	4366 2G	6719 3A	9720 3G	
2287 4G	2656 2G	3373 5G	3695 2G	4367 2G	6720 3A	9721 3G	
2288 4G	2657 2G	3374 5G	3696 2G	4368 2G	6721 3A	9722 3G	
2289 4G	2658 2G	3375 5G	3697 2G	4369 2G	6722 3A	9723 3G	
2290 4G	2659 2G	3376 5G	3698 2G	4370 2G	6723 3A	9724 3G	
2291 4G	2660 2G	3377 5G	3699 2G	4371 2G	6724 3A	9725 3G	
2292 4G	2661 2G	3378 5G	3700 2G	4372 2G	6725 3A	9726 3G	
2293 4G	2662 2G	3379 5G	3701 2G	4373 2G	6726 3A	9727 1G	
2294 4G	2663 2G	3380 4G	3702 2G	4374 2G	6727 3A	9728 1G	
2295 4G	2664 2G	3381 4G	3703 2G	4375 2G	6728 3A	9729 1G	
2296 4G	2665 2G	3382 4G	3704 2G	4376 2G	6729 3A	9730 3G	
2297 4G	2666 2G	3383 4G	3705 2G	4377 2G	6730 3A	9731 3G	
2298 4G	2667 2G	3384 4G	3706 2G	4378 2G	6731 3A	9732 3G	
2299 4G	2668 2G	3385 4G	3707 2G	4379 2G	6732 3A	9733 3G	
2300 4G	2669 2G	3386 4G	3708 2G	4380 2G	6733 3A	9734 3G	
2301 4G	2670 2G	3387 4G	3709 2G	4381 2G	6734 3A	9735 1G	
2302 4G	2671 2G	3388 4G	3710 2G	4382 2G	6735 1G	9736 2G	
2303 4G	2672 2G	3389 4G	3711 2G	4383 2G	6736 2G	9737 2G	
2304 4G	2673 2G	3390 4G	3712 2G	4384 2G	6737 2G	9738 3G	
2305 4G	2674 2G	3391 4G	3713 2G	4385 2G	6738 2G	9739 3G	
2306 4G	2675 2G	3392 4G	3714 2G	4386 2G	6739 2G	9740 1G	
2307 4G	2676 2G	3393 4G	3715 2G	4387 2G	6740 2G	9741 2G	
2308 4G	2677 2G	3394 4G	3716 2G	4388 2G	6741 2G	9742 2G	
2309 4G	2678 2G	3395 4G	3717 2G	4389 2G	6742 2G	9743 3G	
2310 4G	2679 2G	3396 4G					

3422	D4
3423	D3
3431	A2
3432	B4
3433	B2
3434	B1
3435	D1
3436	B3
4001	C1
4002	C4
4005	D3
4006	C4
4009	B3
4010	B3
4011	B4
4012	D2
4014	D3
5401	B1
6301	B2
6331	C2
6345	D3
6361	D3
6421	D4
7301	B4
7303	A4
7304	B3
7305	B3
7332	C3
7333	C4
7334	C3
7335	B2
7345	D3
7362	D3
7364	D3
7365	D3
7417	D2
7411	D3
7421	D4
9000	B2
9001	C4
9002	A2
9003	A2
9004	C3
9006	C3
9007	A2
9008	C3

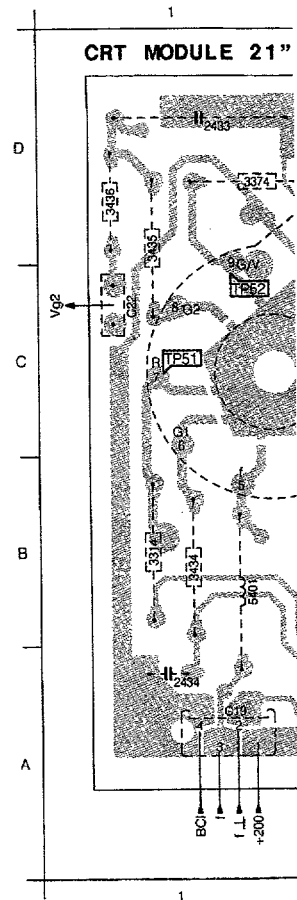


C19	C1
C20	B5
C21	B2
C22	B2
C2301	B4
C2331	C5
C2332	C5
C2391	C3
C2392	C3
C2411	C4
C2412	C5
C2421	C5
C2422	C5
C2432	C3
C2433	A2
C2434	A2
C3001	B4
C3002	B4
C3003	A4
C3004	B4
C3008	B4
C3009	B4
C3010	A4
C3011	A4
C3012	B5
C3013	B3
C3014	C2
C3015	B3
C3016	B4
C3031	B5
C3032	B5
C3033	B5
C3034	C4
C3038	C4
C3039	C3
C3040	C3
C3041	C4
C3042	C4
C3043	C4
C3044	C3
C3045	C3
C3061	A5
C3062	A5
C3063	A5
C3064	A5
C3068	A4
C3069	A4
C3070	A3
C3071	A4
C3072	A4
C3073	A3
C3074	A1
C3075	A3
C3076	A4
C3077	A4
C3081	C3
C3092	C3
C3093	C2
C3094	C3
C3095	C3
C3096	B4


3397 B3
3398 B4
3411 C4
3413 C5
3414 C5
3415 C5
3421 C5
3422 C5
3423 C3
3431 C1
3432 C1
3433 C1
3434 A2
3435 B1
3436 A1
4000 B5
4002 C5
4003 C5
4005 C3
4007 B3
4008 A3
4008 C4
4011 A4
5005 C5
6301 B3
6303 C3
6331 C3
6345 C3
6361 A3
6411 C4
6512 C2
7301 B4
7302 B4
7303 B4
7304 B3
7305 B3
7306 B3
7332 C4
7333 C5
7334 C4
7335 C5
7345 C5
7353 C3
7362 A5
7363 A4
7364 A4
7365 A4
7391 C4
7401 C4
7421 C4
8000 A1
9000 C4
9001 C4
9002 C4
9003 A4
9004 C4
9006 B4
9007 B4
9008 A4
9009 A4

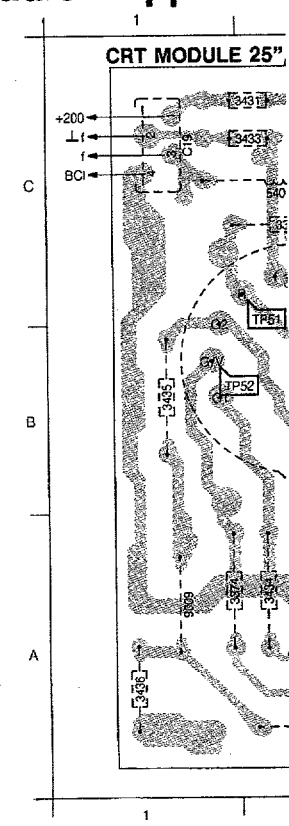

C19	A1	3422	D4
C20	B4	3423	D3
C21	B2	3431	A2
C22	C1	3432	B4
3301	A4	3433	B2
2331	B4	3434	B1
2361	C4	3435	D1
2381	D2	3436	B1
2392	D2	4000	C4
2411	D4	4002	D4
2412	D4	4005	D3
2421	D4	4006	C4
2431	D2	4009	B3
2432	D3	4010	B3
2433	D1	4011	B4
2434	B1	4012	D2
3301	B4	4014	D3
3302	A4	5401	B1
3303	A4	6301	B2
3304	A4	6331	C2
3310	A3	6345	D3
3311	B3	6361	D3
3312	A3	6421	D4
3313	A2	7301	B4
3314	B1	7303	A4
3315	A3	7304	B3
3316	A3	7305	B3
3331	B4	7332	C3
3332	B4	7333	C4
3333	B4	7334	C3
3334	B3	7335	B2
3340	B3	7345	D3
3341	B3	7362	D3
3342	B3	7363	D4
3343	B2	7364	D3
3344	B2	7365	D3
3345	D3	7391	D2
3361	C4	7411	D3
3362	C4	7421	D4
3363	C4	9000	B2
3364	C4	9001	C4
3370	C3	9002	D4
3371	C3	9003	A2
3372	C3	9004	C3
3373	D3	9006	C3
3374	D1	9007	A2
3375	D3	9008	C3
3376	C3		
3377	C3		
3391	D2		
3392	D2		
3393	D2		
3394	D2		
3395	D3		
3396	B3		
3397	B3		
3398	B3		
3411	D3		
3412	D4		
3413	D4		
3414	D4		
3415	D4		
3421	D4		

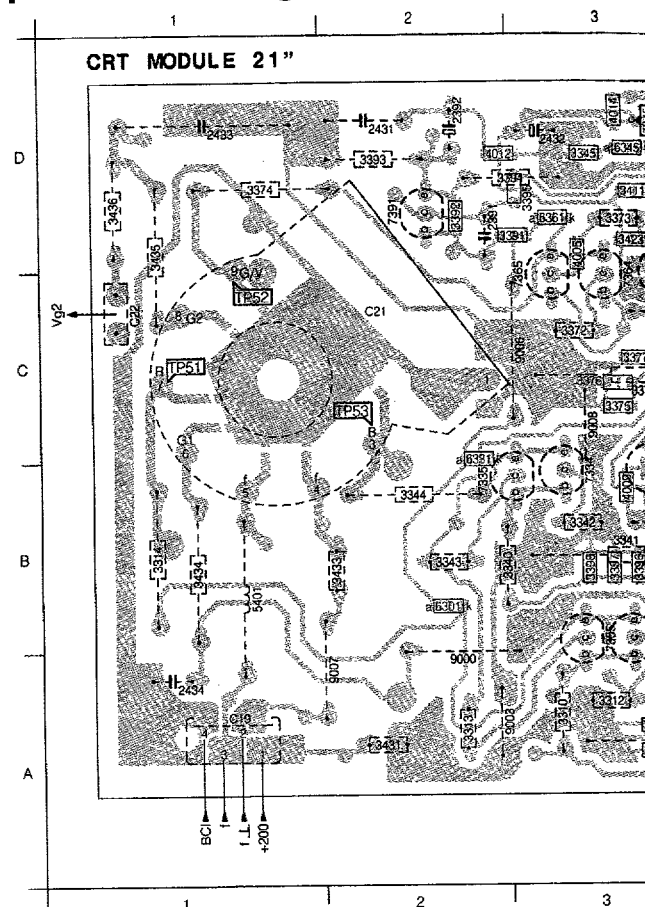

	C19	C1	3397	B3
	C20	B5	3398	B4
	C21	B2	3411	C4
	2301	B4	3413	C5
	2331	C5	3414	C5
	2361	A5	3415	C5
	2391	C3	3421	C3
	2393	C3	3422	C5
	2411	C4	3423	C3
	2412	C5	3431	C1
	2421	C5	3432	A5
	2431	C2	3433	C1
	2432	C3	3434	C2
	2434	A2	3435	B1
	2434	A2	3436	A1
	3301	B4	4000	B5
	3302	B4	4002	C3
	3303	A4	4003	C3
	3304	B4	4004	C3
	3306	B4	4007	B3
	3309	B4	4008	A3
	3310	A4	4008	C4
	3311	A4	4011	A4
	3312	B3	4015	B2
	3313	A3	6301	B3
	3314	C2	6331	C3
	3315	B3	6345	C3
	3316	B4	6361	A3
	3331	B5	6411	C4
	3332	C5	6445	C5
	3333	B6	7001	B4
	3334	C4	7302	B4
	3338	C4	7303	B4
	3339	C4	7304	B3
	3340	C3	7305	B3
	3344	C4	7331	C4
	3345	C2	7332	C4
	3343	C4	7333	C5
	3344	C3	7334	C4
	3345	C3	7335	C3
	3361	A5	7345	C3
	3363	A5	7346	A5
	3363	A5	7362	A5
	3364	A5	7363	A4
	3368	A4	7364	A4
	3369	A4	7365	A3
	3370	A3	7391	C2
	3373	A3	7421	C5
	3372	A4	7421	C5
	3373	A3	8000	A2
	3374	A1	9001	A5
	3375	A3	9001	C4
	3377	A4	9001	C5
	3391	A3	9003	A3
	3391	A4	9004	C4
	3392	C3	9006	B3
	3393	C2	9007	B3
	3393	C3	9007	B3
	3395	C3	9009	A1
	3396	B4		

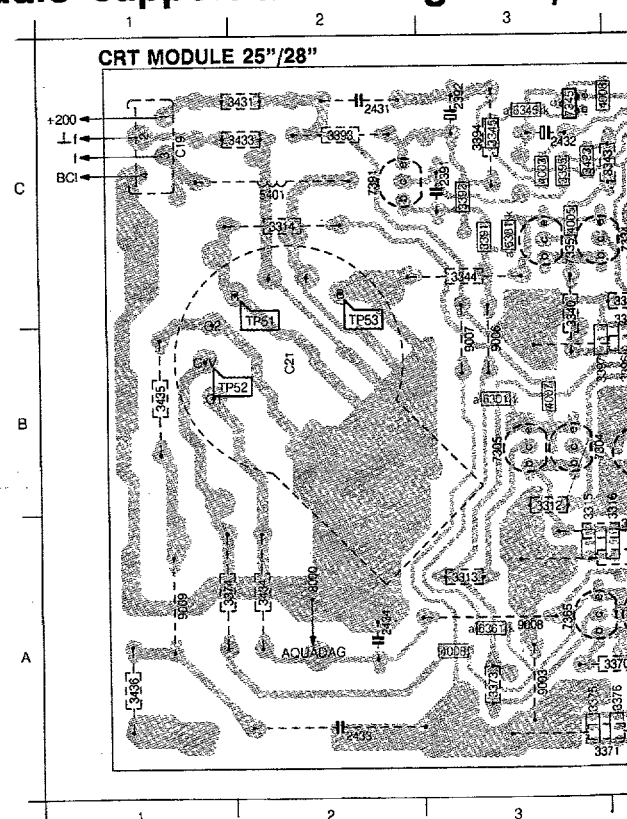

Picture tube module /


CHASSIS GR2.1

6.25



F

DIAGRAM F
SCHEMA F


1005 PICTURE TUBE MODULE/MODULE SUPPORT TUBE IMAGE/BILDRÖHRE

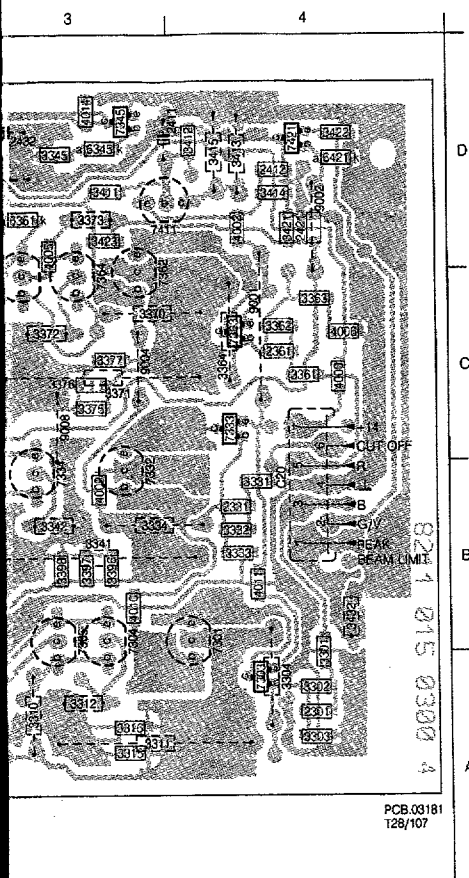

5"/28"

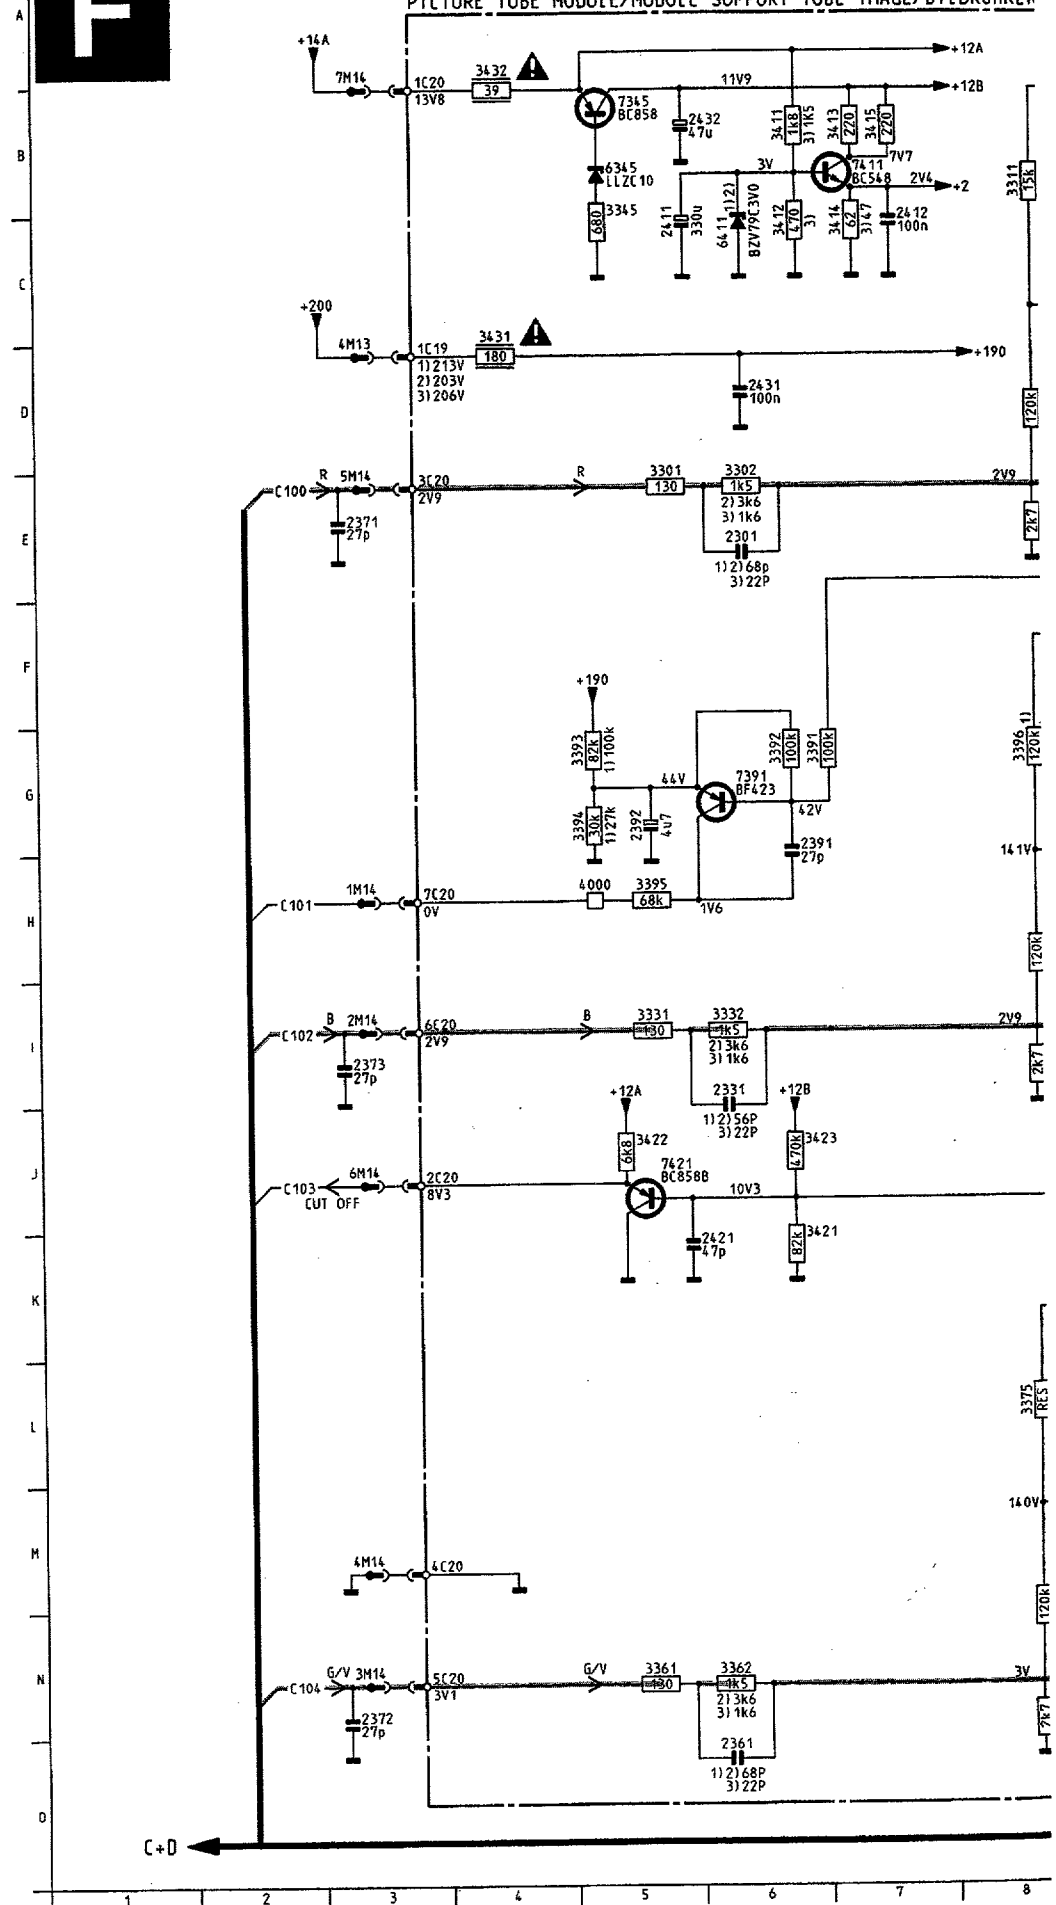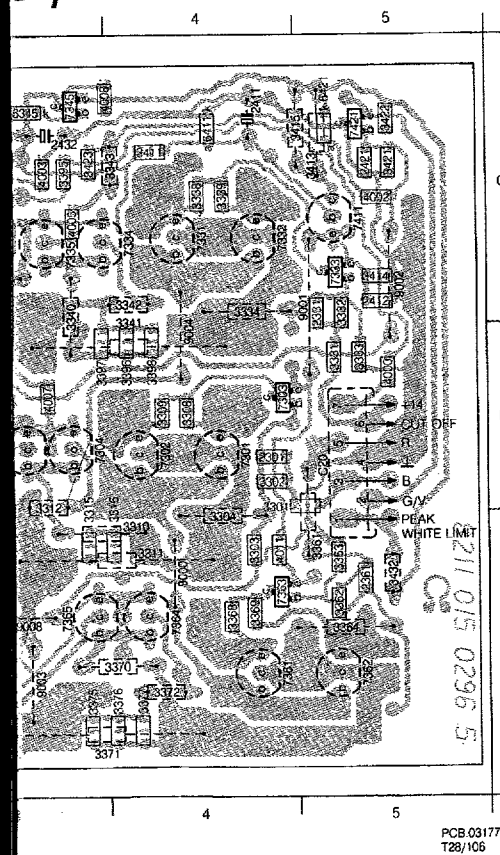

BILDROHREN MODUL/MODULO CRT/MODULO TUBO DE IMAGEN

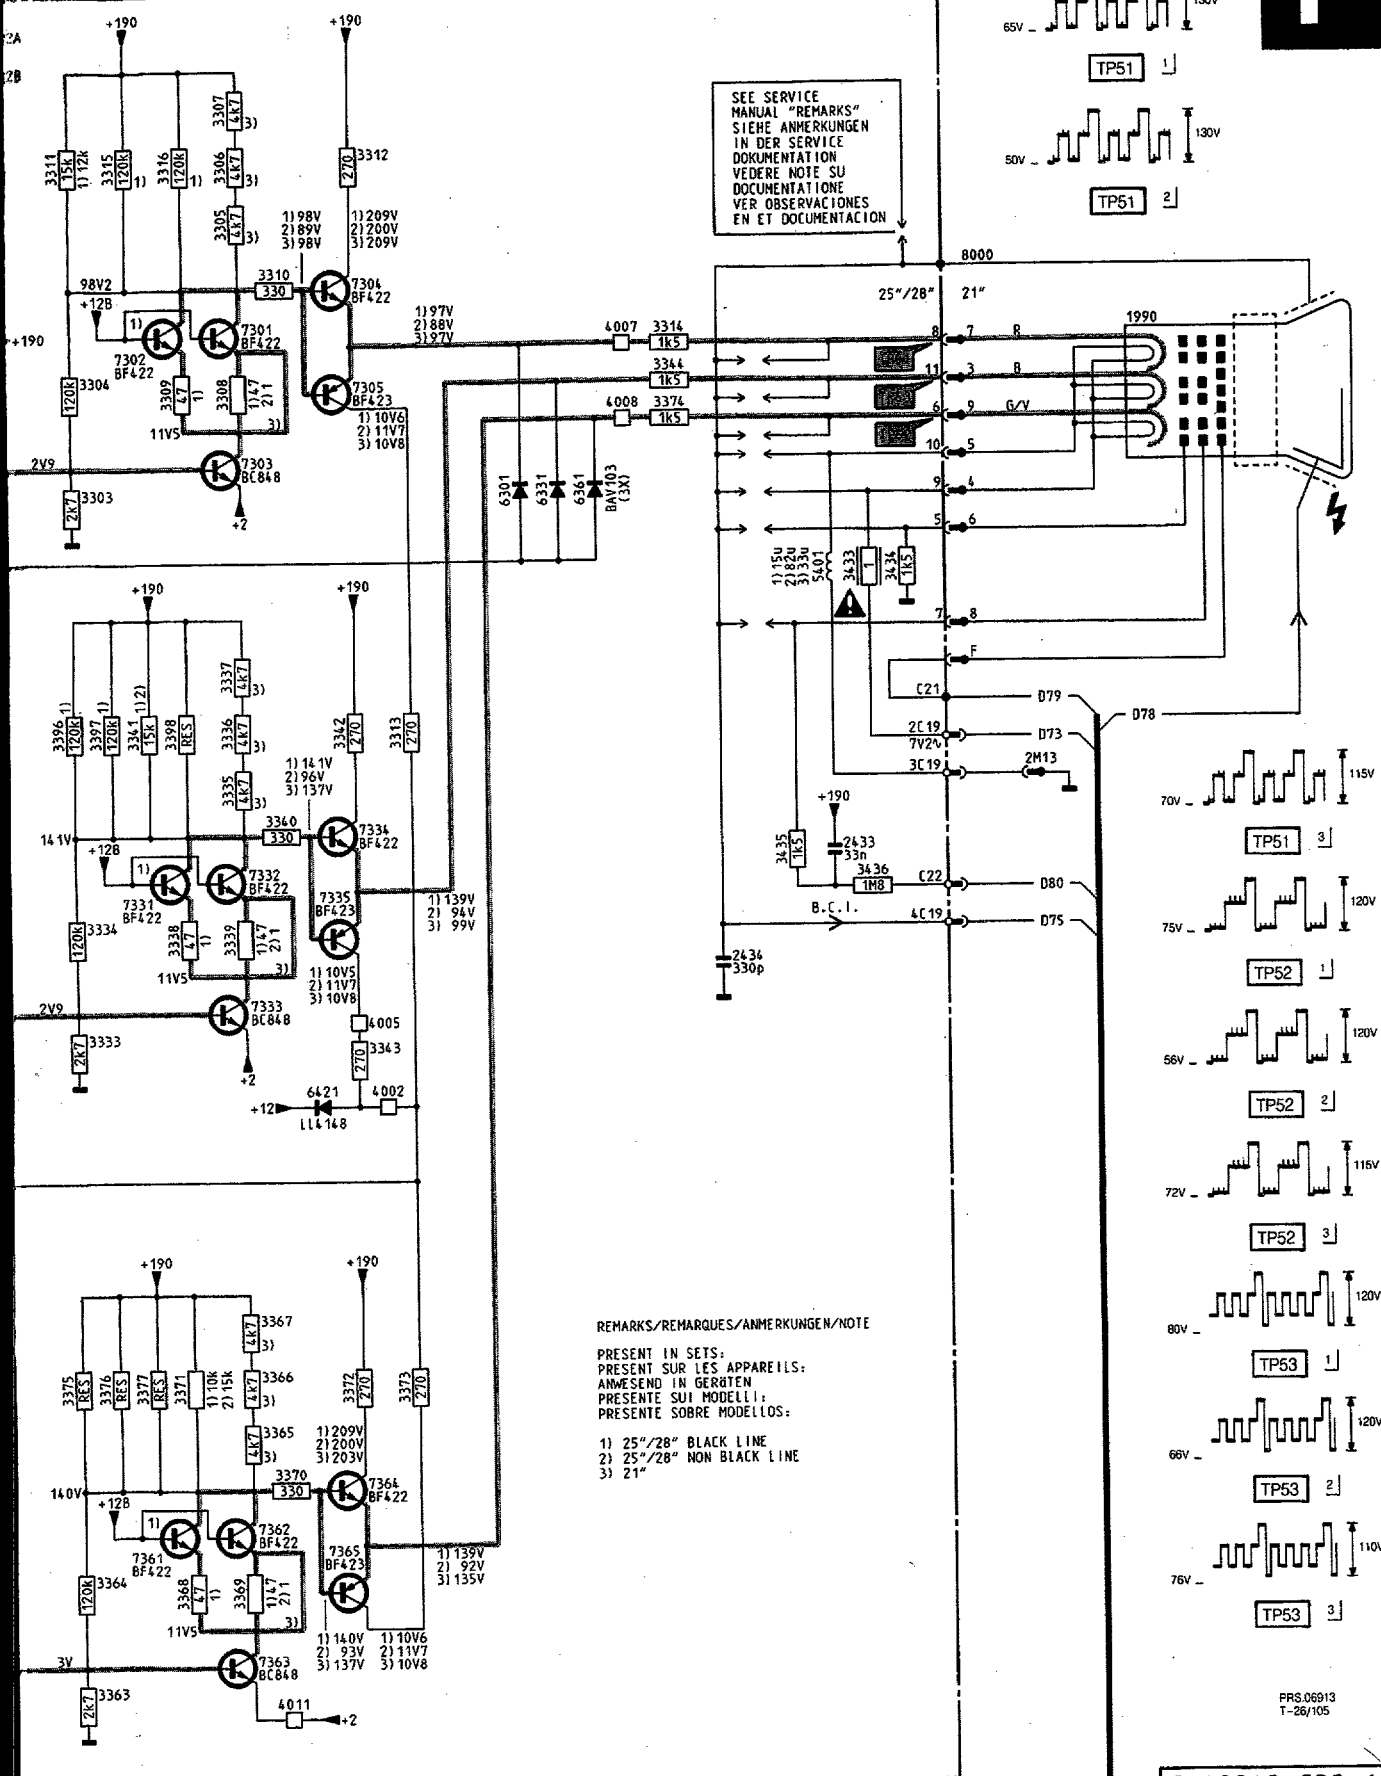

REMARKS/REMARQUES/ANMERKUNGEN/NOTE

PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERÄTEN
PRESENTE SUI MODELLI:
PRESENTE SOBRE MODELOS:

- 1) 25"/28" BLACK LINE
2) 25"/28" NON BLACK LINE
3) 21"


FRS.06913
T-26/105

CHASSIS GR2.1


CL06532002/017, FREF
040291

F

1005	A 3
1990	D17
2301	E 6
2331	I 6
2361	O 6
2371	E 3
2372	N 3
2373	I 3
2391	H 6
2392	G 5
2411	C 5
2412	C 7
2421	K 6
2431	D 6
2432	B 6
2433	H14
2434	I 13
2435	E 5
2436	E 6
2437	E 8
2438	C 9
2439	D 8
2440	B 9
2441	B 9
2442	D 9
2443	C10
2444	B 8
2445	B11
2446	G11
2447	D13
2448	B 9
2449	I 5
2450	I 6
2451	I 8
2452	H 8
2453	G 9
2454	G 9
2455	F 9
2456	H 9
2457	H 9
2458	G10
2459	G 9
2460	G10
2461	I11
2462	D13
2463	B 5
2464	N 6
2465	N 8
2466	M 8
2467	L10
2468	L10
2469	K10
2470	N 9
2471	N 9
2472	M10
2473	L 9
2474	L10
2475	L11
2476	D13
2477	L 8
2478	L 9
2479	G 7
2480	G 6
2481	G 5
2482	G 5
2483	H 5
2484	G 8
2485	G 8
2486	G 9
2487	B 6
2488	B 7
2489	C 7
2490	K 6
2491	J 5
2492	J 6
2493	D 4
2494	A 4
2495	F14
2496	F15
2497	H14
2498	H14
2499	H 5
2500	I11
2501	I11
2502	D13
2503	D13
2504	N10
2505	F14
2506	E12
2507	B 5
2508	E12
2509	C 6
2510	J10
2511	D10
2512	D10
2513	C10
2514	D10
2515	H 9
2516	H10
2517	H10
2518	H10
2519	B 5
2520	B 5
2521	M10
2522	M10
2523	M10
2524	M10
2525	G 6
2526	B 7
2527	J 5

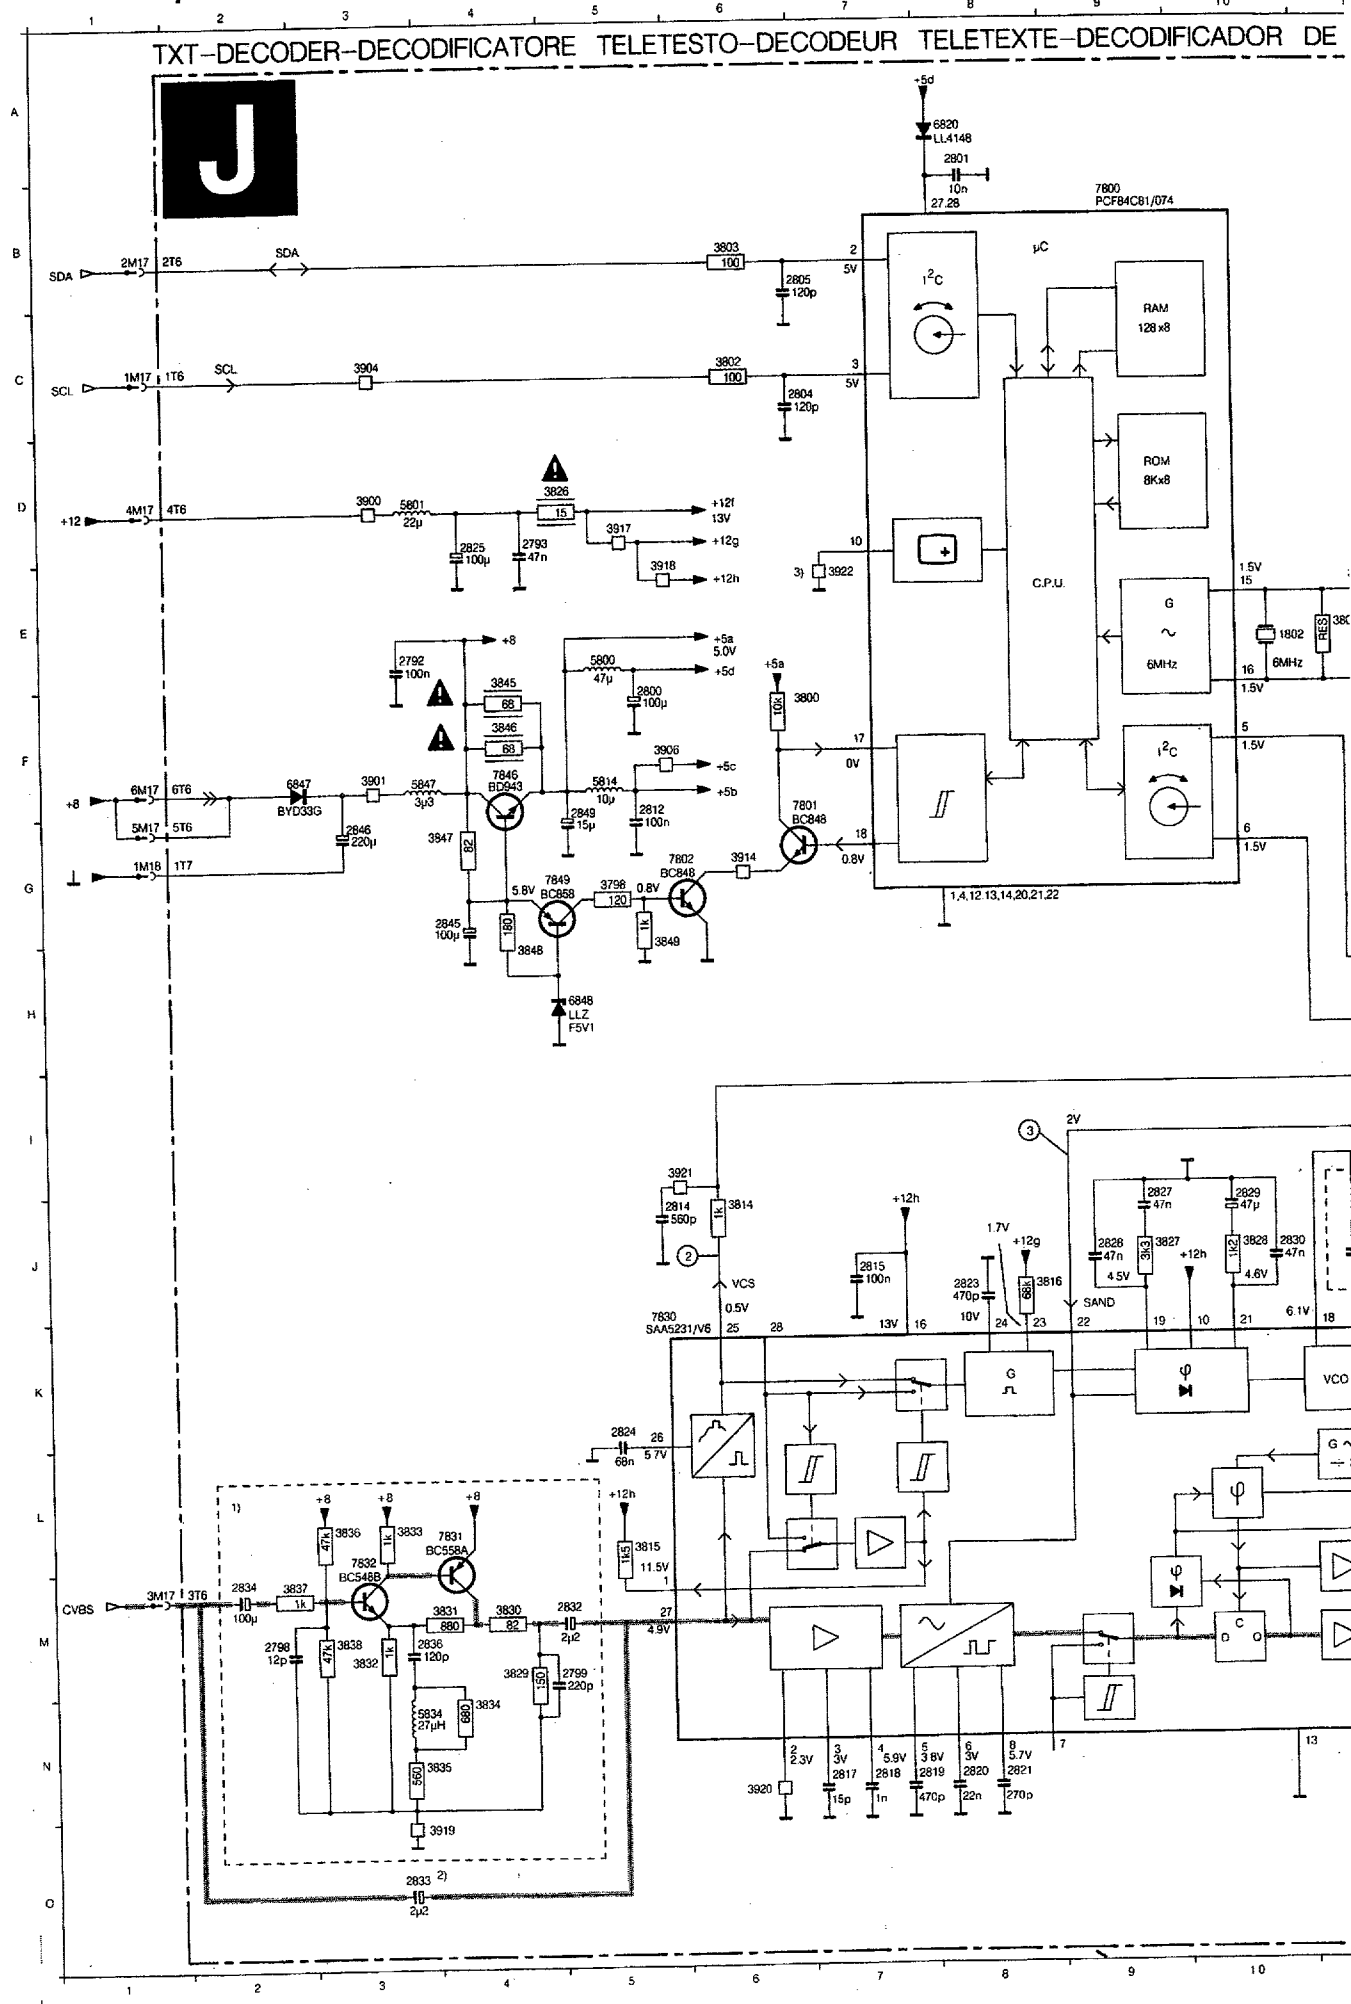

DOOR DE TELETEX

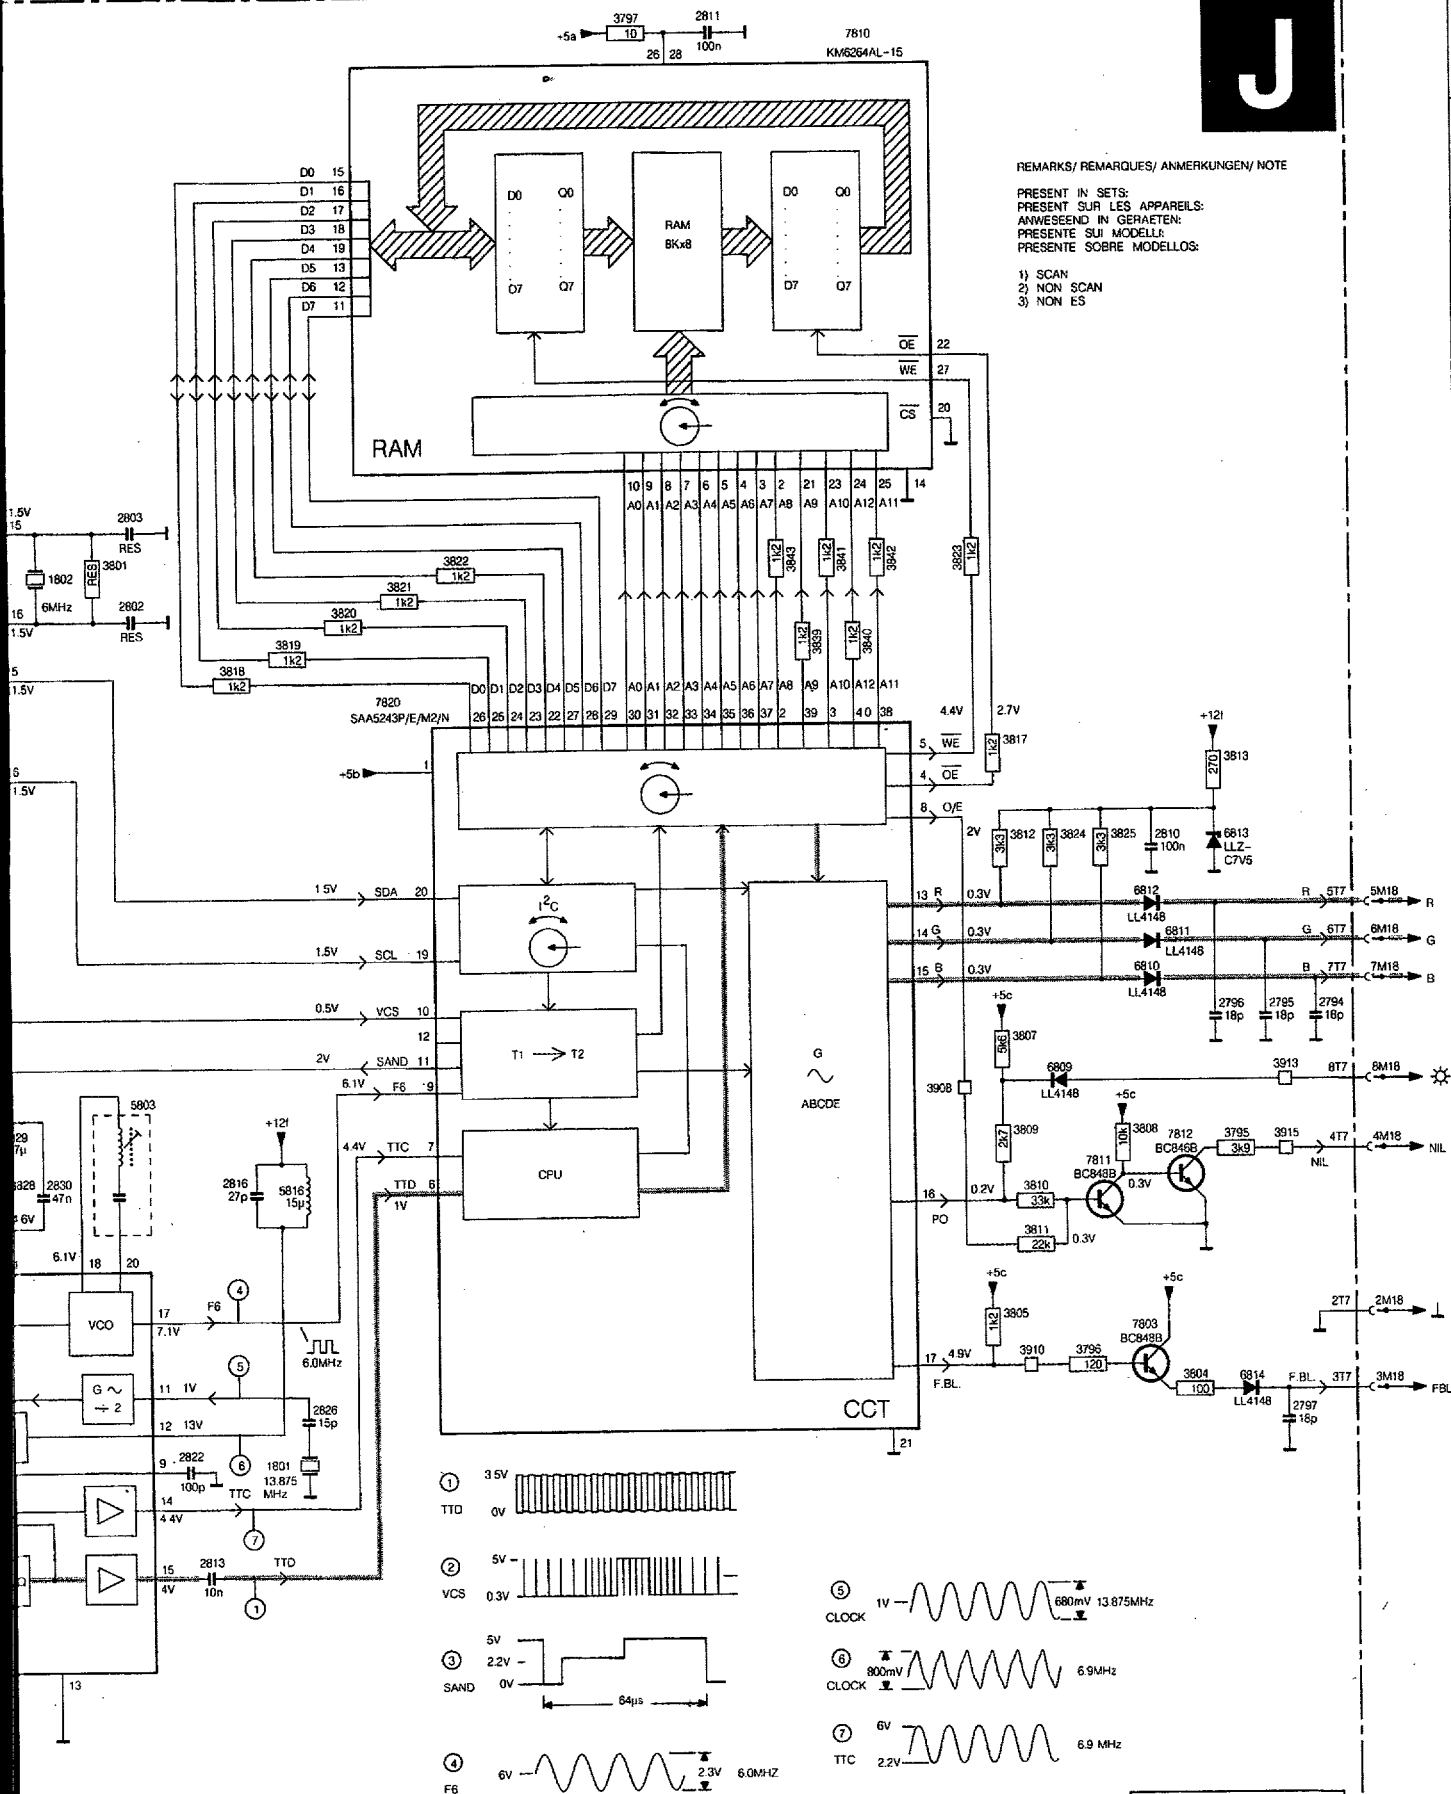

REMARKS/REMARQUES/ANMERKUNGEN/NOTE

PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESENDE IN GERÄTEN:
PRESENTI SUI MODELLI:
PRESENTI SUI MODELLI:

- 1) SCAN
- 2) NON SCAN
- 3) NON ES


J

CHASSIS GR2.1

FRS 06854
T-08 104

1801 L12
1802 E10
2792 E3
2793 D4
2794 I20
2795 I20
2796 I20
2797 L21
2798 M2
2799 M4
2800 F5
2801 A8
2802 E1
2803 E1
2804 C6
2805 B6
2810 G15
2811 A11
2812 G5
2813 M1
2814 J5
2815 J7
2816 J12
2817 N7
2818 N7
2819 N7
2820 N8
2821 N8
2822 L1
2823 J8
2824 K5
2825 D4
2826 L11
2827 J9
2828 J9
2829 J11
2830 J11
2832 M5
2833 O3
2834 M2
2836 M3
2845 G4
2846 G3
2849 G5
3795 J21
3796 K15
3797 A15
3798 G5
3800 F6
3801 E1
3802 C6
3803 B6
3804 L11
3805 K11
3807 I11
3808 J15
3809 J11
3810 J11
3811 J11
3812 G11
3813 G21
3814 J6
3815 L5
3816 J8
3817 G11
3818 F12
3819 F12
3820 E1
3821 E1
3822 E1
3823 E1
3824 G11
3825 G15
3826 D5
3827 J9
3828 J11
3829 M4
3830 M4
3831 M4
3832 M3
3833 M3
3834 M4
3835 N3
3836 L3
3837 M2
3838 M3
3839 F11
3840 F11
3841 E1
3842 E1
3843 E1
3845 E4
3846 F4
3847 G4
3848 H4
3849 H5
3850 C3
3851 F3
3852 D3
3853 F5
3854 I1
3855 F11
3856 F11
3857 D5
3858 E5
3859 O4
3860 N6
3861 I6
3862 E7
5800 E5
5801 D3
5803 I1
5804 F4
5805 J1
5806 N3
5807 F4
5808 I1
5809 I1
5810 H1
5811 H1
5812 H1
5813 G21
5814 L21
5820 A8
5847 F3
5848 H5
5849 G5
7800 B9
7801 F7
7802 G6
7803 K1
7810 A1
7811 J1
7812 J1
7820 F1
7830 K5
7831 L4
7832 L3
7846 F4
7849 G5

1290 TXT FLOF MODULE

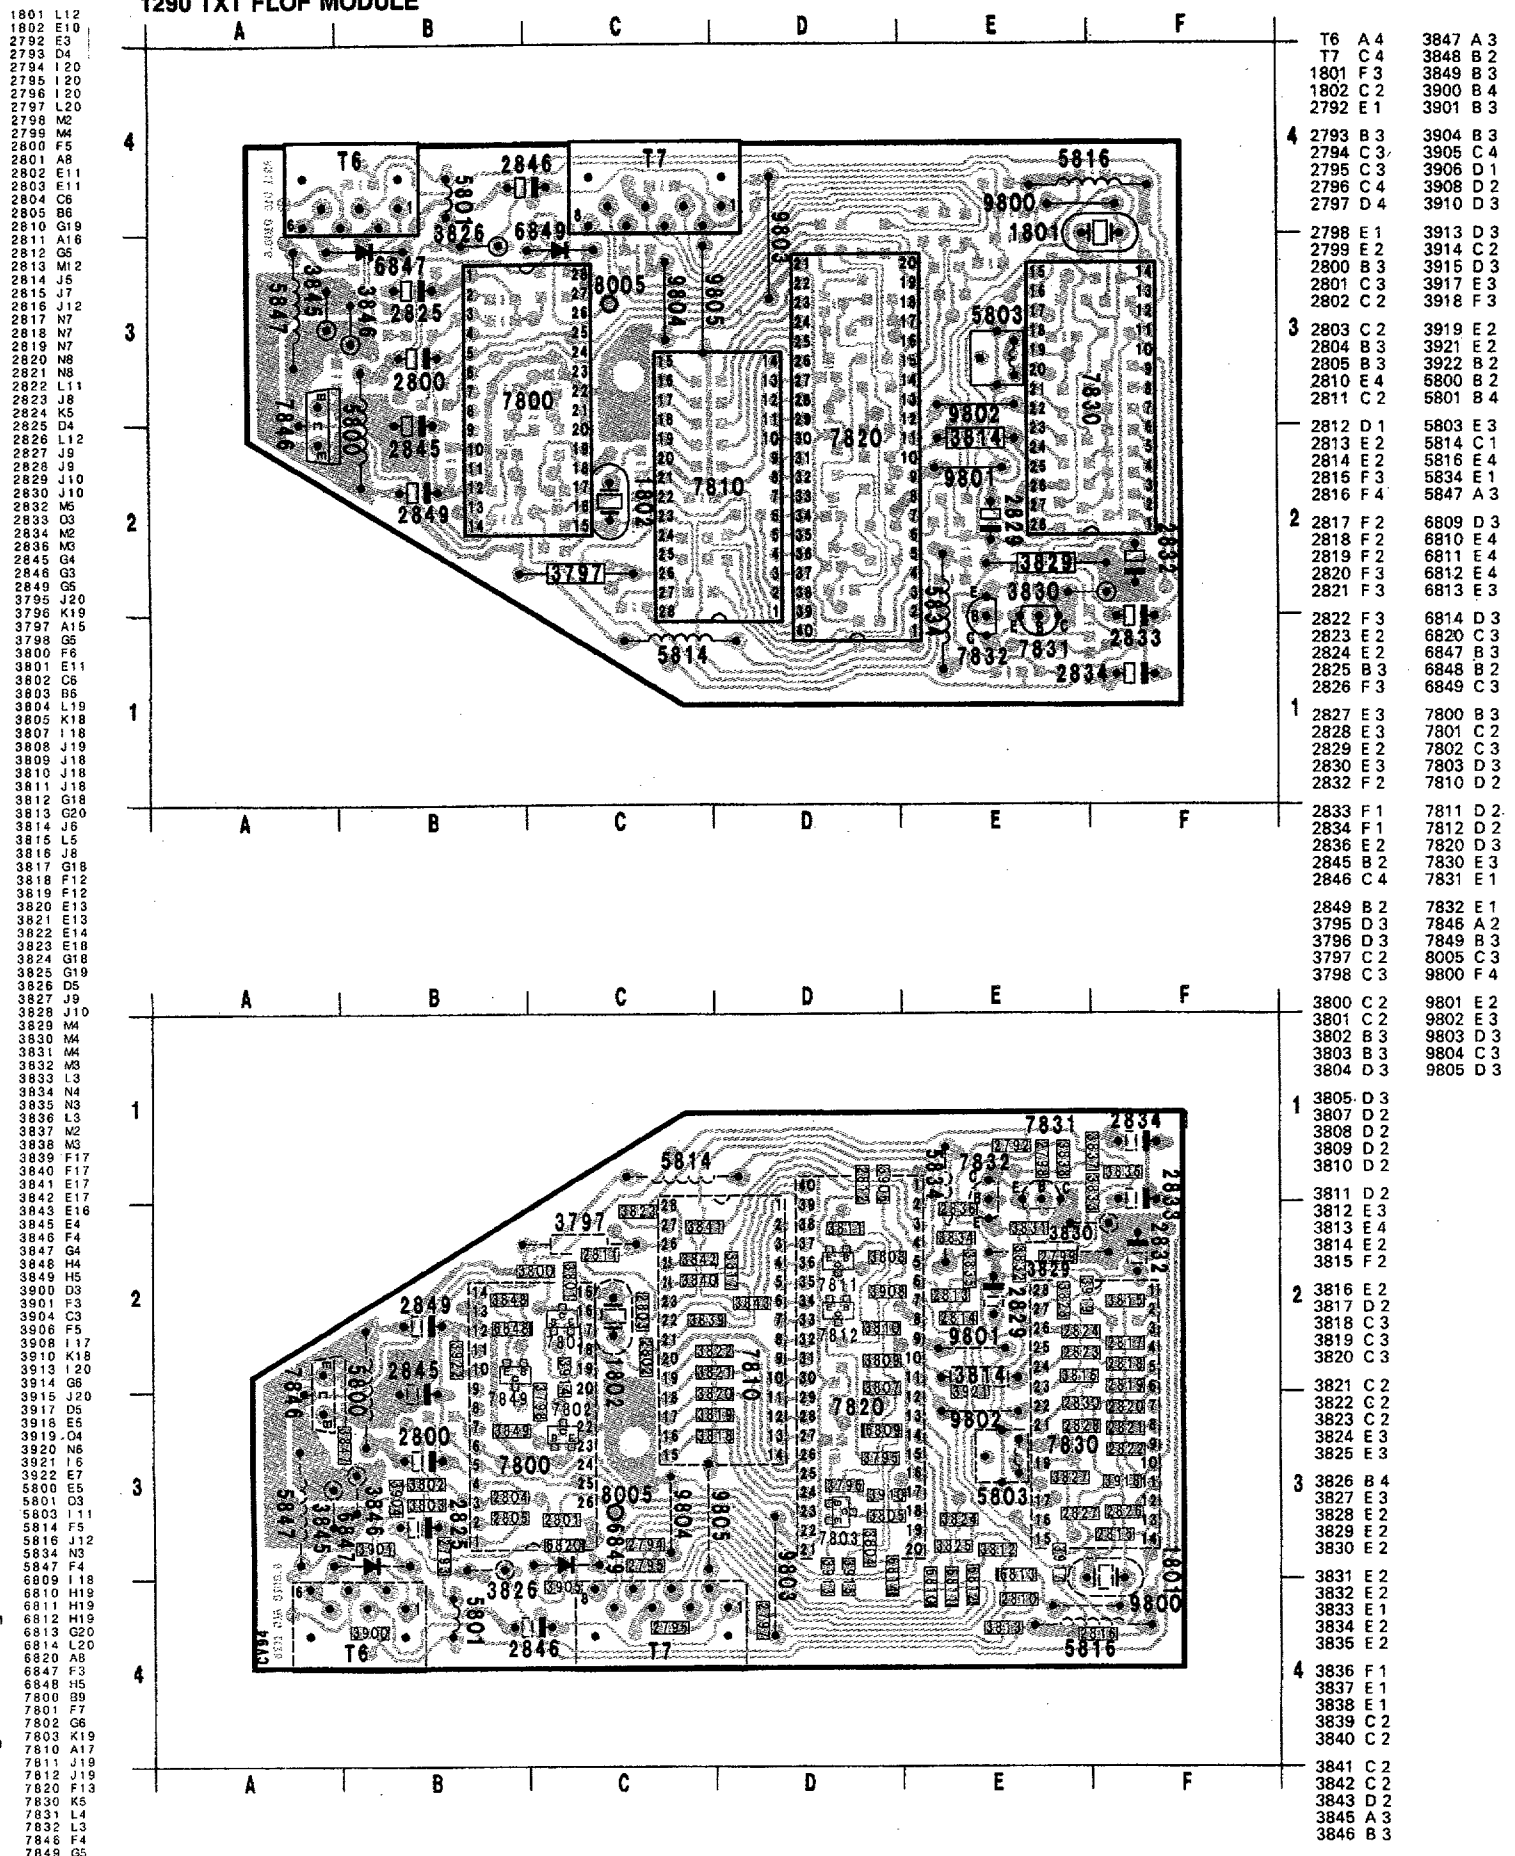


G


MONO IF/SOUND MODULE
 MODULO IF/AUDIO MONO
 MODULO SONIDO MONO FI


REMARKS/REMARQUES/ANMERKUNGEN/NOTE

PRESENT IN SETS:
 PRESENT SUR LES APPAREILS:
 ANWESEN IN GERÄTEN:
 PRESENTE SUI MODELLI:
 PRESENTE SOBRE MODELOS:

- 1) MULTI-SYSTEM
 2) SINGLE-SYSTEM
 3) UK
 4) NON UK

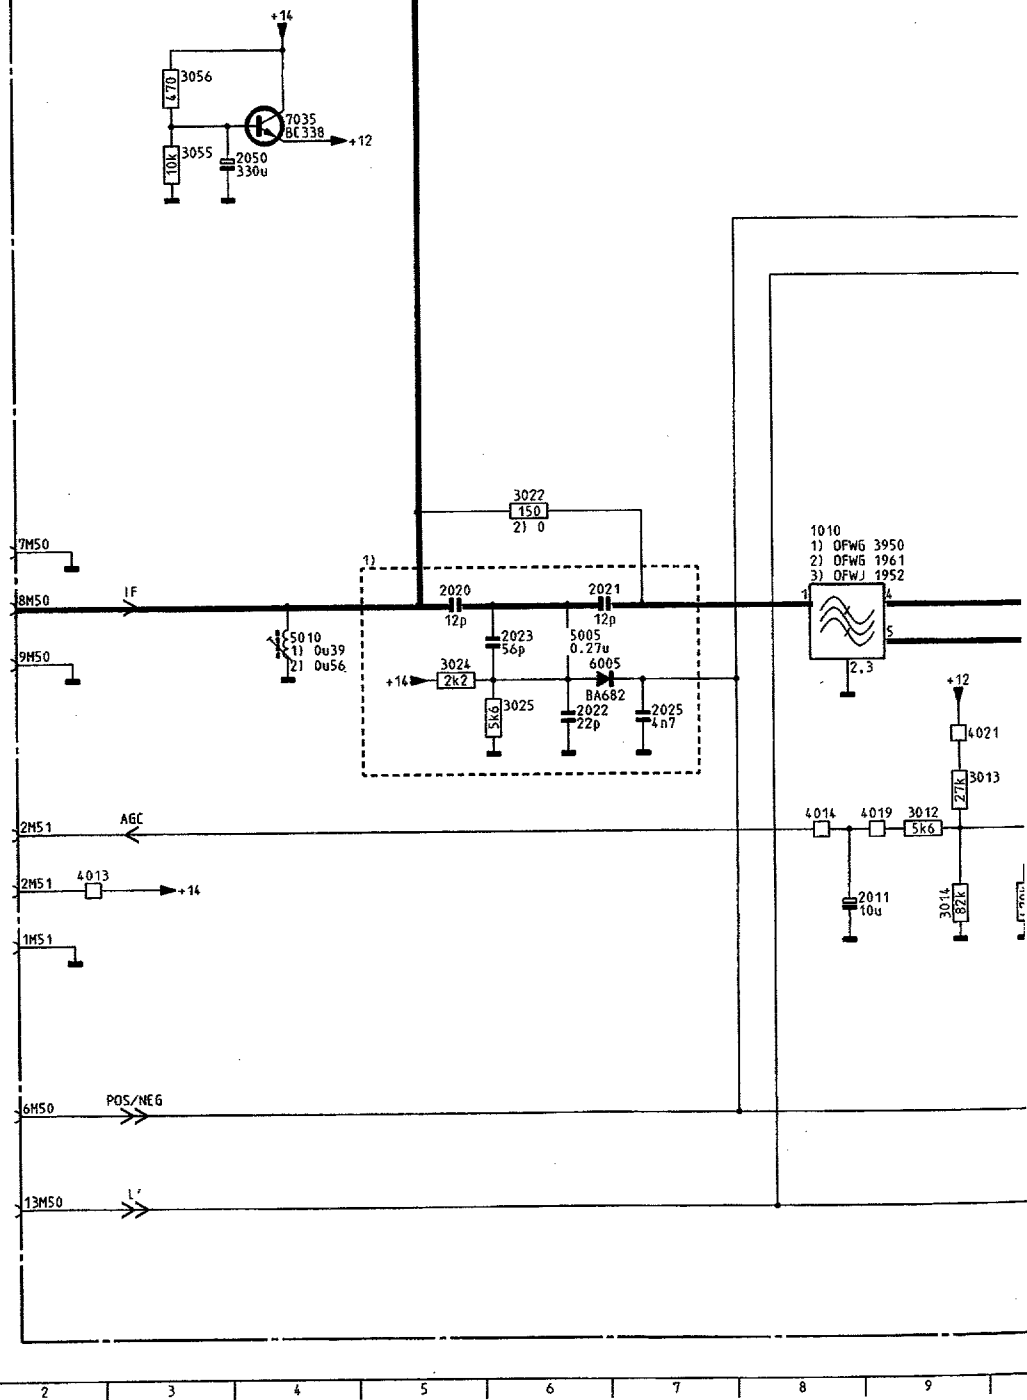

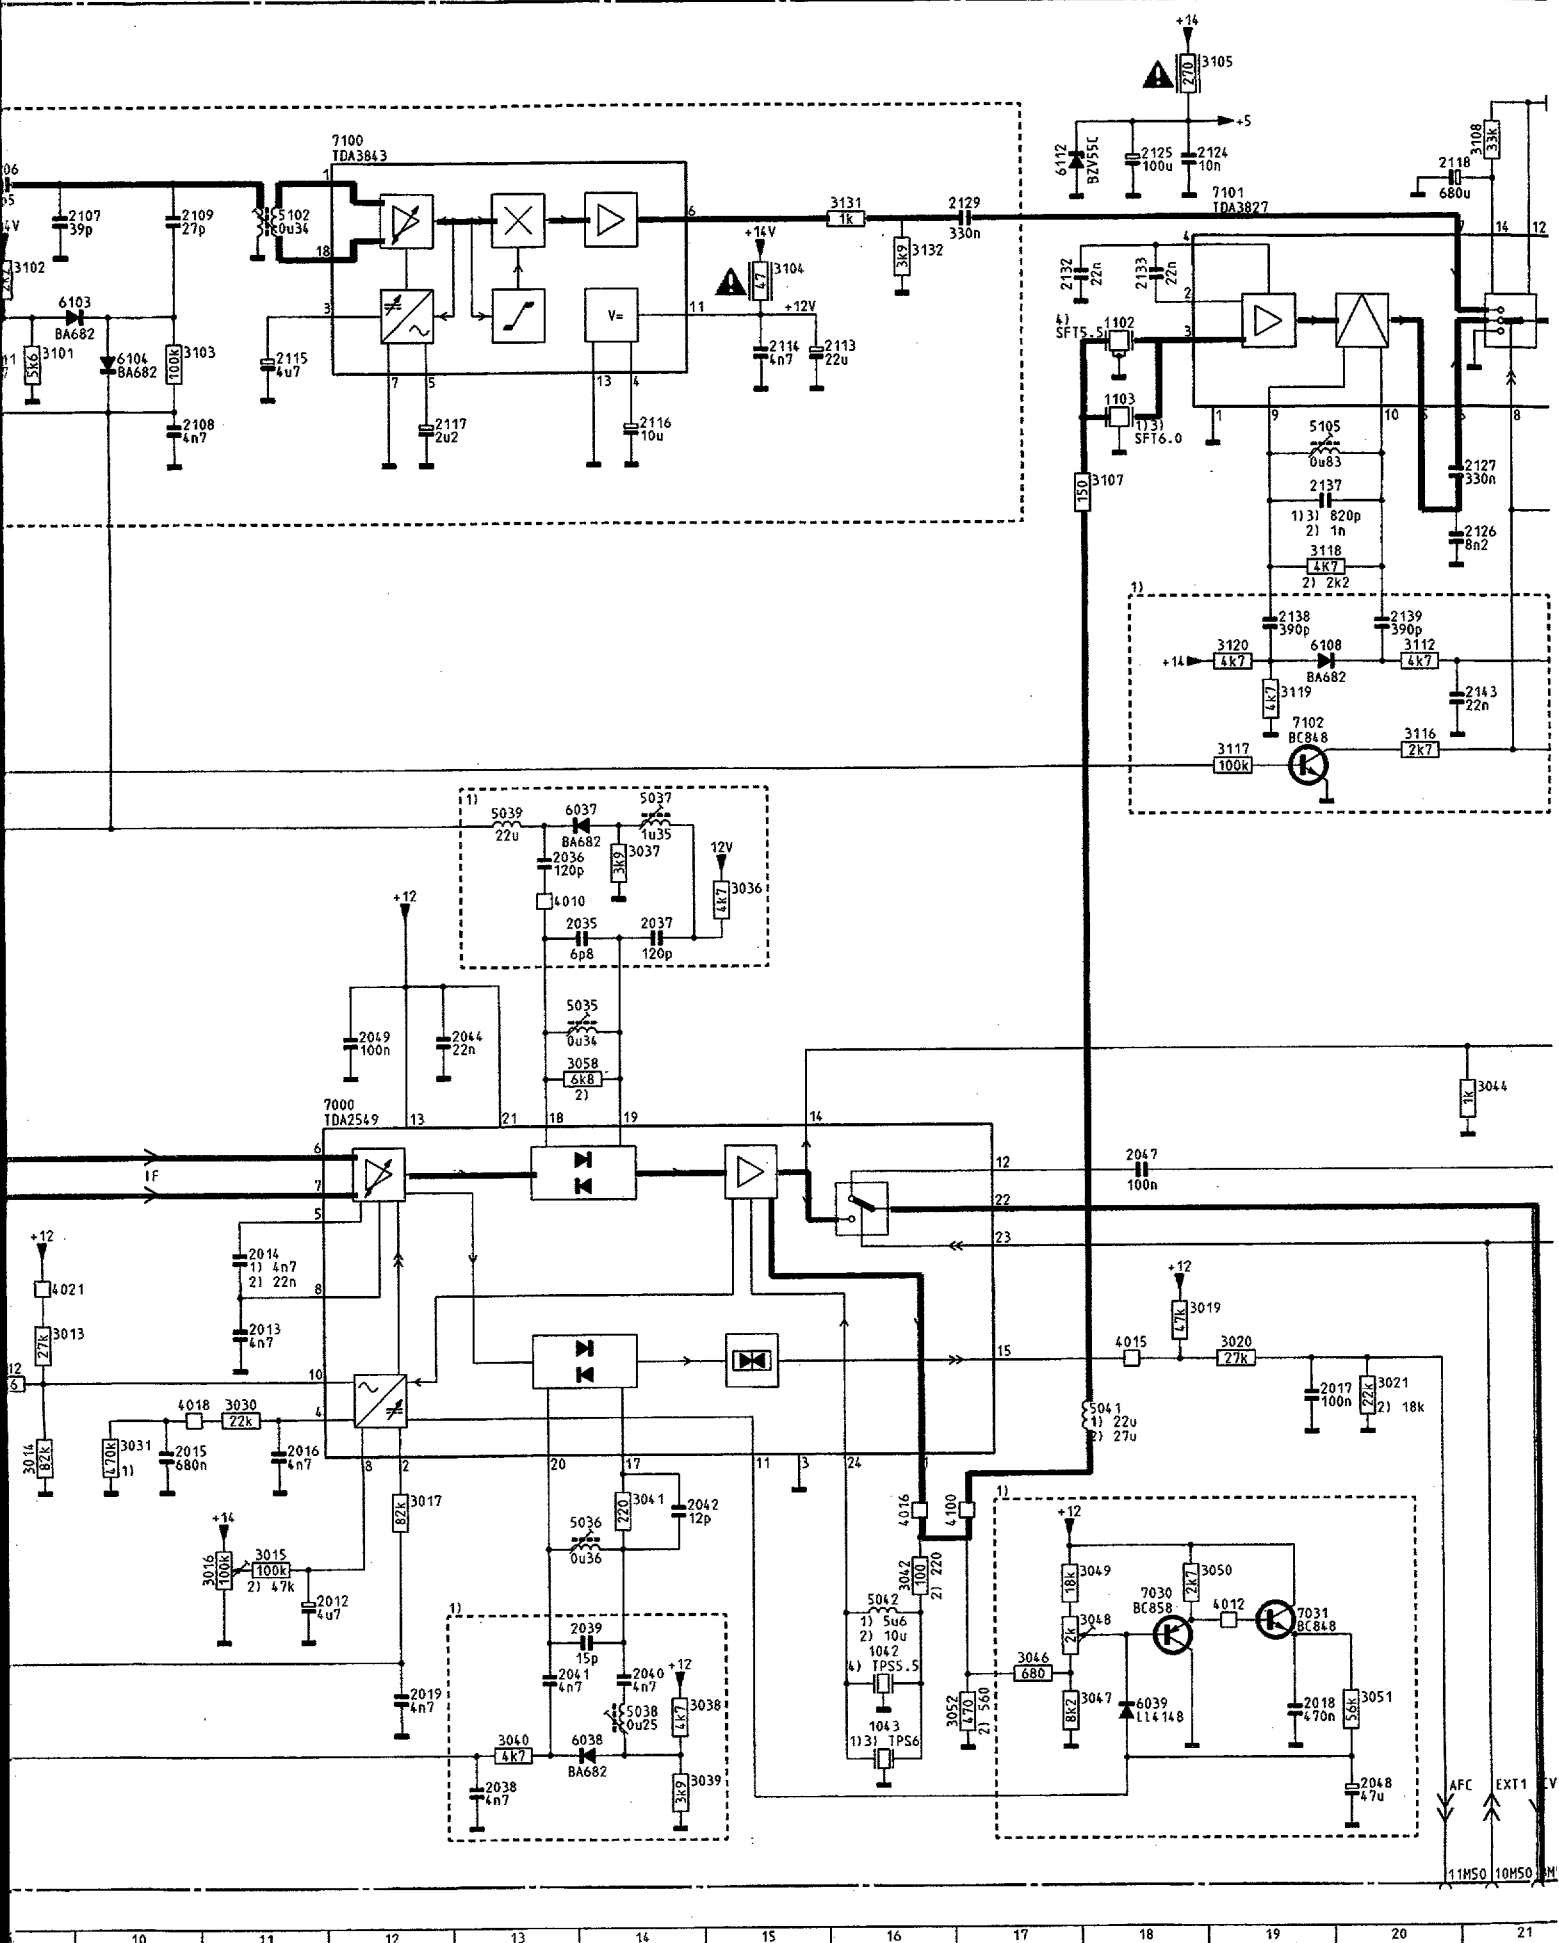

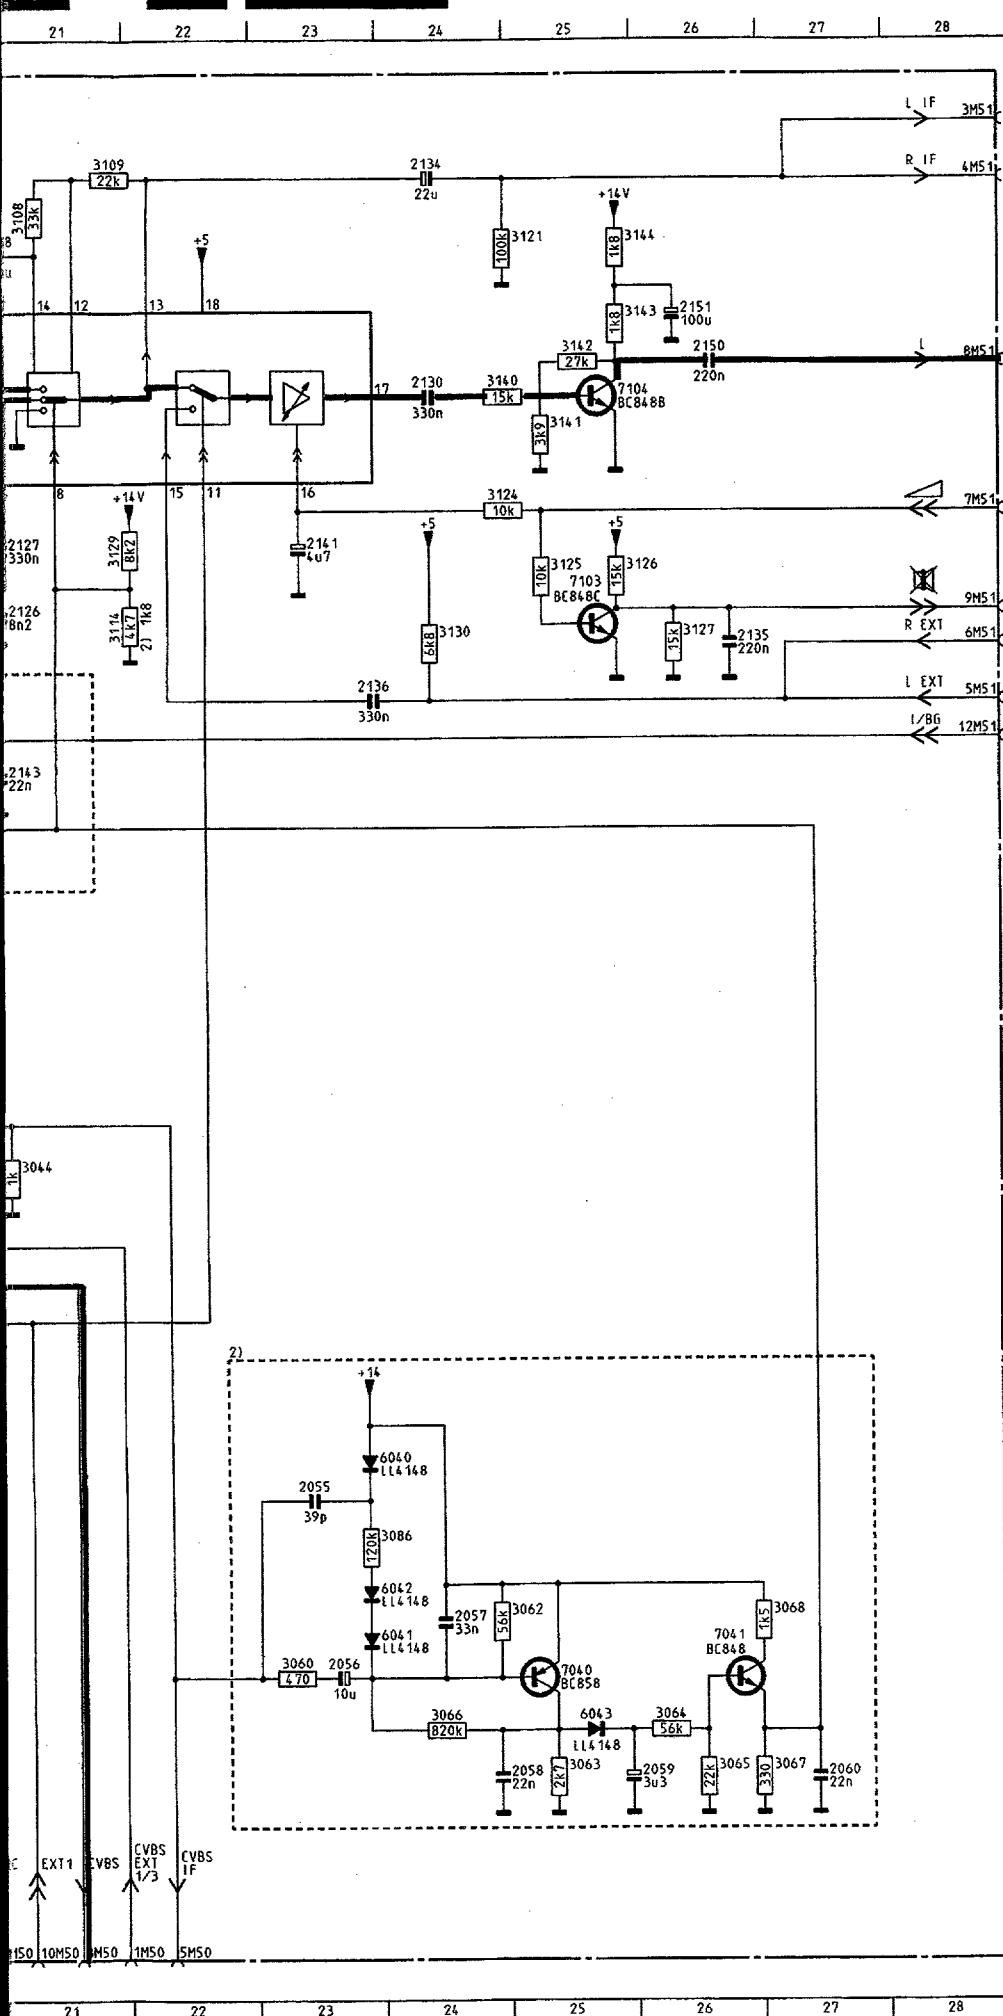

CHASSIS GR2.1

C106532002/016, MREF
040291

G

1010	I 8	3102	C 9
1042	N16	3103	C10
1043	M16	3104	C15
1102	C18	3105	A19
1103	D18	3107	D18
2011	L 9	3108	B21
2012	M11	3109	A21
2013	K11	3112	F20
2014	J11	3114	E22
2015	L10	3116	F20
2016	L11	3117	G19
2017	L19	3118	E20
2018	N19	3119	F19
2019	N12	3120	F19
2020	J 5	3121	B25
2021	J 7	3124	D25
2022	K 6	3125	D25
2023	J 6	3126	D26
2025	K 7	3127	E26
2035	M14	3129	D22
2036	G13	3130	E24
2037	H14	3131	B16
2038	O13	3132	C16
2039	M14	3140	E25
2040	N14	3141	C25
2041	N13	3142	C25
2042	L14	3143	B26
2044	I13	3144	B26
2047	J18	4010	H13
2048	O20	4012	M19
2049	I12	4014	K 8
2050	F 4	4015	K18
2055	L23	4016	L16
2056	M23	4018	L11
2057	M24	4019	K 9
2058	N25	4021	K 9
2059	N26	4100	L17
2060	N27	5005	J 6
2100	B 6	5010	J 4
2101	C 7	5035	I14
2102	B 7	5036	M14
2104	B 8	5037	G14
2105	B 9	5038	N14
2106	B 9	5039	G13
2107	B10	5041	L18
2108	D10	5042	M16
2109	B10	5100	C 6
2110	B 8	5101	B 7
2111	C 9	5102	B11
2113	C16	5105	D20
2114	C15	6005	J 7
2115	C11	6037	G14
2116	D14	6038	N14
2117	D12	6039	N18
2118	B21	6040	K24
2124	B19	6041	M24
2125	B18	6042	M24
2126	E21	6043	N25
2127	D21	6101	C 8
2129	B17	6102	C 9
2130	C24	6103	C10
2132	C18	6104	C10
2133	C18	6108	F20
2134	A24	6112	B18
2135	E26	7000	I12
2136	E24	7030	M18
2137	D20	7031	M19
2138	F19	7035	F 4
2139	F20	7040	M25
2141	D23	7041	M26
2143	F21	7100	B12
2150	C26	7101	B19
2151	C26	7102	F19
3012	K 9	7103	E25
3013	K 9	7104	C25
3014	L 9		
3015	M11		
3016	M11		
3017	L12		
3019	K18		
3020	K19		
3021	K20		
3022	I 6		
3024	J 5		
3025	J 6		
3030	L11		
3031	L10		
3036	H15		
3037	G14		
3038	N14		
3039	O14		
3040	N13		
3041	L14		
3042	M16		
3044	I21		
3046	N17		
3047	N18		
3048	M18		
3049	M18		
3050	M18		
3051	N20		
3052	N17		
3055	F 3		
3056	E 3		
3058	I14		
3060	M23		
3062	M25		
3063	N25		
3064	N26		
3065	N26		
3066	N24		
3067	N27		
3068	M27		
3086	L24		
3100	C 8		
3101	C 9		




6.33


6.34

CHASSIS GR2.1



Module FI/son mono

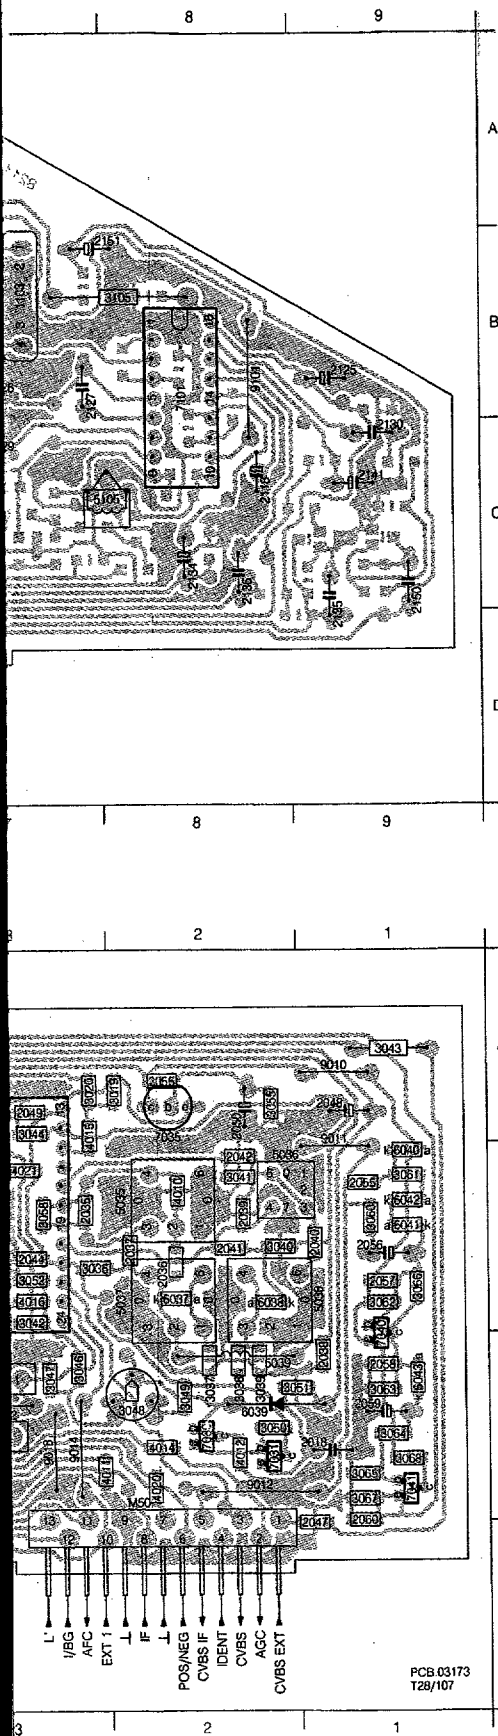

M50 C2	3108 C8
M51 C8	3109 C8
1010 B4	3112 C8
1042 C3	3114 C7
1043 C3	3116 B5
1102 B7	3117 B4
1103 B7	3118 C8
2011 C4	3119 C7
2012 B4	3120 C7
2013 B3	3121 C8
2014 B3	3124 C9
2015 C4	3125 C8
2016 B3	3126 D8
2017 A3	3127 C9
2018 C1	3129 C7
2019 C4	3130 C8
2020 C4	3131 B7
2021 C4	3132 B6
2022 B4	3140 C9
2023 C4	3141 C9
2025 B4	3142 C9
2035 B3	3143 C9
2036 B2	3144 B7
2037 B2	4010 B2
2038 C1	4011 C3
2039 B2	4012 C2
2040 B2	4013 A4
2041 B2	4014 C2
2042 B2	4015 B3
2044 B3	4016 B3
2047 D1	4018 C3
2048 A1	4019 C3
2049 A3	4020 C2
2050 A2	4021 B3
2055 B1	4100 A3
2056 B1	5005 C4
2057 B1	5010 C4
2058 C1	5035 B3
2059 C1	5036 B2
2060 D1	5037 B3
2100 C5	5038 B1
2101 C5	5039 C2
2102 C5	5041 A4
2104 C6	5042 C3
2105 C5	5100 B5
2106 C6	5101 C6
2107 B6	5102 B6
2108 C6	5105 C7
2109 B6	6005 C4
2110 C6	6037 B2
2111 C5	6038 B2
2112 B6	6039 C2
2113 B5	6040 B1
2114 B5	6041 B1
2115 B6	6042 B1
2116 B6	6043 C1
2117 A6	6101 C6
2118 C8	6102 C6
2124 B8	6103 B6
2125 B9	6104 B6
2126 B7	6108 C7
2127 B7	6112 B9
2129 C7	7000 B3
2130 C9	7030 C2
2132 B8	7031 C2
2133 B8	7035 A2
2134 C8	7040 C1
2135 D9	7041 C1
2136 C8	7100 B6
2137 C8	7101 B8
2138 C7	7102 B4
2139 C8	7103 C9
2141 C9	7104 C9
2143 C7	9010 A1
2150 D9	9011 B1
2151 B7	9012 C2
3012 B3	9014 C3
3013 B3	9016 A4
3014 B4	9017 A4
3015 B4	9018 C3
3016 B4	9026 C4
3017 B4	9028 B5
3019 A3	9030 C5
3020 A3	9031 C5
3021 B4	9032 C5
3022 C4	9100 C5
3024 C4	9101 B8
3025 C4	9102 B7
3030 B3	91

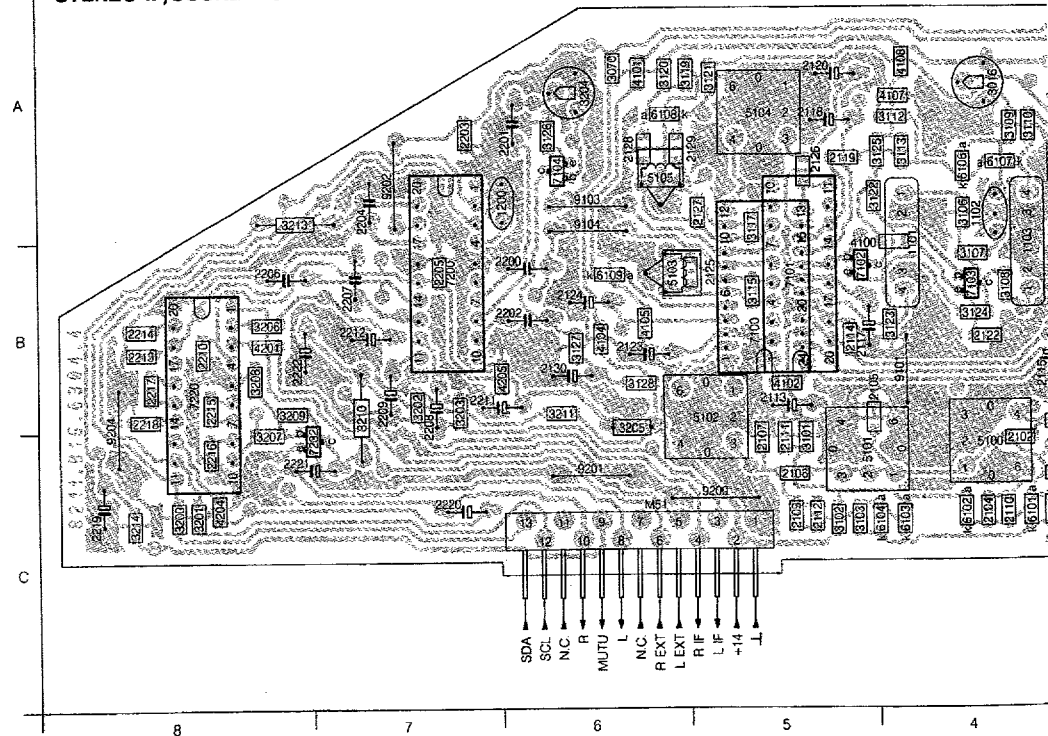



Module FI/son stéréo

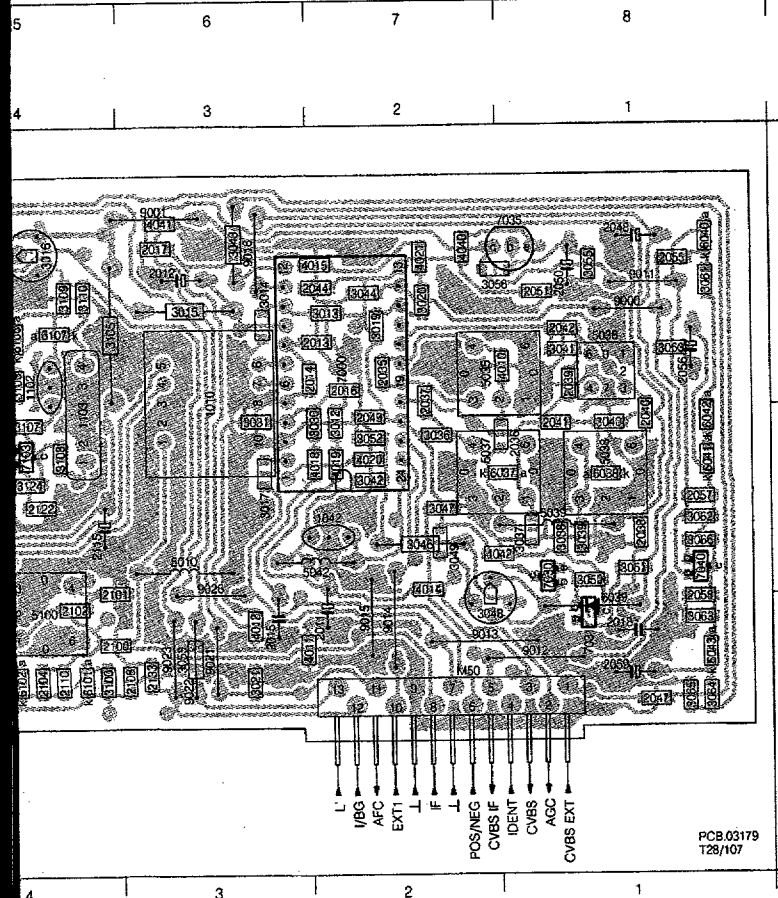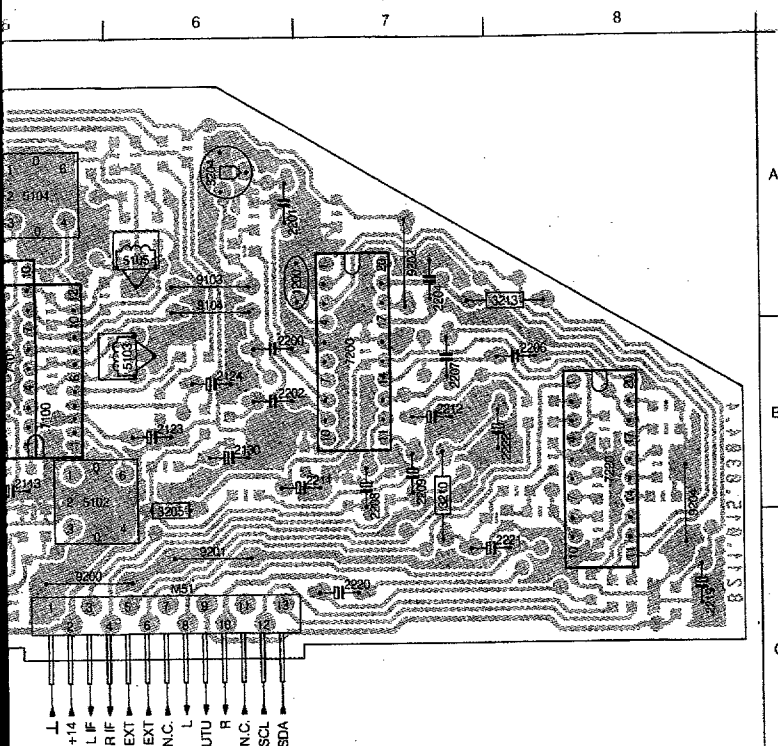

A	M50 C2	3066 B1
	M51 C6	3070 A6
	1010 B3	3100 C4
	1042 B2	3101 C5
	1101 B4	3102 C5
	1102 A4	3103 C5
	1103 B4	3105 A4
	1200 A7	3106 A4
	2011 C2	3107 B4
	2012 A3	3108 B4
	2013 A2	3109 A4
	2014 A3	3110 A4
	2015 C3	3112 A4
	2016 A2	3113 A4
	2017 A3	3115 B5
	2018 C1	3117 B5
	2035 A2	3119 A6
	2036 B1	3120 A6
	2037 B2	3121 A5
	2038 B1	3122 A5
	2039 A1	3123 B4
	2040 B1	3124 B4
	2041 B1	3125 A5
	2042 A1	3126 A6
	2044 A2	3127 B6
	2047 C1	3128 B6
	2048 A1	3200 C8
	2049 B2	3201 C8
	2050 A1	3202 B7
	2051 A1	3203 B7
	2055 A1	3204 A6
	2056 A1	3205 C6
	2057 B1	3206 B8
	2058 C1	3207 C8
	2059 C1	3208 B8
	2100 C3	3209 B8
	2101 B3	3210 B7
	2102 C4	3211 B6
	2104 C4	3212 A8
	2105 B5	3214 C8
	2106 C5	4010 A2
	2107 C5	4011 C3
	2108 C4	4012 C3
	2109 C5	4014 B2
	2110 C4	4015 A2
	2111 C5	4018 B3
	2112 C5	4019 B2
	2113 B5	4020 B2
	2114 B5	4021 A2
	2115 B4	4040 A2
	2117 B5	4041 A3
	2118 A5	4042 B1
	2119 A5	4100 B5
	2120 A5	4101 A6
	2122 B4	4102 B5
	2123 B6	4104 B6
	2124 B6	4105 B6
	2126 B5	4107 A4
	2126 A5	4108 A4
	2127 A6	4201 B8
	2128 A6	4204 C8
	2129 A6	4205 B7
	2130 B6	5010 B3
	2133 C3	5035 A2
	2200 B6	5036 A1
	2201 A7	5037 B2
	2202 B6	5038 B1
	2203 A7	5039 B1
	2204 A7	5042 B2
	2205 B7	5100 C4
	2206 B8	5101 C5
	2207 B7	5102 B5
	2208 C7	5103 B6
	2209 B7	5104 A5
	2210 B8	5105 A6
	2211 B7	6037 B1
	2212 B7	6038 B1
	2213 B8	6039 C1
	2214 B8	6040 A1
	2215 B8	6041 B1
	2216 C8	6042 B1
	2217 B8	6043 C1
	2218 B8	6101 C4
	2219 C8	6102 C4
	2220 C7	6103 C4
	2221 C8	6104 C5
	2222 B8	6106 A4
	3012 B2	6107 A4
	3013 A2	6108 A6
	3014 A3	6109 B6
	3015 A3	7000 A2
	3016 A4	7030 B1
	3017 B3	7031 C1
	3019 A2	7035 A1
	3020 A2	7040 B1
	3021 C3	7100 B5
	3030 B3	7101 B5
	3031 B3	7102 B5
	3036 B2	7103 B4
	3037 B1	7104 A6
	3038 B1	7200 B7
	3039 B1	7220 B8
	3040 B1	7232 C8
	3041 A1	9000 A1
	3042 B2	9001 A3
	3043 A3	9011 A1
	3044 A2	9012 C1
	3046 B2	9013 C2
	3047 B2	9014 C2
	3048 C2	9015 C2
	3049 B2	9016 A3
	3050 B1	9021 C3
	3051 B1	9022 C3
	3052 B2	9023 C3
	3053 C3	9026 B3
	3055 A1	9101 B4
	3056 A1	9103 A6
	3060 A1	9104 A6
	3061 A1	9200 C5
	3062 B1	9201 C6
	3063 C1	9202 A7
	3064 C1	9204 C8
	3065 C1	

6.37

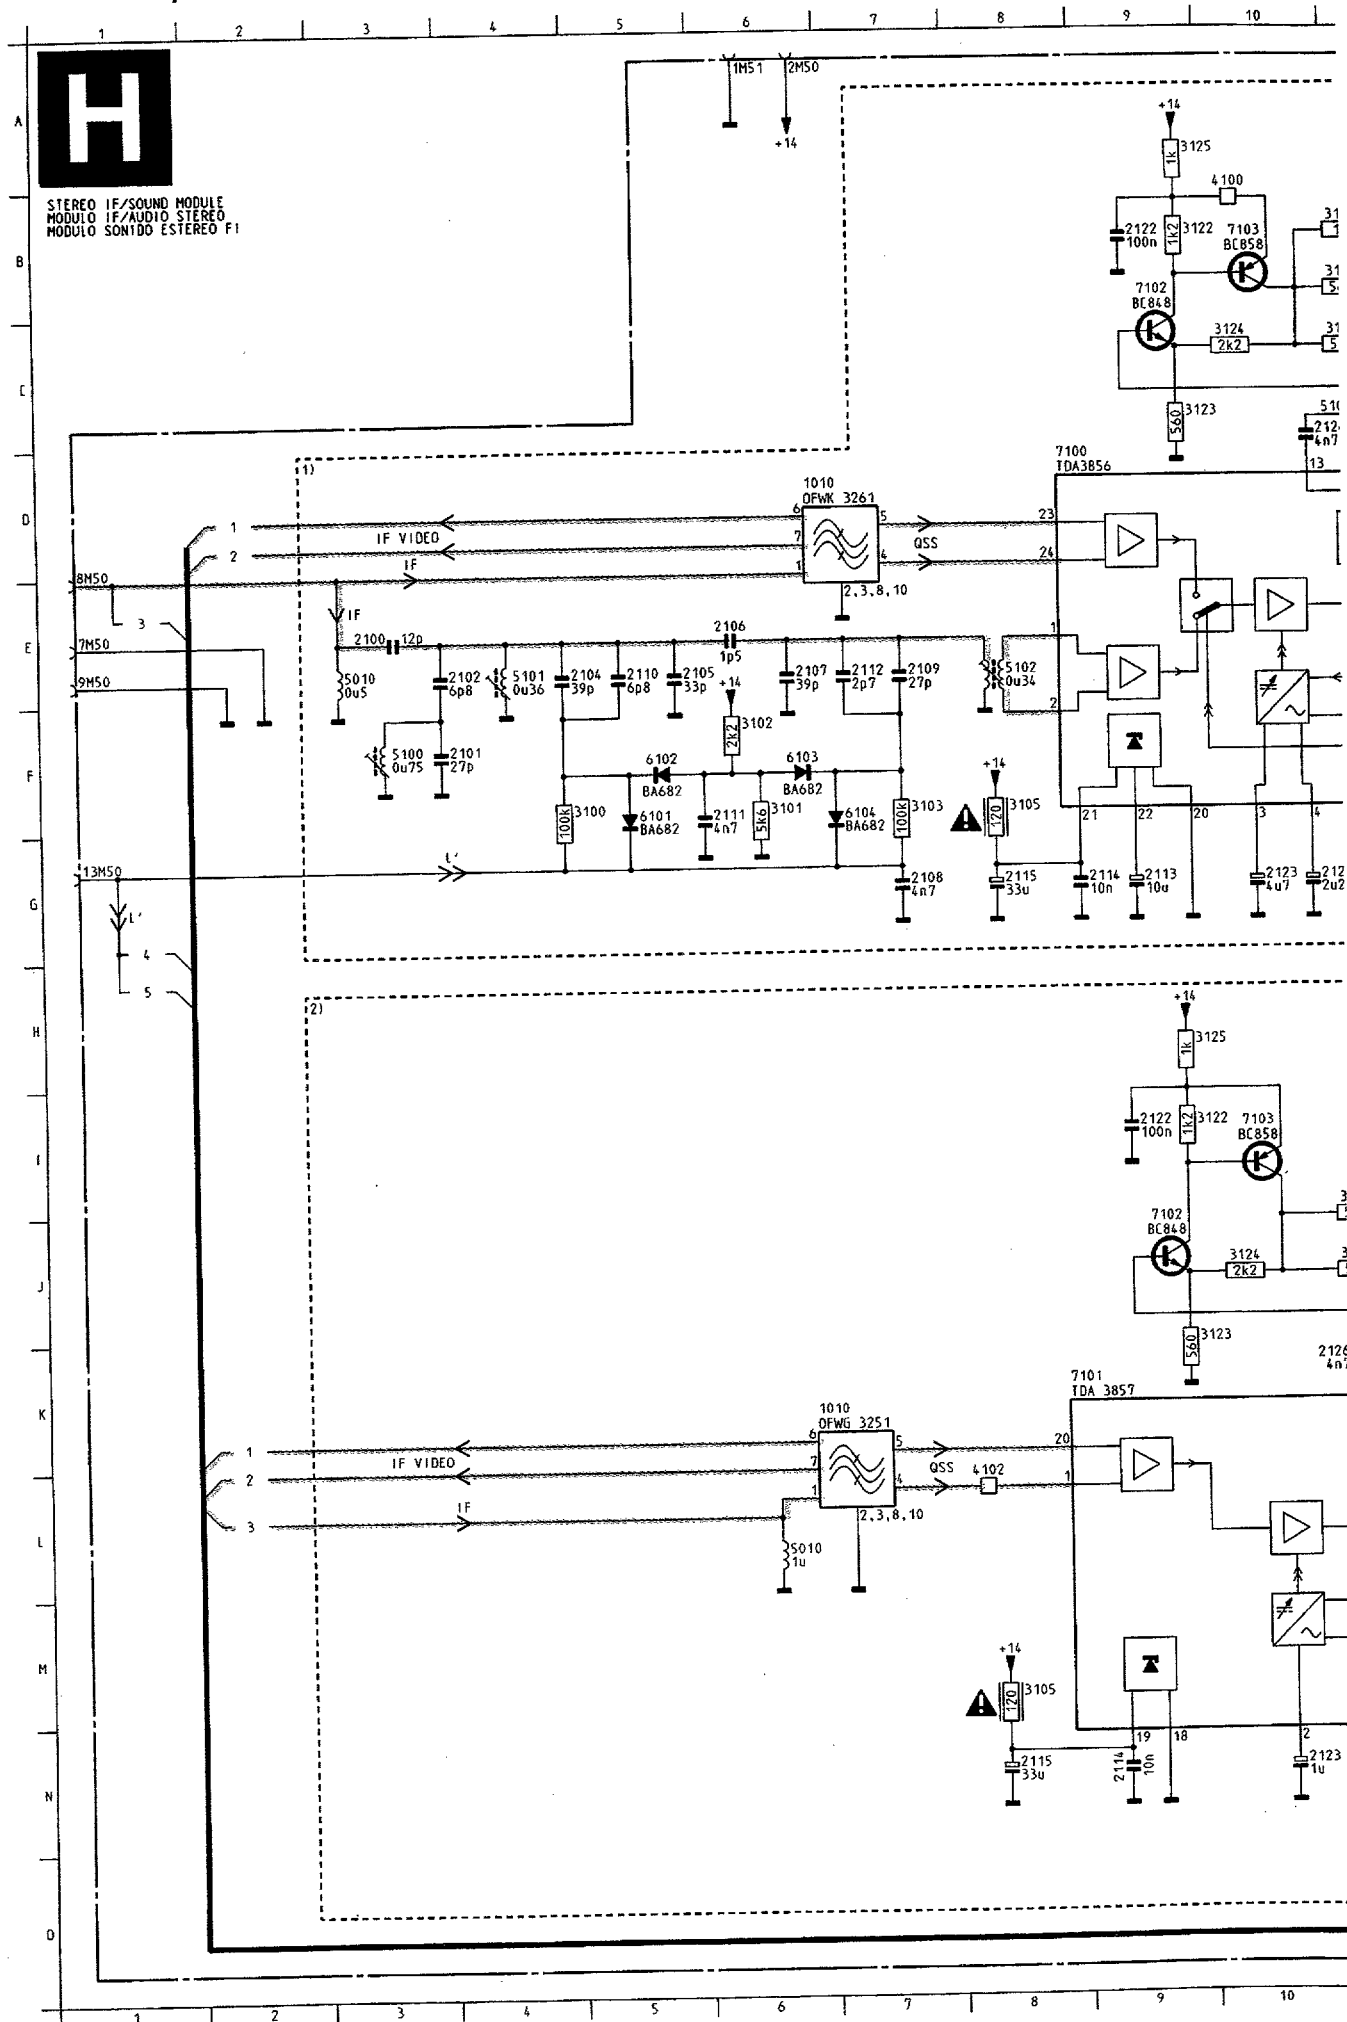


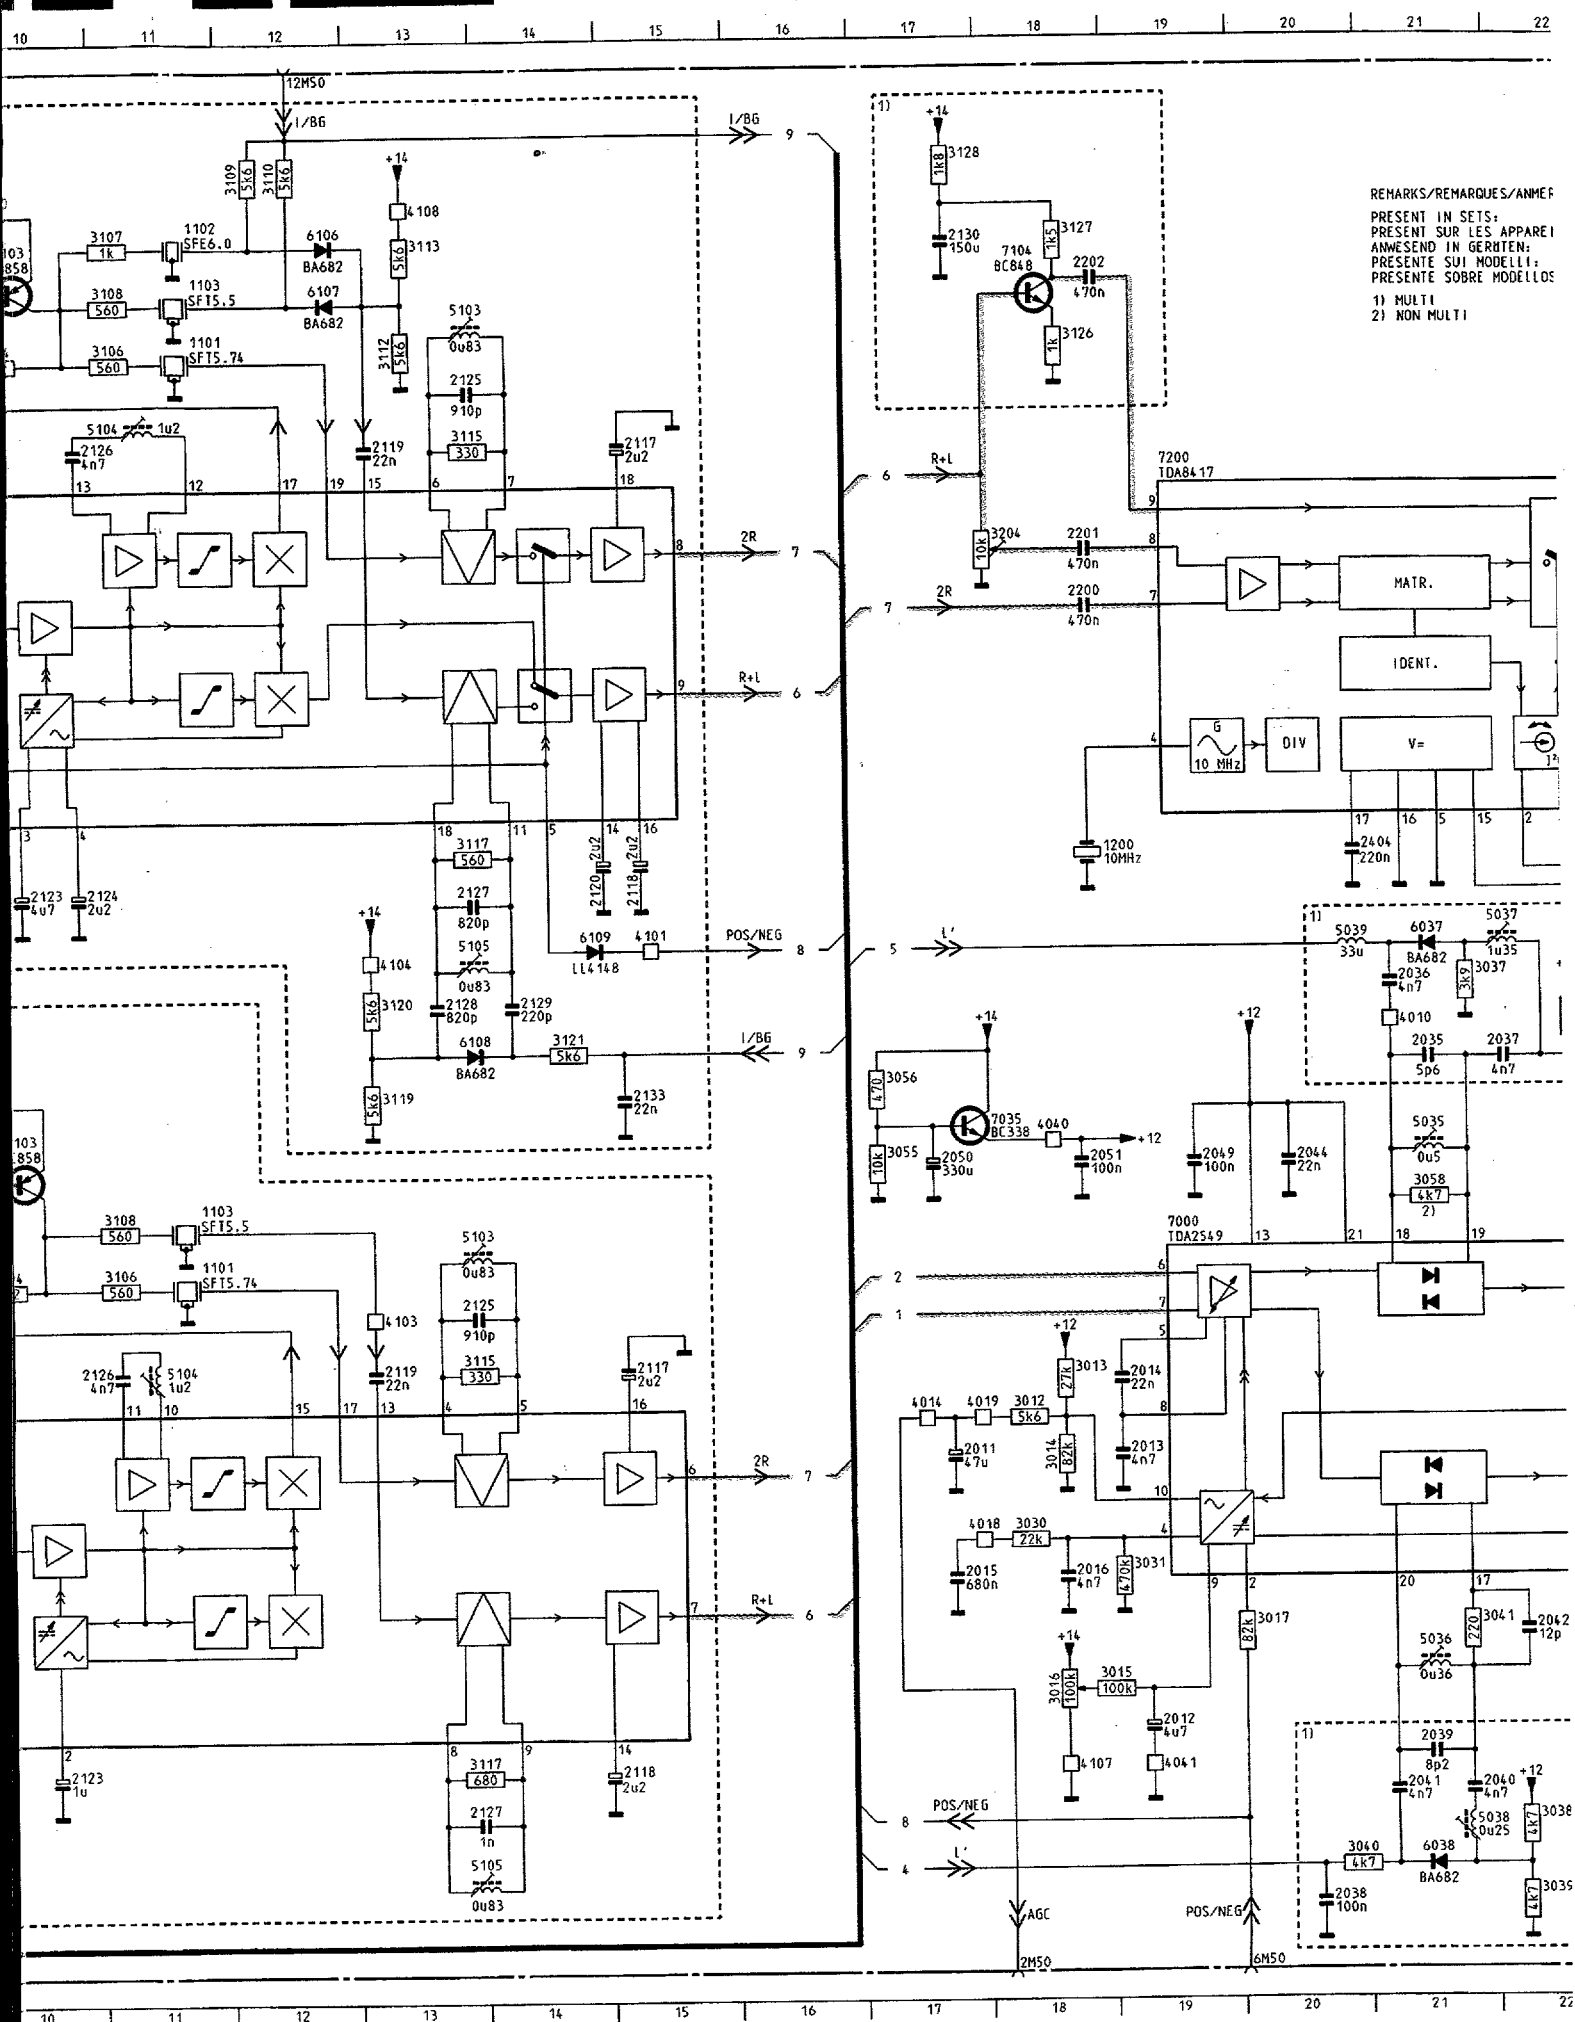


REMARQUES/ANMERKUNGEN/NOTE

IN SETS:
SUR LES APPAREILS:
IN GERÄTEN:
SUI MODELLI:
SOBRE MODELOS:

ULTI

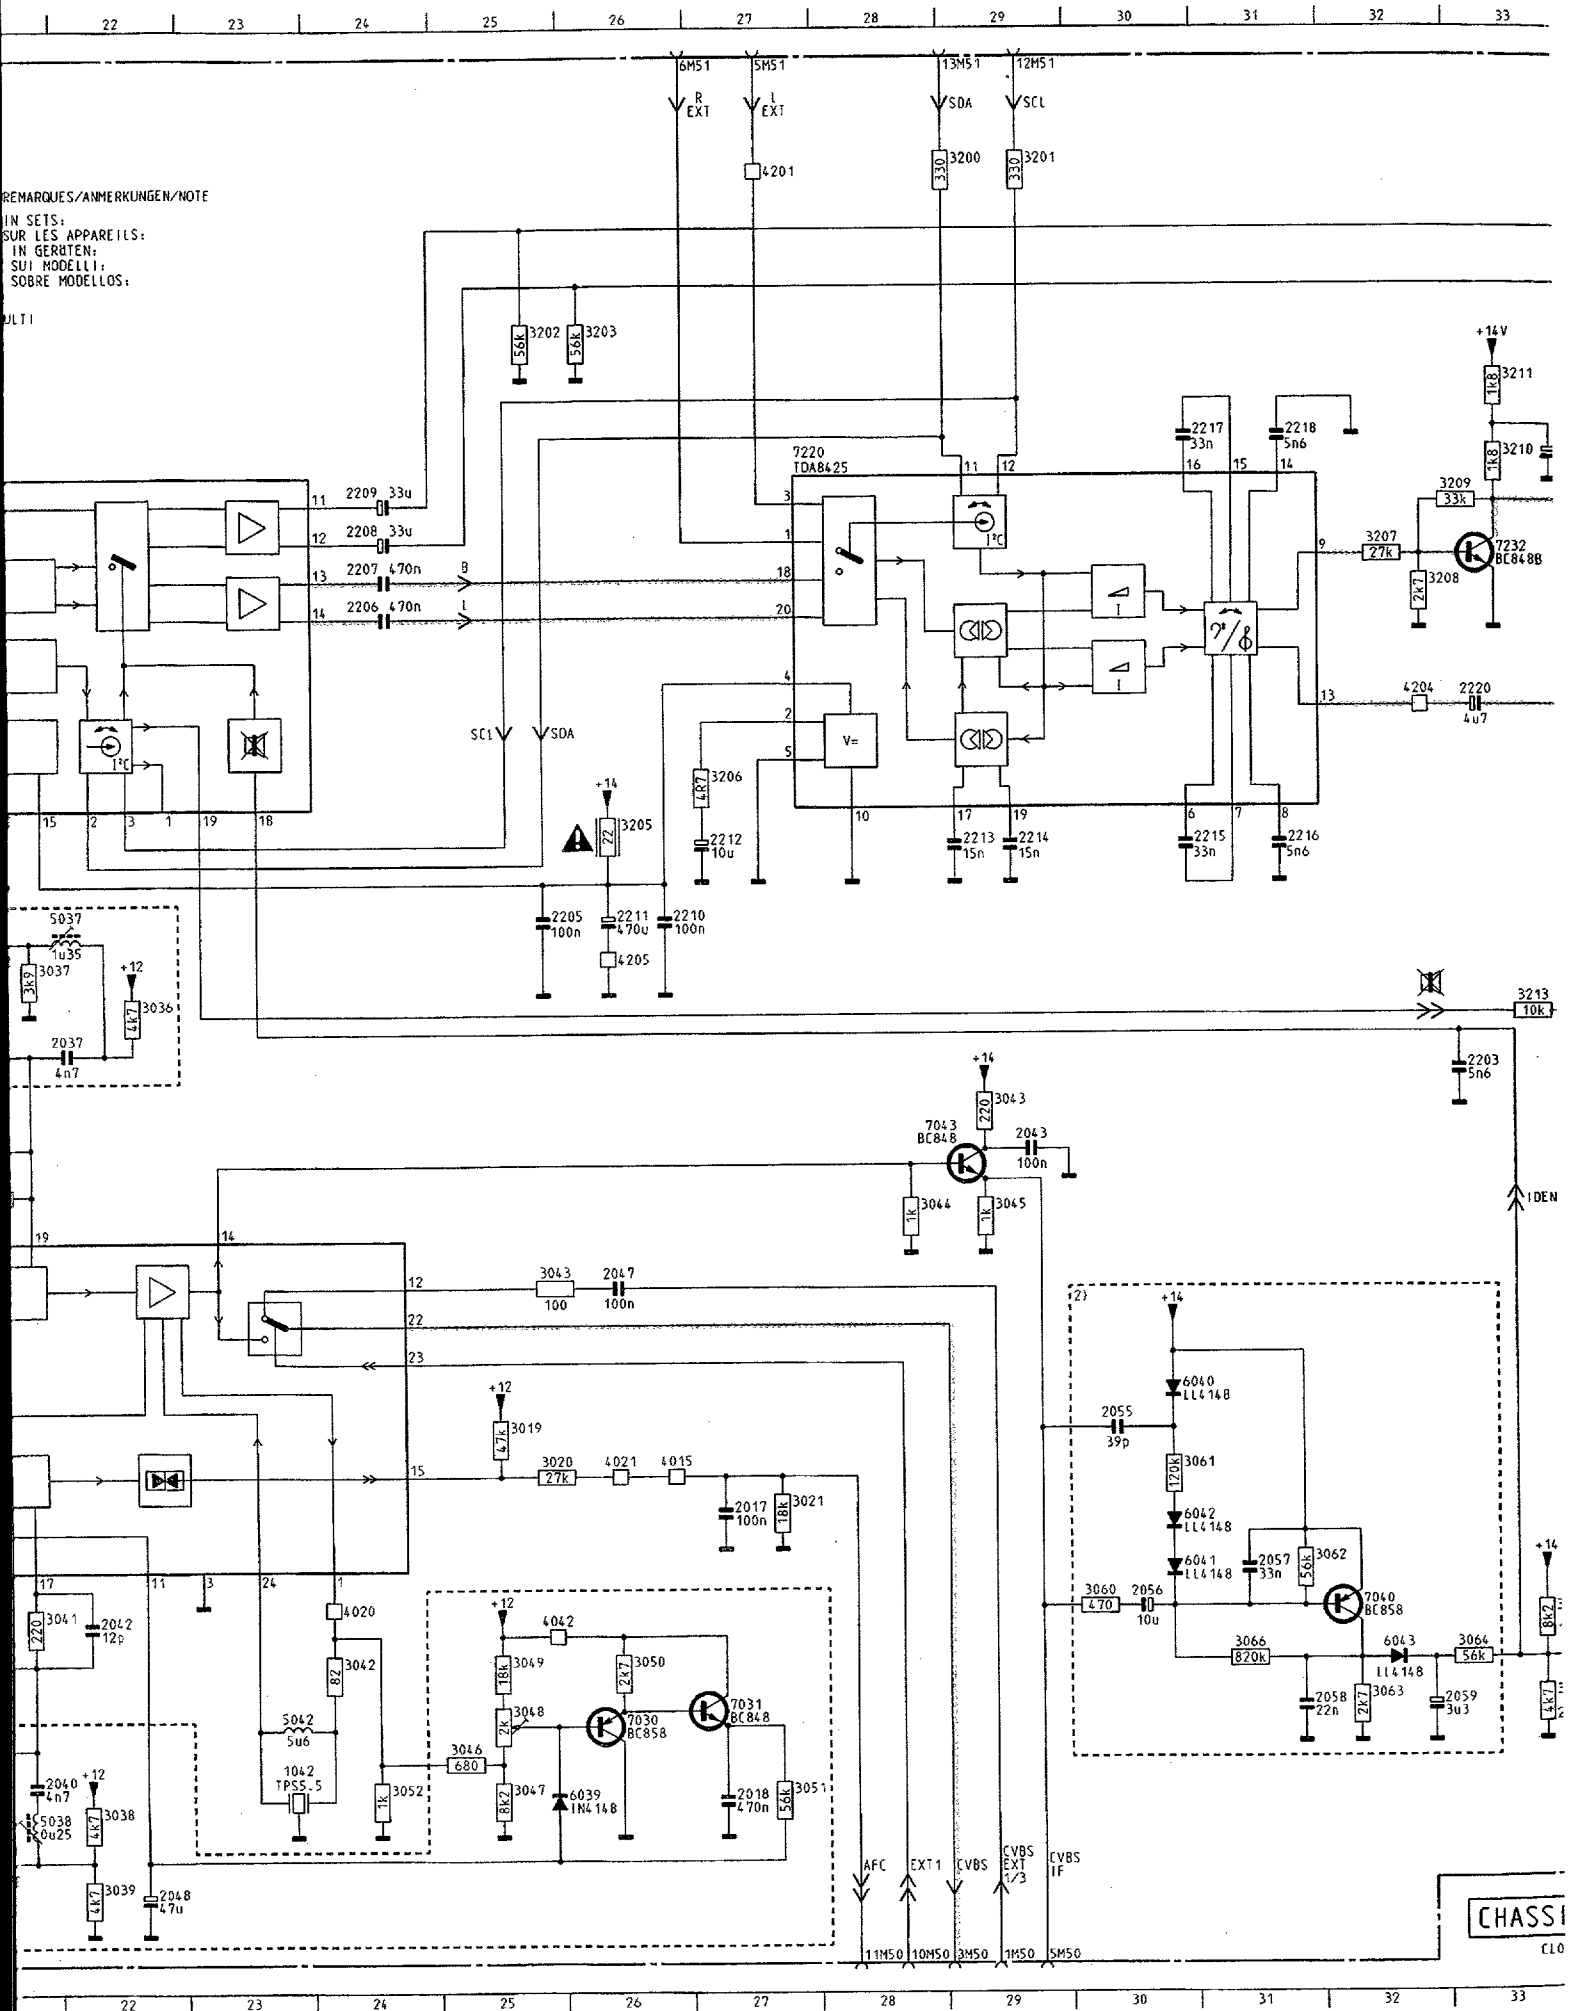

CHASSIS
C10

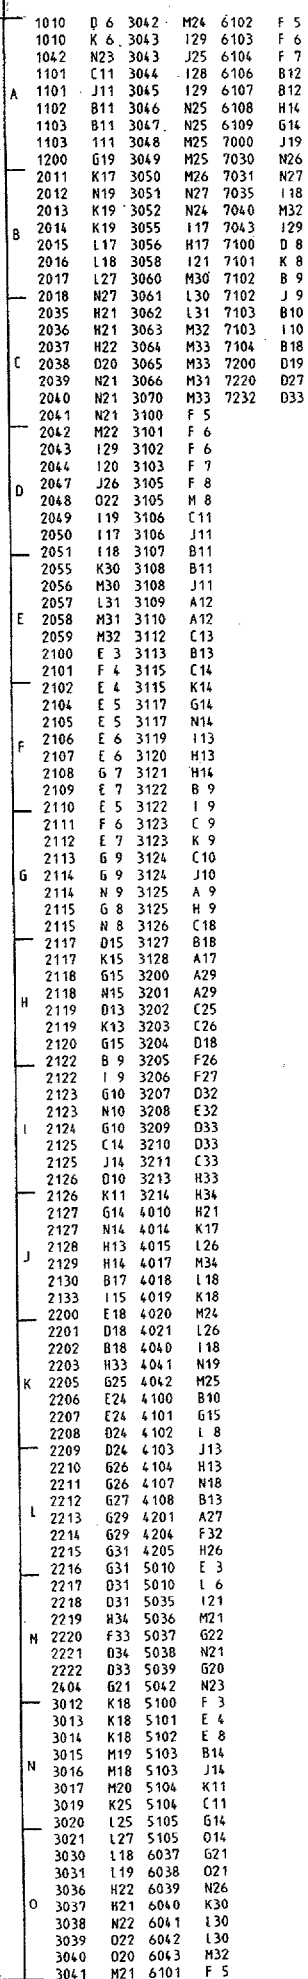



ND MODULE
DIO STEREO
D ESTEREO FI


REMARKS/REMARQUES/ANMERKUNGEN/NOTE



PRESENT IN SETS:
PRESENT SUR LES APPAREILS:
ANWESEND IN GERÄTEN:
PRESENTE SUI MODELLI:
PRESENTE SOBRE MODELOS:

- 1) PAL I
2) PAL BG

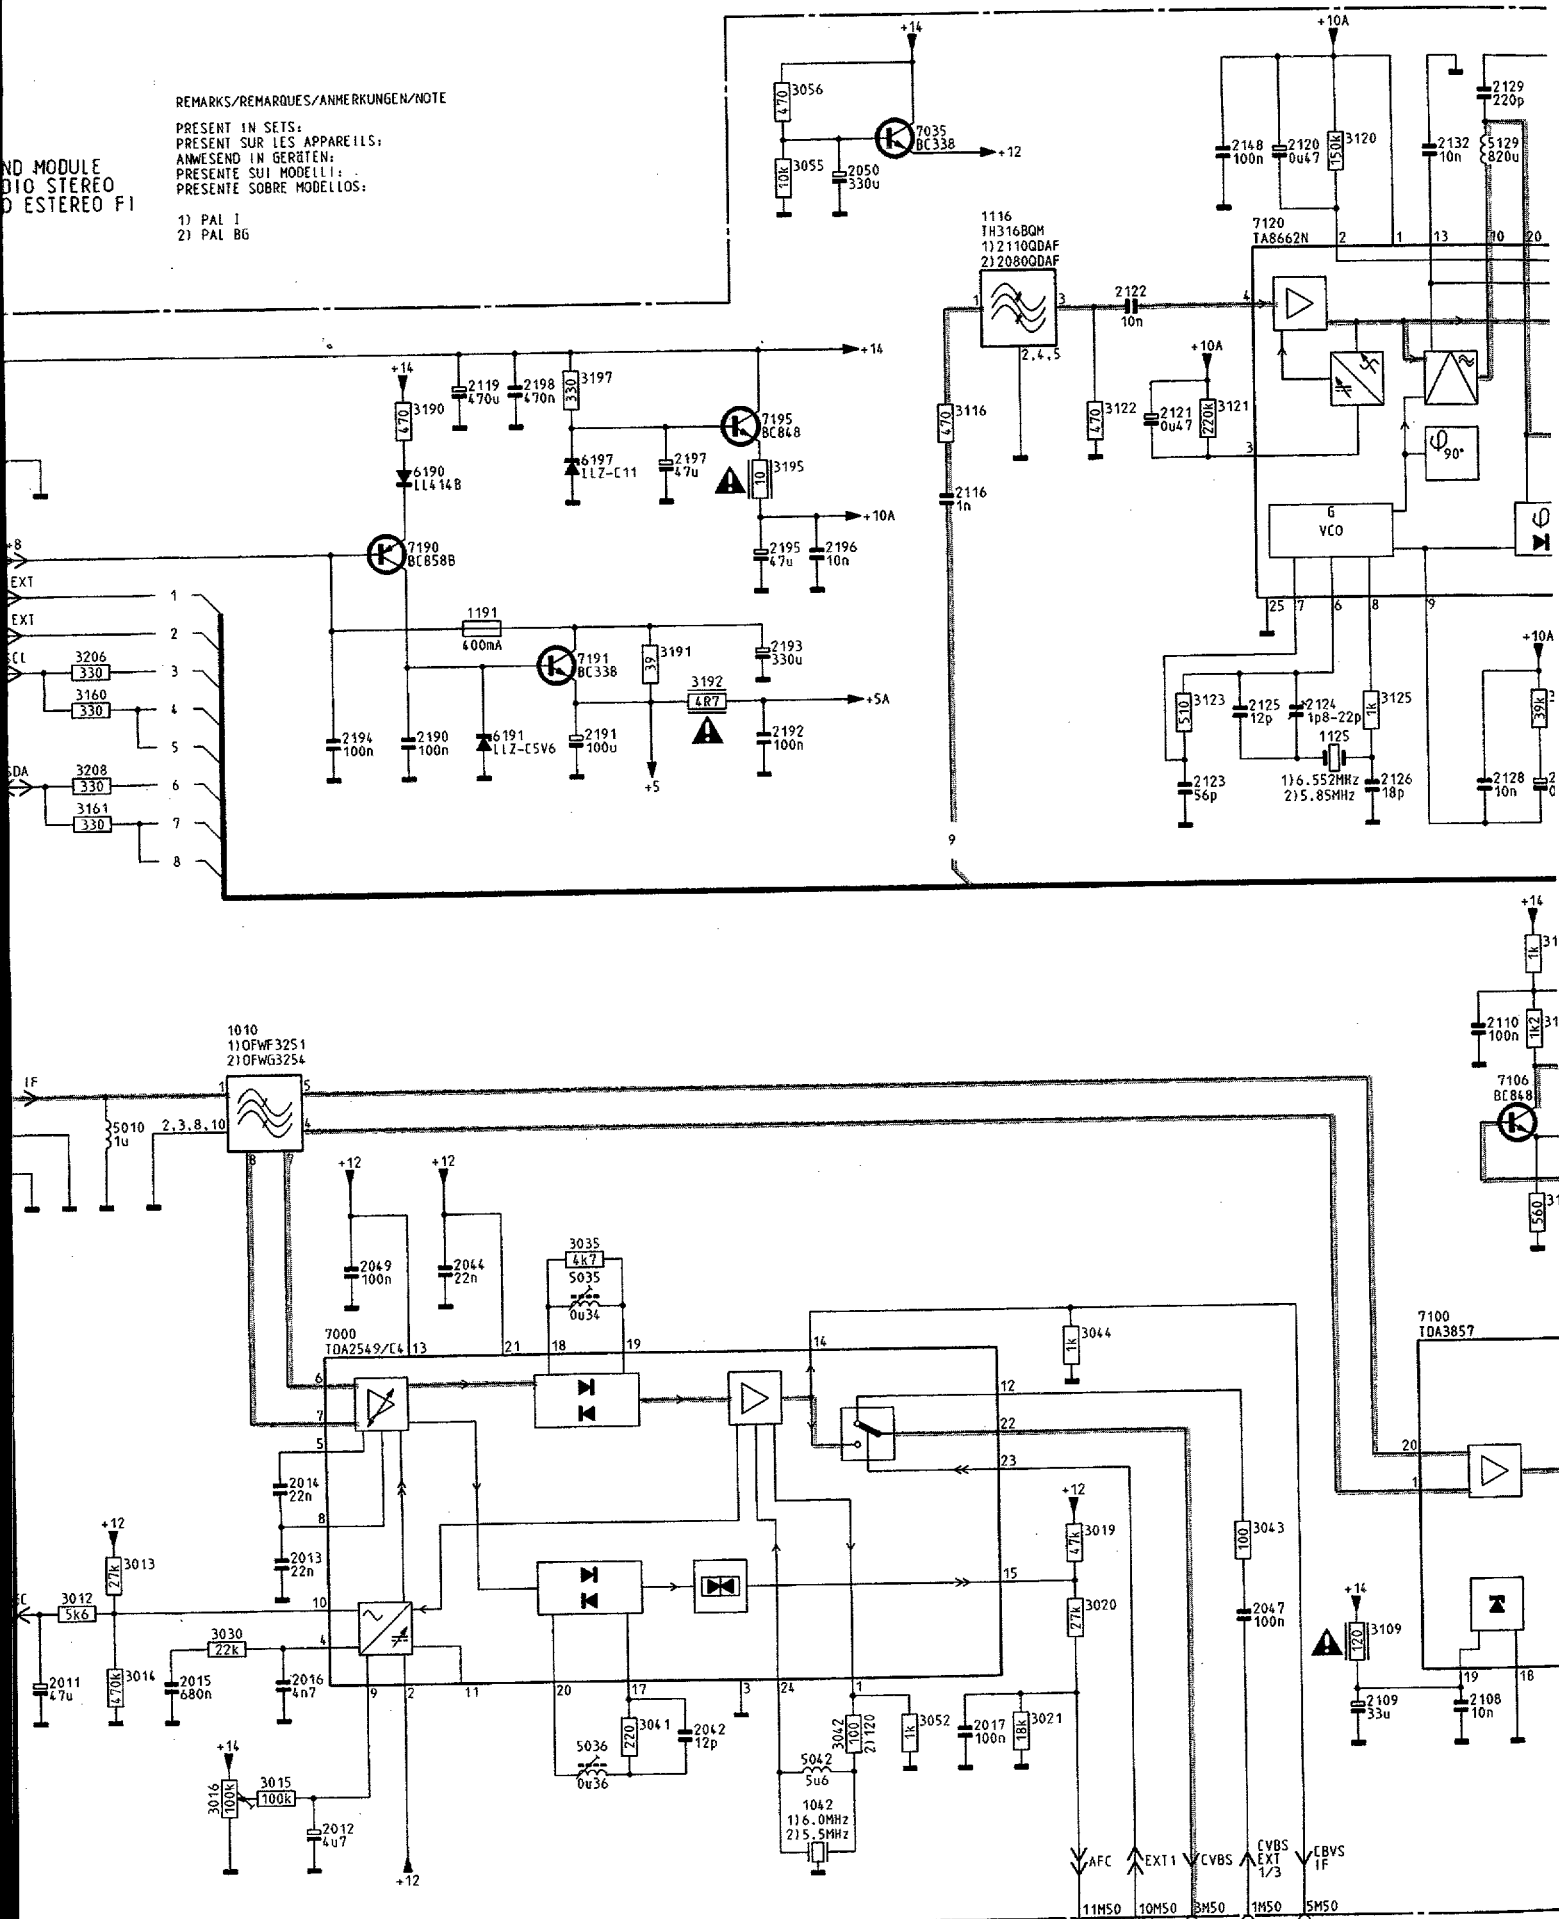

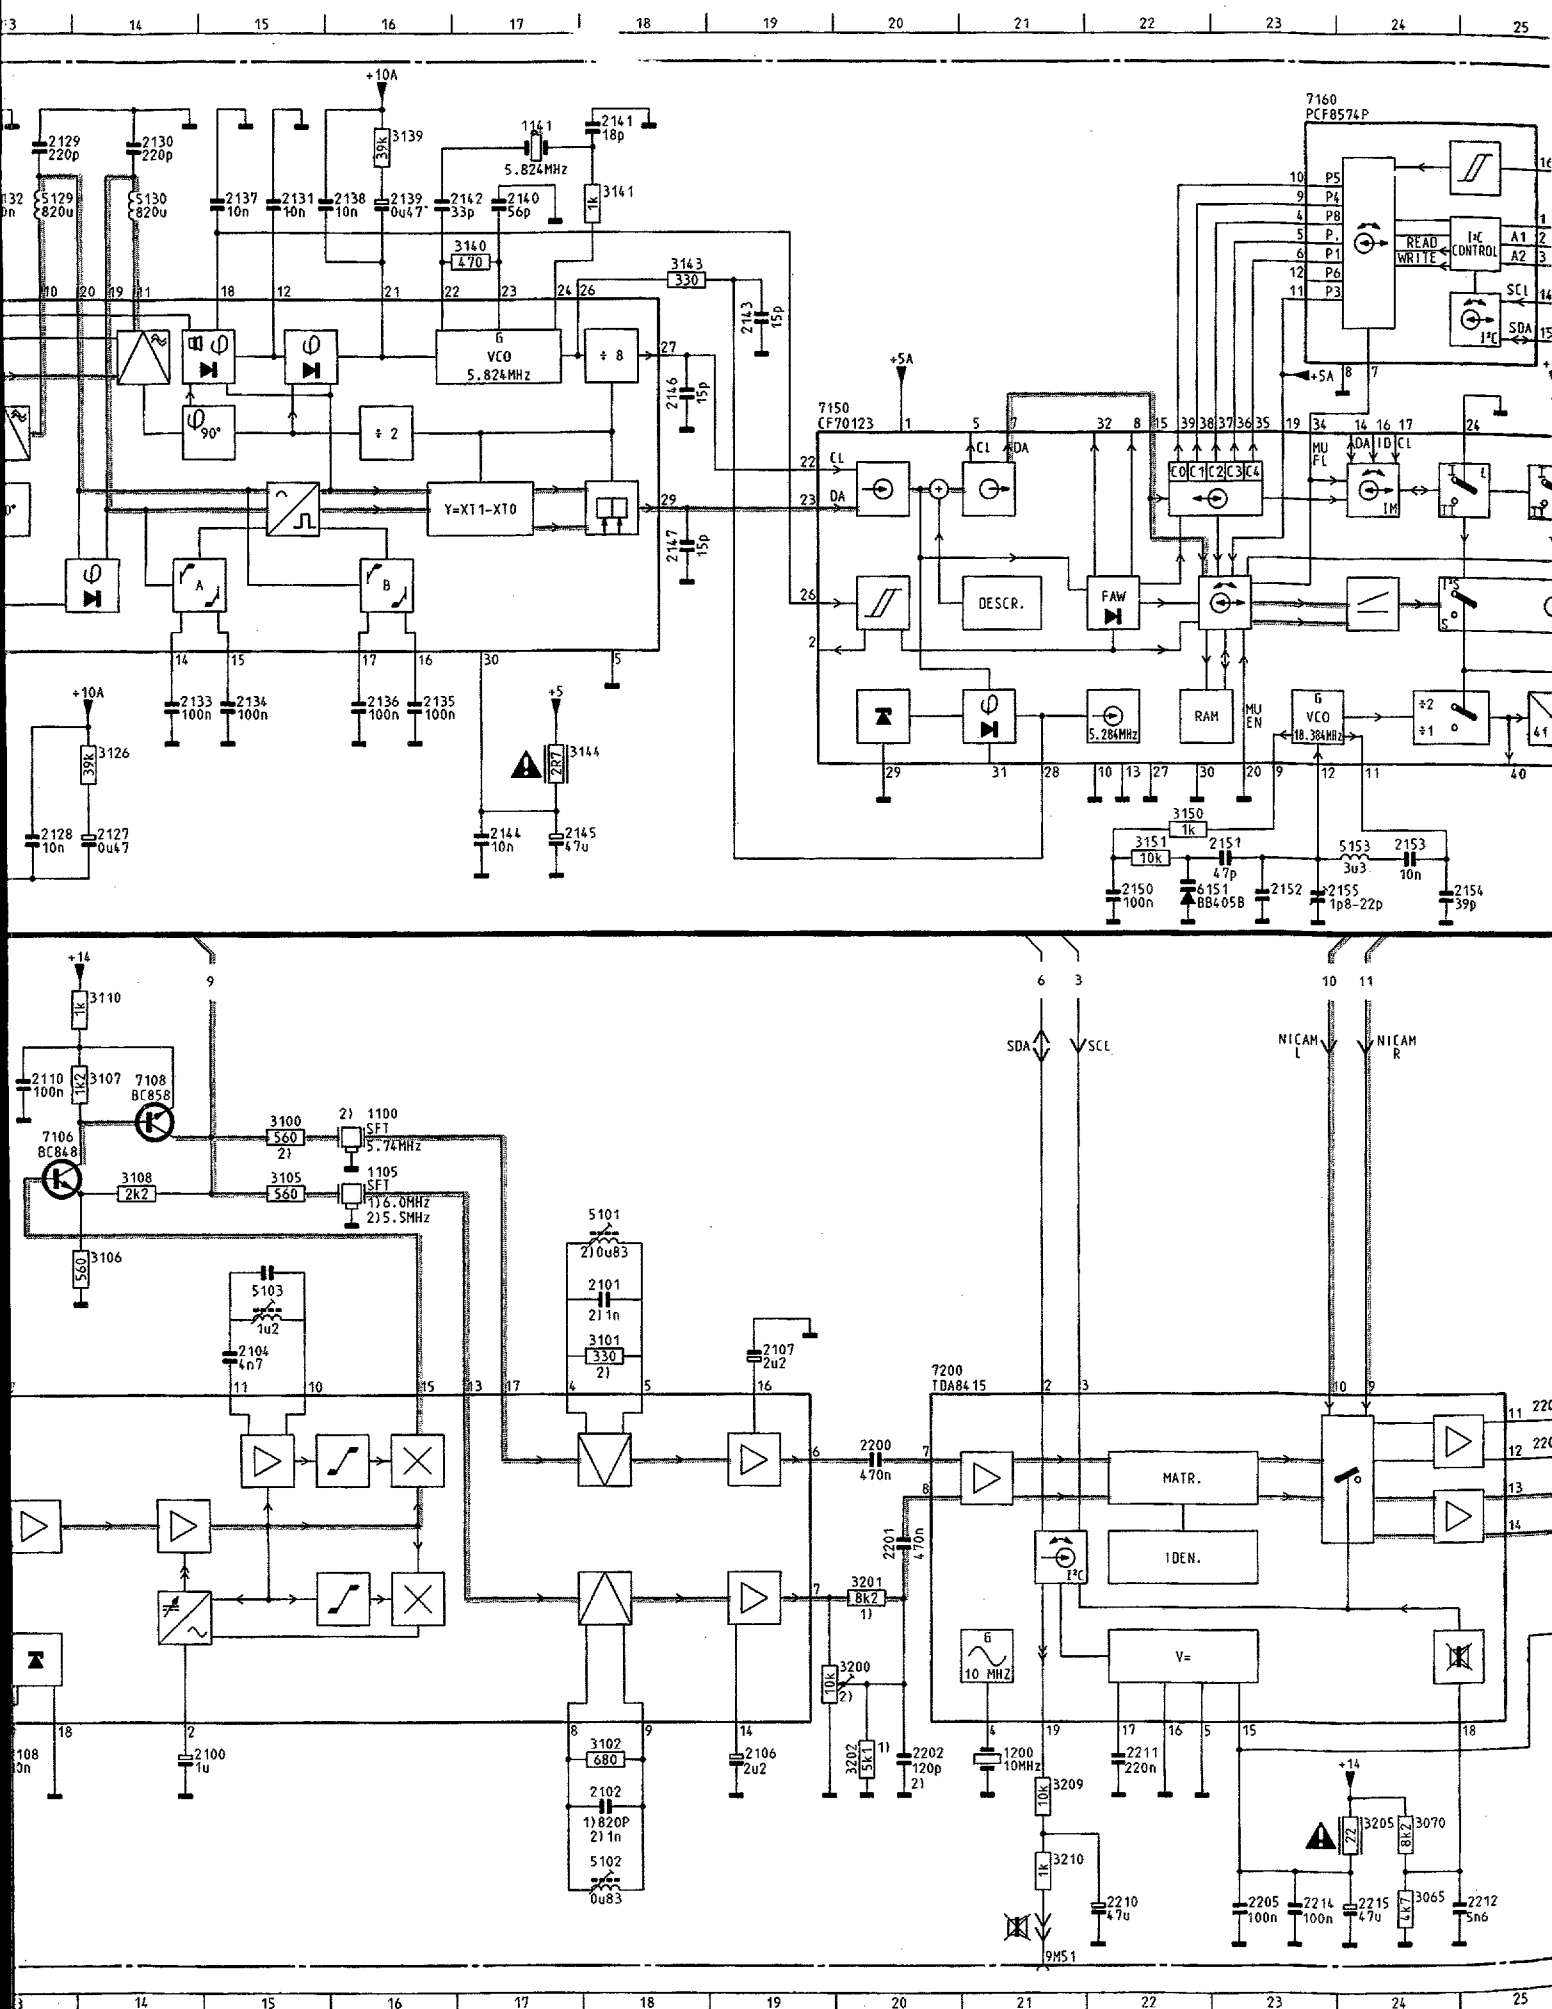

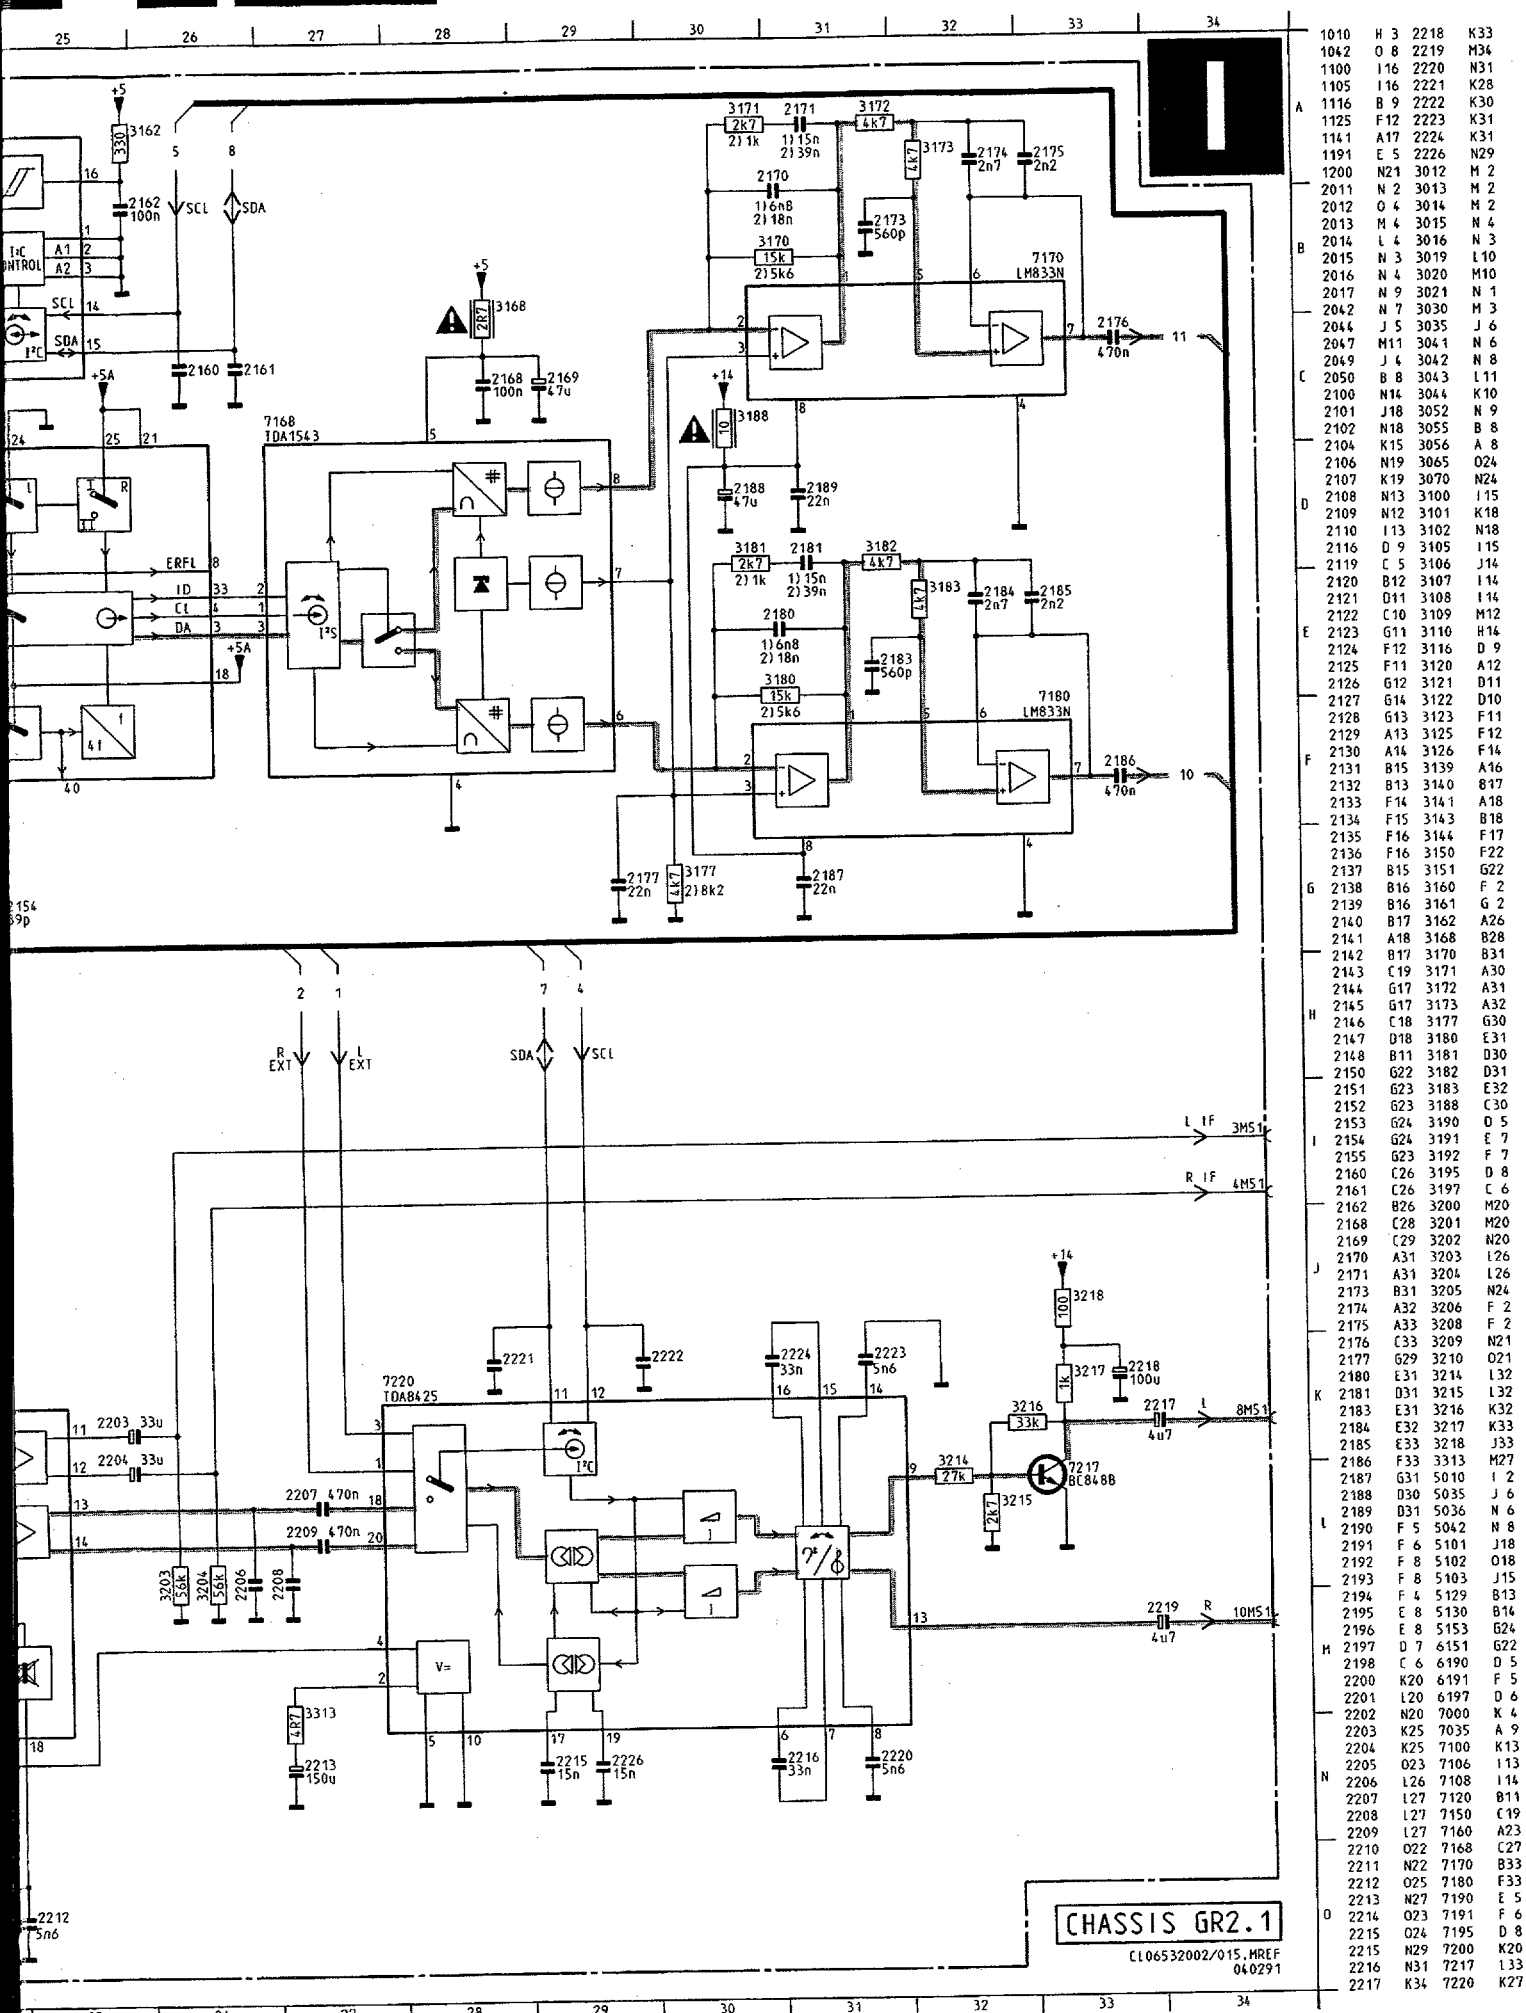


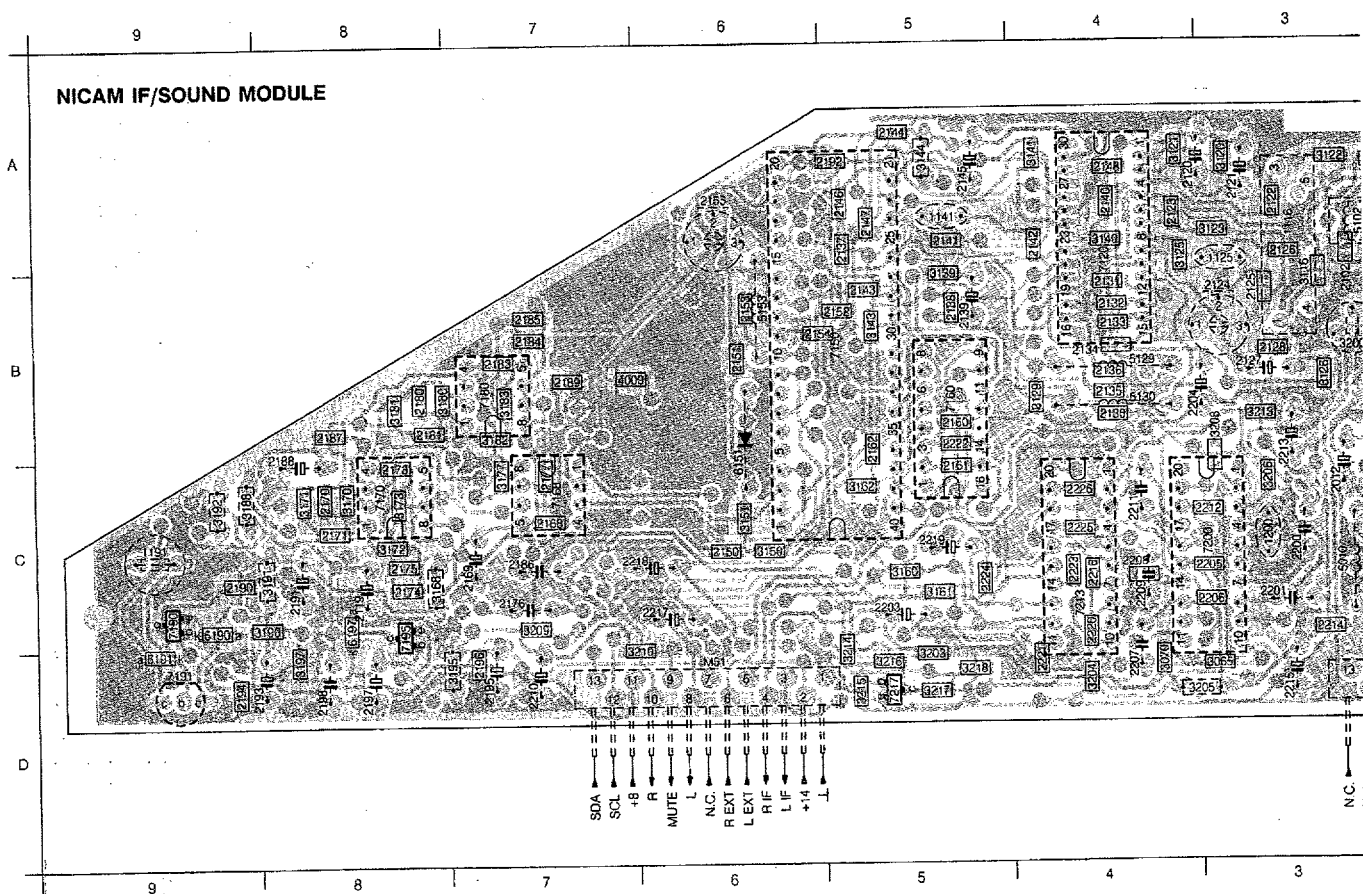
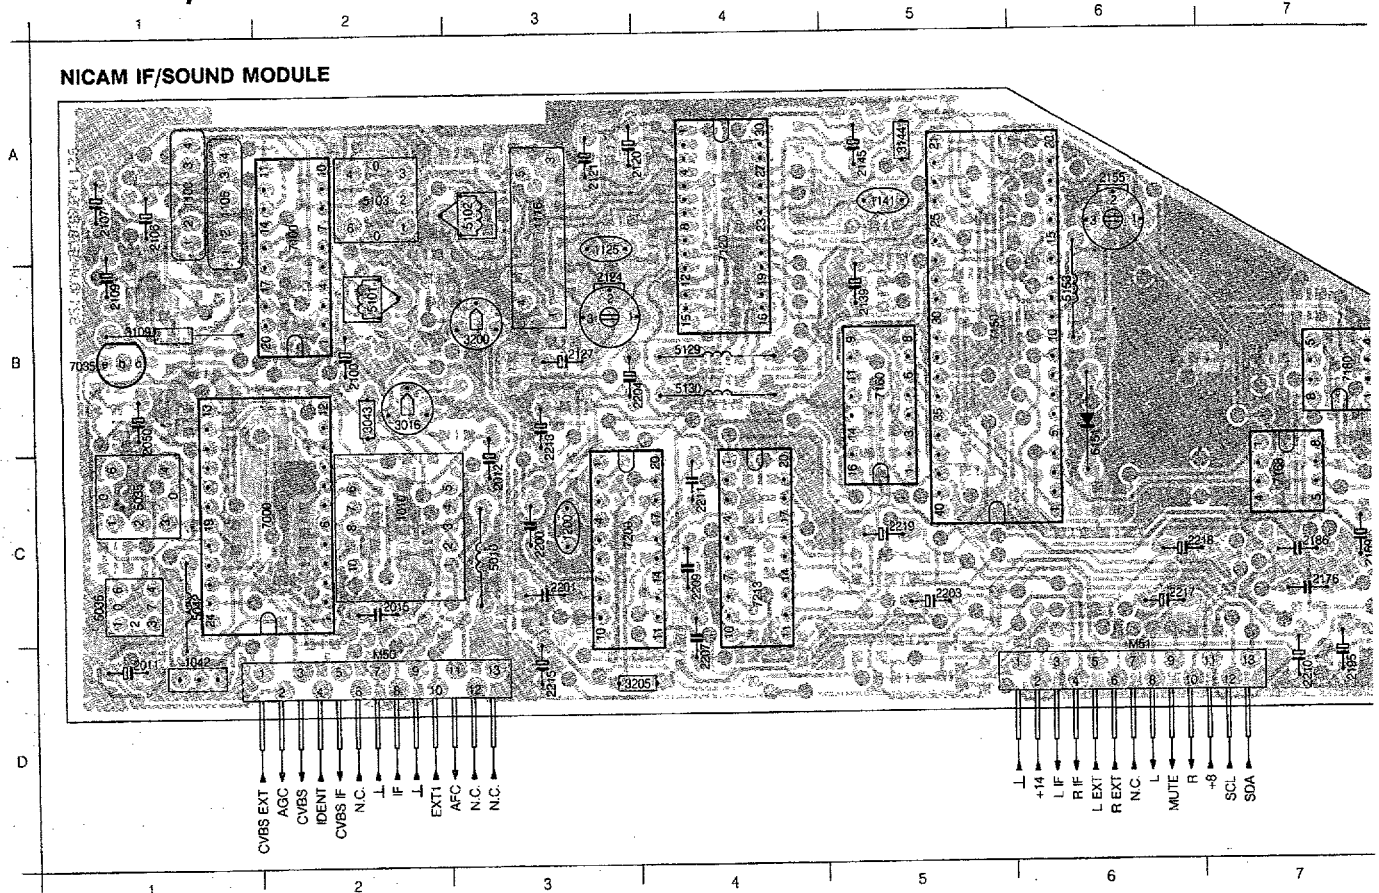


6.45


6.46

CHASSIS GR2.1

Module FI/son NICAM

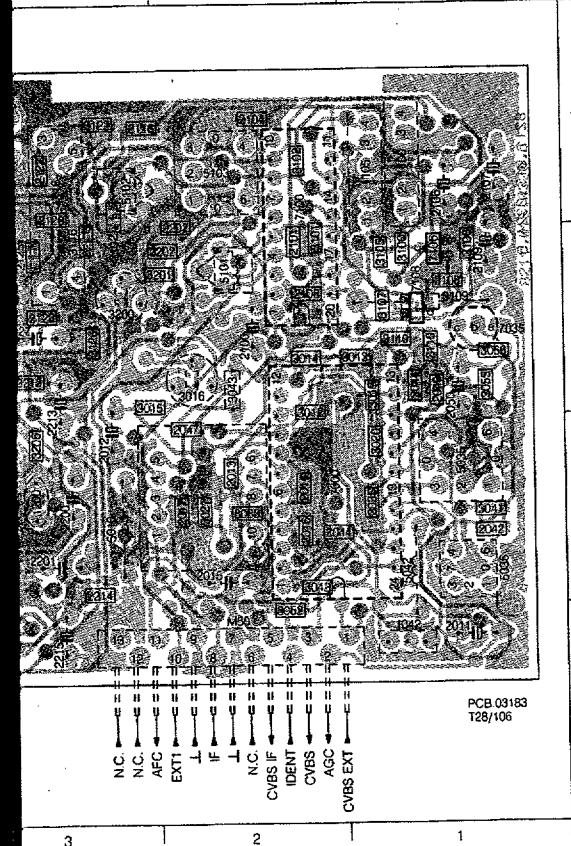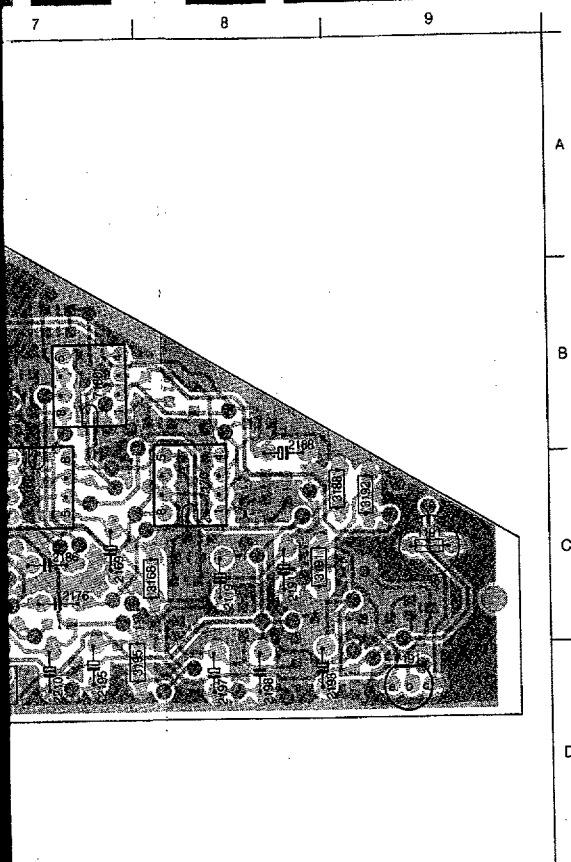


M50 D2	3015 B2
M51 D6	3016 B2
1010 C2	3019 B1
1042 D1	3020 C1
1100 A1	3021 C2
1105 A1	3030 C2
1116 A3	3035 C1
1125 A3	3041 C1
1141 A5	3042 C2
1191 C9	3043 B2
1200 C3	3044 B1
2011 D1	3052 D2
2012 C3	3055 B1
2013 C2	3056 B1
2014 C2	3055 D3
2015 C2	3070 D4
2016 C2	3100 B1
2017 C2	3101 B2
2042 C1	3102 A2
2044 C1	3105 B1
2047 C2	3106 B1
2049 B1	3107 B1
2050 B1	3108 B1
2100 B2	3109 B1
2101 B2	3110 B1
2102 B3	3116 B3
2104 A2	3120 A3
2106 A1	3121 A4
2107 A1	3122 A3
2108 B2	3123 A3
2109 B1	3125 B4
2110 B1	3126 B3
2116 A2	3139 B5
2119 C8	3140 A4
2120 A4	3141 A4
2121 A3	3143 B5
2122 A3	3144 A5
2123 A4	3150 C6
2124 B3	3151 C6
2125 B3	3160 C5
2126 A3	3161 C5
2127 B3	3162 C5
2128 B3	3168 C8
2129 B4	3170 C8
2130 B4	3171 C8
2131 B4	3172 C8
2132 B4	3173 C8
2133 B4	3177 C7
2134 B4	3180 B8
2135 B4	3181 B8
2136 B4	3182 B7
2137 A5	3183 B7
2138 B5	3188 C9
2139 B5	3190 C8
2140 A4	3191 C8
2141 A5	3192 C9
2142 A4	3195 D7
2143 B5	3197 D8
2144 A5	3200 B3
2145 A5	3201 B2
2146 A5	3202 B2
2147 A5	3203 D5
2148 A4	3204 D4
2150 C6	3205 D3
2151 B6	3206 C3
2152 B5	3208 B3
2153 B6	3209 C7
2154 B5	3210 D6
2155 A6	3213 B3
2160 B5	3214 D5
2161 C5	3215 D5
2162 C5	3216 D5
2168 C7	3217 D5
2169 C7	3218 D5
2170 C8	4000 B6
2171 C8	5010 C3
2173 C8	5035 C1
2174 C8	5036 C1
2175 C8	5042 C1
2176 C7	5101 B2
2177 C7	5102 A3
2180 B8	5103 A2
2181 B8	5129 B4
2183 B7	5130 B4
2184 B7	5153 B6
2185 B7	6151 C6
2186 C7	6190 C9
2187 B8	6191 D9
2188 B8	6197 C8
2189 B7	7000 C2
2190 C9	7035 B1
2191 C8	7100 A2
2192 A5	7106 B1
2193 D9	7108 B1
2194 D9	7120 B4
2195 D7	7150 B5
2196 D7	7160 B5
2197 D8	7168 C7
2198 D8	7170 C8
2200 C3	7180 B7
2201 C3	7190 C9
2202 A2	7191 D9
2203 C5	7195 C8
2204 B4	7200 C3
2205 C3	7213 C4
2206 C3	7217 D5
2207 D4	
2208 C4	
2209 C4	
2210 D7	
2211 C4	
2212 C3	
2213 C3	
2214 C3	
2215 D3	
2216 C4	
2217 C6	
2218 C6	
2219 C5	
2220 C4	
2221 D4	
2222 B5	
2223 C4	
2224 C5	
2225 C4	
2226 C4	
3012 B2	
3013 B1	
3014 B2	

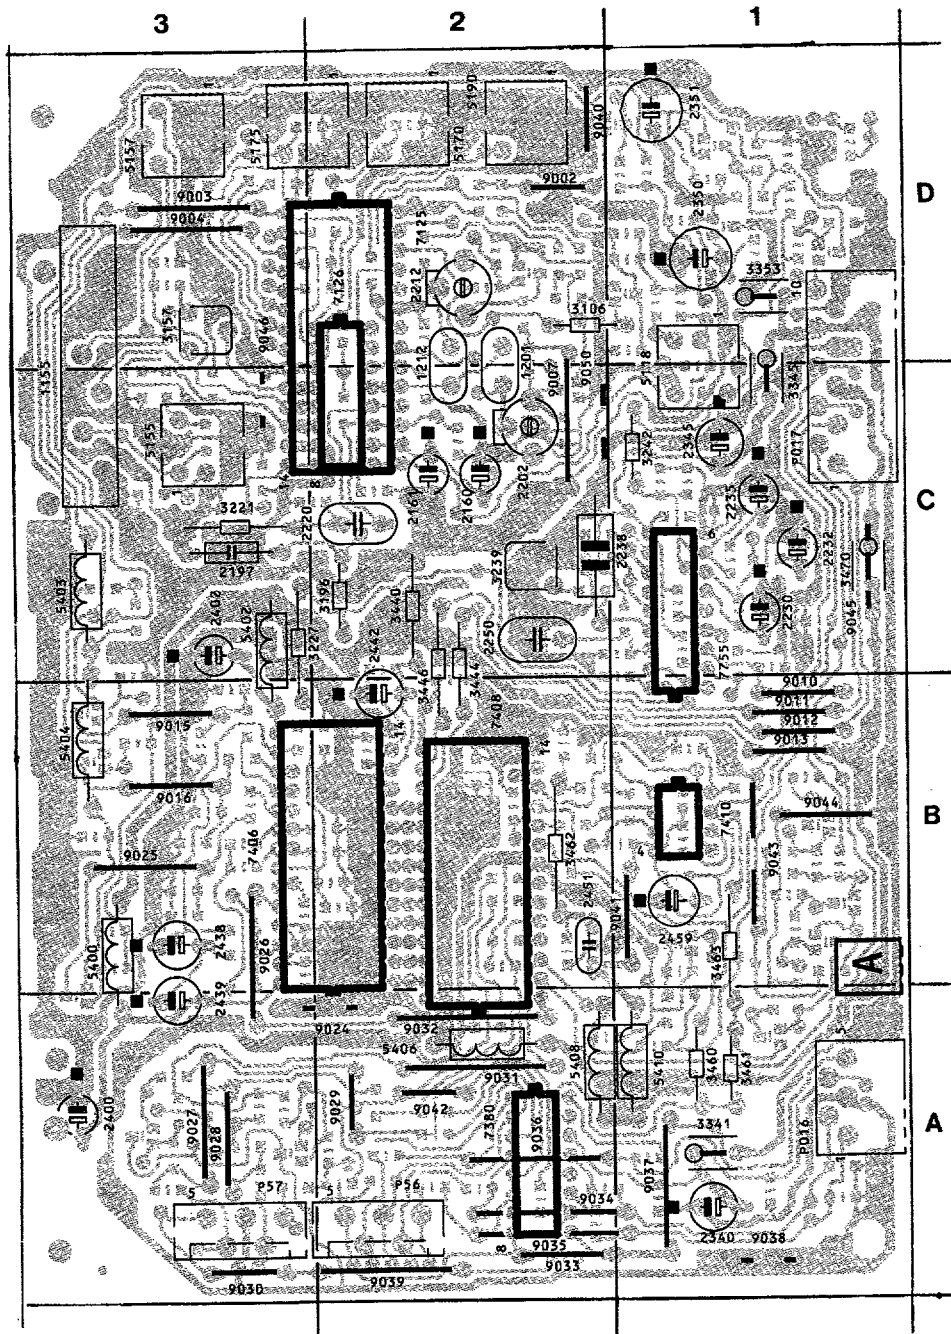


1155 C3	2404 B3	3265 C1	3997 D1	74
1201 D2	2405 B3	3270 C1	4001 D2	77
1212 D2	2409 B3	3275 C1	4002 C3	9C
2103 D1	2410 B3	3276 C1	4003 B2	9C
2105 D1	2413 C3	3330 B1	4004 A1	9C
2118 D1	2414 B3	3331 A1	4005 C2	9C
2119 D1	2415 B3	3332 A1	4006 D1	9C
2120 D1	2430 B3	3333 B1	4007 D2	9C
2125 C3	2432 B3	3334 B1	4010 B1	9C
2155 C3	2434 B2	3335 B1	4011 B2	9C
2158 D3	2438 B3	3336 B1	4012 B2	9C
2160 C2	2439 A3	3337 B1	4047 A2	9C
2161 C2	2440 B3	3338 A1	4048 A2	9C
2162 C3	2441 B3	3339 B1	4049 A2	9C
2163 C3	2442 B2	3340 B1	4100 D1	9C
2171 D2	2444 C2	3341 A1	4200 D1	9C
2172 D2	2446 B2	3345 C1	4201 D1	9C
2176 D3	2448 A2	3353 D1	4401 B2	9C
2177 D3	2449 B1	3354 D1	4402 B2	9C
2180 D2	2450 B2	3380 A3	4403 B2	9C
2181 D3	2451 B2	3381 A3	4404 B1	9C
2185 C2	2454 B1	3382 A3	4406 A1	9C
2187 D2	2455 B2	3383 A3	4407 B1	9C
2189 D2	2459 B1	3384 A3	4410 B1	9C
2196 C2	2466 B2	3385 A3	4411 B1	9C
2197 C3	3103 D1	3386 A2	4415 C3	9C
2201 D2	3104 D1	3387 A3	5118 D1	9C
2202 C2	3105 D1	3388 A2	5155 C3	9C
2211 D2	3106 D2	3390 A1	5157 D3	9C
2212 D2	3107 D2	3391 A1	5170 D2	9C
2220 C2	3108 D2	3394 A2	5175 D2	9C
2222 C2	3155 C3	3395 A1	5190 D2	9C
2227 B2	3156 C3	3398 A2	5400 B3	9C
2230 C1	3157 D3	3399 A1	5402 C3	9C
2232 C1	3158 D3	3404 C3	5403 C3	9C
2234 C1	3170 D2	3405 B3	5404 B3	9C
2235 C1	3175 D2	3410 B3	5406 A2	9C
2238 C2	3195 C2	3411 B3	5408 A2	9C
2239 C1	3196 C2	3412 B3	5410 A1	9C
2250 C2	3200 D2	3413 B3	6300 B2	9C
2251 C1	3201 D2	3414 B3	7103 D1	9C
2255 C1	3202 D2	3416 B3	7105 D1	9C
2260 C1	3211 D2	3434 B3	7125 D3	9C
2270 C2	3212 D2	3435 B3	7126 D2	9C
2330 B1	3214 C2	3436 B2	7200 C2	9C
2333 B1	3220 C2	3437 B2	7210 D2	9C
2340 A1	3221 C3	3438 B3	7233 D1	9C
2345 C1	3222 D2	3440 C2	7234 D1	9C
2350 D1	3227 C3	3441 C2	7330 B1	9C
2351 D1	3228 B2	3442 B2	7333 B1	9C
2380 A2	3231 C1	3444 C2	7335 B1	9C
2381 A2	3232 C1	3446 C2	7337 B1	9C
2382 A2	3233 D1	3448 B2	7338 A1	9C
2383 A2	3234 D1	3450 A2	7350 D1	9C
2384 A2	3235 C1	3452 A2	7380 A2	9C
2385 A2	3236 D1	3454 B2	7381 A3	9C
2390 A1	3237 D1	3460 A1	7385 A3	9C
2391 A3	3238 C2	3461 A1	7387 A3	9C
2395 A3	3239 C2	3462 B2	7400 B3	9C
2397 A3	3240 C1	3463 B1	7402 B3	9C
2399 C1	3241 D1	3464 B1	7404 B3	9C
2400 A3	3242 C1	3465 A2	7406 B2	9C
2402 C3	3250 C1	3470 C1	7408 A2	9C

D1
D2
C3
B2
A1
C2
D1
D2
B1
B2
B2
B2
B2
B1
B1
B1
C3
D1
C3
C3
D2
D2
D2
D2
B3
C3
C3
C3
A2
A2
A1
D1
D1
D2
D2
D1
B1
B1
B1
B1
A1
D1
A2
A3
A3
B3
B3
B2
A2


7410 B1
7755 B1
9002 D2
9003 D3
9004 D3
9007 C2
9010 B1
9011 B1
9012 B1
9013 B1
9015 B3
9016 B3
9024 A2
9025 B3
9026 B3
9027 A3
9028 A3
9029 A2
9030 A3
9031 A2
9032 A2
9033 A2
9034 A2
9035 A2
9036 A2
9037 A1
9038 A1
9039 A2
9040 D2
9041 B1
9042 A2
9043 B1
9044 B1
9045 C1
9046 C3
9050 C2
P018 A1
P017 C1
P56 A2
P57 A3

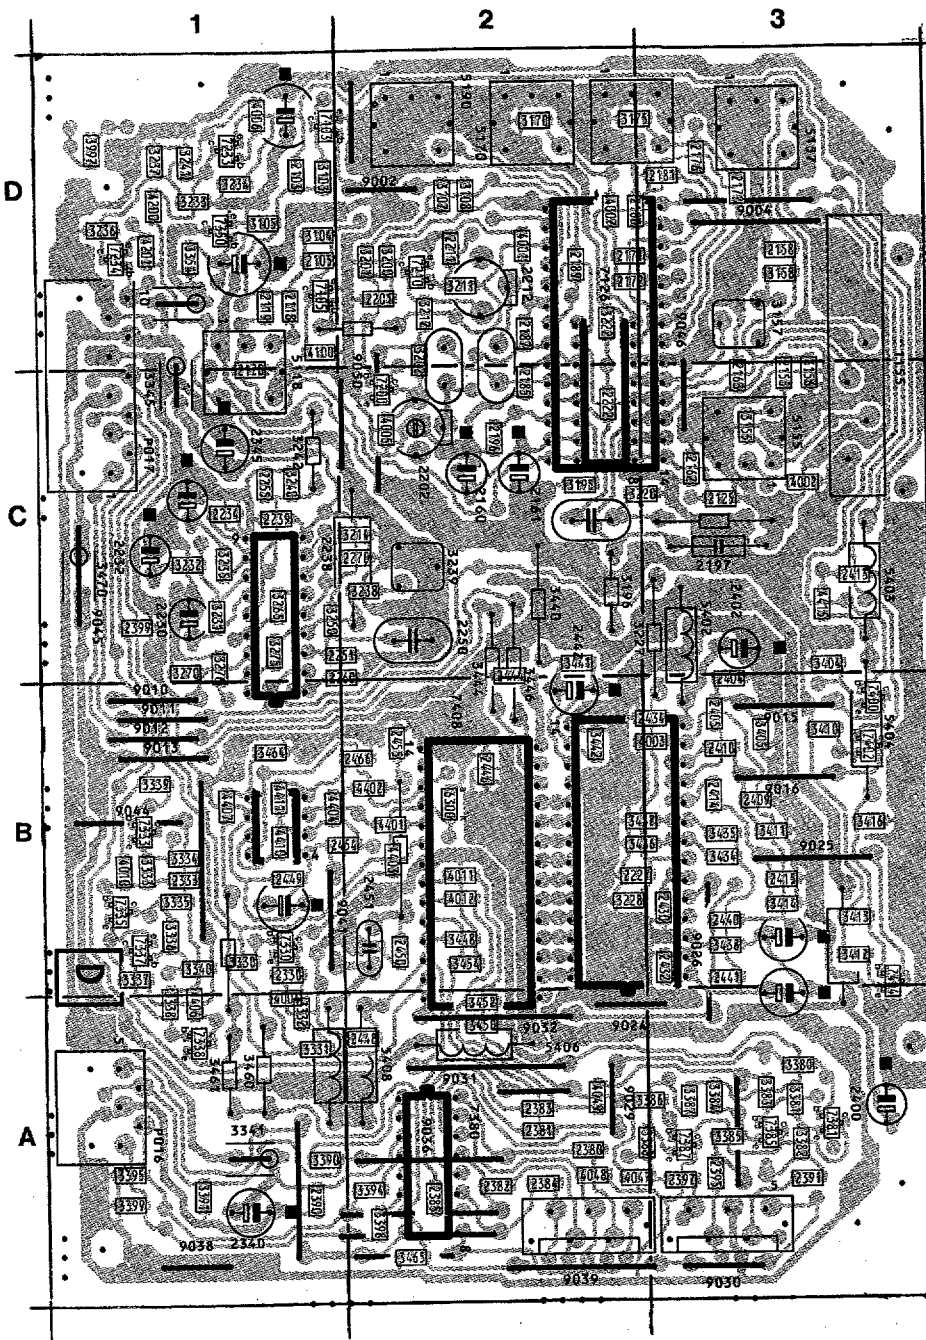



1155 C3	2404 B3	3285 C1	3997 D1	7410 B1
1201 D2	2405 B3	3270 C1	4001 D2	7755 B1
1212 D2	2409 B3	3275 C1	4002 C3	9002 D2
2103 D1	2410 B3	3276 C1	4003 B2	9003 D3
2105 D1	2413 C3	3330 B1	4004 A1	9004 D3
2118 D1	2414 B3	3331 A1	4005 C2	9007 C2
2119 D1	2415 B3	3332 A1	4006 D1	9010 B1
2120 D1	2430 B3	3333 B1	4007 D2	9011 B1
2125 C3	2432 B3	3334 A1	4010 B1	9012 B1
2155 C3	2434 B2	3335 B1	4011 B2	9013 B1
2158 D3	2438 B3	3336 B1	4012 B2	9015 B3
2160 C2	2439 A3	3337 B1	4047 A2	9016 B3
2161 C2	2440 B3	3338 A1	4048 A2	9024 A2
2162 C3	2441 B3	3339 B1	4049 A2	9025 B3
2163 C3	2442 B2	3340 B1	4100 D1	9026 B3
2171 D2	2444 C2	3341 A1	4200 D1	9027 A3
2172 D2	2446 B2	3345 C1	4201 D1	9028 A3
2176 D3	2448 A2	3353 D1	4401 B2	9029 A2
2177 D3	2449 B1	3354 D1	4402 B2	9030 A5
2180 D2	2450 B2	3380 A3	4403 B2	9031 A2
2181 D3	2451 B2	3381 A3	4404 B1	9032 A2
2185 C2	2454 A1	3382 A3	4406 A1	9033 A2
2187 D2	2455 B2	3383 A3	4407 B1	9035 A2
2189 D2	2459 B1	3384 A3	4411 B1	9036 A2
2196 C2	2466 B2	3385 A3	4411 B1	9037 A1
2197 C3	3103 D1	3386 A2	4415 C3	9038 A1
2201 D2	3104 D1	3387 A3	5118 D1	9039 A2
2202 C2	3105 D1	3388 A2	5155 C3	9040 D2
2211 D2	3106 D2	3390 A1	5157 D3	9041 B1
2212 D2	3107 D2	3391 A1	5170 D2	9042 A2
2220 C2	3108 D2	3394 A2	5175 D2	9043 B1
2222 C2	3155 C3	3395 A1	5190 D2	9045 C1
2227 B2	3156 C3	3398 A2	5400 B3	9046 C3
2230 C1	3157 D3	3399 A1	5402 C3	9048 A2
2232 C1	3158 D3	3404 C3	5403 C3	9048 C3
2234 C1	3170 D2	3405 B3	5404 B3	9050 C2
2235 C1	3175 D2	3410 B3	5406 A2	P016 A1
2238 C2	3195 C2	3411 B3	5408 A2	P017 C1
2239 C1	3196 C2	3412 B3	5410 A1	P56 A2
2250 C2	3200 D2	3413 B3	6900 B2	P57 A3
2251 C1	3201 D2	3414 B3	7103 D1	
2255 C1	3202 D2	3416 B3	7105 D1	
2260 C1	3211 D2	3434 B3	7125 D3	
2270 C2	3212 D2	3435 B3	7126 D2	
2330 B1	3214 C2	3436 B2	7200 C2	
2333 B1	3220 C2	3437 B2	7210 D2	
2340 A1	3221 C3	3438 B3	7233 D1	
2345 C1	3222 D2	3440 C2	7234 D1	
2350 D1	3227 C3	3441 C2	7330 B1	
2351 D1	3228 B2	3442 B2	7333 B1	
2380 A2	3231 C1	3444 C2	7335 B1	
2381 A2	3232 C1	3446 C2	7337 B1	
2382 A2	3233 D1	3448 B2	7338 A1	
2383 A2	3234 D1	3450 A2	7350 D1	
2384 A2	3235 C1	3452 A2	7380 A2	
2385 A2	3236 D1	3454 B2	7381 A3	
2390 A1	3237 D1	3460 A1	7385 A3	
2391 A3	3238 C2	3461 A1	7387 A3	
2395 A3	3239 C2	3462 B2	7400 B3	
2397 A3	3240 C1	3463 B1	7402 B3	
2399 C1	3241 D1	3464 B1	7404 B3	
2400 A3	3242 C1	3465 A2	7406 B2	
2402 C3	3250 C1	3470 C1	7408 A2	

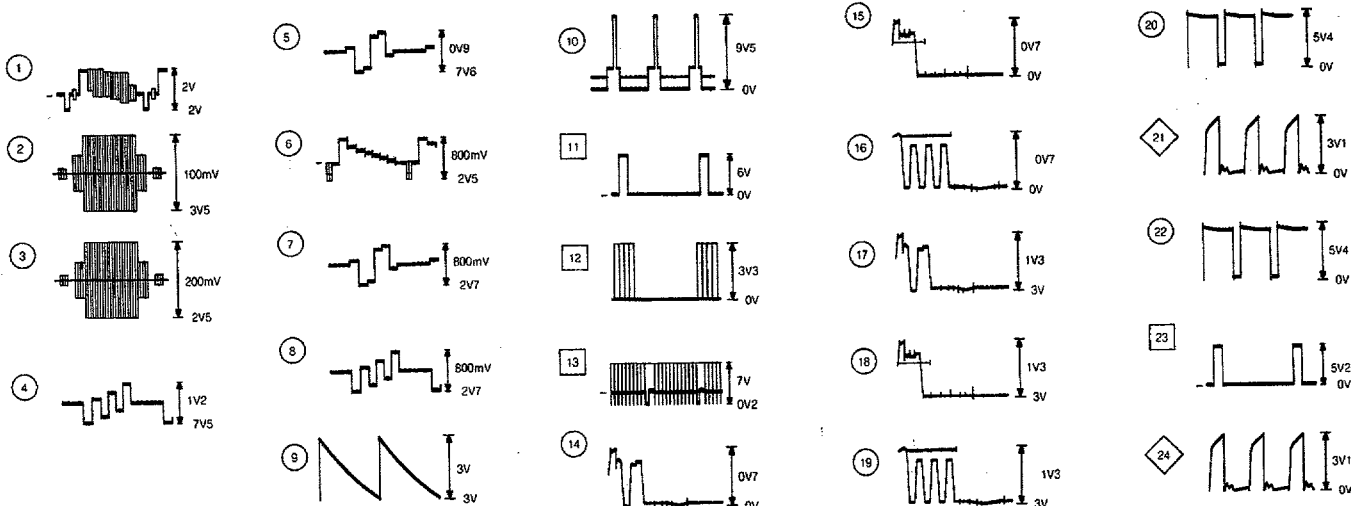

6.49

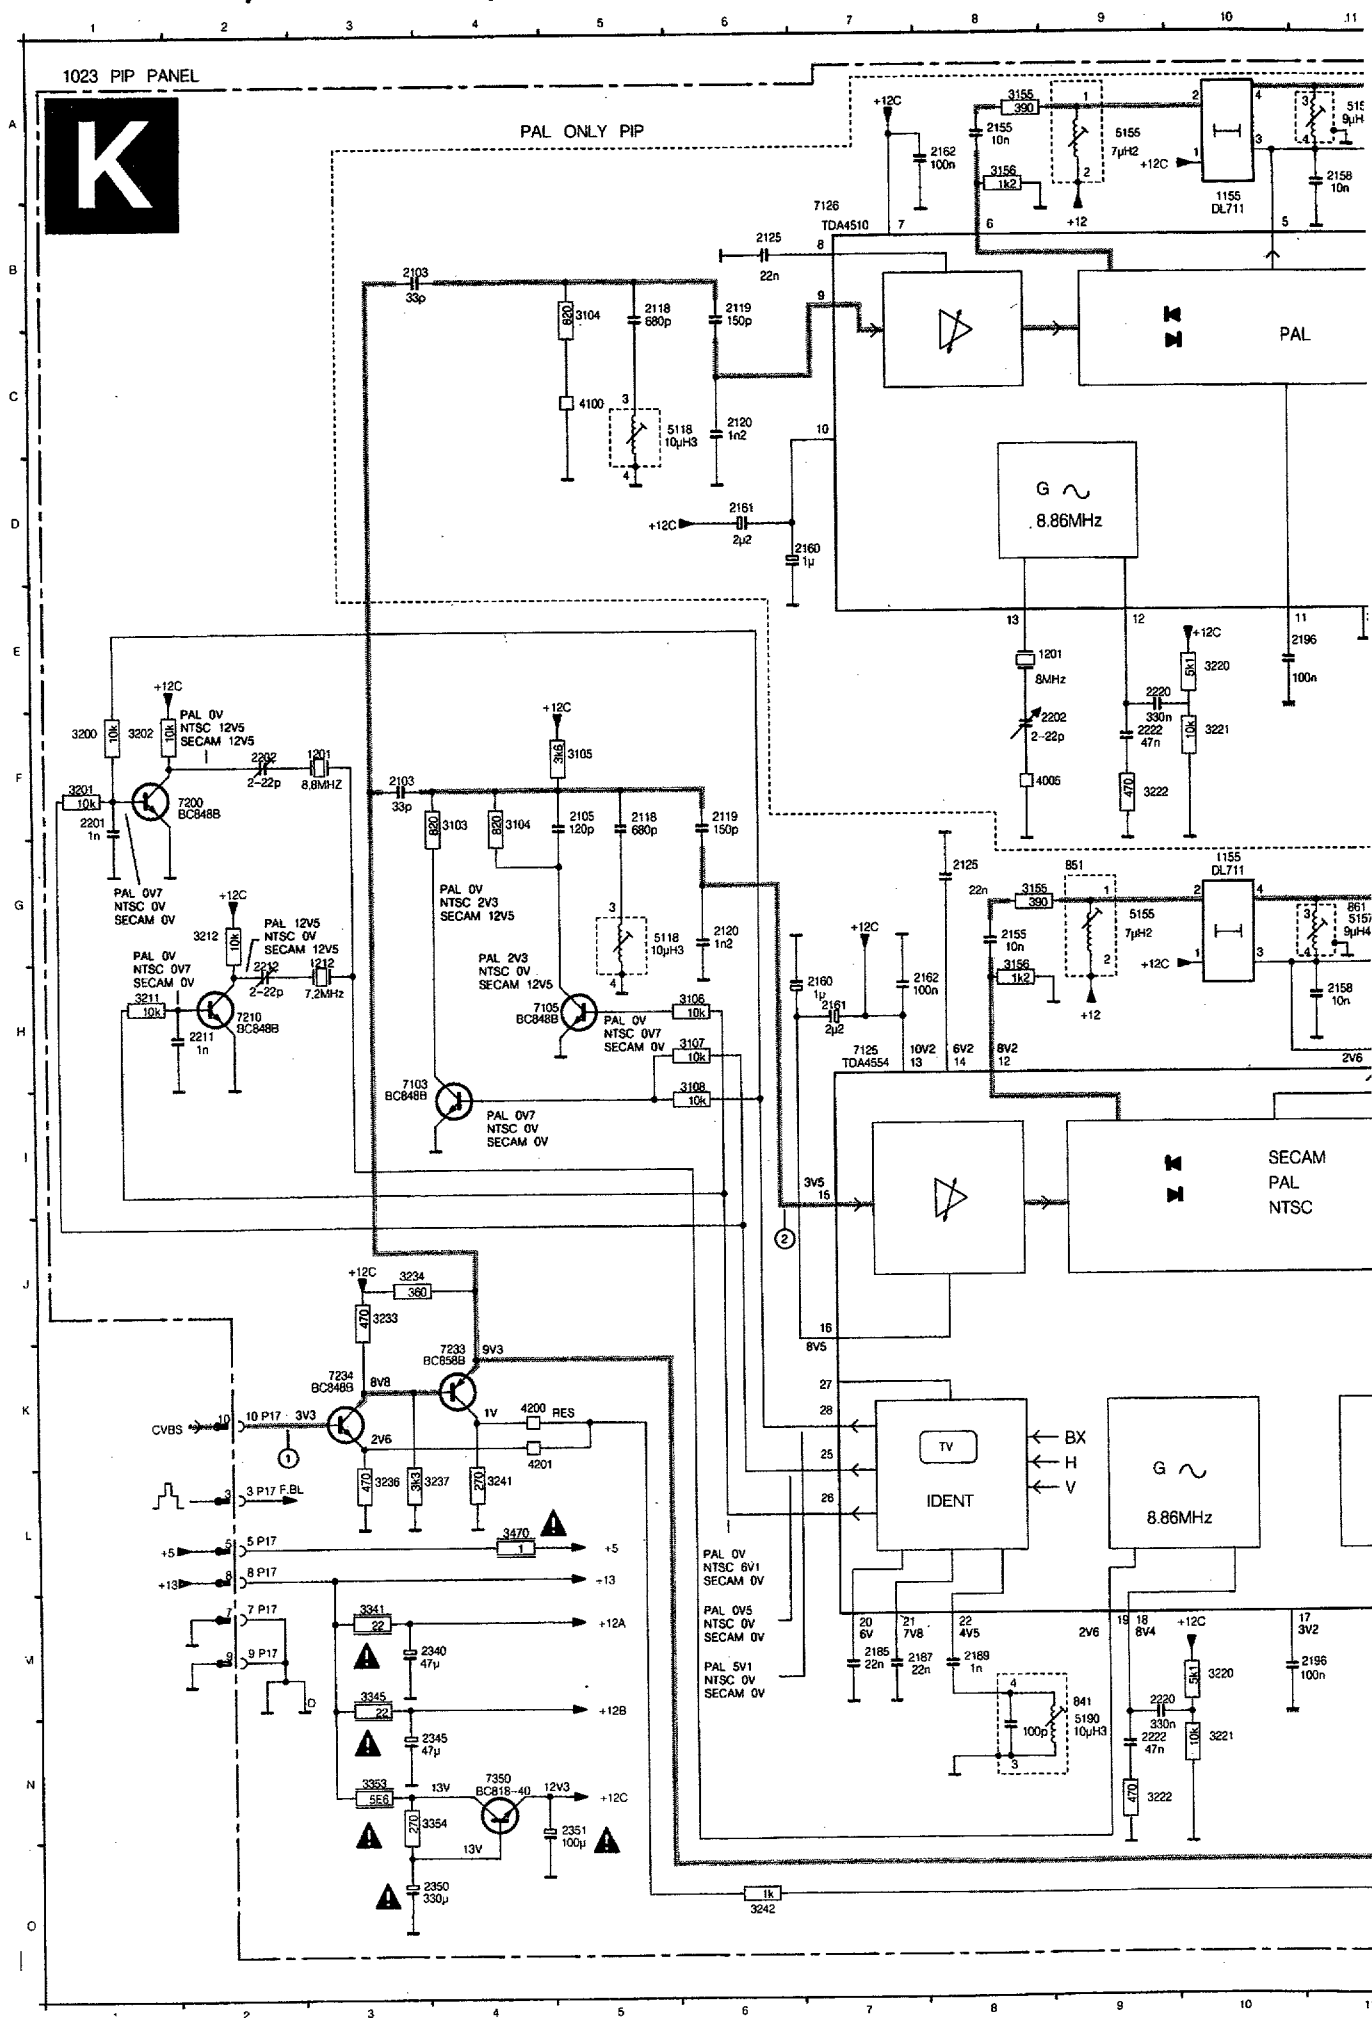

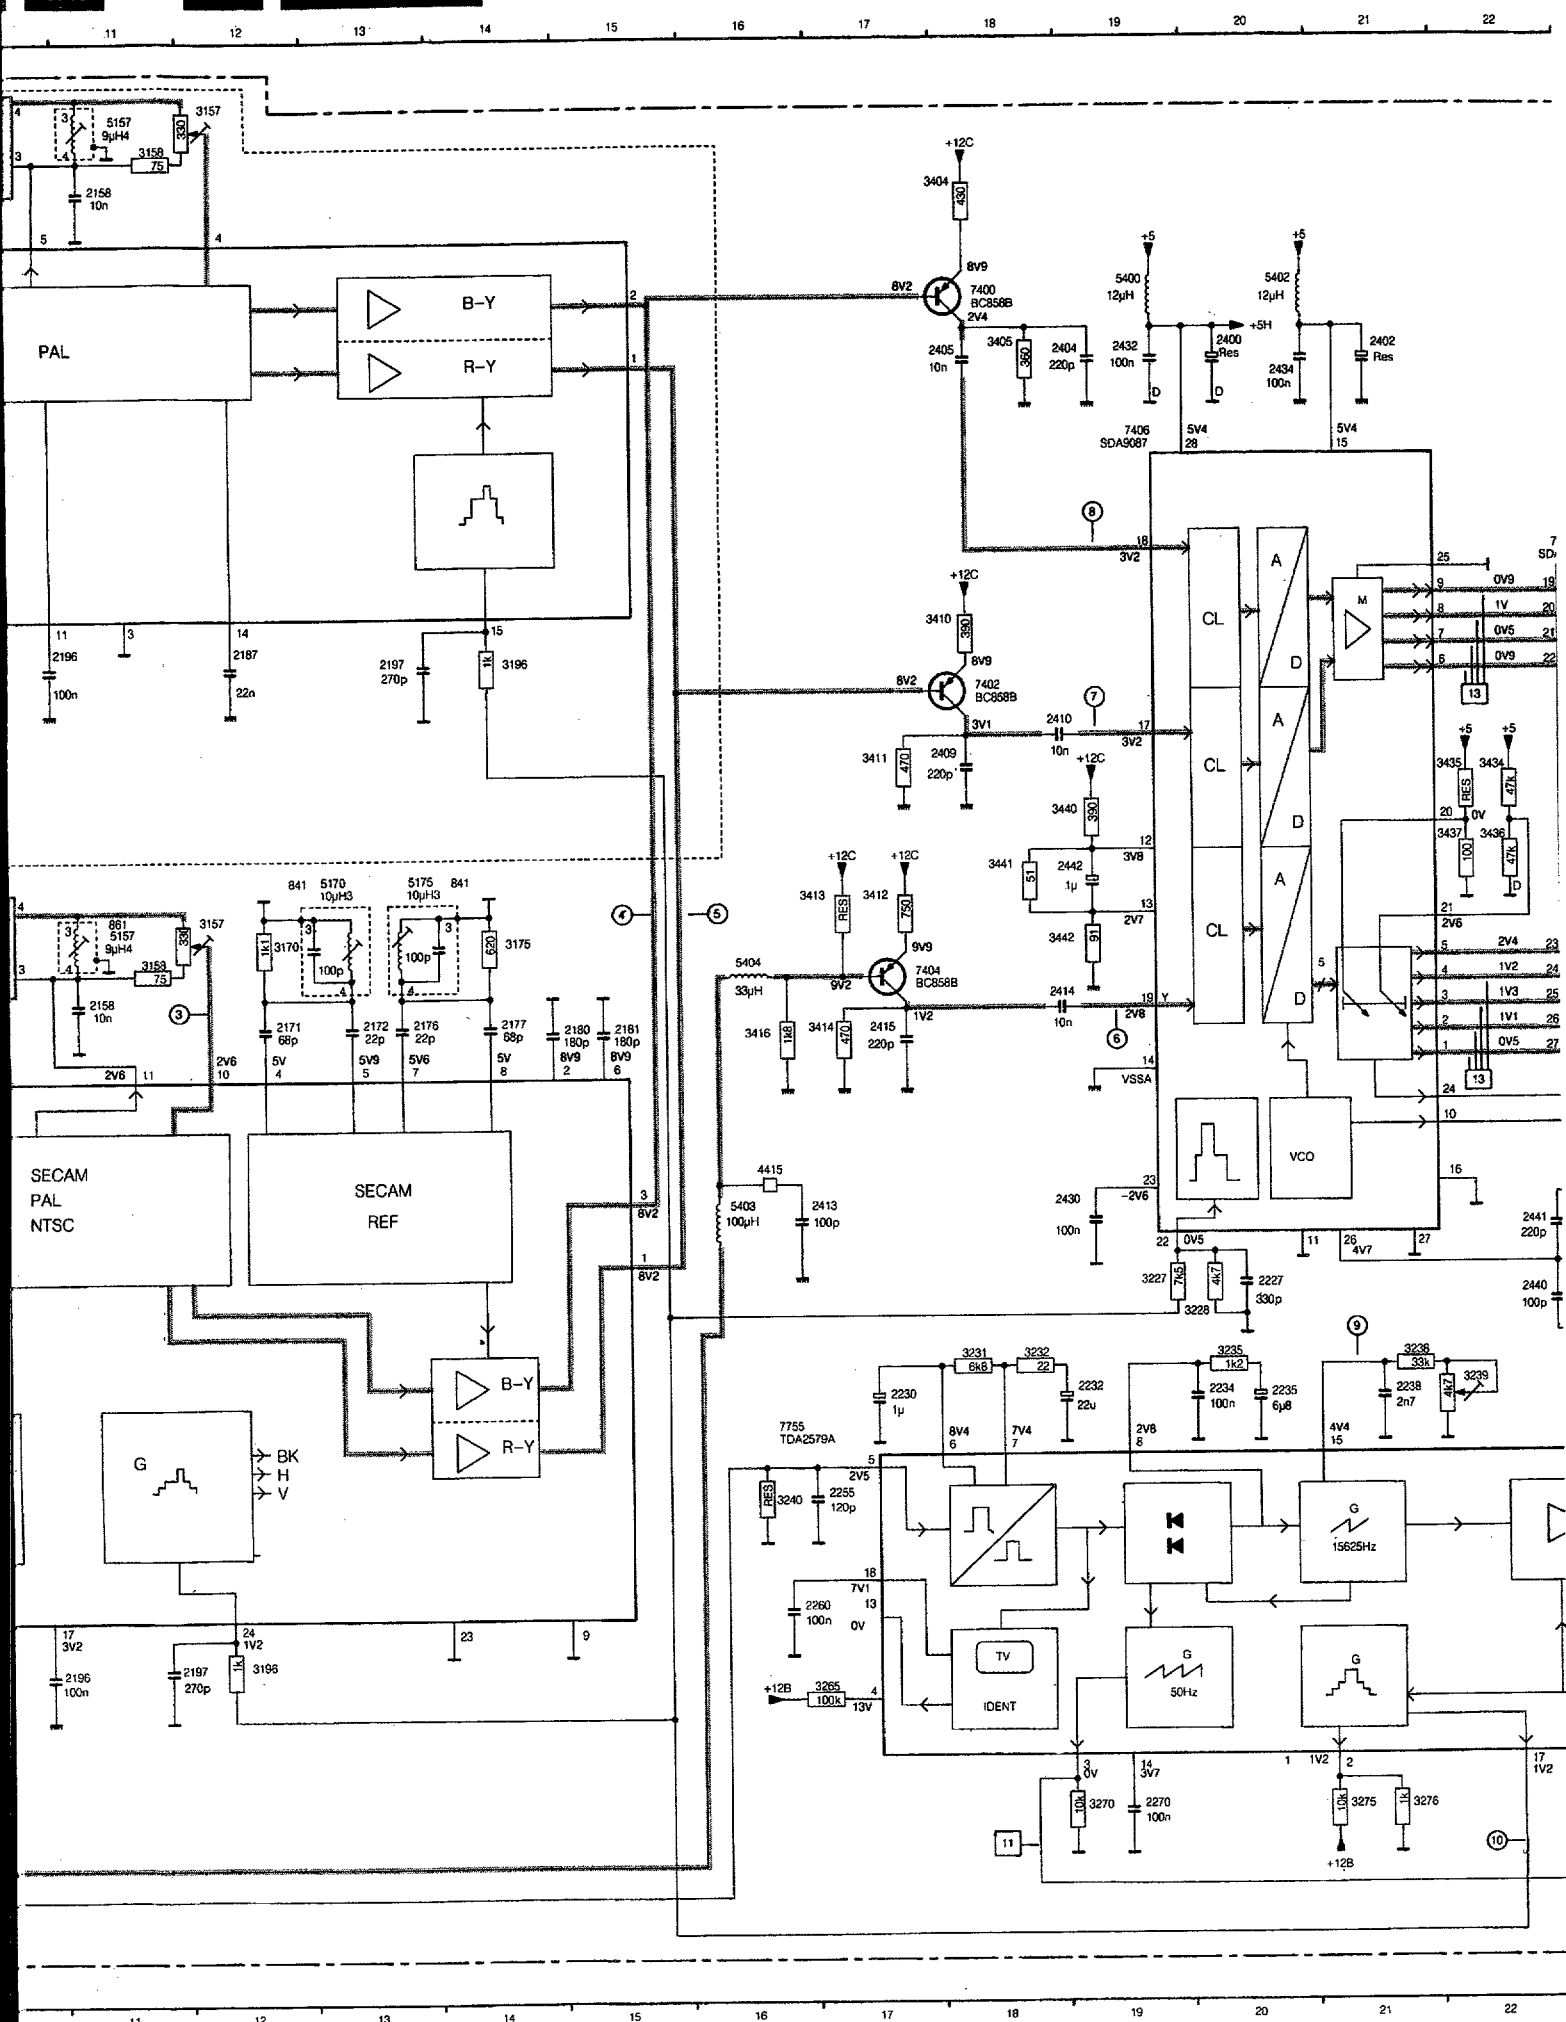

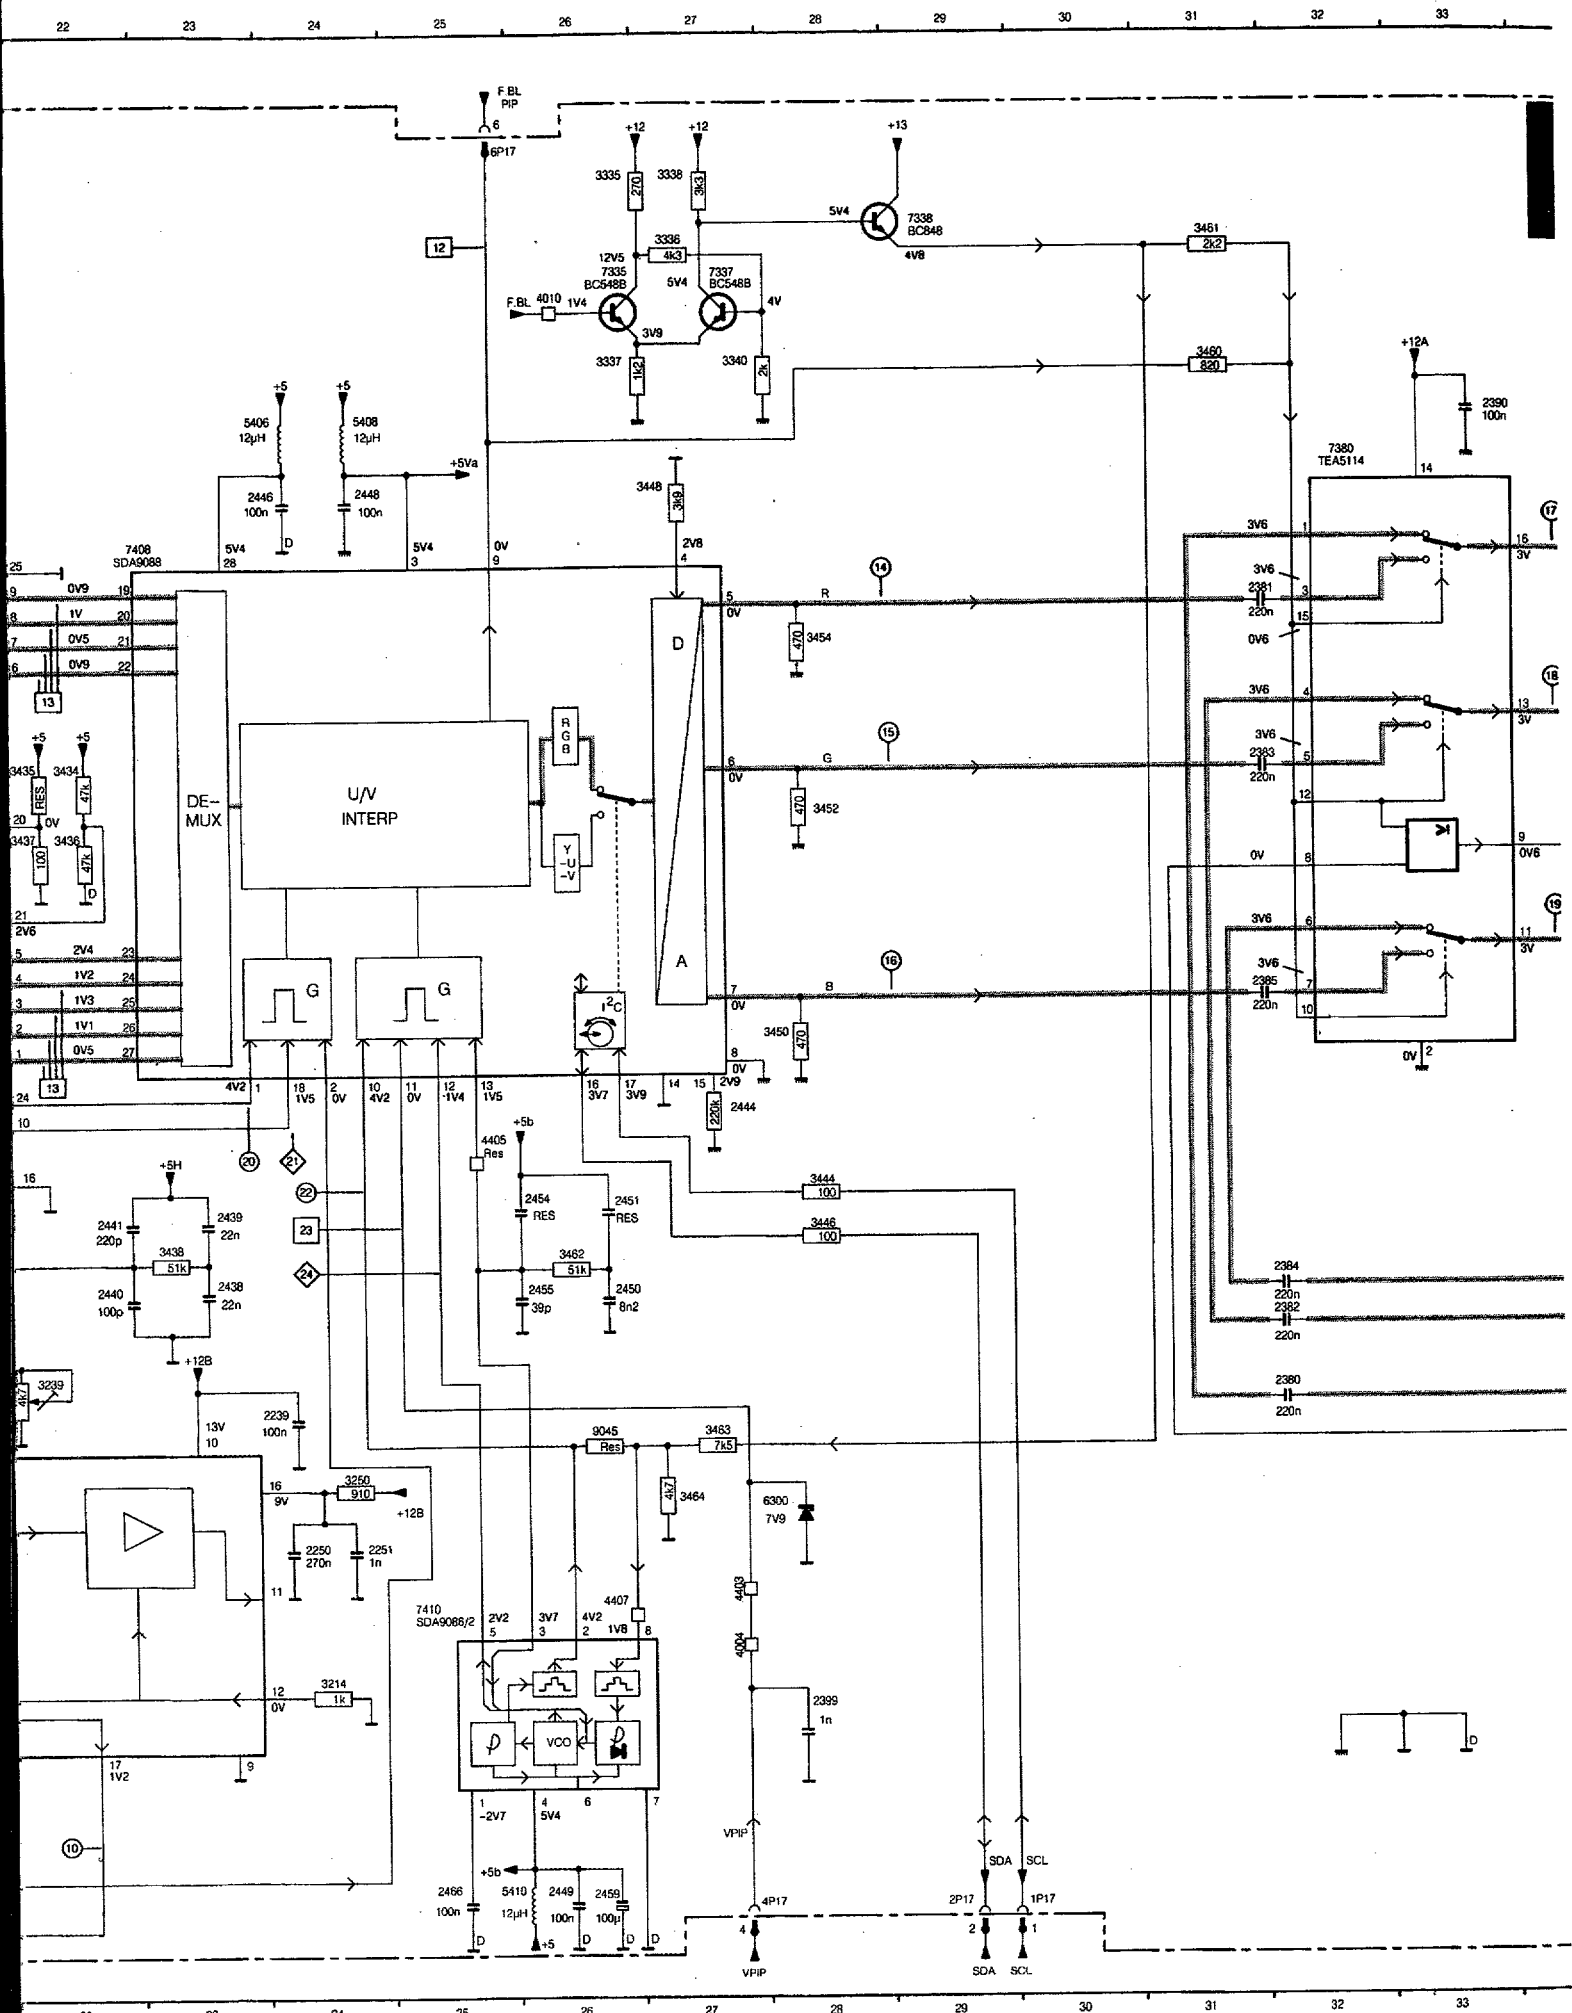



Setting conditions.

All electrical settings should be made under the following conditions:

- supply voltage: $220 - 240 \text{ V} \pm 10\%$; $50 \text{ Hz} \pm 5\%$
- warming-up time ≈ 10 minutes
- the voltages and oscillograms have been measured with regard to tuner earth.
- measuring probe: $R_i > 10 \text{ M}\Omega$; $C_i < 2.5 \text{ pF}$.

1. Settings on the carrier board

1.1 +148V/+95V supply voltage

Connect a voltmeter over C2631.

Using R3635, set the supply voltage to $+148 \text{ V} \pm 0.5 \text{ V}$ for 25" and 28" units or to $95 \text{ V} \pm 0.5 \text{ V}$ for 21" units.

1.2 Focusing

This is set using the focusing potentiometer (on the top of the line output transformer).

1.3 Vg2 setting

Connect a pattern generator and supply a blanking frame signal (black picture). Switch the unit to the service default mode (see section 9).

Connect an oscilloscope to the emitters of transistors 7304 and 7364 on the picture tube module. Set the oscilloscope to frame frequency. Measure the DC voltage level of the measuring pulses (see Fig. 7.2). Using the Vg2 potentiometer on the line output transformer, set the measuring pulse with the lowest DC voltage level to:

- * $+153 \text{ V} \pm 5 \text{ V}$ for 25" and 28" blackline units (protected high-voltage cable)
- * $+130 \text{ V} \pm 5 \text{ V}$ for 28" non-blackline units
- * $+118 \text{ V} \pm 5 \text{ V}$ for 25" non-blackline units
- * $+120 \text{ V} \pm 5 \text{ V}$ for 21" units.

1.4 Horizontal synchronization

Connect pin 5-IC7470 to pin 9-IC7470.

Supply an aerial signal and tune the set.

Adjust potentiometer 3457 until the picture is straight.

Remove the interconnection.

1.5 Horizontal centring

Set using potentiometer 3461.

1.6 Picture width

Set using potentiometer 3525.

1.7 Vertical centring

Set using potentiometer 3516.

1.8 Picture height

Set using potentiometer 3504.

1.9 East/West correction

Set using potentiometer 3521. This setting is only for 25" and 28" units.

1.10 Chroma bandpass filter

a. Setting for PAL/SECAM

Connect a signal generator to pin 20 of the euroconnector frequency to 4.286 MHz to EXT1. Connect pin 27- (+12V). Connect an oscilloscope to Set 5301 to maximum amplitude. Remove the interconnection.

b. Setting for PAL sets (TDA4510)

Connect a signal generator to pin 20 of the euroconnector frequency to 4.43 MHz . Connect an oscilloscope to Set 5301 to maximum amplitude.

1.11 Chroma auxiliary oscillator

Connect a pattern generator to colour bar pattern. Connect (TDA4510) or pin 17-IC7306. Set 2313 so that the colour is practically stopped. Remove the interconnection.

1.12 SECAM demodulators (TDA4650)

Connect a pattern generator to black pattern. Connect at pin 1-IC7306. Set 5304 to minimum amplitude. Connect the oscilloscope to minimum amplitude.

1.13 White balance

Connect a pattern generator to picture. Switch on the service menu and select "WHITE BALANCE". Set the values of "GREEN" and "RED" required white balance is

1.14 Peak white limit

Switch on the service menu and select "WHITE BALANCE". Set "WHITE LIMIT" to the following values:
 - 23 for blackline units
 - 53 for non-blackline units
 - 53 for 21" units.

1.15 Cut-off points of the picture

Connect a pattern generator to picture. Switch on the service menu and select "CUT OFF". Switch on "D" and "RED", "GREEN" and "BLUE" respective guns give no picture.

1.16 Options

Switch on the service menu and select "OPTION 2".

Switch the options "ON" or "OFF" whether the following options:

- "PIP" on a PIP set
- "2ND SCART" on a set
- "TELETEXT" on a television
- "AUTO STORE" for the installation menu
- "SVHS" for the Y/C connector
- "MULTI SYSTEM" for a television
- "HYPERBAND" for a television to the frequency band
- "UHF ONLY" for a television to the UHF band
- "NICAM TWIN" for stereo receive NICAM sound

al settings

1.10 Chroma bandpass filter

a. Setting for PAL/SECAM sets (TDA4650)

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.286 MHz/0.2 Vpp. Switch the unit to EXT1. Connect pin 27-IC7306 to pin 13-IC7306 (+12V). Connect an oscilloscope to pin 15-IC7306. Set 5301 to maximum amplitude. Remove the interconnection.

b. Setting for PAL sets (TDA4510)

Connect a signal generator (e.g. PM 5326) to pin 20 of the euroconnector (EXT1) and set its frequency to 4.43 MHz. Connect the unit to EXT1. Connect an oscilloscope to pin 9-IC7305. Set 5301 to maximum amplitude.

1.11 Chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 11-IC7305 (TDA4510) or pin 17-IC7306 (TDA4650) to earth. Set 2313 so that the colour on the screen has practically stopped. Remove the interconnection.

1.12 SECAM demodulators for PAL/SECAM sets (TDA4650)

Connect a pattern generator and supply a SECAM black pattern. Connect an oscilloscope to pin 1-IC7306. Set 5304 to minimum amplitude. Connect the oscilloscope to pin 3-IC7306. Set 3312 to minimum amplitude.

1.13 White balance

Connect a pattern generator and select a white picture. Switch on the service menu (see section 9) and select "WHITE BALANCE". Set the values of "GREEN" and "BLUE" so that the required white balance is achieved.

1.14 Peak white limit

Switch on the service menu (see section 9) and select "WHITE BALANCE". Set "WHITE LIMIT" to the value:

- 23 for blackline units
- 53 for non-blackline units
- 53 for 21" units.

1.15 Cut-off points of the picture tube

Connect a pattern generator and select a black picture. Switch on the service menu and select "CUT OFF". Switch on "DISABLE" ("ON"). Set "RED", "GREEN" and "BLUE" until the respective guns give no more light on the screen.

1.16 Options

Switch on the service menu and select "OPTION 1" or "OPTION 2".

Switch the options "ON" and "OFF" according to whether the following options are present:

- "PIP" on a PIP set
- "2ND SCART" on a set with two euroconnectors
- "TELETEXT" on a teletext set
- "AUTO STORE" for the automatic tuning facility in the installation menu
- "SVHS" for the Y/C connector in mono sets
- "MULTI SYSTEM" for multisystem sets
- "HYPERBAND" for a tuner which can be tuned to the frequency band of 300 MHz to 450 MHz
- "UHF ONLY" for a tuner which can only be tuned to the UHF band
- "NICAM TWIN" for stereo sets which can also receive NICAM sound.

2. Settings on the IF/sound module

2.1 AFC and the picture demodulator

a. Setting for multisystem units

Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 33.4 MHz for mono sets or to 33.95 MHz for stereo sets. Modulate (AM) the signal with, for example, 1kHz.

Tune mono sets to VHF1 band at a tuning voltage of approximately 5V at pin 11 of the tuner. The "search" (selection B of the manual installation menu) can be stopped by selecting menu selection C "programme".

Set stereo sets to a tuning frequency of 45 MHz. Select system France.

AFC: using 5036 set the voltage at pin 15-IC7000 to 6V (DC).

Picture demodulator: set 5035 to a maximum (undistorted) signal at pin 22-IC7000.

Then set the frequency of the signal generator to 38.9 MHz. Select system Europe on the set.

AFC: using 5038 set the voltage at pin 15-IC7000 to 6V (DC).

Picture demodulator: set 5037 to a maximum (undistorted) signal at pin 22-IC7000.

Adjacent channel suppression (mono sets):

Then set the frequency of the signal generator to 33.4 MHz. Place pin 9-IC7000 at a fixed voltage of +1V using a laboratory supply. Tune the set to the UHF band and select system France.

Set 5005 to a minimum signal at pin 22-IC7000.

b. Setting for single-system units

Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 38.9 MHz. Modulate (AM) the signal with, for example, 1kHz.

AFC: using 5036 set the voltage at pin 15-IC7000 to 6V (DC).

Picture demodulator: set 5035 to a maximum (undistorted) signal at pin 22-IC7000.

2.2 RF-AGC

If the picture from a strong local transmitter is distorted, adjust 3016 until the picture is not distorted.

2.3 MF-AGC (Multisystem units)

Connect a pattern generator and supply a SECAM-L colour bar signal. Connect an oscilloscope to pin 22-IC7000. Set the amplitude of the video signal with 3048 to 1.7 Vpp for stereo units or to 1.8 Vpp for mono units.

2.4 AM-IF sound filter (Multisystem units)

Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 30.9 MHz. Modulate (AM) the signal with 1kHz, for example. Tune the unit to UHF band and select system France. Connect an oscilloscope to pin 9-IC7100 and set 5100 to minimum amplitude.

Place pin 3-IC7100 on a fixed voltage of +2V using a laboratory supply.

Set the frequency of the generator to 32.4 MHz and set 5101 and 5102 to maximum amplitude.

IF/sound module

Tuner demodulator system units

Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 38.9 MHz. Modulate (AM) the signal with 1kHz, for example. Connect an oscilloscope to pin 17-IC7100 (TDA3856) or pin 16-IC7101 (TDA3856) and set 5104 to minimum amplitude.

Set VHF1 band at a tuning voltage of 1V at pin 11 of the tuner. The B of the manual installation is completed by selecting menu selection.

Set a tuning frequency of 45 MHz. Set the voltage at pin 15-IC7000 to minimum.

For: set 5035 to a maximum level at pin 22-IC7000. Frequency of the signal generator to system Europe on the set. Set the voltage at pin 15-IC7000 to minimum.

For: set 5037 to a maximum level at pin 22-IC7000. **Suppression** (mono sets): Frequency of the signal generator to pin 9-IC7000 at a fixed voltage of 1V supply. Tune the set to the selected system France. Minimum signal at pin 22-IC7000.

System units

Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 38.9 MHz. Modulate (AM) the signal with 1kHz. Set the voltage at pin 15-IC7000 to minimum.

For: set 5035 to a maximum level at pin 22-IC7000.

Set a strong local transmitter is 316 until the picture is not visible.

System units) Connect a signal generator and supply a colour bar signal. Connect an oscilloscope to pin 22-IC7000. Set the amplitude of the signal to 1.7 Vpp for stereo and 1.0 Vpp for mono units.

For (Multisystem units)

Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 38.9 MHz. Modulate (AM) the signal with 1kHz. Tune the unit to UHF band France. Connect an oscilloscope to pin 16-IC7101 and set 5100 to minimum.

Set on a fixed voltage of +2V using the signal generator to 32.4 MHz. Set 5102 to maximum amplitude.

2.5 IF sound demodulator (stereo and NICAM units) Connect a signal generator (e.g. PM 5326) via a capacitor of 5p6 to pin 17 of the tuner and set its frequency to 38.9 MHz. Modulate (AM) the signal with 1kHz, for example. Connect an oscilloscope to pin 17-IC7100 (TDA3856) or pin 16-IC7101 (TDA3856) and set 5104 to minimum amplitude.

2.6 5.5 MHz or 6.0 MHz FM sound demodulator Connect a pattern generator and supply a PAL signal with FM mono sound. Set 5105 (mono and stereo units) or 5102 (NICAM units) to maximum sound reproduction.

2.7 5.742 MHz FM sound demodulator (stereo and NICAM units) Connect a pattern generator and supply a PAL BG signal with two-language sound. Select language II on the unit with the remote control. Set 5103 (stereo units) or 5101 (NICAM units) to maximum sound reproduction.

2.8 Stereo matrix (stereo and NICAM units) Connect a pattern generator and supply a PAL BG signal with stereo sound. Select only the right-hand channel sound. Set the balance of the unit completely to the left. Set 3204 (stereo units) or 3200 (NICAM units) to minimum sound reproduction.

2.9 NICAM demodulator (NICAM units) Connect a pattern generator and supply a PAL signal with NICAM sound. Connect the X-input of the oscilloscope to pin 19-IC7120. Connect the Y-input of the oscilloscope to pin 20-IC7120. Set the oscilloscope to the X-Y position. Set the sensitivity of the oscilloscope to 1V/div AC. Set the X and Y position so that the cross pattern is in the centre of the oscilloscope picture. Set 2124 on a straight cross pattern (see fig. 7.3).

2.10 "Sample" clock oscillator (NICAM units) Connect a pattern generator and supply a PAL signal with NICAM sound. Connect an oscilloscope to pin 9-IC7150. Set the sensitivity of the oscilloscope to 1V/div and the time base to 2μs/div. Set 2155 so that a symmetrical block wave is visible.

3. Setting on the teletext

Connect pin 22-IC7830 to earth. Connect a frequency counter to pin 17-IC7830. Set 6000 MHz ± 30kHz. Remove the interconnection.

4. Settings on the PIP module

Setting conditions Before making each setting, erase the picture with the prescribed signal. Set the screen and that the unit has reached the normal temperature (after ≈ 10 min.).

4.1 Horizontal synchronization Do not supply an aerial or generator. Connect pin 28-IC7125 to pin 11-IC7125. If TDA4554 is present (PAL selected), connect pin 5-IC7755 to earth. Measure the frequency at pin 11-IC7125. Set 3239 set it to 15.625 Hz ± 25 Hz. Remove the interconnection.

4.2 Chroma bandpass filter Setting for PIP modules with TDA4554

a. Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.43 MHz/0.2Vpp.

Connect pin 27-IC7125 to 13-IC7125. Connect an oscilloscope to pin 15-IC7125. Set 5118 to maximum amplitude. Remove the interconnection.

b. Setting for PIP modules with TDA4554 Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.43 MHz/0.2Vpp. Connect an oscilloscope to pin 15-IC7125. Set 5118 to maximum amplitude. Remove the interconnection.

4.3 PAL chroma auxiliary oscillator Connect a pattern generator at pin 11-IC7126. Connect pin 22-IC7126 to earth. Set 2202 so that the colour of the picture is practically still. Remove the interconnection.

4.4 NTSC chroma auxiliary oscillator modules with TDA4554

Connect a pattern generator at pin 11-IC7126. Connect pin 22-IC7126 to earth. Set 2202 so that the colour of the picture is practically still. Remove the interconnection.

3. Setting on the teletext decoder

Connect pin 22-IC7830 to earth. Connect a frequency counter to pin 17-IC7830 and set 5803 to 6000 MHz $\pm$ 30kHz.
Remove the interconnection.

4. Settings on the PIP module

Setting conditions

Before making each setting, ensure that a PIP picture with the prescribed signal is visible on the screen and that the unit has reached its operating temperature (after $\approx$ 10 min.).

4.1 Horizontal synchronization

Do not supply an aerial or generator signal. Connect pin 28-IC7125 to pin 13-IC7125 if TDA4554 is present (PAL selection). Connect pin 5-IC7755 to earth.
Measure the frequency at pin 17-IC7755 and using 3239 set it to 15.625 Hz $\pm$ 25 Hz.
Remove the interconnection.

4.2 Chroma bandpass filter

a. Setting for PIP modules with TDA4554

Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.286 MHz/0.2 Vpp.

Connect pin 27-IC7125 to 13-IC7125. Connect an oscilloscope to pin 15-IC7125.

Set 5118 to maximum amplitude.

Remove the interconnection.

b. Setting for PIP modules with TDA4510

Connect a signal generator (e.g. PM 5326) to pin 10 of P17 and set its frequency to 4.43 MHz/0.2Vpp.

Connect an oscilloscope to pin 9-IC7126.

Set 5118 to maximum amplitude.

4.3 PAL chroma auxiliary oscillator

Connect a pattern generator and supply a PAL colour bar pattern. Connect pin 17-IC7125 (TDA4554) or pin 11-IC7126 (TDA4510) to earth.
Set 2202 so that the colour of the PIP picture is practically still.

Remove the interconnection.

4.4 NTSC chroma auxiliary oscillator for PIP modules with TDA4554

Connect a pattern generator and supply an NTSC M colour bar pattern. Connect pin 17-IC7125 to earth. Set 2202 so that the colour of the PIP picture is practically still.

Remove the interconnection.

4.5 Delay line

Connect a pattern generator and supply a PAL colour bar signal. Connect the X-input of the oscilloscope to pin 1-IC7125 (TDA4554) or pin 1-IC7126 (TDA4510). Connect the Y-input of the oscilloscope to pin 3-IC7125 (TDA4554) or pin 2-IC7126 (TDA4510). Set the oscilloscope to the X-Y position.

Set 5155 and 5157 so that the vectors lie in one line (points which are furthest from the origin).

Set the pattern generator to the "DEM" mode. Set R3157 so that the vectors lie on top of one another in the origin.

4.6 SECAM identification for PIP modules with TDA4554

Connect a pattern generator and supply a SECAM colour bar signal.

Connect pin 27-IC7125 to pin 13-IC7125.

Connect an oscilloscope to pin 21-IC7125.

Set 5190 to minimum DC level.

Remove the interconnection.

4.7 SECAM demodulators for PIP modules with TDA4554

Connect a pattern generator and supply a SECAM signal without contents (black). Connect pin 27-IC7125 to pin 13-IC7125. Connect an oscilloscope to pin 1-IC7125. Using 5175, set the DC level during the scan equal to the DC level during the flyback.

In the same way set 5170, but now measure at pin 3-IC7125.

Remove the interconnection.




Fig. 7.1

PRS 06772
T-26/034





Fig. 7.2

MDA.01468
T28/826

MAIN PANEL

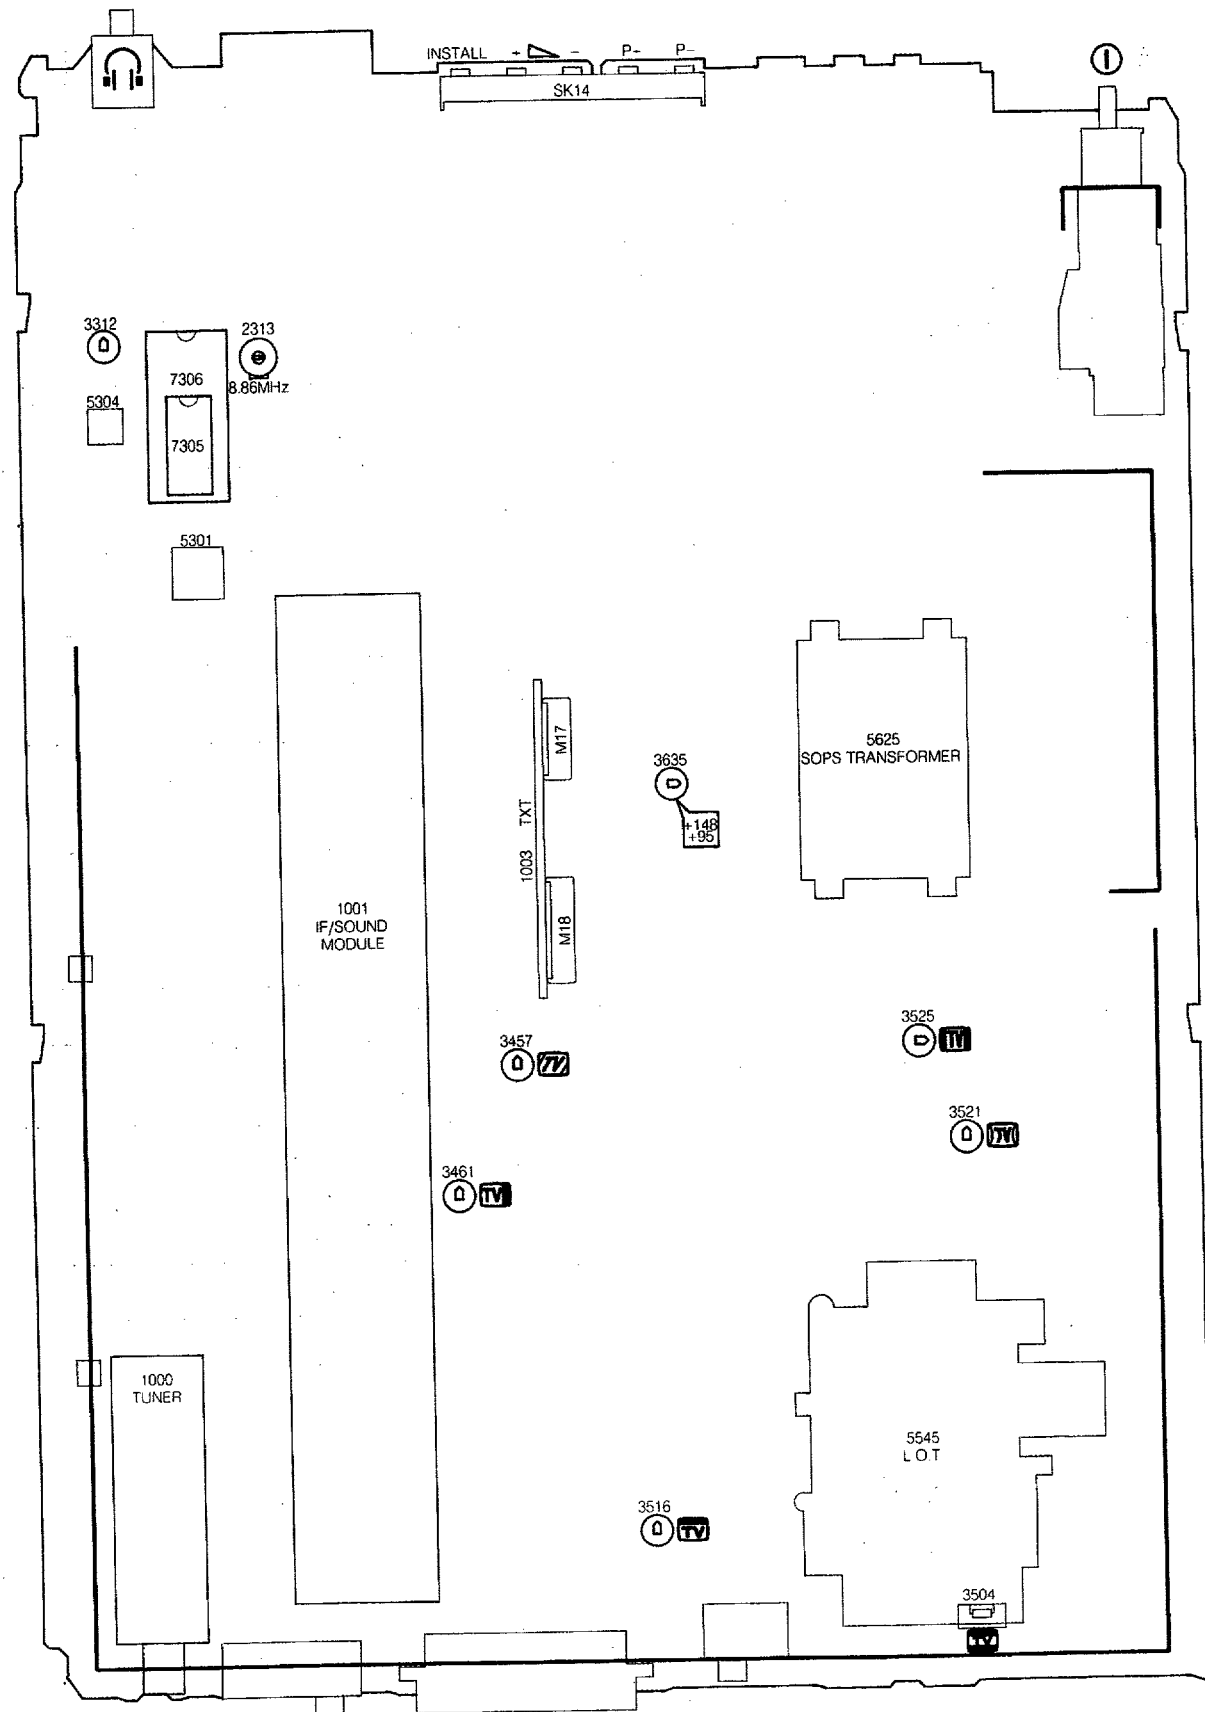

TXT

7E

NIC/

501

503



STE

MOI


Fig. 7.3

PIP MODULE


TXT MODULE

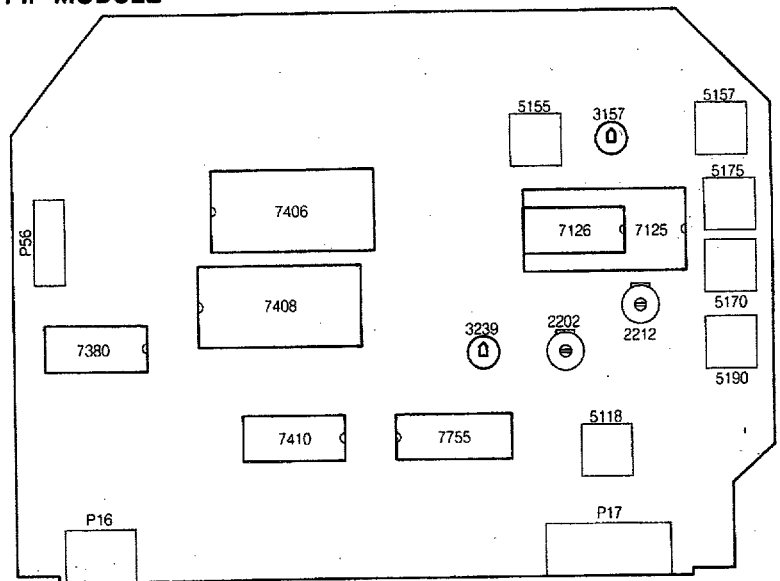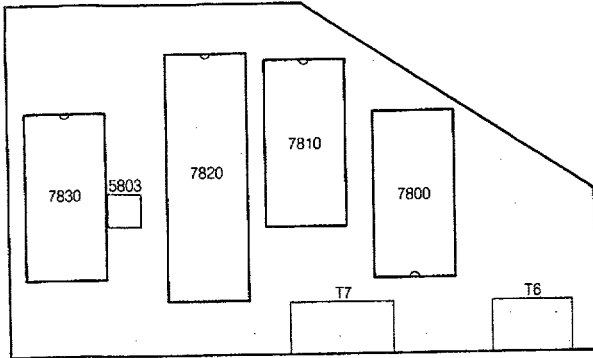

NICAM IF/SOUND MODULE

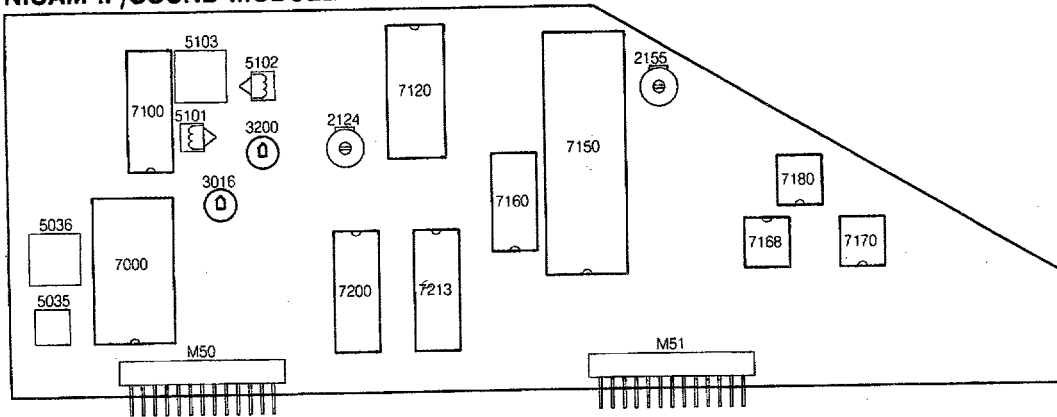

STEREO IF/SOUND MODULE

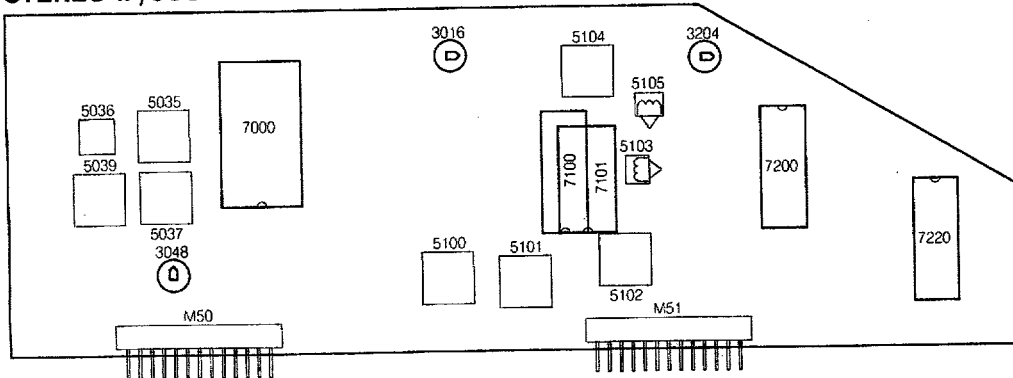

MONO IF/SOUND MODULE

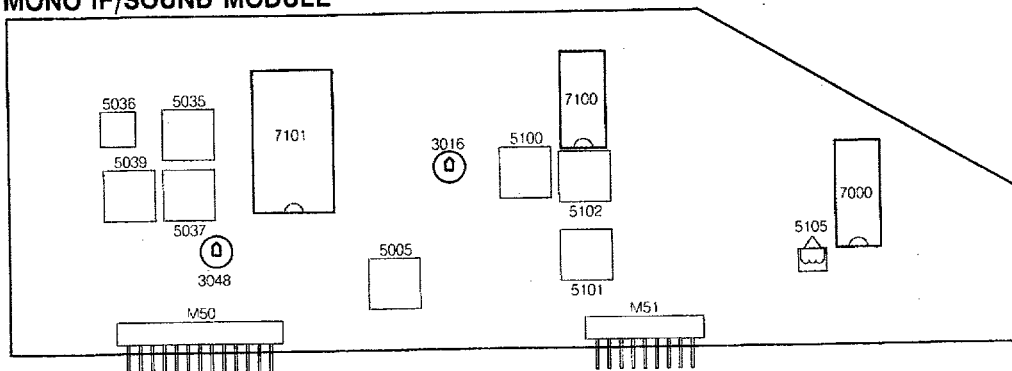


Fig. 7.3

1. Servicing of SMDs (Surface Mounted Devices)

1.1 General cautions on handling and storage

- Oxidation on the terminals of SMDs results in poor soldering. Do not handle SMDs with bare hands.
- Avoid using storage places that are sensitive to oxidation such as places with sulphur or chlorine gas, direct sunlight, high temperatures or a high degree of humidity.
The capacitance or resistance value of the SMDs may be affected by this.
- Rough handling of circuit boards containing SMDs may cause damage to the components as well as the circuit boards. Circuit boards containing SMDs should never be bent or flexed. Different circuit board materials expand and contract at different rates when heated or cooled and the components and/or solder connections may be damaged due to the stress. Never rub or scrape chip components as this may cause the value of the component to change. Similarly, do not slide the circuit board across any surface.

1.2 Removal of SMDs

- Heat the solder (for 2-3 seconds) at each terminal of the chip. By means of litz wire and a slight horizontal force, small components can be removed with the soldering iron. They can also be removed with a solder sucker (see Fig. 8.1A) or:
- While holding the SMD with a pair of tweezers, take it off gently using the soldering iron's heat applied to each terminal (see Fig. 8.1B).
- Remove the excess solder on the solder lands by means of litz wire or a solder sucker (see Fig. 8.1C).

Caution on removal:

- When handling the soldering iron, use suitable pressure and be careful.
- When removing the chip, do not use undue force with the pair of tweezers.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).
- The chip, once removed, must never be reused.

1.3 Attachment of SMDs

- Locate the SMD on the solder lands by means of tweezers and solder the component on one side. Ensure that the component is positioned correctly on the solder lands (see Fig. 8.2A).
- Next complete the soldering of the terminals of the component (see Fig. 8.2B).

Caution when attaching SMDs:

- When soldering the SMD terminals, do not touch them directly with the soldering iron. The soldering should be done as quickly as possible; care must be taken to avoid damage to the terminals of the SMDs themselves.
- Keep the SMD's body in contact with the printed board when soldering.
- The soldering iron to be used (approx. 30 W) should preferably be equipped with a thermal control (soldering temperature: 225 to 250°C).
- Soldering should not be done outside the solder land.
- Soldering flux (of rosin) may be used, but should not be acidic.
- After soldering, let the SMD cool down gradually at room temperature.
- The quantity of solder must be proportional to the size of the solder land. If the quantity is too great, the SMD might crack or the solder lands might be torn loose from the printed board (see Fig. 8.3).

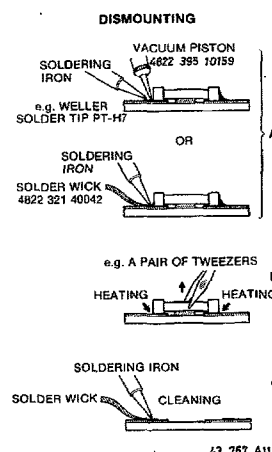


Fig. 8.1




Fig. 8.2

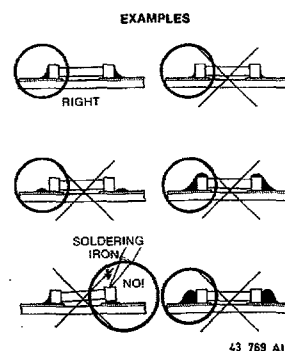


Fig. 8.3

2. Replacing the EEPROM IC7710

If the EEPROM has to be replaced during a repair, the microprocessor will load the EEPROM with a number of default values for the white balance, peak white limit and cut-off point settings.

However, all these values should be checked and adjusted, if necessary.

All options should also be set, the programs installed and personal preference set.

3. Table of fault messages

Fault indication	Description	Possible fault
OSD: ER PIP	I ² C fault PIP module	* +5 on PIP module * IC7406
OSD: ER TXT	I ² C fault TXT module	* +5 on teletext module * IC7800
OSD: ER NICAM	I ² C fault IC7160 (NICAM units)	* +5 on MF/sound module * IC7160, C2160, C2161, C2221, C2222 * IC7213
OSD: ER 8415	I ² C fault IC7200 (stereo and NICAM units)	* +14 on MF/sound module * IC7200 * IC7220
OSD: ER 8425	I ² C fault IC7213 (NICAM units) I ² C fault IC7220 (Stereo units)	* IC7213/IC7220
OSD: ER EEPROM	I ² C fault IC7710	* IC7710
OSD: ER TUNER	I ² C fault tuner (stereo and NICAM units)	* Tuner * TS7003
OSD: ER CHROMA	I ² C fault IC7309	* supply IC7309 (+9) * IC7309
Flashing LED	Internal fault in μ P	* IC7708
OSD: ER BUS	I ² C bus blocked	* C2714, C2715

1. Service default mode

The GR2.1 is equipped with a service default mode. The service default mode is a fixed defined mode in which the unit can be placed.

1.1 Mode definition

The definition of the fixed mode in the service default mode is as follows:

- all sound and picture controls are in the central position (with the exception of the volume which is set to low)
- stereo units are tuned to 475.25 MHz
- mono units are tuned to programme 0
- system:
 - * PAL BG, PAL/SECAM BG or PAL I for single system units
 - * SECAM L for multisystem units.

1.2 Switching on and off

The service default mode is switched on by briefly short-circuiting the pins M33 and M34 (SERVICE) behind the INSTALL key on the carrier panel when switching the unit on with the mains switch. In order to indicate that the unit is in the service default mode, an "S" appears on the screen. The service default mode can only be switched off by switching the unit to standby. If the unit is switched off and then on again using the mains switch or mains plug, the service default mode remains switched on.

1.3 Operation and extra facilities

In addition to the fact that the unit can be operated normally, in the service default mode two extra functions are available:

- Autostore
When operating the install key on the local control panel, the unit is tuned to the next transmitter frequency. This frequency is also stored under the selected programme number. Therefore the installation menu cannot be accessed in the service default mode!
- Service menu
The service menu is activated by first pressing the  key and then at the same time the P+ key on the local control panel. The service menu now appears on the screen. The service menu offers the facility to set various options and make a number of picture tube settings. The various components in the service menu are selected using the coloured keys on the remote control. The various components themselves are adjusted using the + and - keys on the remote control. The values and options set are immediately stored in the EEPROM.

Note 1:

If the service menu does not appear on the screen and the autostore function does not react, then the "LOCK" function is probably activated.

If the autostore function only does not react, the hotel mode is activated.

Note 2:

If a multisystem unit in the service default mode is to be used with the PAL/SECAM BG system, the "MULTI SYSTEM" option can be temporarily switched off.

2. Hotel mode

In the hotel mode the volume control is limited to a maximum to be set beforehand and the installation menu cannot be called up.


2.1 Switching the hotel mode on and off

Select programme number 38.


First press  + and keep this depressed while pressing P -.

Survey of menus


MAIN MENU STEREO

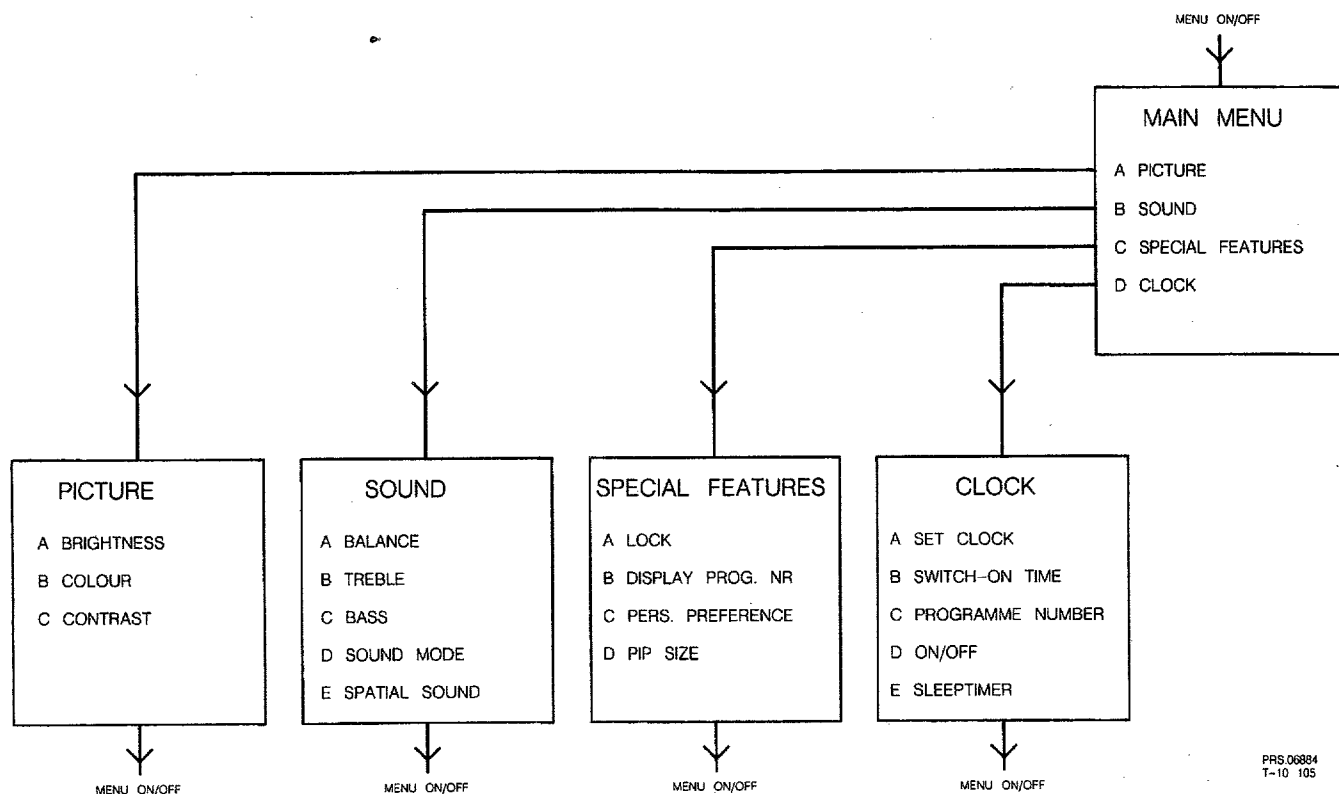


MAIN MENU MONO

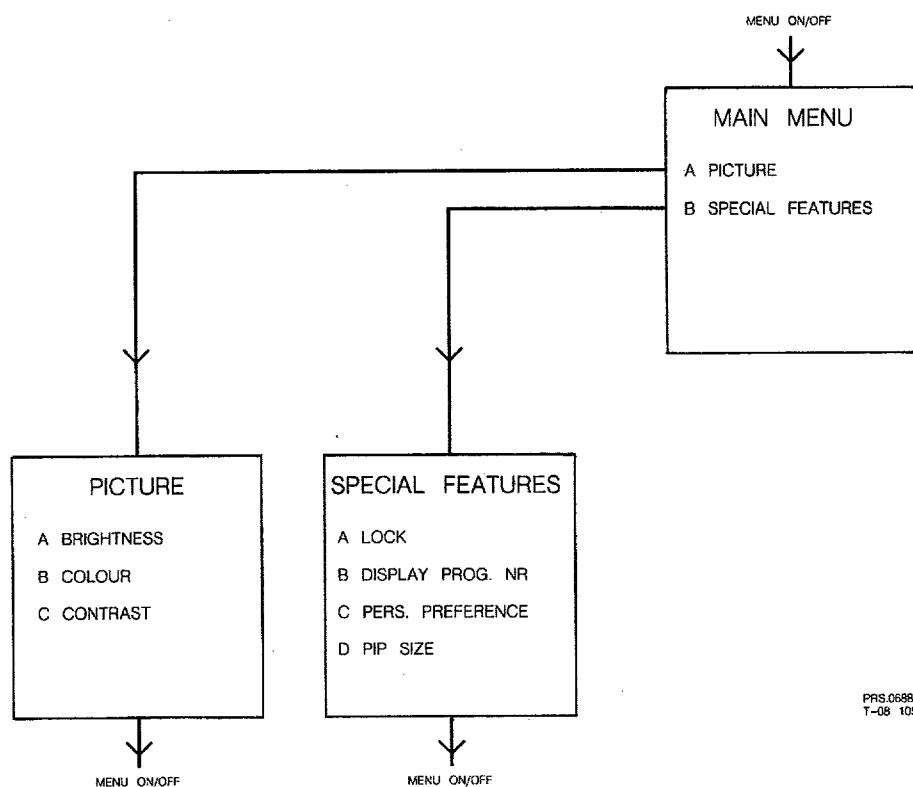

INSTALLATION MENU

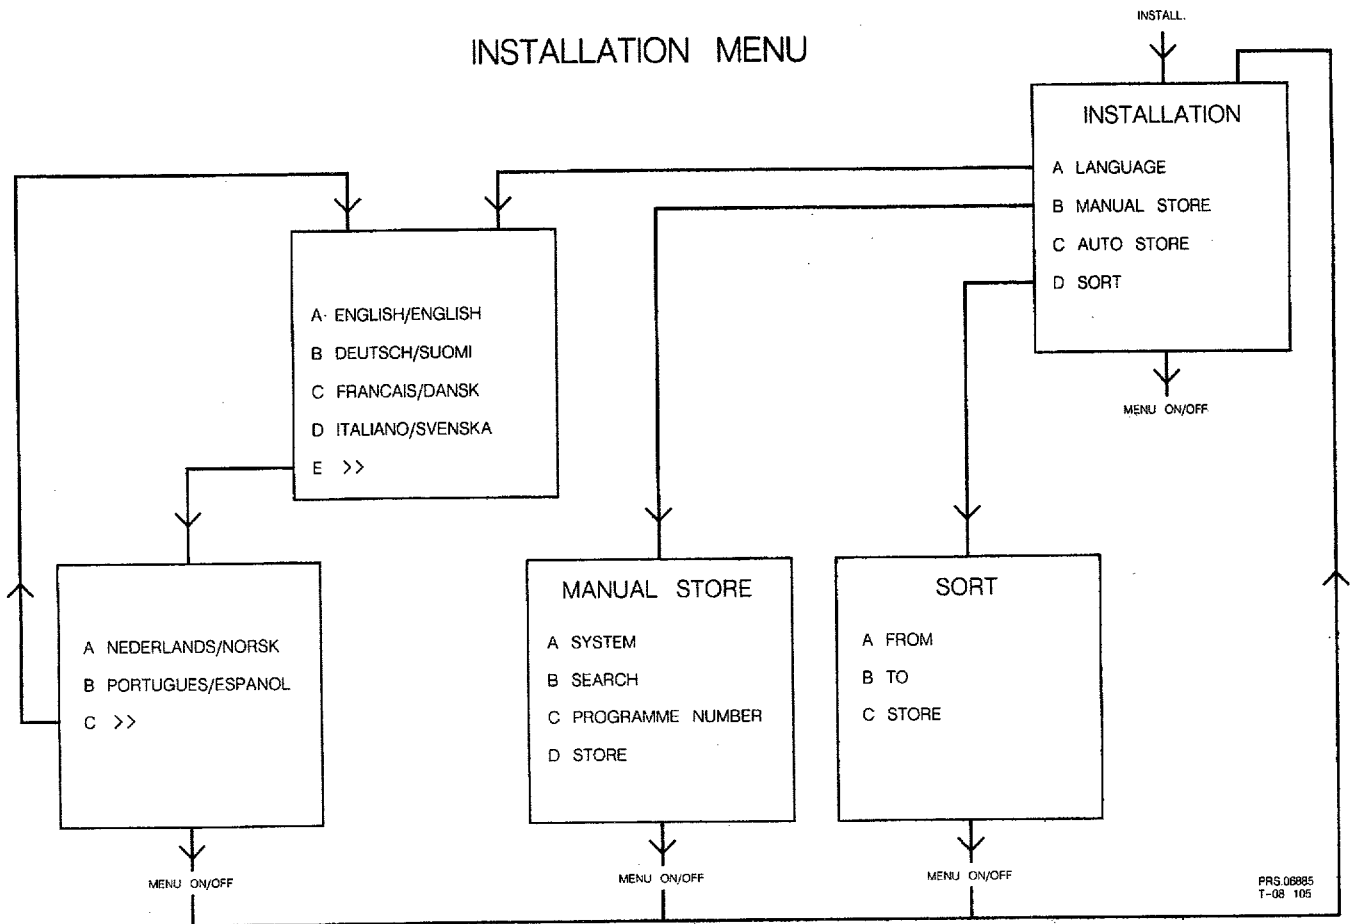

SERVICE MENU

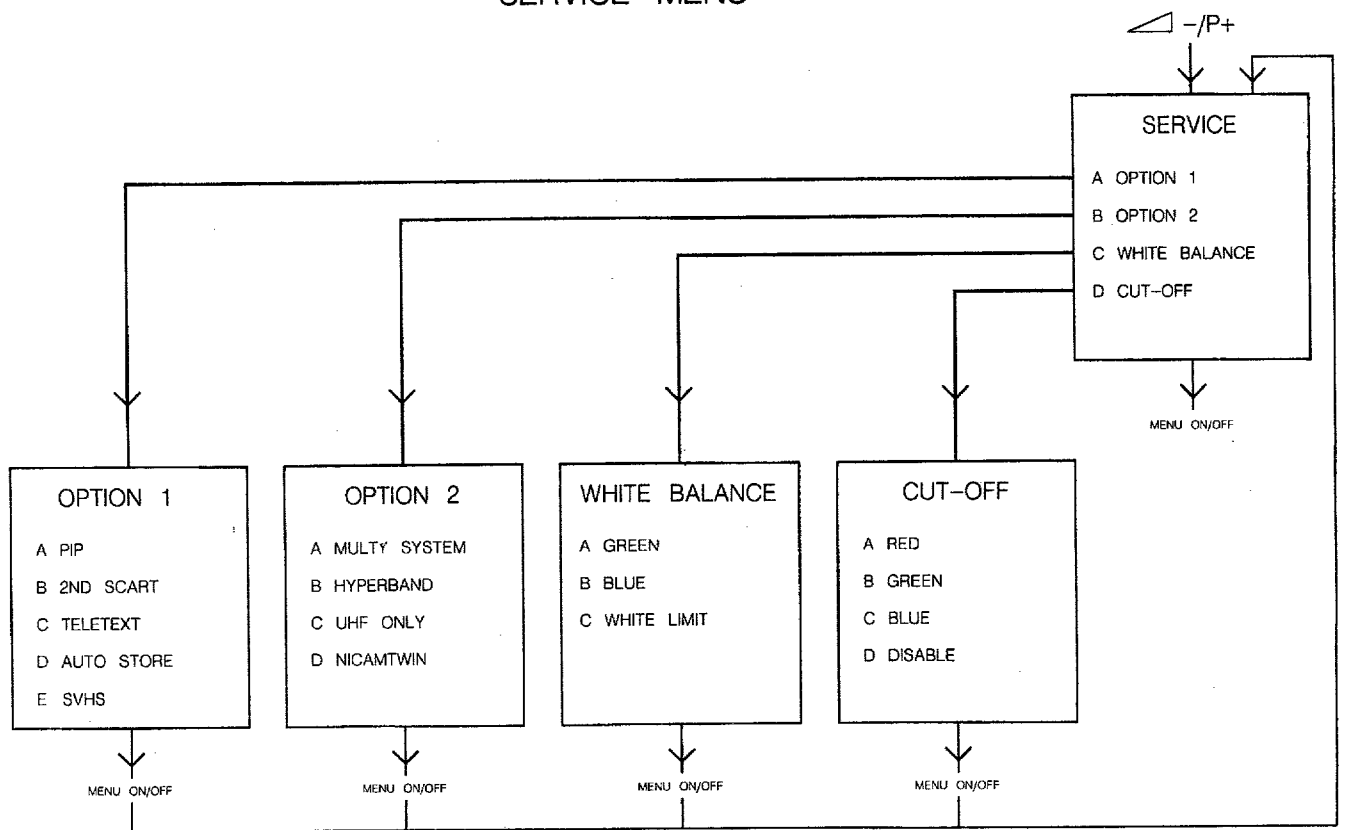

Carrier panel

Mechanical parts			— —			— —		
4822 404 31174	bracket EURO MOD.		2003 4822 122 31784	4,7nF 10% 50V		2333 4822 121 42408	220nF 5% 63V	
4822 492 70871	spring (wire)		2003 4822 122 32893	100nF 80% 50V		2334 4822 122 31965	220pF 5% 63V	
4822 492 70143	spring fix. TS7625		2004 4822 122 33205	12pF 10% 63V		2335 4822 122 31965	220pF 5% 63V	
4822 256 91766	LED holder		2008 4822 122 31765	100pF 5% 50V		2336 4822 122 31797	22nF 10% 63V	
4822 276 50354	keyboard 5-fold		2231 4822 124 41525	100µF 20% 25V		2337 4822 122 31797	22nF 10% 63V	
4822 466 30395	shielding IC7708		2232 4822 122 32863	22nF 80% 50V		2338 4822 122 31797	22nF 10% 63V	
4822 256 30274	fuse holder		2233 4822 122 32863	22nF 80% 50V		2339 4822 122 33496	100nF 10% 63V	
4822 320 20126	focus cable		2234 4822 122 32863	22nF 80% 50V		2340 4822 122 31797	22nF 10% 63V	
			2235 4822 122 32863	22nF 80% 50V		2341 4822 122 31797	22nF 10% 63V	
			2236 4822 122 31784	4,7nF 10% 50V		2342 4822 122 33496	100nF 10% 63V	
			2237 4822 122 32893	100nF 80% 50V		2343 4822 122 33496	100nF 10% 63V	
			2238 4822 122 32597	6,8nF 10% 63V		2344 4822 122 33496	100nF 10% 63V	
			2238 4822 122 31784	4,7nF 10% 50V		2345 4822 122 31797	22nF 10% 63V	
			2239 4822 122 32893	100nF 80% 50V		2346 4822 122 31765	100pF 5% 50V	
			2240 4822 124 40214	1000µF 20% 25V		2349 5322 122 31647	1nF 10% 63V	
			2241 4822 122 32893	100nF 80% 50V		2350 4822 122 31797	22nF 10% 63V	
			2242 4822 124 40214	1000µF 20% 25V		2351 4822 122 31797	22nF 10% 63V	
			2243 4822 122 32863	22nF 80% 50V		2352 5322 122 31647	1nF 10% 63V	
			2245 4822 122 32863	22nF 80% 50V		2353 4822 122 33496	100nF 10% 63V	
			2246 4822 124 41596	22µF 20% 50V		2354 4822 124 40242	1µF 20% 63V	
			2246 4822 124 41506	47µF 20% 16V		2355 4822 124 40849	330µF 20% 16V	
			2248 4822 124 40849	330µF 20% 16V		2356 4822 122 31797	22nF 10% 63V	
			2249 4822 122 32863	22nF 80% 50V		2357 4822 122 31797	22nF 10% 63V	
			2250 4822 121 42472	10nF 10% 50V		2358 4822 122 31797	22nF 10% 63V	
			2251 4822 121 42472	10nF 10% 50V		2359 4822 122 31765	100pF 5% 50V	
			2252 4822 121 51252	470nF 5% 63V		2360 4822 122 33496	100nF 10% 63V	
			2254 4822 121 51252	470nF 5% 63V		2361 4822 122 33496	100nF 10% 63V	
			2255 4822 121 51252	470nF 5% 63V		2362 4822 122 33496	100nF 10% 63V	
			2256 4822 122 32142	270pF 5% 63V		2363 4822 122 31972	39pF 5% 50V	
			2257 4822 122 32142	270pF 5% 63V		2365 4822 124 40242	1µF 20% 63V	
			2260 4822 122 32566	3,9nF 10% 63V		2366 4822 124 41566	3,3µF 20% 50V	
			2261 4822 122 32566	3,9nF 10% 63V		2367 4822 124 40435	10µF 20% 50V	
			2262 4822 122 32142	270pF 5% 63V		2367 4822 124 41596	22µF 20% 50V	
			2263 4822 122 32142	270pF 5% 63V		2368 4822 122 33205	12pF 10% 63V	
			2264 4822 121 51252	470nF 5% 63V		2368 4822 122 32504	15pF 5% 50V	
			2265 4822 121 51252	470nF 5% 63V		2370 4822 121 42408	220nF 5% 63V	
			2300 4822 122 32482	22pF 5% 63V		2371 4822 122 31825	27pF 10% 50V	
			2301 4822 122 31773	560pF 5% 50V		2372 4822 122 31825	27pF 10% 50V	
			2303 4822 122 32142	270pF 5% 63V		2373 4822 122 31825	27pF 10% 50V	
			2304 4822 122 33498	2,7nF 10% 63V		2374 4822 122 31772	47pF 5% 50V	
			2304 4822 122 31773	560pF 5% 50V		2375 4822 122 31765	100pF 5% 50V	
			2305 4822 122 32444	33pF 5% 50V		2376 4822 122 31765	100pF 5% 50V	
			2306 4822 122 31965	220pF 5% 63V		2380 4822 122 31766	120pF 5% 50V	
			2307 4822 122 31965	220pF 5% 63V		2381 4822 122 31766	120pF 5% 50V	
			2308 4822 122 32442	10nF 50V		2384 4822 122 31765	100pF 5% 50V	
			2309 4822 122 32442	10nF 50V		2384 4822 051 10008	0Ω 5% 0,25W	
			2310 4822 122 32442	10nF 50V		2385 4822 122 31765	100pF 5% 50V	
			2311 4822 122 33496	100nF 10% 63V		2451 4822 122 32442	10nF 50V	
			2312 4822 122 32442	10nF 50V		2451 4822 122 33496	100nF 10% 63V	
			2313 4822 125 50045	20pF		2456 4822 124 40242	1µF 20% 63V	
			2314 5322 121 42661	330nF 5% 63V		2457 4822 122 33496	100nF 10% 63V	
			2315 4822 122 32504	15pF 5% 50V		2458 4822 121 42937	2,7nF 1% 250V	
			2315 4822 122 33205	12pF 10% 63V		2459 4822 122 33496	100nF 10% 63V	
			2316 4822 122 31825	27pF 10% 50V		2460 5322 122 31647	1nF 10% 63V	
			2317 4822 122 33466	82pF 2%		2460 4822 122 31784	4,7nF 10% 50V	
			2318 4822 122 32875	100pF 5% 50V		2460 4822 122 32442	10nF 50V	
			2319 4822 122 31825	27pF 10% 50V		2461 5322 122 31647	1nF 10% 63V	
			2320 4822 122 32444	33pF 5% 50V		2464 4822 122 33496	100nF 10% 63V	
			2320 4822 122 31839	82pF 10% 50V		2465 4822 124 40849	330µF 20% 16V	
			2321 4822 122 31797	22nF 10% 63V		2466 4822 124 41577	4,7µF 20% 50V	
			2322 4822 122 31797	22nF 10% 63V		2467 4822 122 33496	100nF 10% 63V	
			2323 4822 122 32542	47nF 10% 63V		2468 4822 124 40242	1µF 20% 63V	
			2325 4822 122 32542	47nF 10% 63V		2469 4822 124 41596	22µF 20% 50V	
			2326 4822 051 10008	0Ω 5% 0,25W		2470 4822 122 31772	47pF 5% 50V	
			2326 4822 122 33496	100nF 10% 63V		2471 5322 121 42661	330nF 5% 63V	
			2327 4822 122 32442	10nF 50V		2473 5322 121 42661	330nF 5% 63V	
			2328 4822 121 41856	22nF 5% 250V		2475 4822 122 31797	22nF 10% 63V	
			2328 4822 121 42408	220nF 5% 63V		2500 4822 122 31965	220pF 5% 63V	
			2329 4822 121 42408	220nF 5% 63V		2500 4822 122 31727	470pF 5% 63V	
			2329 4822 121 41856	22nF 5% 250V		2502 4822 124 41596	22µF 20% 50V	
			2330 4822 122 31765	100pF 5% 50V		2505 4822 122 32542	47nF 10% 63V	
			2331 4822 122 31765	100pF 5% 50V		2506 4822 124 41747	680µF 20%	
			2332 5322 122 31842	330pF 5% 63V		2506 4822 124 41334	470µF 20% 35V	

Carrier panel (continued)

								
2507	4822 122 31797	22nF 10% 63V	2675	4822 124 21215	680μF 20% 40V	3245	4822 051 10103	10k 2% 0,25W
2509	4822 124 41576	2,2μF 20% 50V	2676	5322 122 32331	1nF 10% 100V	3246	4822 050 23301	330Ω 1% 0,6W
2520	5322 124 41299	68μF 20% 25V	2701	4822 122 31765	100pF 5% 50V	3247	4822 116 52175	100Ω 5% 0,5W
2521	4822 122 32891	68nF 10% 63V	2702	4822 122 32442	10nF 50V	3248	4822 050 23301	330Ω 1% 0,6W
2522	5322 121 42661	330nF 5% 63V	2703	4822 121 51252	470nF 5% 63V	3249	4822 116 52193	39Ω 5% 0,5W
2524	4822 124 21208	4,7μF 20% 50V	2704	4822 122 32542	47nF 10% 63V	3249	4822 116 52175	100Ω 5% 0,5W
2524	4822 124 42167	4,7μF 20% 50V	2705	4822 122 31766	120pF 5% 50V	3250	4822 116 52204	1k 5% 0,5W
2526	4822 121 42472	10nF 10% 50V	2706	5322 124 41299	68μF 20% 25V	3251	4822 116 52204	1k 5% 0,5W
2526	4822 122 31759	18nF 10%	2707	4822 124 40242	1μF 20% 63V	3253	4822 116 52211	150Ω 5% 0,5W
2528	5322 121 42025	0,22μF 10% 250V	2708	4822 122 31766	120pF 5% 50V	3254	4822 116 52211	150Ω 5% 0,5W
2531	4822 121 43396	120nF 5% 63V	2709	4822 122 32083	8,2pF 5% 50V	3255	4822 116 52204	1k 5% 0,5W
2531	4822 121 42408	220nF 5% 63V	2710	4822 122 32083	8,2pF 5% 50V	3256	4822 116 52204	1k 5% 0,5W
2532	4822 124 40242	1μF 20% 63V	2711	4822 122 31825	27pF 10% 50V	3257	4822 051 10334	330k 2% 0,25W
2532	4822 124 41577	4,7μF 20% 50V	2712	4822 122 31825	27pF 10% 50V	3258	4822 051 10334	330k 2% 0,25W
2533	4822 124 40242	1μF 20% 63V	2713	4822 124 41525	100μF 20% 25V	3259	4822 051 10334	330k 2% 0,25W
2538	4822 121 51256	39nF 10% 50V	2714	4822 122 31766	120pF 5% 50V	3260	4822 051 10334	330k 2% 0,25W
2539	4822 124 41525	100μF 20% 25V	2715	4822 122 31766	120pF 5% 50V	3261	4822 116 80747	75Ω 5% 0,125W
2545	4822 126 10202	1,5nF 10% 2kV	2716	4822 122 33496	100nF 10% 63V	3262	4822 116 80747	75Ω 5% 0,125W
2545	4822 122 33707	1,2nF 10% 2kV	2717	4822 122 31644	2,2nF 10% 63V	3263	4822 051 10008	0Ω 5% 0,25W
2546	5322 121 42523	8,2nF 5% 2kV	2718	4822 122 33496	100nF 10% 63V	3263	4822 051 10562	5k6 2% 0,25W
2546	5322 121 41603	10nF 5% 2kV	2719	4822 124 40242	1μF 20% 63V	3264	4822 051 10008	0Ω 5% 0,25W
2546	4822 121 43065	7,5nF 5% 2kV	2719	5322 121 42386	100nF 5% 63V	3264	4822 051 10562	5k6 2% 0,25W
2547	4822 121 40488	22nF 10% 400V	2721	4822 122 32442	10nF 50V	3265	4822 050 21008	1Ω 1% 0,6W
2547	5322 121 44151	33nF 10% 400V	2722	4822 121 42007	100nF 10% 100V	3266	4822 050 21008	1Ω 1% 0,6W
2549	4822 121 42073	390 nF 10% 400V	2722	4822 122 32893	100nF 80% 50V	3300	4822 051 10562	5k6 2% 0,25W
2549	4822 121 42074	470 nF 10% 400V	2781	4822 122 33496	100nF 10% 63V	3301	4822 051 10272	2k7 2% 0,25W
2550	4822 121 51527	390nF 5% 250V	2800	4822 124 41506	47μF 20% 16V	3302	4822 051 20222	2k2 5% 0,1W
2550	4822 121 43148	470nF 10% 2000V	2805	4822 122 31772	47pF 5% 50V	3303	4822 051 10332	3k3 2% 0,25W
2551	4822 124 41831	1μF 20% 160V	2810	4822 122 31784	4,7nF 10% 50V	3303	4822 051 10122	1k2 2% 0,25W
2559	4822 124 41525	100μF 20% 25V	2875	4822 122 32893	100nF 80% 50V	3304	4822 051 10182	1k8 2% 0,25W
2560	4822 121 51408	33nF 10% 250V				3305	4822 051 10431	430Ω 2% 0,25W
2563	4822 122 10175	2,2nF 10% 50V				3306	4822 051 10103	10k 2% 0,25W
2570	4822 124 40764	22μF 100 V				3307	4822 051 10681	680Ω 2% 0,25W
2574	4822 122 10175	2,2nF 10% 50V				3308	4822 051 10331	330Ω 2% 0,25W
2580	4822 124 40214	1000μF 20% 25V				3309	4822 051 10331	330Ω 2% 0,25W
2585	4822 124 40435	10μF 20% 50V				3310	4822 116 52286	5k1 5% 0,5W
2588	4822 122 31644	2,2nF 10% 63V				3311	4822 051 10391	390Ω 2% 0,25W
2590	5322 121 42498	680nF 5% 63V				3312	4822 100 11677	470Ω 30% lin 0,2W
2590	5322 121 42498	680nF 5% 63V				3313	4822 051 10103	10k 2% 0,25W
2600	4822 124 41531	470nF 10%				3313	4822 051 10332	3k3 2% 0,25W
		250VAC				3314	4822 051 10103	10k 2% 0,25W
2605	4822 124 23492	220μF 50% 385V				3315	4822 051 10911	910Ω 2% 0,25W
2605	4822 124 42104	68μF 20% 385V				3316	4822 051 10105	1M 5% 0,25W
2607	4822 122 33922	1nF 20% 400V				3317	4822 051 20222	2k2 5% 0,1W
2611	5322 124 41299	68μF 20% 25V				3318	4822 051 10472	4k7 2% 0,25W
2617	4822 121 43047	1μF 10% 63V				3323	4822 116 52272	330k 5% 0,5W
2620	5322 121 42465	68nF 5% 63V				3325	4822 051 10271	270Ω 2% 0,25W
2625	4822 122 40593	1nF 10% 1kV				3326	4822 051 10271	270Ω 2% 0,25W
2626	4822 122 40594	470pF 10% 1kV				3327	4822 050 11202	1k2 1% 0,4W
2629	4822 122 31784	4,7nF 10% 50V				3328	4822 051 10473	47k 2% 0,25W
2630	4822 124 23418	47μF 200V				3330	4822 051 10109	10Ω 2% 0,25W
2630	4822 124 22349	100μF 160V				3331	4822 051 10109	10Ω 2% 0,25W
2631	4822 124 22349	100μF 160V				3332	4822 050 23901	390Ω 1% 0,6W
2631	4822 124 23418	47μF 200V				3334	4822 050 21809	18Ω 1% 0,6W
2632	4822 126 11382	1nF 10% 1kV				3335	4822 116 52184	18Ω 5% 0,5W
2636	4822 122 31644	2,2nF 10% 63V				3336	4822 052 10189	18Ω 5% 0,33W
2640	4822 124 40214	1000μF 20% 25V				3336	4822 052 10279	27Ω 5% 0,33W
2641	4822 124 40214	1000μF 20% 25V				3337	4822 052 10189	18Ω 5% 0,33W
2646	4822 124 42153	15μF 20% 50V				3337	4822 052 10279	27Ω 5% 0,33W
2649	4822 122 33496	100nF 10% 63V				3338	4822 116 52204	1k 5% 0,5W
2650	4822 122 33496	100nF 10% 63V				3339	4822 051 10152	1k5 2% 0,25W
2652	5322 122 32331	1nF 10% 100V				3340	4822 116 52204	1k 5% 0,5W
2653	5322 122 32331	1nF 10% 100V				3341	4822 051 10103	10k 2% 0,25W
2658	5322 122 32838	82nF 10% 63V				3342	4822 051 10102	1k 2% 0,25W
2660	4822 124 40201	1000μF 20% 16V				3343	4822 051 10104	100k 2% 0,25W
2661	4822 124 41506	47μF 20% 16V				3344	4822 051 10182	1k8 2% 0,25W
2662	4822 122 30107	270pF 2% 100V				3347	4822 116 52219	330Ω 5% 0,5W
2662	5322 122 32056	220pF 2% 100V				3348	4822 116 52219	330Ω 5% 0,5W
2663	5322 122 32344	82pF 2% 100V				3349	4822 116 52219	330Ω 5% 0,5W
2663	4822 122 31081	100pF 2% 100V				3350	4822 116 52204	1k 5% 0,5W
2664	4822 124 41576	2,2μF 20% 50V				3351	4822 116 52263	2k7 5% 0,5W
2670	4822 122 31766	120pF 5% 50V				3352	4822 116 52263	2k7 5% 0,5W
2671	4822 121 42408	220nF 5% 63V				3353	4822 116 52263	2k7 5% 0,5W
2675	5322 124 41468	1000μF 20% 40V						

Carrier panel (continued)



3354	4822 051 10221	220Ω 2% 0,25W
3357	4822 051 10102	1k 2% 0,25W
3358	4822 051 10331	330Ω 2% 0,25W
3359	4822 051 10331	330Ω 2% 0,25W
3360	4822 051 10102	1k 2% 0,25W
3361	4822 051 10102	1k 2% 0,25W
3362	4822 051 10472	4k7 2% 0,25W
3365	4822 116 52245	150k 5% 0,5W
3365	4822 116 52301	75k 5% 0,5W
3366	4822 051 20183	18k 5% 0,1W
3367	4822 116 52175	100Ω 5% 0,5W
3368	4822 116 52175	100Ω 5% 0,5W
3369	4822 116 52175	100Ω 5% 0,5W
3370	4822 051 10332	3k3 2% 0,25W
3371	4822 051 10332	3k3 2% 0,25W
3372	4822 051 10472	4k7 2% 0,25W
3373	4822 051 10102	1k 2% 0,25W
3374	4822 050 26803	68k 1% 0,6W
3375	4822 051 10331	330Ω 2% 0,25W
3376	4822 051 10331	330Ω 2% 0,25W
3380	4822 051 10101	100Ω 2% 0,25W
3381	4822 051 10101	100Ω 2% 0,25W
3394	4822 051 10104	100k 2% 0,25W
3395	4822 051 10683	68k 2% 0,25W
3450	4822 116 52238	12k 5% 0,5W
3451	4822 116 52175	100Ω 5% 0,5W
3452	4822 116 52175	100Ω 5% 0,5W
3455	4822 051 10102	1k 2% 0,25W
3456	4822 051 10682	6k8 2% 0,25W
3457	4822 100 11676	10k 30% lin 0,2W
3458	4822 051 10303	30k 2% 0,25W
3459	4822 051 10823	82k 2% 0,25W
3460	4822 051 10333	33k 2% 0,25W
3461	4822 100 11682	47k 30% lin 0,2W
3463	4822 051 20183	18k 5% 0,1W
3464	4822 051 10123	12k 2% 0,25W
3465	4822 051 10394	390k 2% 0,25W
3466	4822 051 10152	1k5 2% 0,25W
3467	4822 116 80692	2M2 5% 0,2W
3467	4822 050 21205	1M2 1% 0,6W
3468	4822 051 10682	6k8 2% 0,25W
3469	4822 051 10229	22Ω 2% 0,25W
3470	4822 116 52269	3k3 5% 0,5W
3471	4822 050 19109	91Ω 1% 0,4W
3473	4822 116 52265	270k 5% 0,5W
3474	4822 051 10392	3k9 2% 0,25W
3483	4822 051 10479	47Ω 2% 0,25W
3485	4822 051 20222	2k2 5% 0,1W
3501	4822 051 10759	75Ω 2% 0,25W
3501	4822 051 10101	100Ω 2% 0,25W
3502	4822 050 28201	820Ω 1% 0,6W
3503	4822 052 10108	1Ω 5% 0,33W
3504	4822 100 11684	100Ω 10% 0,1W
3505	4822 051 10471	470Ω 2% 0,25W
3506	4822 116 52245	150k 5% 0,5W
3507	4822 116 52233	10k 5% 0,5W
3507	4822 116 52238	12k 5% 0,5W
3508	4822 051 10228	22Ω 5% 0,25W
3509	4822 051 10228	22Ω 5% 0,25W
3510	4822 051 10228	22Ω 5% 0,25W
3511	4822 051 10228	22Ω 5% 0,25W
3512	4822 051 10109	10Ω 2% 0,25W
3513	4822 050 25601	560Ω 1% 0,6W
3514	4822 051 10392	3k9 2% 0,25W
3515	4822 051 10228	22Ω 5% 0,25W
3516	4822 100 11678	22k 30% lin 0,2W
3517	4822 051 10228	22Ω 5% 0,25W
3518	4822 051 10101	100Ω 2% 0,25W
3519	4822 051 10228	22Ω 5% 0,25W
3520	4822 116 52211	150Ω 5% 0,5W
3521	4822 100 11679	4,7k 30% lin 0,2W
3522	4822 051 10152	1k5 2% 0,25W
3523	4822 051 10228	22Ω 5% 0,25W



3524	4822 051 10683	68k 2% 0,25W
3525	4822 100 11678	22k 30% lin 0,2W
3525	4822 100 11676	10k 30% lin 0,2W
3526	4822 051 10823	82k 2% 0,25W
3526	4822 051 10104	100k 2% 0,25W
3527	4822 051 10125	1M2 5% 0,25W
3527	4822 051 10333	33k 2% 0,25W
3528	4822 051 20222	2k2 5% 0,1W
3528	4822 051 10681	680Ω 2% 0,25W
3529	4822 051 10228	22Ω 5% 0,25W
3530	4822 051 10102	1k 2% 0,25W
3530	4822 051 10008	0Ω 5% 0,25W
3531	4822 051 10104	100k 2% 0,25W
3531	4822 051 10008	0Ω 5% 0,25W
3532	4822 051 10103	10k 2% 0,25W
3532	4822 051 10153	15k 2% 0,25W
3533	4822 051 10822	8k2 2% 0,25W
3534	4822 052 10828	8Ω2 5% 0,33W
3535	4822 116 52231	820Ω 5% 0,5W
3535	4822 116 52243	1k5 5% 0,5W
3536	4822 051 10822	8k2 2% 0,25W
3538	4822 116 52251	18k 5% 0,5W
3539	4822 053 20684	680k 5% 0,25W
3539	4822 053 20434	430k 5% 0,25W
3540	4822 051 10399	39Ω 2% 0,25W
3542	4822 050 28201	820Ω 1% 0,6W
3543	4822 051 10101	100Ω 2% 0,25W
3545	4822 116 52256	2k2 5% 0,5W
3545	4822 111 70178	120Ω 5% 5W
3545	4822 116 82999	330Ω 5% 5W
3546	4822 050 15608	5Ω6 1% 0,4W
3549	4822 116 52251	18k 5% 0,5W
3550	4822 052 10153	15k 5% 0,33W
3550	4822 116 52251	18k 5% 0,5W
3551	4822 050 25601	560Ω 1% 0,6W
3552	4822 050 25601	560Ω 1% 0,6W
3553	4822 052 10561	560Ω 5% 0,33W
3560	4822 116 52254	20k 5% 0,5W
3560	4822 116 52247	16k 5% 0,5W
3560	4822 051 10333	33k 2% 0,25W
3570	4822 052 10688	6Ω8 5 0,33W
3582	4822 050 25601	560Ω 1% 0,6W
3585	4822 052 10159	15Ω 5% 0,33W
3588	4822 052 10561	560Ω 5% 0,33W
3589	4822 050 24701	470Ω 1% 0,6W
3590	4822 116 52234	100k 5% 0,5W
3591	4822 051 10474	470k 2% 0,25W
3592	4822 051 10681	680Ω 2% 0,25W
3603	4822 053 21915	9M1 5% 0,5W
3605	4822 052 10102	1k 5% 0,33W
3606	4822 052 10102	1k 5% 0,33W
3610	4822 052 10159	15Ω 5% 0,33W
3610	4822 052 10688	6Ω8 5 0,33W
3617	4822 116 52213	180Ω 5% 0,5W
3619	4822 116 52182	15Ω 5% 0,5W
3620	4822 053 12121	120Ω 5% 3W
3622	4822 053 11479	47Ω 5% 2W
3624	4822 116 52272	330k 5% 0,5W
3625	4822 116 52292	560k 5% 0,5W
3626	4822 053 12361	360Ω 5% 3W
3626	4822 113 80565	180Ω 5% 5W
3627	4822 053 12361	360Ω 5% 3W
3628	4822 051 10334	330k 2% 0,25W
3629	4822 051 10682	6k8 2% 0,25W
3631	4822 050 22204	220k 1% 0,6W
3631	4822 050 21204	120k 1% 0,6W
3634	4822 116 52269	3k3 5% 0,5W
3634	4822 116 52263	2k7 5% 0,5W
3635	4822 100 11681	1k 30% 0,1W
3636	4822 051 10224	220k 2% 0,25W
3637	4822 051 10101	100Ω 2% 0,25W
3647	4822 050 23603	36k 1% 0,6W
3647	4822 050 23303	33k 1% 0,6W



3648	4822 051 10273	27k 2% 0,25W
3649	4822 050 23309	33Ω 1% 0,6W
3658	4822 052 10688	6Ω8 5 0,33W
3659	4822 051 10181	180Ω 2% 0,25W
3660	4822 051 10101	100Ω 2% 0,25W
3661	4822 051 10361	360Ω 2% 0,25W
3662	4822 051 10221	220Ω 2% 0,25W
3663	4822 051 10472	4k7 2% 0,25W
3664	4822 051 10272	2k7 2% 0,25W
3665	4822 051 10103	10k 2% 0,25W
3666	4822 051 10102	1k 2% 0,25W
3667	4822 051 10361	360Ω 2% 0,25W
3668	4822 051 10102	1k 2% 0,25W
3669	4822 051 10102	1k 2% 0,25W
3670	4822 051 10303	30k 2% 0,25W
3671	4822 116 52204	1k 5% 0,5W
3672	4822 051 10103	10k 2% 0,25W
3673	4822 051 10472	4k7 2% 0,25W
3674	4822 051 10112	1k1 2% 0,25W
3675	4822 116 52239	120k 5% 0,5W
3676	4822 051 10103	10k 2% 0,25W
3701	4822 051 10273	27k 2% 0,25W
3702	4822 051 10153	15k 2% 0,25W
3704	4822 051 10103	10k 2% 0,25W
3705	4822 051 10102	1k 2% 0,25W
3706	4822 051 10472	4k7 2% 0,25W
3707	4822 051 10223	22k 2% 0,25W
3708	4822 051 10334	330k 2% 0,25W
3710	4822 051 10008	0Ω 5% 0,25W
3710	4822 051 10243	24k 2% 0,25W
3711	4822 116 52244	15k 5% 0,5W
3711	4822 116 80176	1Ω 5% 0,5W
3712	4822 051 10223	22k 2% 0,25W
3712	4822 051 10008	0Ω 5% 0,25W
3713	4822 051 10223	22k 2% 0,25W
3713	4822 051 10008	0Ω 5% 0,25W
3714	4822 051 10155	1M5 5% 0,25W
3716	4822 051 10103	10k 2% 0,25W
3717	4822 051 10103	10k 2% 0,25W
3718	4822 116 52215	220Ω 5% 0,5W
3719	4822 116 52215	220Ω 5% 0,5W
3720	4822 116 52215	220Ω 5% 0,5W
3721	4822 051 10103	10k 2% 0,25W
3722	4822 051 10103	10k 2% 0,25W
3723	4822 051 10103	10k 2% 0,25W
3724	4822 051 10103	10k 2% 0,25W
3725	4822 051 10103	10k 2% 0,25W
3726	4822 051 10103	10k 2% 0,25W
3727	4822 116 52175	100Ω 5% 0,5W
3728	4822 116 52175	100Ω 5% 0,5W
3729	4822 051 10911	910Ω 2% 0,25W
3730	4822 051 10221	220Ω 2% 0,25W
3731	4822 051 10103	10k 2% 0,25W
3732	4822 053 11103	10k 5% 2W
3732	4822 053 11332	3k3 5% 2W
3733	4822 116 52283	4k7 5% 0,5W
3733	4822 050 23902	3k9 1% 0,6W
3734	4822 116 52283	4k7 5% 0,5W
3734	4822 050 23902	3k9 1% 0,6W
3735	4822 051 10104	100k 2% 0,25W
3736	4822 116 52175	100Ω 5% 0,5W
3737	4822 116 52284	47k 5% 0,5W
3737	4822 116 52204	1k 5% 0,5W
3741	4822 051 10123	12k 2% 0,25W
3742	4822 051 10332	3k3 2% 0,25W
3743	4822 051 10472	4k7 2% 0,25W
3747	4822 051 10273	27k 2% 0,25W
3748	4822 051 10273	27k 2% 0,25W
3749	4822 051 10273	27k 2% 0,25W
3750	4822 051 10273	27k 2% 0,25W
3751	4822 051 10153	15k 2% 0,25W
3752	4822 051 10153	15k 2% 0,25W
3753	4822 051 10153	15k 2% 0,25W

Carrier panel (continued)

 3754 4822 051 10153 15k 2% 0,25W 3755 4822 051 10008 0Ω 5% 0,25W 3755 4822 051 10101 100Ω 2% 0,25W 3756 4822 051 10101 100Ω 2% 0,25W 3757 4822 051 20222 2k2 5% 0,1W 3758 4822 051 10392 3k9 2% 0,25W 3759 4822 116 52175 100Ω 5% 0,5W 3768 4822 116 52235 1M 5% 0,5W 3770 4822 051 10473 47k 2% 0,25W 3771 4822 116 52251 18k 5% 0,5W 3772 4822 051 10392 3k9 2% 0,25W 3774 4822 051 10103 10k 2% 0,25W 3775 4822 051 10101 100Ω 2% 0,25W 3776 4822 051 10562 5k6 2% 0,25W 3777 4822 116 52264 27k 5% 0,5W 3778 4822 051 10563 56k 2% 0,25W 3779 4822 116 52233 10k 5% 0,5W 3780 4822 051 10103 10k 2% 0,25W 3781 4822 051 10472 4k7 2% 0,25W 3850 4822 116 52189 30Ω 5% 0,5W 3851 4822 116 80747 75Ω 5% 0,125W 3852 4822 116 80747 75Ω 5% 0,125W 3853 4822 116 80747 75Ω 5% 0,125W 3854 4822 116 80747 75Ω 5% 0,125W 3855 4822 116 52201 75Ω 5% 0,5W 3856 4822 051 10101 100Ω 2% 0,25W 3857 4822 051 10331 330Ω 2% 0,25W 3858 4822 051 10331 330Ω 2% 0,25W 3859 4822 051 10331 330Ω 2% 0,25W 3860 4822 116 80176 1Ω 5% 0,5W 3861 4822 051 10562 5k6 2% 0,25W 3866 4822 051 10103 10k 2% 0,25W 3867 4822 116 80747 75Ω 5% 0,125W 3868 4822 116 80747 75Ω 5% 0,125W 3869 4822 116 52175 100Ω 5% 0,5W 3871 4822 116 52175 100Ω 5% 0,5W 3874 4822 050 21008 1Ω 1% 0,6W 3875 4822 051 10102 1k 2% 0,25W 3880 4822 116 52204 1k 5% 0,5W 3881 4822 116 52224 470Ω 5% 0,5W 3882 4822 116 52224 470Ω 5% 0,5W 3883 4822 051 10104 100k 2% 0,25W 3884 4822 050 21004 100k 1% 0,6W 3885 4822 051 10223 22k 2% 0,25W 3886 4822 051 10472 4k7 2% 0,25W 3887 4822 116 52289 5k6 5% 0,5W 3888 4822 116 52207 1k2 5% 0,5W 3890 4822 051 10103 10k 2% 0,25W 4221 4822 051 10008 0Ω 5% 0,25W 4222 4822 051 10008 0Ω 5% 0,25W 4223 4822 051 10008 0Ω 5% 0,25W 4224 4822 051 10008 0Ω 5% 0,25W 4233 4822 051 10008 0Ω 5% 0,25W 4237 4822 051 10008 0Ω 5% 0,25W 4239 4822 051 10008 0Ω 5% 0,25W 4300 4822 051 10008 0Ω 5% 0,25W 4301 4822 051 10008 0Ω 5% 0,25W 4302 4822 051 10008 0Ω 5% 0,25W 4303 4822 051 10008 0Ω 5% 0,25W 4304 4822 051 10008 0Ω 5% 0,25W 4305 4822 051 10008 0Ω 5% 0,25W 4306 4822 051 10008 0Ω 5% 0,25W 4307 4822 051 10008 0Ω 5% 0,25W 4308 4822 051 10008 0Ω 5% 0,25W 4310 4822 051 10008 0Ω 5% 0,25W 4312 4822 051 10008 0Ω 5% 0,25W 4314 4822 051 10008 0Ω 5% 0,25W 4315 4822 051 10008 0Ω 5% 0,25W 4316 4822 051 10008 0Ω 5% 0,25W 4317 4822 051 10008 0Ω 5% 0,25W 4318 4822 051 10008 0Ω 5% 0,25W 4319 4822 051 10152 1k5 2% 0,25W 4320 4822 051 10008 0Ω 5% 0,25W	 4321 4822 051 10008 0Ω 5% 0,25W 4322 4822 051 10008 0Ω 5% 0,25W 4323 4822 051 10008 0Ω 5% 0,25W 4324 4822 051 10008 0Ω 5% 0,25W 4325 4822 051 10008 0Ω 5% 0,25W 4326 4822 051 10008 0Ω 5% 0,25W 4329 4822 051 10008 0Ω 5% 0,25W 4450 4822 051 10008 0Ω 5% 0,25W 4451 4822 051 10008 0Ω 5% 0,25W 4452 4822 051 10008 0Ω 5% 0,25W 4500 4822 051 10008 0Ω 5% 0,25W 4501 4822 051 10008 0Ω 5% 0,25W 4502 4822 051 10008 0Ω 5% 0,25W 4503 4822 051 10008 0Ω 5% 0,25W 4504 4822 051 10008 0Ω 5% 0,25W 4505 4822 051 10008 0Ω 5% 0,25W 4506 4822 051 10008 0Ω 5% 0,25W 4507 4822 051 10008 0Ω 5% 0,25W 4602 4822 051 10008 0Ω 5% 0,25W 4603 4822 051 10008 0Ω 5% 0,25W 4604 4822 051 10008 0Ω 5% 0,25W 4605 4822 051 10008 0Ω 5% 0,25W 4700 4822 051 10008 0Ω 5% 0,25W 4701 4822 051 10008 0Ω 5% 0,25W 4704 4822 051 10008 0Ω 5% 0,25W 4706 4822 051 10008 0Ω 5% 0,25W 4707 4822 051 10008 0Ω 5% 0,25W 4708 4822 051 10008 0Ω 5% 0,25W 4709 4822 051 10008 0Ω 5% 0,25W 4710 4822 051 10008 0Ω 5% 0,25W 4711 4822 051 10008 0Ω 5% 0,25W 4712 4822 051 10008 0Ω 5% 0,25W 4713 4822 051 10008 0Ω 5% 0,25W 4714 4822 051 10008 0Ω 5% 0,25W 4715 4822 051 10008 0Ω 5% 0,25W 4716 4822 051 10008 0Ω 5% 0,25W 4718 4822 051 10008 0Ω 5% 0,25W 4720 4822 051 10008 0Ω 5% 0,25W 4721 4822 051 10008 0Ω 5% 0,25W 4723 4822 051 10008 0Ω 5% 0,25W 4850 4822 051 10008 0Ω 5% 0,25W 4851 4822 051 10008 0Ω 5% 0,25W 4852 4822 051 10008 0Ω 5% 0,25W 4853 4822 051 10008 0Ω 5% 0,25W 4854 4822 051 10008 0Ω 5% 0,25W 4855 4822 051 10008 0Ω 5% 0,25W 4856 4822 051 10008 0Ω 5% 0,25W 4857 4822 051 10008 0Ω 5% 0,25W 4858 4822 051 10008 0Ω 5% 0,25W 4859 4822 051 10008 0Ω 5% 0,25W 4862 4822 051 10008 0Ω 5% 0,25W 4863 4822 051 10008 0Ω 5% 0,25W 4865 4822 051 10008 0Ω 5% 0,25W 4866 4822 051 10008 0Ω 5% 0,25W 4867 4822 051 10008 0Ω 5% 0,25W	 5549 4822 157 53069 coil balance 5554 4822 157 63079 AT4042/97 25"/28" 5554 4822 157 63161 AT4042/90G 21" 5582 5322 157 52539 15μH 5588 4822 157 52505 33μH 10% 5605 4822 157 53995 100μH 10% 5606 4822 157 53995 100μH 10% 5619 4822 156 21125 3,9μH 10% 25"/28" 5619 4822 157 51235 4μH 7 10% 21" 5621 4822 157 60412 150μH 10% 25"/28" 5621 4822 157 53903 180μH 10% 21" 5625 4822 148 81159 S.O.P.S. trafo 21" 5625 4822 148 81168 S.O.P.S. trafo 25"/28" 5630 4822 157 60387 1μH 5631 4822 158 10551 27μH 5632 4822 158 10551 27μH 5661 4822 152 20678 33μH 10% 5701 4822 157 52843 56μH 5% 5703 4822 157 52279 33μH 10% 5801 4822 157 53001 27μH 10%
	 5240 4822 158 10551 27μH 5242 4822 158 10551 27μH 5301 4822 157 63075 7,95μH 8% 5303 4822 157 53906 47μH 5303 5322 157 51687 39μH 10% 5304 4822 157 63074 7,6μH 5306 4822 320 40081 470 NSEC 5530 4822 152 20559 390μH 10% 5534 4822 158 10728 coil 25"/28" 5534 4822 157 62771 coil 21" 5541 4822 157 63078 line driver 5545 4822 140 10417 L.O.T. 25"/28" non BL.L. 5545 4822 140 10414 L.O.T. 25"/28" BL.L. 5545 4822 140 10418 L.O.T. 21"	 6245 4822 130 30621 1N4148 6246 4822 130 81139 LLZ-C3V3 6247 4822 130 81139 LLZ-C3V3 6248 4822 130 80446 LL4148 6249 4822 130 80446 LL4148 6300 4822 130 80446 LL4148 6302 4822 130 34382 BZX79-C8V2 6303 4822 130 34382 BZX79-C8V2 6310 4822 130 80954 LLZ-C5V6 6315 4822 130 80446 LL4148 6316 4822 130 30621 1N4148 6317 4822 130 30621 1N4148 6318 4822 130 80446 LL4148 6367 4822 130 80884 LLZ-C5V1 6464 4822 130 81015 LLZ-C10 6465 4822 130 61219 BZX79-F10 6465 4822 130 80239 BZX79-F8V2 6465 4822 130 34281 BZX79-F15 6503 4822 130 42489 BYD33G 6504 4822 130 80446 LL4148 6518 4822 130 80446 LL4148 6519 4822 130 80446 LL4148 6546 4822 130 41275 BY228/20 6547 4822 130 41602 BYW95C/20 6548 4822 130 30621 1N4148 6549 4822 130 42488 BYD33D 6551 4822 130 42489 BYD33G 6560 4822 130 80446 LL4148 6561 4822 130 34383 BZX79-C47 6563 4822 130 80915 BYD74C 6570 4822 130 42488 BYD33D 6571 4822 130 42488 BYD33D 6580 4822 130 82512 BYV29F-400 6580 4822 130 32961 BYV28-200 6585 4822 130 42488 BYD33D 6590 4822 130 81141 LLZ-C43 6591 4822 130 30621 1N4148 6592 4822 130 80928 BZX79-C30 6610 4822 130 80446 LL4148 6611 4822 130 34268 LLZ-F16 6612 4822 130 30621 1N4148 6617 4822 130 31456 BZV85-C5V1 6621 4822 130 42488 BYD33D 6622 4822 130 30621 1N4148 6630 4822 130 33531 BY229F-600 6630 4822 130 81175 BYD74G 6640 4822 130 80914 BYD74B 6641 4822 130 80914 BYD74B 6646 4822 130 42488 BYD33D

Carrier panel (continued)

Mains module

 6648 4822 130 34488 BZX79-F12 6648 4822 130 61219 BZX79-F10 6649 4822 130 30621 1N4148 6660 4822 130 30621 1N4148 6661 4822 130 42488 BYD33D 6662 4822 130 80905 LLZ-F5V1 6663 4822 130 34281 BZX79-F15 6664 4822 130 61219 BZX79-F10 6664 4822 130 30862 BZX79-F9V1 6665 4822 130 80883 LLZ-C4V7 6666 4822 130 80887 LLZ-C36 6666 4822 130 81141 LLZ-C43 6669 4822 130 80446 LL4148 6670 4822 130 20245 SF0Q5D43 6675 4822 130 80914 BYD74B 6675 4822 130 42488 BYD33D 6705 4822 130 80905 LLZ-F5V1 6707 4822 209 72895 TLUV5320 6708 4822 130 81145 LLZ-F2V4 6709 4822 130 82037 HZT33	 7672 4822 130 61207 BC848 7701 5322 130 42012 BC858A 7702 4822 130 61207 BC848 7703 4822 130 61207 BC848 7704 4822 130 61207 BC848 7705 4822 130 61207 BC848 7706 4822 130 61207 BC848 7707 4822 130 61207 BC848 7708 4822 209 63872 TMP47C1237N-U105 GR2VSL1 7708 4822 209 63947 TMP47C1237N-U107 GR2VSL2 7708 4822 209 63861 TMP47C1637N-U208 GR2FSL2 7708 4822 209 63875 TMP47C1637N-U211 GR2FSL1 7709 4822 130 61207 BC848 7710 4822 209 62098 ST24C02CP 7711 4822 130 61207 BC848 7712 4822 130 61207 BC848 7805 4822 130 61207 BC848 7810 4822 130 61207 BC848	4822 212 23664 mains mod. 10 4822 265 30389 2P MALE 32 4822 265 30389 2P MALE 33 4822 265 30877 3P MALE  2601 4822 121 40487 100n 400V  3601 4822 116 40211 PTC/NTC 3607 4822 050 23901 390Ω  5600 4822 157 63073 filter
 7000 5322 130 42012 BC858A 7001 5322 130 42012 BC858A 7002 5322 130 42012 BC858A 7003 4822 130 42133 BC817 7240 4822 209 73253 TDA2613/N1 7240 4822 209 73853 TDA1521/N4 7243 5322 130 42012 BC858 7244 4822 130 42513 BC858C 7245 5322 130 42136 BC848C 7246 5322 130 42136 BC848C 7247 5322 130 42136 BC848C 7248 4822 130 61207 BC848 7249 4822 130 61207 BC848 7301 4822 130 61207 BC848 7302 5322 130 42012 BC858 7303 4822 130 61207 BC848 7305 4822 209 70019 TDA4510/V2/S8 7306 4822 209 63109 TDA4650/V3 7307 4822 209 63108 TDA4660/V2 7308 4822 209 71512 TDA4565/V6 7309 4822 209 63733 TDA4680/V5 7310 4822 130 61207 BC848 7311 5322 209 10576 4053B 7312 5322 209 10576 4053B 7341 4822 130 61207 BC848 7370 4822 130 61207 BC848 7371 4822 130 61207 BC848 7372 4822 130 61207 BC848 7373 4822 130 61207 BC848 7374 4822 130 61207 BC848 7455 5322 130 42012 BC858 7470 4822 209 63297 TDA2579B/N1 7500 4822 130 41344 BC337-40 7502 4822 130 60775 2SD1266P 7503 4822 130 61236 BD234 7504 4822 130 61207 BC848 7505 5322 130 42012 BC858 7530 4822 130 61207 BC848 7533 4822 130 60111 2SA1359 7534 4822 130 44283 BC636 7540 4822 130 41344 BC337-40 7545 4822 130 61265 BU508AF 7546 4822 130 62677 BUT11AF/1 7591 5322 130 42012 BC858 7600 4822 209 63735 TDA8385/N2 7614 4822 209 63732 CNR50 7625 4822 130 43919 BUT12AF 7661 5322 130 44921 BD943 7663 4822 130 42513 BC858C 7671 4822 130 61207 BC848		 6602 4822 130 31933 1N5061 6603 4822 130 31933 1N5061 6604 4822 130 31933 1N5061 6605 4822 130 31933 1N5061

CRT modules

4822 212 23675 CRT MOD. 25"/28" BL.L. 4822 212 23676 CRT MOD. 25"/28" NON BL.L. 4822 212 23678 CRT MOD. 21"			3345 4822 051 10681 680Ω 2% 0,25W 3361 4822 116 52208 130Ω 5% 0,5W 3361 4822 051 10131 130Ω 2% 0,25W 3362 4822 051 10152 1k5 2% 0,25W 3362 4822 051 10162 1k6 2% 0,25W 3362 4822 051 10362 3k6 2% 0,25W 3363 4822 051 10272 2k7 2% 0,25W 3364 4822 116 52239 120k 5% 0,5W 3365 4822 116 52283 4k7 5% 0,5W 3366 4822 116 52283 4k7 5% 0,5W 3367 4822 116 52283 4k7 5% 0,5W 3368 4822 051 10479 47Ω 2% 0,25W 3369 4822 051 10479 47Ω 2% 0,25W 3369 4822 051 10118 1Ω1 5% 0,25W 3370 4822 116 52219 330Ω 5% 0,5W 3371 4822 053 12103 10k 5% 3W 3371 4822 053 12153 15k 5% 3W 3372 4822 052 10271 270Ω 5% 0,33W 3373 4822 052 10271 270Ω 5% 0,33W 3374 4822 050 21502 1k5 1% 0,6W 3391 4822 051 10104 100k 2% 0,25W 3392 4822 051 10104 100k 2% 0,25W 3393 4822 116 52234 100k 5% 0,5W 3393 4822 050 28203 82k 1% 0,6W 3394 4822 051 10333 33k 2% 0,25W 3394 4822 116 52267 30k 5% 0,5W 3395 4822 051 10683 68k 2% 0,25W 3396 4822 051 10124 120k 2% 0,25W 3397 4822 051 10124 120k 2% 0,25W 3411 4822 051 10182 1k8 2% 0,25W 3411 4822 116 52243 1k5 5% 0,5W 3412 4822 116 52224 470Ω 5% 0,5W 3413 4822 116 52218 300Ω 5% 0,5W 3413 4822 051 10221 220Ω 2% 0,25W 3414 4822 051 10519 51Ω 2% 0,25W 3414 4822 051 10479 47Ω 2% 0,25W 3415 4822 116 52218 300Ω 5% 0,5W 3415 4822 051 10221 220Ω 2% 0,25W 3421 4822 051 10104 100k 2% 0,25W 3422 4822 051 10682 6k8 2% 0,25W 3422 4822 050 26802 6k8 1% 0,6W 3423 4822 051 10474 470k 2% 0,25W 3423 4822 116 52285 470k 5% 0,5W 3431 4822 052 10181 180Ω 5% 0,33W 3432 4822 052 10399 39Ω 5% 0,33W 3433 4822 052 10108 1Ω 5% 0,33W 3434 4822 050 21502 1k5 1% 0,6W 3435 4822 050 21502 1k5 1% 0,6W 3436 4822 050 21805 1M8 1% 0,6W 4000 4822 051 10008 0Ω 5% 0,25W 4001 4822 051 10008 0Ω 5% 0,25W 4002 4822 051 10008 0Ω 5% 0,25W 4003 4822 051 10008 0Ω 5% 0,25W 4005 4822 051 10008 0Ω 5% 0,25W 4006 4822 051 10008 0Ω 5% 0,25W 4007 4822 051 10008 0Ω 5% 0,25W 4008 4822 051 10008 0Ω 5% 0,25W 4009 4822 051 10008 0Ω 5% 0,25W 4010 4822 051 10008 0Ω 5% 0,25W 4011 4822 051 10008 0Ω 5% 0,25W 4012 4822 051 10008 0Ω 5% 0,25W			7301 4822 130 41773 BF869 7301 4822 130 41782 BF422 7303 4822 130 61207 BC848 7304 4822 130 41782 BF422 7304 4822 130 41782 BF422 7305 4822 130 41646 BF423 7332 4822 130 41773 BF869 7332 4822 130 41782 BF422 7333 4822 130 61207 BC848 7334 4822 130 41782 BF422 7335 4822 130 41646 BF423 7345 5322 130 42012 BC858A 7362 4822 130 41773 BF869 7362 4822 130 41782 BF422 7363 4822 130 61207 BC848 7364 4822 130 41782 BF422 7365 4822 130 41646 BF423 7391 4822 130 41646 BF423 7411 4822 130 40938 BC548 7421 5322 130 41983 BC858B		
19 4822 265 30378 4P MALE 20 4822 290 40295 7P MALE 21 4822 255 70261 CRT SOCKET 25"/28" 21 4822 255 70251 CRT SOCKET 21"								
2301 4822 122 31961 68pF 5% 63V 2301 4822 122 31825 27pF 10% 50V 2301 4822 122 32482 22pF 5% 63V 2331 4822 122 31774 56pF 5% 50V 2331 4822 122 31825 27pF 10% 50V 2331 4822 122 32482 22pF 5% 63V 2361 4822 122 31774 56pF 5% 50V 2361 4822 122 32482 22pF 5% 63V 2361 4822 122 31825 27pF 10% 50V 2391 4822 121 43878 27pF 2% 500V 2392 4822 124 40246 4,7μF 20% 63V 2392 4822 124 41577 4,7μF 20% 50V 2411 4822 124 40849 330μF 20% 16V 2412 4822 122 33496 100nF 10% 63V 2421 4822 122 31772 47pF 5% 50V 2431 4822 121 41689 100nF 10% 250V 2432 4822 124 41506 47μF 20% 16V 2433 5322 121 50885 33nF 5% 1kV 2434 5322 122 32334 220pF 10% 100V			3371 4822 053 12103 10k 5% 3W 3371 4822 053 12153 15k 5% 3W 3372 4822 052 10271 270Ω 5% 0,33W 3373 4822 052 10271 270Ω 5% 0,33W 3374 4822 050 21502 1k5 1% 0,6W 3391 4822 051 10104 100k 2% 0,25W 3392 4822 051 10104 100k 2% 0,25W 3393 4822 116 52234 100k 5% 0,5W 3393 4822 050 28203 82k 1% 0,6W 3394 4822 051 10333 33k 2% 0,25W 3394 4822 116 52267 30k 5% 0,5W 3395 4822 051 10683 68k 2% 0,25W 3396 4822 051 10124 120k 2% 0,25W 3397 4822 051 10124 120k 2% 0,25W 3411 4822 051 10182 1k8 2% 0,25W 3411 4822 116 52243 1k5 5% 0,5W 3412 4822 116 52224 470Ω 5% 0,5W 3413 4822 116 52218 300Ω 5% 0,5W 3413 4822 051 10221 220Ω 2% 0,25W 3414 4822 051 10519 51Ω 2% 0,25W 3414 4822 051 10479 47Ω 2% 0,25W 3415 4822 116 52218 300Ω 5% 0,5W 3415 4822 051 10221 220Ω 2% 0,25W 3421 4822 051 10104 100k 2% 0,25W 3422 4822 051 10682 6k8 2% 0,25W 3422 4822 050 26802 6k8 1% 0,6W 3423 4822 051 10474 470k 2% 0,25W 3423 4822 116 52285 470k 5% 0,5W 3431 4822 052 10181 180Ω 5% 0,33W 3432 4822 052 10399 39Ω 5% 0,33W 3433 4822 052 10108 1Ω 5% 0,33W 3434 4822 050 21502 1k5 1% 0,6W 3435 4822 050 21502 1k5 1% 0,6W 3436 4822 050 21805 1M8 1% 0,6W 4000 4822 051 10008 0Ω 5% 0,25W 4001 4822 051 10008 0Ω 5% 0,25W 4002 4822 051 10008 0Ω 5% 0,25W 4003 4822 051 10008 0Ω 5% 0,25W 4005 4822 051 10008 0Ω 5% 0,25W 4006 4822 051 10008 0Ω 5% 0,25W 4007 4822 051 10008 0Ω 5% 0,25W 4008 4822 051 10008 0Ω 5% 0,25W 4009 4822 051 10008 0Ω 5% 0,25W 4010 4822 051 10008 0Ω 5% 0,25W 4011 4822 051 10008 0Ω 5% 0,25W 4012 4822 051 10008 0Ω 5% 0,25W			5401 4822 156 20915 33μH 5401 4822 158 10563 82μH 7,5%		
3301 4822 051 10131 130Ω 2% 0,25W 3302 4822 051 10152 1k5 2% 0,25W 3302 4822 051 10162 1k6 2% 0,25W 3302 4822 051 10362 3k6 2% 0,25W 3303 4822 051 10272 2k7 2% 0,25W 3304 4822 116 52239 120k 5% 0,5W 3305 4822 116 52283 4k7 5% 0,5W 3306 4822 116 52283 4k7 5% 0,5W 3307 4822 116 52283 4k7 5% 0,5W 3308 4822 051 10479 47Ω 2% 0,25W 3308 4822 051 10118 1Ω1 5% 0,25W 3310 4822 116 52219 330Ω 5% 0,5W 3311 4822 053 12123 12k 5% 3W 3311 4822 053 12153 15k 5% 3W 3312 4822 052 10271 270Ω 5% 0,33W 3313 4822 052 10271 270Ω 5% 0,33W 3314 4822 050 21502 1k5 1% 0,6W 3315 4822 051 10124 120k 2% 0,25W 3316 4822 051 10124 120k 2% 0,25W 3331 4822 051 10131 130Ω 2% 0,25W 3332 4822 051 10152 1k5 2% 0,25W 3332 4822 051 10162 1k6 2% 0,25W 3332 4822 051 10362 3k6 2% 0,25W 3333 4822 051 10272 2k7 2% 0,25W 3334 4822 116 52239 120k 5% 0,5W 3335 4822 116 52283 4k7 5% 0,5W 3336 4822 116 52283 4k7 5% 0,5W 3337 4822 116 52283 4k7 5% 0,5W 3339 4822 051 10479 47Ω 2% 0,25W 3339 4822 051 10118 1Ω1 5% 0,25W 3340 4822 116 52219 330Ω 5% 0,5W 3341 4822 053 12153 15k 5% 3W 3342 4822 052 10271 270Ω 5% 0,33W 3343 4822 052 10271 270Ω 5% 0,33W 3344 4822 050 21502 1k5 1% 0,6W			6301 4822 130 80877 BAV103 6331 4822 130 80877 BAV103 6345 4822 130 81015 BZV55-F10 6361 4822 130 80877 BAV103 6411 4822 130 80879 BZV55-C3V0 6421 4822 130 80446 LL4148					

Euro module

Mono IF/sound module

1006 4822 212 23666 EURO MODULE	 3834 4822 051 10279 27Ω 2% 0,25W 3835 4822 051 10221 220Ω 2% 0,25W 3836 4822 051 10102 1k 2% 0,25W 3837 4822 052 10278 2Ω 5% 0,33W 3838 4822 116 80747 75Ω 5% 0,125W 4851 4822 051 10008 0Ω 5% 0,25W 4852 4822 051 10008 0Ω 5% 0,25W 4854 4822 051 10008 0Ω 5% 0,25W 4855 4822 051 10008 0Ω 5% 0,25W 4856 4822 051 10008 0Ω 5% 0,25W 4858 4822 051 10008 0Ω 5% 0,25W	4822 212 23688 IF MOD. MULTI 4822 212 23689 IF MOD. PAL/SECAM BG 4822 212 23694 IF MOD. PAL I
 23 4822 265 40442 10P MALE 26 4822 265 40442 10P MALE 30 4822 265 41086 9P MALE 32 4822 267 40666 3P MALE 48 4822 267 60247 EURO CONNECTOR		various 1010 4822 242 72212 OFWG3950 1010 4822 242 72374 OFWG1961 1010 4822 242 70936 OFWJ1952 1042 4822 242 72211 TPS 5,5MHz 1043 4822 153 30025 6MHz 1102 4822 242 70714 SFT5,5MA 1103 4822 242 71841 SFT6,0MA
 2800 4822 121 51252 470nF 5% 63V 2801 4822 121 51252 470nF 5% 63V 2802 4822 121 51252 470nF 5% 63V 2803 4822 121 51252 470nF 5% 63V 2804 4822 122 33496 100nF 10% 63V 2805 4822 122 33496 100nF 10% 63V 2806 4822 122 33496 100nF 10% 63V 2807 4822 124 41506 47μF 20% 16V 2810 4822 122 32142 270pF 5% 63V 2811 4822 122 32142 270pF 5% 63V 2812 4822 122 33496 100nF 10% 63V 2813 4822 122 32542 47nF 10% 63V 2814 4822 122 31759 18nF 2815 4822 122 33496 100nF 10% 63V 2816 4822 122 33496 100nF 10% 63V 2817 4822 122 33496 100nF 10% 63V 2818 4822 122 33496 100nF 10% 63V 2819 4822 124 41525 100μF 20% 25V 2820 5322 121 42386 100nF 5% 63V 2821 4822 124 40433 47μF 20% 25V 2822 4822 124 40435 10μF 20% 50V 2823 4822 122 33496 100nF 10% 63V 2831 4822 124 40272 33μF 20% 16V 2833 4822 122 33496 100nF 10% 63V 2834 4822 122 33496 100nF 10% 63V	 5800 4822 157 51462 10μH	
 3800 4822 116 52189 30Ω 5% 0,5W 3801 4822 116 80747 75Ω 5% 0,125W 3802 4822 116 52211 150Ω 5% 0,5W 3803 4822 116 52211 150Ω 5% 0,5W 3804 4822 116 52204 1k 5% 0,5W 3805 4822 116 52204 1k 5% 0,5W 3806 4822 051 10334 330k 2% 0,25W 3807 4822 051 10334 330k 2% 0,25W 3808 4822 051 10334 330k 2% 0,25W 3809 4822 051 10334 330k 2% 0,25W 3810 4822 051 10622 6k2 2% 0,25W 3811 4822 051 10182 1k8 2% 0,25W 3812 4822 051 10331 330Ω 2% 0,25W 3813 4822 116 52201 75Ω 5% 0,5W 3814 4822 051 10152 1k5 2% 0,25W 3815 4822 051 10472 4k7 2% 0,25W 3816 4822 116 52296 6k8 5% 0,5W 3819 4822 051 10331 330Ω 2% 0,25W 3820 4822 051 10331 330Ω 2% 0,25W 3821 4822 051 10331 330Ω 2% 0,25W 3822 4822 051 10331 330Ω 2% 0,25W 3823 4822 051 10561 560Ω 2% 0,25W 3824 4822 051 10151 150Ω 2% 0,25W 3825 4822 051 10223 22k 2% 0,25W 3826 4822 051 10102 1k 2% 0,25W 3827 4822 051 10339 33Ω 2% 0,25W 3828 4822 051 10562 5k6 2% 0,25W 3829 4822 051 10821 820Ω 2% 0,25W 3830 4822 051 10683 68k 2% 0,25W 3831 4822 051 10123 12k 2% 0,25W 3833 4822 051 10279 27Ω 2% 0,25W	 6800 4822 130 80954 LLZ-C5V6 6801 4822 130 80446 LL4148 6802 4822 130 80446 LL4148 6803 4822 130 30621 1N4148	 2011 4822 124 40435 10μF 20% 50V 2012 4822 124 41577 4,7μF 20% 50V 2013 4822 122 31784 4,7nF 10% 50V 2014 4822 122 31784 4,7nF 10% 50V 2014 4822 122 31797 22nF 10% 63V 2015 5322 121 42498 680nF 5% 63V 2016 4822 122 31784 4,7nF 10% 50V 2017 4822 122 33496 100nF 10% 63V 2018 4822 121 51252 470nF 5% 63V 2019 4822 122 31784 4,7nF 10% 50V 2020 4822 122 33205 12pF 10% 63V 2021 4822 122 33205 12pF 10% 63V 2022 4822 122 33472 22pF 2% 2025 4822 122 31784 4,7nF 10% 50V 2035 4822 122 32507 6,8pF 5% 50V 2036 4822 122 31766 120pF 5% 50V 2037 4822 122 31766 120pF 5% 50V 2038 4822 122 31784 4,7nF 10% 50V 2039 4822 122 32504 15pF 5% 50V 2040 4822 122 31784 4,7nF 10% 50V 2041 4822 122 31784 4,7nF 10% 50V 2042 4822 122 33205 12pF 10% 63V 2044 4822 122 31797 22nF 10% 63V 2047 4822 122 33496 100nF 10% 63V 2048 4822 124 41506 47μF 10% 16V 2049 4822 122 33496 100nF 10% 63V 2050 4822 124 40849 330μF 20% 16V 2055 4822 122 31972 39pF 5% 50V 2056 4822 124 40435 10μF 20% 50V 2057 4822 122 31981 33nF ±0,5pF 50V 2058 4822 122 31797 22nF 10% 63V 2059 4822 124 41566 3,3μF 20% 50V 2060 4822 122 31797 22nF 10% 63V 2100 4822 122 33205 12pF 10% 63V 2101 4822 122 33473 27pF 2% 2102 4822 122 32507 6,8pF 5% 50V 2104 4822 122 33474 47pF 2% 2105 4822 122 33465 39pF 2% 2106 4822 122 31792 1,5pF 10% 50V 2107 4822 122 33465 39pF 2% 2108 4822 122 31784 4,7nF 10% 50V 2109 4822 122 33473 27pF 2% 2110 5322 126 10514 0,47pF 5% 63V 2111 4822 122 31784 4,7nF 10% 50V 2113 4822 124 41596 22μF 20% 50V 2114 4822 122 31784 4,7nF 10% 50V 2115 4822 124 41577 4,7μF 20% 50V 2116 4822 124 40435 10μF 20% 50V 2117 4822 124 41576 2,2μF 20% 50V 2118 4822 124 40432 1500μF 20% 25V 2124 4822 122 32442 10nF 50V 2125 4822 124 40195 150μF 20% 16V 2126 4822 121 43898 8,2nF 10% 50V 2127 5322 121 42661 330nF 5% 63V 2129 5322 121 42661 330nF 5% 63V 2130 5322 121 42661 330nF 5% 63V 2132 4822 122 31797 22nF 10% 63V

Mono IF/sound module (continued)

 2133 4822 122 31797 22nF 10% 63V 2134 4822 124 41596 22µF 20% 50V 2135 4822 121 42408 220nF 5% 63V 2136 5322 121 42661 330nF 5% 63V 2137 4822 126 11381 820pF 2% 2137 4822 122 31746 1000pF 5% 50V 2141 4822 124 41577 4,7µF 20% 50V 2143 4822 122 31797 22nF 10% 63V 2150 4822 121 42408 220nF 5% 63V 2151 4822 124 40195 150µF 20% 16V	 3109 4822 051 10223 22k 2% 0,25W 3112 4822 051 10472 4k7 2% 0,25W 3114 4822 051 10472 4k7 2% 0,25W 3114 4822 051 10182 1k8 2% 0,25W 3116 4822 116 52263 2k7 5% 0,5W 3117 4822 051 10104 100k 2% 0,25W 3118 4822 051 10472 4k7 2% 0,25W 3118 4822 051 20222 2k2 5% 0,1W 3119 4822 051 10472 4k7 2% 0,25W 3120 4822 051 10472 4k7 2% 0,25W 3121 4822 051 10104 100k 2% 0,25W 3124 4822 051 10103 10k 2% 0,25W 3125 4822 051 10103 10k 2% 0,25W 3126 4822 051 10153 15k 2% 0,25W 3127 4822 051 10153 15k 2% 0,25W 3129 4822 051 10822 8k2 2% 0,25W 3130 4822 051 10682 6k8 2% 0,25W 3131 4822 051 10102 1k 2% 0,25W 3132 4822 051 10392 3k9 2% 0,25W 3140 4822 051 10153 15k 2% 0,25W 3141 4822 051 10392 3k9 2% 0,25W 3142 4822 051 10273 27k 2% 0,25W 3143 4822 051 10182 1k8 2% 0,25W 3144 4822 051 10182 1k8 2% 0,25W 4010 4822 051 10008 0Ω 5% 0,25W 4011 4822 051 10008 0Ω 5% 0,25W 4012 4822 051 10008 0Ω 5% 0,25W 4013 4822 051 10008 0Ω 5% 0,25W 4014 4822 051 10008 0Ω 5% 0,25W 4015 4822 051 10008 0Ω 5% 0,25W 4016 4822 051 10008 0Ω 5% 0,25W 4018 4822 051 10008 0Ω 5% 0,25W 4019 4822 051 10008 0Ω 5% 0,25W 4020 4822 051 10008 0Ω 5% 0,25W 4021 4822 051 10008 0Ω 5% 0,25W 4100 4822 051 10008 0Ω 5% 0,25W	 7000 4822 209 72812 TDA2549/C4 7030 5322 130 42012 BC858 7031 4822 130 61207 BC848 7035 4822 130 44121 BC338 7040 5322 130 42012 BC858A 7041 4822 130 61207 BC848 7100 4822 209 63105 TDA3843/V2 7101 4822 209 63217 TDA3827/V2 7102 4822 130 61207 BC848 7103 5322 130 42136 BC848C 7104 5322 130 41982 BC848B
 3012 4822 051 10562 5k6 2% 0,25W 3013 4822 051 10273 27k 2% 0,25W 3014 4822 051 10823 82k 2% 0,25W 3015 4822 051 10104 100k 2% 0,25W 3015 4822 051 10473 47k 2% 0,25W 3016 4822 100 11163 100k 30% LIN 0,1W 3017 4822 051 10823 82k 2% 0,25W 3019 4822 051 10473 47k 2% 0,25W 3020 4822 051 10223 22k 2% 0,25W 3020 4822 051 10273 27k 2% 0,25W 3021 4822 051 10273 27k 2% 0,25W 3021 4822 051 20183 18k 5% 0,1W 3022 4822 051 10151 150Ω 2% 0,25W 3022 4822 051 10008 0Ω 5% 0,25W 3024 4822 051 20222 2k2 5% 0,1W 3025 4822 051 10562 5k6 2% 0,25W 3030 4822 051 10223 22k 2% 0,25W 3031 4822 051 10474 470k 2% 0,25W 3036 4822 051 10472 4k7 2% 0,25W 3037 4822 051 10392 3k9 2% 0,25W 3038 4822 051 10472 4k7 2% 0,25W 3039 4822 051 10392 3k9 2% 0,25W 3040 4822 051 10472 4k7 2% 0,25W 3041 4822 051 10221 220Ω 2% 0,25W 3042 4822 051 10101 100Ω 2% 0,25W 3042 4822 051 10221 220Ω 2% 0,25W 3043 4822 116 52175 100Ω 5% 0,5W 3044 4822 051 10102 1k 2% 0,25W 3044 4822 051 10271 270Ω 2% 0,25W 3046 4822 051 10681 680Ω 2% 0,25W 3047 4822 051 10822 8k2 2% 0,25W 3048 4822 100 11683 2k 30% LIN 0,2W 3049 4822 051 20183 18k 5% 0,1W 3050 4822 051 10272 2k7 2% 0,25W 3051 4822 051 10563 56k 2% 0,25W 3052 4822 051 10471 470Ω 2% 0,25W 3052 4822 051 10561 560Ω 2% 0,25W 3055 4822 051 10103 10k 2% 0,25W 3056 4822 051 10471 470Ω 2% 0,25W 3058 4822 051 10682 6k8 2% 0,25W 3060 4822 051 10471 470Ω 2% 0,25W 3061 4822 051 10124 120k 2% 0,25W 3062 4822 051 10563 56k 2% 0,25W 3063 4822 051 10272 2k7 2% 0,25W 3064 4822 051 10563 56k 2% 0,25W 3065 4822 051 10223 22k 2% 0,25W 3066 4822 051 10824 820k 2% 0,25W 3067 4822 051 10331 330Ω 2% 0,25W 3068 4822 051 10152 1k5 2% 0,25W 3080 4822 051 10102 1k 2% 0,25W 3080 4822 051 20222 2k2 5% 0,1W 3080 4822 051 10332 3k3 2% 0,25W 3100 4822 051 10104 100k 2% 0,25W 3101 4822 051 10562 5k6 2% 0,25W 3102 4822 051 20222 2k2 5% 0,1W 3103 4822 051 10104 100k 2% 0,25W 3104 4822 051 10479 47Ω 2% 0,25W 3105 4822 053 11271 270Ω 5% 2W 3107 4822 051 10151 150Ω 2% 0,25W 3108 4822 051 10333 33k 2% 0,25W	 5005 4822 157 53539 0,27µH 5% 5010 4822 157 63081 0,56µH 20% 5035 4822 157 53534 0,34µH 5% 5036 4822 157 53609 0,36µH 5% 5037 4822 157 53537 1,35µH 5% 5038 4822 157 63076 1,2µH 5% 5039 4822 157 52983 22µH 5041 4822 157 52983 22µH 5041 4822 157 53001 27µH 10% 5042 4822 157 53634 5,6µH 10% 5042 4822 152 20677 10µH 5100 4822 157 53538 0,75µH 5% 5101 4822 157 53535 0,36µH 5% 5102 4822 157 53536 0,34µH 5% 5105 4822 157 52511 0,83µH	
 6005 4822 130 80888 BA682 6037 4822 130 80888 BA682 6038 4822 130 80888 BA682 6039 4822 130 30621 1N4148 6040 4822 130 80446 BAS32L 6041 4822 130 80446 BAS32L 6042 4822 130 80446 BAS32L 6043 4822 130 80446 BAS32L 6101 4822 130 80888 BA682 6102 4822 130 80888 BA682 6103 4822 130 80888 BA682 6104 4822 130 80888 BA682 6108 4822 130 80888 BA682 6112 4822 130 80884 LLZ-C5V1		

Stereo IF/sound module

								
4822 212 23663 IF MOD. MULTI			2130 4822 124 40195 150μF 20% 16V			3105 4822 053 11121 120Ω 5% 2W		
4822 212 23687 IF MOD. NON MULTI			2133 4822 122 31797 22nF 10% 63V			3106 4822 051 10561 560Ω 2% 0,25W		
			2200 4822 121 51252 470nF 5% 63V			3107 4822 051 10102 1k 2% 0,25W		
			2201 4822 121 51252 470nF 5% 63V			3108 4822 051 10561 560Ω 2% 0,25W		
			2202 4822 121 51252 470nF 5% 63V			3109 4822 051 10562 5k6 2% 0,25W		
			2203 4822 122 31916 5,6nF 10% 63V			3110 4822 051 10562 5k6 2% 0,25W		
			2204 4822 121 42408 220nF 5% 63V			3112 4822 051 10562 5k6 2% 0,25W		
			2204 4822 121 42408 220nF 5% 63V			3113 4822 051 10562 5k6 2% 0,25W		
			2205 4822 122 32893 100nF 80% 50V			3115 4822 051 10331 330Ω 2% 0,25W		
			2206 4822 121 51252 470nF 5% 63V			3117 4822 051 10561 560Ω 2% 0,25W		
			2207 4822 121 51252 470nF 5% 63V			3117 4822 051 10681 680Ω 2% 0,25W		
			2208 4822 124 41509 33μF 20% 35V			3119 4822 051 10562 5k6 2% 0,25W		
			2209 4822 124 41509 33μF 20% 35V			3120 4822 051 10562 5k6 2% 0,25W		
			2210 4822 122 32893 100nF 80% 50V			3121 4822 051 10562 5k6 2% 0,25W		
			2211 4822 124 40198 470μF 20% 16V			3122 4822 051 10122 1k2 2% 0,25W		
			2212 4822 124 40435 10μF 20% 50V			3123 4822 051 10561 560Ω 2% 0,25W		
			2213 4822 122 31782 15000pF 10% 50V			3124 4822 051 20222 2k2 5% 0,1W		
			2214 4822 122 31782 15000pF 10% 50V			3125 4822 051 10102 1k 2% 0,25W		
			2215 4822 122 31981 33nF ±0,5pF 50V			3126 4822 051 10102 1k 2% 0,25W		
			2216 4822 122 31916 5,6nF 10% 63V			3127 4822 051 10152 1k5 2% 0,25W		
			2217 4822 122 31981 33nF ±0,5pF 50V			3128 4822 051 10182 1k8 2% 0,25W		
			2218 4822 122 31916 5,6nF 10% 63V			3200 4822 051 10331 330Ω 2% 0,25W		
			2219 4822 124 41577 4,7μF 20% 50V			3201 4822 051 10331 330Ω 2% 0,25W		
			2220 4822 124 41577 4,7μF 20% 50V			3202 4822 051 10563 56k 2% 0,25W		
			2221 4822 124 41577 4,7μF 20% 50V			3203 4822 051 10563 56k 2% 0,25W		
			2222 4822 124 41643 100μF 20% 16V			3204 4822 100 11676 10k 30% LIN 0,2W		
						3205 4822 052 10229 22Ω 5% 0,33W		
			3012 4822 051 10562 5k6 2% 0,25W			3206 4822 051 10478 4Ω7 5% 0,25W		
			3013 4822 051 10273 27k 2% 0,25W			3207 4822 051 10273 27k 2% 0,25W		
			3014 4822 051 10823 82k 2% 0,25W			3208 4822 051 10272 2k7 2% 0,25W		
			3015 4822 116 52234 100k 5% 0,5W			3209 4822 051 10333 33k 2% 0,25W		
			3016 4822 100 11163 100k 30% LIN 0,1W			3210 4822 116 52204 1k 5% 0,5W		
			3017 4822 051 10823 82k 2% 0,25W			3211 4822 051 10101 100Ω 2% 0,25W		
			3019 4822 051 10473 47k 2% 0,25W			3213 4822 116 52233 10k 5% 0,5W		
			3020 4822 051 10273 27k 2% 0,25W			3214 4822 051 10102 1k 2% 0,25W		
			3021 4822 051 20183 18k 5% 0,1W			4010 4822 051 10008 0Ω 5% 0,25W		
			3030 4822 051 10223 22k 2% 0,25W			4011 4822 051 10008 0Ω 5% 0,25W		
			3031 4822 051 10474 470k 2% 0,25W			4012 4822 051 10008 0Ω 5% 0,25W		
			3036 4822 051 10472 4k7 2% 0,25W			4014 4822 051 10008 0Ω 5% 0,25W		
			3037 4822 051 10392 3k9 2% 0,25W			4015 4822 051 10008 0Ω 5% 0,25W		
			3038 4822 051 10472 4k7 2% 0,25W			4018 4822 051 10008 0Ω 5% 0,25W		
			3039 4822 051 10472 4k7 2% 0,25W			4019 4822 051 10008 0Ω 5% 0,25W		
			3040 4822 051 10472 4k7 2% 0,25W			4020 4822 051 10008 0Ω 5% 0,25W		
			3041 4822 051 10221 220Ω 2% 0,25W			4021 4822 051 10008 0Ω 5% 0,25W		
			3042 4822 051 10151 150Ω 2% 0,25W			4040 4822 051 10008 0Ω 5% 0,25W		
			3042 4822 116 90536 120Ω 1% 0,125W			4041 4822 051 10008 0Ω 5% 0,25W		
			3043 4822 116 52175 100Ω 5% 0,5W			4042 4822 051 10008 0Ω 5% 0,25W		
			3044 4822 051 10102 1k 2% 0,25W			4100 4822 051 10008 0Ω 5% 0,25W		
			3044 4822 051 10271 270Ω 2% 0,25W			4101 4822 051 10008 0Ω 5% 0,25W		
			3046 4822 116 52228 680Ω 5% 0,5W			4102 4822 051 10008 0Ω 5% 0,25W		
			3047 4822 051 10822 8k2 2% 0,25W			4103 4822 051 10008 0Ω 5% 0,25W		
			3048 4822 100 11683 2k 30% LIN 0,2W			4104 4822 051 10008 0Ω 5% 0,25W		
			3049 4822 051 20183 18k 5% 0,1W			4105 4822 051 10008 0Ω 5% 0,25W		
			3050 4822 051 10272 2k7 2% 0,25W			4107 4822 051 10008 0Ω 5% 0,25W		
			3051 4822 051 10563 56k 2% 0,25W			4108 4822 051 10008 0Ω 5% 0,25W		
			3052 4822 051 10102 1k 2% 0,25W			4201 4822 051 10008 0Ω 5% 0,25W		
			3055 4822 051 10103 10k 2% 0,25W			4204 4822 051 10008 0Ω 5% 0,25W		
			3056 4822 051 10471 470Ω 2% 0,25W			4205 4822 051 10008 0Ω 5% 0,25W		
			3060 4822 051 10471 470Ω 2% 0,25W					
			3061 4822 051 10124 120k 2% 0,25W					
			3062 4822 051 10563 56k 2% 0,25W			5010 4822 157 63081 0,56μH 20%		
			3063 4822 051 10272 2k7 2% 0,25W			5010 4822 157 53302 1μH 20%		
			3064 4822 051 10224 220k 2% 0,25W			5035 4822 157 53534 0,34μH 5%		
			3065 4822 051 10472 4k7 2% 0,25W			5036 4822 157 53609 0,36μH 5%		
			3065 4822 051 10124 120k 2% 0,25W			5037 4822 157 53537 1,35μH 5%		
			3066 4822 051 10824 820k 2% 0,25W			5038 4822 157 63076 1,2μH 5%		
			3070 4822 051 10822 8k2 2% 0,25W			5039 4822 152 20678 33μH 10%		
			3100 4822 051 10104 100k 2% 0,25W			5042 4822 157 62767 8,2μH 10%		
			3101 4822 051 10562 5k6 2% 0,25W			5042 4822 157 53634 5,6μH 10%		
			3102 4822 051 20222 2k2 5% 0,1W			5100 4822 157 53538 0,75μH 5%		
			3103 4822 051 10104 100k 2% 0,25W			5101 4822 157 53535 0,36μH 5%		
						5102 4822 157 53536 0,34μH 5%		

 5103 4822 157 52511 0,83μH 5104 4822 157 63077 0,25μH 5% 5105 4822 157 52511 0,83μH	4822 212 23692 IF MOD. PAL BG 4822 212 23691 IF MOD. PAL I	 2147 4822 122 32504 15pF 5% 50V 2148 4822 122 33496 100nF 10% 63V 2150 4822 122 32893 100nF 80% 50V 2151 4822 122 31772 47pF 5% 50V 2153 4822 122 32862 10nF 80% 50V
 6037 4822 130 80888 BA682 6038 4822 130 80888 BA682 6039 4822 130 30621 1N4148 6040 4822 130 80446 BAS32L 6041 4822 130 80446 BAS32L 6042 4822 130 80446 BAS32L 6043 4822 130 80446 BAS32L 6101 4822 130 80888 BA682 6102 4822 130 80888 BA682 6103 4822 130 80888 BA682 6104 4822 130 80888 BA682 6106 4822 130 80888 BA682 6107 4822 130 80888 BA682 6108 4822 130 80888 BA682 6109 4822 130 80446 LL4148	various 1010 4822 242 72554 OFWG3254 1010 4822 242 72553 OFWJ3251 1042 4822 242 72211 TPS 5,5MHz 1042 4822 153 30025 6MHz 1100 4822 242 70485 SET5,74MA 1105 4822 242 70714 SFT5,5MA 1105 4822 242 71713 SFE6,0MBF 1116 4822 242 72301 TH316BQM-2080QDAF 1116 4822 242 72303 TH316BQM-2110QDAF 1125 4822 242 72302 5,850 MHz 1125 4822 242 72347 6,552 MHz 1141 4822 242 72304 5,824 MHz 1191 4822 253 10064 FUSE 0,4A 1200 4822 242 80208 10 MHz	2154 4822 122 31972 39pF 5% 50V 2155 4822 125 50045 20pF 2162 4822 122 32893 100nF 80% 50V 2168 4822 122 33496 100nF 10% 63V 2169 4822 124 41506 47μF 20% 16V 2170 4822 122 31759 18nF 2170 4822 122 32597 6,8nF 10% 63V 2171 4822 122 33608 39nF 10% 63V 2171 4822 122 31782 15000pF 10% 50V 2173 4822 122 31773 560pF 5% 50V 2174 4822 122 33498 2,7nF 10% 63V 2175 4822 122 32999 2,2N 5% NPO 2176 4822 121 51252 470nF 5% 63V 2177 4822 122 32863 22nF 80% 50V 2180 4822 122 31759 18nF
 7000 4822 209 72812 TDA2549/C4 7030 5322 130 42012 BC858 7031 4822 130 61207 BC848 7035 4822 130 44121 BC338 7040 5322 130 42012 BC858A 7100 4822 209 63059 TDA3856/V3 7101 4822 209 63784 TDA3857/V3 7102 4822 130 61207 BC848 7103 5322 130 42012 BC858 7104 4822 130 61207 BC848 7200 4822 209 63294 TDA8417/V1 7220 4822 209 63734 TDA8425/V7 7232 5322 130 41982 BC848B	 2011 4822 124 41506 47μF 20% 16V 2012 4822 124 41577 4,7μF 20% 50V 2013 4822 122 31797 22nF 10% 63V 2014 4822 122 31797 22nF 10% 63V 2015 5322 121 42498 680nF 5% 63V 2016 4822 122 31784 4,7nF 10% 50V 2017 4822 122 33496 100nF 10% 63V 2042 4822 122 33205 12pF 10% 63V 2044 4822 122 31797 22nF 10% 63V 2047 4822 122 33496 100nF 10% 63V 2049 4822 122 33496 100nF 10% 63V 2050 4822 124 40849 330μF 20% 16V 2100 4822 124 40242 1μF 20% 63V 2101 4822 122 31746 1000pF 5% 50V 2102 4822 122 31746 1000pF 5% 50V 2102 4822 122 32765 820pF 10% 63V 2104 4822 122 31784 4,7nF 10% 50V 2106 4822 124 41576 2,2μF 20% 50V 2107 4822 124 41576 2,2μF 20% 50V 2108 4822 122 32862 10nF 80% 50V 2109 4822 124 41509 33μF 20% 35V 2110 4822 122 32893 100nF 80% 50V 2116 5322 122 31647 1nF 10% 63V 2119 4822 124 40198 470μF 20% 16V 2120 4822 124 41407 0,47μF 20% 63V 2121 4822 124 41407 0,47μF 20% 63V 2122 4822 122 32862 10nF 80% 50V 2123 4822 122 31774 56pF 5% 50V 2124 4822 125 50045 20pF 2125 4822 122 33205 12pF 10% 63V 2126 4822 122 31769 18pF 5% 50V 2127 4822 124 41407 0,47μF 20% 63V 2128 4822 122 32862 10nF 80% 50V 2129 4822 122 31965 220pF 5% 63V 2130 4822 122 31965 220pF 5% 63V 2131 4822 122 32862 10nF 80% 50V 2132 4822 122 32862 10nF 80% 50V 2133 4822 122 32893 100nF 80% 50V 2134 4822 122 32893 100nF 80% 50V 2135 4822 122 32893 100nF 80% 50V 2136 4822 122 32893 100nF 80% 50V 2137 4822 122 32862 10nF 80% 50V 2138 4822 122 32862 10nF 80% 50V 2139 4822 124 41407 0,47μF 20% 63V 2140 4822 122 31774 56pF 5% 50V 2141 4822 122 31769 18pF 5% 50V 2142 4822 122 32444 33pF 5% 50V 2143 4822 122 32504 15pF 5% 50V 2144 4822 122 32862 10nF 80% 50V 2145 4822 124 41506 47μF 20% 16V 2146 4822 122 32504 15pF 5% 50V	2180 4822 122 32597 6,8nF 10% 63V 2181 4822 122 33608 39nF 10% 63V 2181 4822 122 31782 15000pF 10% 50V 2183 4822 122 31773 560pF 5% 50V 2184 4822 122 33498 2,7nF 10% 63V 2185 4822 122 32999 2,2N 5% NPO 2186 4822 121 51252 470nF 5% 63V 2187 4822 122 32863 22nF 80% 50V 2188 4822 124 41506 47μF 20% 16V 2189 4822 122 32863 22nF 80% 50V 2190 4822 122 32893 100nF 80% 50V 2191 4822 124 41643 100μF 20% 16V 2192 4822 122 32893 100nF 80% 50V 2193 4822 124 40849 330μF 20% 16V 2194 4822 122 32893 100nF 80% 50V 2195 4822 124 41506 47μF 20% 16V 2196 4822 122 32862 10nF 80% 50V 2197 4822 124 41506 47μF 20% 16V 2198 4822 121 51252 470nF 5% 63V 2200 4822 121 51252 470nF 5% 63V 2201 4822 121 51252 470nF 5% 63V 2202 4822 122 31766 120pF 5% 50V 2203 4822 124 41509 33μF 20% 35V 2204 4822 124 41509 33μF 20% 35V 2205 4822 122 32893 100nF 80% 50V 2207 4822 121 51252 470nF 5% 63V 2209 4822 121 51252 470nF 5% 63V 2210 4822 124 41577 4,7μF 20% 50V 2211 4822 121 42408 220nF 5% 63V 2212 4822 122 31916 5,6nF 10% 63V 2213 4822 124 40195 150μF 20% 16V 2214 4822 122 32893 100nF 80% 50V 2215 4822 124 41506 47μF 20% 16V 2216 4822 122 31981 33nF ±0,5pF 50V 2217 4822 124 41577 4,7μF 20% 50V 2218 4822 124 41643 100μF 20% 16V 2219 4822 124 41577 4,7μF 20% 50V 2220 4822 122 31916 5,6nF 10% 63V 2223 4822 122 31916 5,6nF 10% 63V 2224 4822 122 31981 33nF ±0,5pF 50V 2225 4822 122 31782 15000pF 10% 50V 2226 4822 122 31782 15000pF 10% 50V
		 3012 4822 051 10562 5k6 2% 0,25W 3013 4822 051 10273 27k 2% 0,25W 3014 4822 051 10823 82k 2% 0,25W 3015 4822 051 10104 100k 2% 0,25W 3016 4822 100 11163 100k 30% LIN 0,1W 3019 4822 051 10473 47k 2% 0,25W 3020 4822 051 10273 27k 2% 0,25W 3021 4822 051 20183 18k 5% 0,1W

NICAM IF/sound module (continued)

-II-

3030	4822 051 10223	22k 2% 0,25W
3035	4822 051 10472	4k7 2% 0,25W
3041	4822 051 10221	220Ω 2% 0,25W
3042	4822 116 90536	120Ω 1% 0,125W
3042	4822 051 10101	100Ω 2% 0,25W
3043	4822 050 21001	100Ω 1% 0,6W
3044	4822 051 10102	1k 2% 0,25W
3052	4822 051 10102	1k 2% 0,25W
3055	4822 051 10103	10k 2% 0,25W
3056	4822 051 10471	470Ω 2% 0,25W
3065	4822 051 10472	4k7 2% 0,25W
3070	4822 051 10822	8k2 2% 0,25W
3100	4822 051 10561	560Ω 2% 0,25W
3101	4822 051 10331	330Ω 2% 0,25W
3102	4822 051 10681	680Ω 2% 0,25W
3105	4822 051 10561	560Ω 2% 0,25W
3106	4822 051 10561	560Ω 2% 0,25W
3107	4822 051 10122	1k2 2% 0,25W
3108	4822 051 20222	2k2 5% 0,1W
3109	4822 053 11121	120Ω 5% 2W
3110	4822 051 10102	1k 2% 0,25W
3116	4822 051 10471	470Ω 2% 0,25W
3120	4822 051 10154	150k 2% 0,25W
3121	4822 051 10224	220k 2% 0,25W
3122	4822 051 10471	470Ω 2% 0,25W
3123	4822 051 10511	510Ω 2% 0,25W
3125	4822 051 10102	1k 2% 0,25W
3126	4822 051 10393	39k 2% 0,25W
3139	4822 051 10393	39k 2% 0,25W
3140	4822 051 10471	470Ω 2% 0,25W
3141	4822 051 10102	1k 2% 0,25W
3143	4822 051 10331	330Ω 2% 0,25W
3144	4822 052 10278	2Ω 5% 0,33W
3150	4822 051 10102	1k 2% 0,25W
3151	4822 051 10103	10k 2% 0,25W
3160	4822 051 10331	330Ω 2% 0,25W
3161	4822 051 10331	330Ω 2% 0,25W
3162	4822 051 10331	330Ω 2% 0,25W
3168	4822 052 10278	2Ω 5% 0,33W
3170	4822 051 10562	5k6 2% 0,25W
3170	4822 051 10153	15k 2% 0,25W
3171	4822 051 10102	1k 2% 0,25W
3171	4822 051 10272	2k7 2% 0,25W
3172	4822 051 10472	4k7 2% 0,25W
3173	4822 051 10472	4k7 2% 0,25W
3177	4822 051 10822	8k2 2% 0,25W
3177	4822 051 10472	4k7 2% 0,25W
3180	4822 051 10562	5k6 2% 0,25W
3180	4822 051 10153	15k 2% 0,25W
3181	4822 051 10102	1k 2% 0,25W
3181	4822 051 10272	2k7 2% 0,25W
3182	4822 051 10472	4k7 2% 0,25W
3183	4822 051 10472	4k7 2% 0,25W
3188	4822 052 10109	10Ω 5% 0,33W
3190	4822 051 10471	470Ω 2% 0,25W
3191	4822 052 10399	39Ω 5% 0,33W
3192	4822 052 10478	4Ω 5% 0,33W
3195	4822 052 10109	10Ω 5% 0,33W
3197	4822 051 10331	330Ω 2% 0,25W
3200	4822 100 11676	10k 30% LIN 0,2W
3201	4822 051 10822	8k2 2% 0,25W
3202	4822 051 10512	5k1 2% 0,25W
3203	4822 051 10563	56k 2% 0,25W
3204	4822 051 10563	56k 2% 0,25W
3205	4822 052 10229	22Ω 5% 0,33W
3206	4822 051 10331	330Ω 2% 0,25W
3208	4822 051 10331	330Ω 2% 0,25W
3209	4822 051 10103	10k 2% 0,25W
3210	4822 051 10102	1k 2% 0,25W
3213	4822 051 10478	4Ω 5% 0,25W
3214	4822 051 10273	27k 2% 0,25W
3215	4822 051 10272	2k7 2% 0,25W
3216	4822 051 10333	33k 2% 0,25W

-II-

3217	4822 051 10102	1k 2% 0,25W
3218	4822 051 10101	100Ω 2% 0,25W
4000	4822 051 10393	39k 2% 0,25W
4000	4822 051 10392	3k9 2% 0,25W
4199	4822 051 10008	0Ω 5% 0,25W

~

5010	4822 157 53302	1μH
5035	4822 157 53534	0,34μH 5%
5036	4822 157 53609	0,36μH 5%
5042	4822 157 53634	5,6μH 10%
5101	4822 157 52511	0,83μH
5102	4822 157 52511	0,83μH
5103	4822 157 63077	0,25μH 5%
5129	4822 157 51238	0,820μH
5130	4822 157 51238	0,820μH
5153	4822 157 53575	3,3μH

→

6151	5322 130 34953	BB405B
6190	4822 130 80446	LL4148
6191	4822 130 80954	LLZ-C5V6
6197	4822 130 81027	LLZ-C11



7000	4822 209 72812	TDA2549/C4
7035	4822 130 44121	BC338
7100	4822 209 63784	TDA3857/V3
7106	4822 130 61207	BC848
7108	5322 130 42012	BC858
7120	4822 209 73558	TA8662N
7150	4822 209 61114	CF70123
7160	5322 209 10883	PCF8574P
7168	4822 209 73236	TDA1543/N2
7170	4822 209 83163	LM833N
7180	4822 209 83163	LM833N
7190	5322 130 41983	BC858B
7191	4822 130 44121	BC338
7195	4822 130 61207	BC848
7200	4822 209 61026	TDA8415/V1
7213	4822 209 63734	TDA8425/V7
7217	5322 130 41982	BC848B

Teletext module

4822 212 23697	TXT MOD. EUROPE
4822 212 23698	TXT MOD. SCAN



21	4822 267 40469	6P MALE GOLD
22	4822 265 40471	8P MALE GOLD

various

1801	4822 242 73552	14,875 MHz
1802	4822 242 71508	6 MHz

-II-

2792	4822 122 33496	100nF 10% 63V
2793	4822 122 32542	47nF 10% 63V
2794	4822 122 31769	18pF 5% 50V
2795	4822 122 31769	18pF 5% 50V
2796	4822 122 31769	18pF 5% 50V
2797	4822 122 31769	18pF 5% 50V
2799	4822 122 31965	220pF 5% 63V
2800	4822 124 40178	100μF 20% 10V
2801	4822 122 32442	10nF 50V
2804	4822 122 31766	120pF 5% 50V
2805	4822 122 31766	120pF 5% 50V
2810	4822 122 33496	100nF 10% 63V
2811	4822 122 33496	100nF 10% 63V
2812	4822 122 33496	100nF 10% 63V
2813	4822 122 32442	10nF 50V
2814	4822 122 31773	560pF 5% 50V
2815	4822 122 33496	100nF 10% 63V
2816	4822 122 31825	27pF 10% 50V
2817	4822 122 32504	15pF 5% 50V
2818	5322 122 31647	1nF 10% 63V
2819	4822 122 31727	470pF 5% 63V
2820	4822 122 31797	22nF 10% 63V
2821	4822 122 32142	270pF 5% 63V
2822	4822 122 31765	100pF 5% 50V
2823	4822 122 31727	470pF 5% 63V
2824	4822 122 32891	68nF 10% 63V
2825	4822 124 41525	100μF 20% 25V
2826	4822 122 32504	15pF 5% 50V
2827	4822 122 32542	47nF 10% 63V
2828	4822 122 32542	47nF 10% 63V
2829	4822 124 41506	47μF 20% 16V
2830	4822 122 32542	47nF 10% 63V
2832	4822 124 41576	2,2μF 20% 50V
2833	4822 124 41576	2,2μF 20% 50V
2834	4822 124 40178	100μF 20% 10V
2836	4822 122 31766	120pF 5% 50V
2845	4822 124 40178	100μF 20% 10V
2846	4822 124 41554	220μF 20% 10V
2849	4822 124 21212	15μF 20% 35V
3795	4822 051 10392	3k9 2% 0,25W
3796	4822 051 10121	120Ω 2% 0,25W
3797	4822 116 52176	10Ω 5% 0,5W
3798	4822 051 10121	120Ω 2% 0,25W
3800	4822 051 10103	10k 2% 0,25W
3802	4822 051 10101	100Ω 2% 0,25W
3803	4822 051 10101	100Ω 2% 0,25W
3804	4822 051 10101	100Ω 2% 0,25W
3805	4822 051 10122	1k2 2% 0,25W
3807	4822 051 10562	5k6 2% 0,25W
3808	4822 051 10103	10k 2% 0,25W
3809	4822 051 10272	2k7 2% 0,25W
3810	4822 051 10333	33k 2% 0,25W
3811	4822 051 10223	22k 2% 0,25W
3812	4822 051 10332	3k3 2% 0,25W
3813	4822 051 10271	270Ω 2% 0,25W
3814	4822 116 52204	1k 5% 0,5W
3815	4822 051 10152	1k5 2% 0,25W

Teletext module (continued)

PIP module

3816 4822 051 10683 68k 2% 0,25W
 3817 4822 051 10122 1k2 2% 0,25W
 3818 4822 051 10122 1k2 2% 0,25W
 3819 4822 051 10122 1k2 2% 0,25W
 3820 4822 051 10122 1k2 2% 0,25W
 3821 4822 051 10122 1k2 2% 0,25W
 3822 4822 051 10122 1k2 2% 0,25W
 3823 4822 051 10122 1k2 2% 0,25W
 3824 4822 051 10332 3k3 2% 0,25W
 3825 4822 051 10332 3k3 2% 0,25W
 3826 4822 052 10159 15Ω 5% 0,33W
 3827 4822 051 10332 3k3 2% 0,25W
 3828 4822 051 10122 1k2 2% 0,25W
 3829 4822 116 52211 150Ω 5% 0,5W
 3830 4822 050 28209 82Ω 1% 0,6W
 3831 4822 051 10681 680Ω 2% 0,25W
 3832 4822 051 10102 1k 2% 0,25W
 3833 4822 051 10102 1k 2% 0,25W
 3834 4822 051 10681 680Ω 2% 0,25W
 3835 4822 051 10561 560Ω 2% 0,25W
 3836 4822 051 10473 47k 2% 0,25W
 3837 4822 051 10102 1k 2% 0,25W
 3838 4822 051 10273 27k 2% 0,25W
 3839 4822 051 10122 1k2 2% 0,25W
 3840 4822 051 10122 1k2 2% 0,25W
 3841 4822 051 10122 1k2 2% 0,25W
 3842 4822 051 10122 1k2 2% 0,25W
 3843 4822 051 10122 1k2 2% 0,25W
 3845 4822 052 10689 68Ω 5% 0,33W
 3846 4822 052 10689 68Ω 5% 0,33W
 3847 4822 051 10829 82Ω 2% 0,25W
 3848 4822 051 10181 180Ω 2% 0,25W
 3849 4822 051 10102 1k 2% 0,25W
 3900 4822 051 10008 0Ω 5% 0,25W
 3901 4822 051 10008 0Ω 5% 0,25W
 3904 4822 051 10008 0Ω 5% 0,25W
 3906 4822 051 10008 0Ω 5% 0,25W
 3908 4822 051 10008 0Ω 5% 0,25W
 3910 4822 051 10008 0Ω 5% 0,25W
 3913 4822 051 10008 0Ω 5% 0,25W
 3914 4822 051 10008 0Ω 5% 0,25W
 3915 4822 051 10008 0Ω 5% 0,25W
 3917 4822 051 10008 0Ω 5% 0,25W
 3918 4822 051 10008 0Ω 5% 0,25W
 3919 4822 051 10008 0Ω 5% 0,25W
 3920 4822 051 10008 0Ω 5% 0,25W
 3921 4822 051 10008 0Ω 5% 0,25W
 3922 4822 051 10008 0Ω 5% 0,25W



5800 4822 156 20966 47 μH
 5801 4822 157 52849 22μH 10%
 5803 4822 157 52825 60μH
 5814 4822 157 53608 10μH
 5816 4822 157 52224 15μH
 5834 4822 157 53001 27μH 10%
 5847 4822 157 51157 3,3μH



6809 4822 130 80446 LL4148
 6810 4822 130 80446 LL4148
 6811 4822 130 80446 LL4148
 6812 4822 130 80446 LL4148
 6813 4822 130 80906 LLZ-C7V5
 6814 4822 130 80446 LL4148
 6820 4822 130 80446 LL4148
 6847 4822 130 42489 BYD33G
 6848 4822 130 80905 LLZ-F5V1



7800 4822 209 63857 PCF84C81/074
 7801 4822 130 61207 BC848
 7802 4822 130 61207 BC848
 7803 5322 130 41982 BC848B
 7810 4822 209 72681 KM6264AL-15
 7811 5322 130 41982 BC848B
 7812 5322 130 60159 BC846B
 7820 4822 209 73879 SAA5243P/E/M3
 7830 4822 209 63645 SAA5231/V7
 7831 4822 130 40962 BC558A
 7832 4822 130 40937 BC548B
 7846 5322 130 44921 BD943
 7849 5322 130 42012 BC858

4822 265 40503 5P female gold plated
 4822 265 40472 10P female gold plated
 4822 265 30828 5P male

Various parts

1155 4822 320 40051 DELAY LINE DL711
 1201 4822 242 70304 crystal 8,867 238 MHz
 1212 4822 242 70736 crystal 7,159 090 MHz



2103 4822 122 32444 33pF 5% 50V
 2105 4822 122 31766 120pF 5% 50V
 2118 4822 122 31775 680pF 5% 50V
 2119 4822 122 31808 150pF 10% 50V
 2120 4822 122 31807 1200pF 5% 50V
 2125 4822 122 32863 22nF 80% 50V
 2155 4822 122 32862 10nF 80% 50V
 2158 4822 122 32862 10nF 80% 50V
 2160 4822 124 40242 1μF 20% 63V
 2161 4822 124 41576 2,2μF 20% 50V
 2162 4822 122 32893 100nF 80% 50V
 2171 4822 122 31961 68pF 5% 63V
 2172 4822 126 11175 22pF 5% 50V
 2176 4822 126 11175 22pF 5% 50V
 2177 4822 122 31961 68pF 5% 63V
 2180 4822 122 31768 180pF 5% 50V
 2181 4822 122 31768 180pF 5% 50V
 2185 4822 122 32863 22nF 80% 50V
 2187 4822 122 32863 22nF 80% 50V
 2189 4822 122 31746 1000pF 5% 50V
 2196 4822 122 32893 100nF 80% 50V
 2197 4822 122 31385 22pF 5% 50V
 2201 4822 122 31746 1000pF 5% 50V
 2202 4822 125 50045 20pF
 2211 4822 122 31746 1000pF 5% 50V
 2212 4822 125 50045 20pF trim.
 2220 5322 121 42661 330nF 5% 63V
 2222 4822 122 32542 47nF 10% 63V
 2227 5322 122 31842 330pF 5% 63V
 2230 4822 124 40242 1μF 20% 63V
 2232 4822 124 41678 22μF 20% 25V
 2234 4822 122 33496 100nF 10% 63V
 2235 4822 124 41578 6,8μF 20% 50V
 2238 4822 121 42937 2,7nF 1% 250V
 2239 4822 122 32893 100nF 80% 50V
 2250 4822 121 51115 270nF 10% 63V
 2251 5322 122 31647 1nF 10% 63V
 2255 4822 122 31766 120pF 5% 50V
 2260 4822 122 32893 100nF 80% 50V
 2270 4822 122 32893 100nF 80% 50V
 2340 4822 124 41506 47μF 20% 16V
 2345 4822 124 41506 47μF 20% 16V
 2350 4822 124 40849 330μF 20% 16V
 2351 4822 124 41643 100μF 20% 16V
 2380 4822 122 32927 220nF
 2381 4822 122 32927 220nF
 2382 4822 122 32927 220nF
 2383 4822 122 32927 220nF
 2384 4822 122 32927 220nF
 2385 4822 122 32927 220nF
 2390 4822 122 32893 100nF 80% 50V
 2399 4822 122 31746 1000pF 5% 50V
 2404 4822 122 31965 220pF 5% 63V
 2405 4822 122 32862 10nF 80% 50V
 2409 4822 122 31965 220pF 5% 63V
 2410 4822 122 32862 10nF 80% 50V
 2413 4822 122 31765 100pF 5% 50V

PIP module (continued)



2414	4822 122 32862	10nF 80% 50V
2415	4822 122 31965	220pF 5% 63V
2430	4822 122 32893	100nF 80% 50V
2432	4822 122 32893	100nF 80% 50V
2434	4822 122 32893	100nF 80% 50V
2438	4822 121 42472	10nF 10% 50V
2439	4822 121 41856	22nF 5% 100V
2440	4822 122 31965	220pF 5% 63V
2441	4822 122 31727	470pF 5% 63V
2442	4822 124 40242	1µF 20% 63V
2446	4822 122 32893	100nF 80% 50V
2448	4822 122 32893	100nF 80% 50V
2450	4822 122 32856	8.2nF 10% 63V
2451	4822 121 51379	82nF 10% 63V
2455	4822 122 31972	39pF 5% 50V
2459	4822 124 41997	470µF 10V
2466	4822 122 32893	100nF 80% 50V



2444	4822 051 10224	220k 2% 0,25W
3103	4822 051 10821	820Ω 2% 0,25W
3104	4822 051 10821	820Ω 2% 0,25W
3105	4822 051 10362	3k6 2% 0,25W
3106	4822 116 52233	10k 5% 0,5W
3107	4822 051 10103	10k 2% 0,25W
3108	4822 051 10103	10k 2% 0,25W
3155	4822 051 10391	390Ω 2% 0,25W
3156	4822 051 10122	1k2 2% 0,25W
3157	4822 100 11391	330Ω 30% LIN
3158	4822 051 10759	75Ω 2% 0,25W
3170	4822 051 10112	1k1 2% 0,25W
3175	4822 051 10621	620Ω 2% 0,25W
3196	4822 116 52204	1k 5% 0,5W
3200	4822 051 10103	10k 2% 0,25W
3201	4822 051 10103	10k 2% 0,25W
3202	4822 051 10103	10k 2% 0,25W
3211	4822 051 10103	10k 2% 0,25W
3212	4822 051 10103	10k 2% 0,25W
3214	4822 051 10102	1k 2% 0,25W
3220	4822 051 10512	5k1 2% 0,25W
3221	4822 116 52233	10k 5% 0,5W
3222	4822 051 10008	JUMPER
3227	4822 116 52299	7k5 5% 0,5W
3228	4822 051 10472	4k7 2% 0,25W
3231	4822 051 10682	6k8 2% 0,25W
3232	4822 051 10229	22Ω 2% 0,25W
3233	4822 051 10471	470Ω 2% 0,25W
3234	4822 051 10361	360Ω 2% 0,25W
3235	4822 051 10122	1k2 2% 0,25W
3236	4822 051 10471	470Ω 2% 0,25W
3237	4822 051 10332	3k3 2% 0,25W
3238	4822 051 10333	33k 2% 0,25W
3239	4822 100 11319	4k7 30% LIN
3241	4822 051 10271	270Ω 2% 0,25W
3242	4822 116 52204	1k 5% 0,5W
3250	4822 051 10911	910Ω 2% 0,25W
3265	4822 051 10104	100k 2% 0,25W
3270	4822 051 10103	10k 2% 0,25W
3275	4822 051 10103	10k 2% 0,25W
3276	4822 051 10102	1k 2% 0,25W
3330	4822 051 20008	jumper
3335	4822 051 10271	270Ω 2% 0,25W
3336	4822 051 10432	4k3 2% 0,25W
3337	4822 051 10122	1k2 2% 0,25W
3338	4822 051 10332	3k3 2% 0,25W
3340	4822 051 10202	2k 2% 0,25W
3341	4822 052 10229	22Ω 5% 0,33W
3345	4822 052 10229	22Ω 5% 0,33W
3353	4822 052 10568	5Ω 5% 0,33W
3354	4822 051 10271	270Ω 2% 0,25W
3390	4822 051 10151	150Ω 2% 0,25W
3391	4822 051 10181	180Ω 2% 0,25W



3394	4822 051 10151	150Ω 2% 0,25W
3395	4822 051 10181	180Ω 2% 0,25W
3398	4822 051 10151	150Ω 2% 0,25W
3399	4822 051 10181	180Ω 2% 0,25W
3404	4822 051 10431	430Ω 2% 0,25W
3405	4822 051 10361	360Ω 2% 0,25W
3410	4822 051 10391	390Ω 2% 0,25W
3411	4822 051 10471	470Ω 2% 0,25W
3412	4822 051 10751	750Ω 2% 0,25W
3414	4822 051 10471	470Ω 2% 0,25W
3416	4822 051 10182	1k8 2% 0,25W
3434	4822 051 10473	47k 2% 0,25W
3436	4822 051 10473	47k 2% 0,25W
3437	4822 051 10101	100Ω 2% 0,25W
3438	4822 051 10513	51k 2% 0,25W
3440	4822 116 52222	390Ω 5% 0,5W
3441	4822 051 10519	51Ω 2% 0,25W
3442	4822 051 10919	91Ω 2% 0,25W
3444	4822 116 52175	100Ω 5% 0,5W
3446	4822 116 52175	100Ω 5% 0,5W
3448	4822 051 10392	3k9 2% 0,25W
3450	4822 051 10471	470Ω 2% 0,25W
3452	4822 051 10471	470Ω 2% 0,25W
3454	4822 051 10471	470Ω 2% 0,25W
3460	4822 116 52231	820Ω 5% 0,5W
3461	4822 116 52259	2k4 5% 0,5W
3462	4822 116 52287	51k 5% 0,5W
3463	4822 116 52299	7k5 5% 0,5W
3464	4822 051 10472	4k7 2% 0,25W
3470	4822 052 10108	1Ω 5% 0,33W
3997	4822 051 10339	33Ω 2% 0,25W
3997	4822 051 10279	27Ω 2% 0,25W

jumpers


4001	4822 051 10008	jumper
4002	4822 051 10008	jumper
4003	4822 051 10008	jumper
4004	4822 051 10008	jumper
4005	4822 051 10008	jumper
4006	4822 051 10008	jumper
4007	4822 051 10008	jumper
4010	4822 051 10008	jumper
4011	4822 051 10008	jumper
4012	4822 051 10008	jumper
4048	4822 051 10008	jumper
4100	4822 051 10008	jumper
4201	4822 051 10008	jumper
4401	4822 051 10008	jumper
4402	4822 051 10008	jumper
4403	4822 051 10008	jumper
4404	4822 051 10008	jumper
4406	4822 051 10008	jumper
4407	4822 051 10008	jumper
4415	4822 051 10008	jumper



5118	4822 157 60435	10,3µH 6%
5155	4822 157 60433	7,2µH 6%
5157	4822 157 60434	9,4µH 6%
5170	4822 157 60432	10,3µH
5175	4822 157 60432	10,3µH
5190	4822 157 60432	10,3µH
5400	4822 157 50943	12µH 10%
5402	4822 157 50943	12µH 10%
5404	4822 156 20915	33µH 10%
5406	4822 157 50943	12µH 10%
5408	4822 157 50943	12µH 10%
5410	4822 157 50943	12µH 10%



6300 4822 130 80906 LLZ-C7V5



7103	5322 130 41982	BC848B
7105	5322 130 41982	BC848B
7125	4822 209 62477	TDA4554/V8
7126	4822 209 70019	TDA4510/V2/S8
7200	5322 130 41982	BC848B
7210	5322 130 41982	BC848B
7233	5322 130 41983	BC858B
7234	5322 130 41982	BC848B
7335	5322 130 41982	BC848B
7337	5322 130 41982	BC848B
7338	5322 130 41982	BC848B
7350	4822 130 42616	BC818-40
7380	4822 209 60479	TEA5114A
7400	5322 130 41983	BC858B
7402	5322 130 41983	BC858B
7404	5322 130 41983	BC858B
7406	4822 209 62473	SDA9087
7408	4822 209 63291	SDA9088/2R
7410	4822 209 63644	SDA9086-3
7755	4822 209 72363	TDA2579A/N8