

Service
Service
Service

Service Manual

Contents	Page
Safety Notes	2
DFU Information.....	14
Service Adjustments	15
Electrical Diagrams	34
Waveforms	82
Exploded Views	99
Parts List	103
Service Bulletins	195

©Copyright 2004 Philips Consumer Electronics
All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, or otherwise without the prior permission of Philips.

Subject to modification



Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

First Published: 05-17-2001

Rev. Date: 09-30-2004

Print Date: 09-30-2004

Safety Notes

IMPORTANT SAFETY NOTICE

WARNING

SAFETY CHECKS

- FIRE AND SHOCK HAZARD
- IMPLOSION
- X-RADIATION
- LEAKAGE CURRENT COLD CHECK
- LEAKAGE CURRENT HOT CHECK
- PICTURE TUBE REPLACEMENT
- PARTS REPLACEMENT

TV SAFETY NOTES

SAFETY PRECAUTIONS FOR TV CIRCUITS

PRECAUTIONS DURING SERVICE

SAFETY CHECK AFTER SERVICING

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

GENERAL SAFETY NOTES

IMPORTANT SAFETY NOTICE

Proper service and repair is important to the safe, reliable operation of all Philips Consumer Electronics Company** equipment. The service procedures recommended by Philips and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various **CAUTIONS** and **NOTICES** which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It also is important to understand that these **CAUTIONS** and **NOTICES ARE NOT EXHAUSTIVE**. Philips could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, Philips has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by Philips must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

** Hereafter throughout this manual, Philips Consumer Electronics Company will be referred to as Philips.

WARNING

Critical components having special safety characteristics are identified with a  or "**S**" by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol  on the schematics or exploded views. Use of substitute replacement parts which do not have the same specified safety characteristics may create shock, fire, or other hazards. Under no circumstances should the original design be modified or altered without written permission from Philips. Philips assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

- Broken Line _____

SAFETY CHECKS

After the original service problem has been corrected, a complete safety check should be made. Be sure to check over the entire set, not just the areas where you have worked. Some previous servicer may have left an unsafe condition, which could be unknowingly passed on to Your customer. Be sure to check all of the following:

FIRE AND SHOCK HAZARD

IMPLOSION

X-RADIATION

LEAKAGE CURRENT COLD CHECK

LEAKAGE CURRENT HOT CHECK

PICTURE TUBE REPLACEMENT

FIRE AND SHOCK HAZARD

1. Be sure all components are positioned in such a way as to avoid the possibility of adjacent component shorts. This is especially important on those chassis which are transported to and from the service shop.
2. Never release a repaired unit unless all protective devices such as insulators, barriers, covers, strain reliefs, and other hardware have been installed in accordance with the original design.
3. Soldering and wiring must be inspected to locate possible cold solder joints, solder splashes, sharp solder points, frayed leads, pinched leads, or damaged insulation (including the ac cord). Be certain to remove loose solder balls and all other loose foreign particles.
4. Check across-the-line components and other components for physical evidence of damage or deterioration and replace if necessary. Follow original layout, lead length, and dress.
5. No lead or component should touch a receiving tube or a resistor rated at 1 watt or more. Lead tension around protruding metal surfaces or edges must be avoided.
6. Critical components having special safety characteristics are identified with an '**S**' by the Ref. No. in the parts list and enclosed within a broken line* (where several critical components are grouped in one area) along with the safety symbol  on the schematic diagrams and /or exploded views.
7. When servicing any unit, always use a separate isolation transformer for the chassis. Failure to use a separate isolation transformer may expose you to possible shock hazard, and may cause damage to servicing instruments.
8. Many electronic products use a polarized ac line cord (one wide pin on the plug). Defeating this safety feature may create a potential hazard to the servicer and the user. Extension cords which do not incorporate the polarizing feature should never be used.
9. After reassembly of the unit, always perform an ac leakage test or resistance test from the line cord to all exposed metal parts of the cabinet. Also, check all metal control shafts (with knobs removed), antenna terminals, handles, screws, etc., to be sure the unit may be safely operated without danger of electrical shock.

* **Broken line** _____

IMPLOSION

1. All picture tubes used in current model receivers are equipped with an integral implosion system. Care should always be used, and safety glasses worn, whenever handling any picture tube. Avoid scratching or otherwise damaging the picture tube during installation.
2. Use only replacement tubes specified by the manufacturer.

X-RADIATION

1. Be sure procedures and instructions to all your service personnel cover the subject of X-radiation. Potential sources of X-rays in TV receivers are the picture tube and the high voltage circuits. The basic precaution which must be exercised is to keep the high voltage at the factory recommended level.
2. To avoid possible exposure to X-radiation and electrical shock, only the manufacturer's specified anode connectors must be used.
3. It is essential that the service technician has an accurate HV meter available at all times. The calibration of this meter should be checked periodically against a reference standard.
4. When the HV circuitry is operating properly there is no possibility of an X-radiation problem. High voltage should always be kept at the manufacturer's rated value - no higher - for optimum performance. Every time a color set is serviced, the brightness should be run up and down while monitoring the HV with a meter to be certain that the HV is regulated correctly and does not exceed the specified value. We suggest that you and your technicians review test procedures so that HV and HV regulation are always checked as a standard servicing procedure, and the reason for this prudent routine is clearly understood by everyone. It is important to use an accurate and reliable HV meter. It is recommended that the HV reading be recorded on each customer's invoice, which will demonstrate a proper concern for the customer's safety.
5. When troubleshooting and making test measurements in a receiver with a problem of excessive high voltage, reduce the line voltage by means of a Variac to bring the HV into acceptable limits while troubleshooting. Do not operate the chassis longer than necessary to locate the cause of the excessive HV.
6. New picture tubes are specifically designed to withstand higher operating voltages without creating undesirable X-radiation. It is strongly recommended that any shop test fixture which is to be used with the new higher voltage chassis be equipped with one of the new type tubes designed for this service. Addition of a permanently connected HV meter to the shop test fixture is advisable. The CRT types used in these new sets should never be replaced with any other types, as this may result in excessive X-radiation.
7. It is essential to use the specified picture tube to avoid a possible X-radiation problem.
8. Most TV receivers contain some type of emergency "Hold Down" circuit to prevent HV from rising to excessive levels in the presence of a failure mode. These various circuits should be understood by all technicians servicing them, especially since many hold down circuits are inoperative as long as the receiver performs normally.

LEAKAGE CURRENT COLD CHECK


1. Unplug the ac line cord and connect a jumper between the two prongs of the plug.
2. Turn on the power switch.
3. Measure the resistance value between the jumpered ac plug and all exposed cabinet parts of the receiver, such as screw heads, antennas, and control shafts. When the exposed metallic part has a return path to the chassis, the reading should be between 1 megohm and 5.2 megohms. When the exposed metal does not have a return path to the chassis, the reading must be infinity. Remove the jumper from the ac line cord.

LEAKAGE CURRENT HOT CHECK

1. Do not use an isolation transformer for this test. Plug the completely reassembled receiver directly into the ac outlet.
2. Connect a **1.5k, 10W resistor** paralleled by a **0.15uF. capacitor** between each exposed metallic cabinet part and a **good earth ground** such as a water pipe, as shown below.
3. Use an ac voltmeter with at least 5000 ohms/volt sensitivity to measure the potential across the resistor.
4. **The potential at any point should not exceed 0.75 volts.** A leakage current tester may be used to make this test; leakage current must not exceed 0.5milliamp. If a measurement is outside of the specified limits, there is a possibility of shock hazard. The receiver should be repaired and rechecked before returning it to the customer.
5. **Repeat the above procedure with the ac plug reversed.** (Note: An ac adapter is necessary when a polarized plug is used. Do not defeat the polarizing feature of the plug.)

OR

With the instrument completely reassembled, plug the AC line cord directly into a 120V AC outlet. **(Do not use an isolation transformer during this test.)** Use a leakage current tester or a metering system that complies with American National Standards Institute (ANSI) C101.1 Leakage Current for Appliances and Underwriters Laboratories (UL) 1410, (50.7). **With the instrument AC switch first in the on position and then in the off position, measure from a known earth ground (metal water pipe, conduit, etc.) to all exposed metal parts of the instrument (antennas, handle brackets, metal cabinet, screw heads, metallic overlays, control shafts, etc.), especially any exposed metal parts that offer an electrical return path to the chassis. Any current measured must not exceed 0.5 milliamp.** Reverse the instrument power cord plug in the outlet and repeat the test. See graphic below.

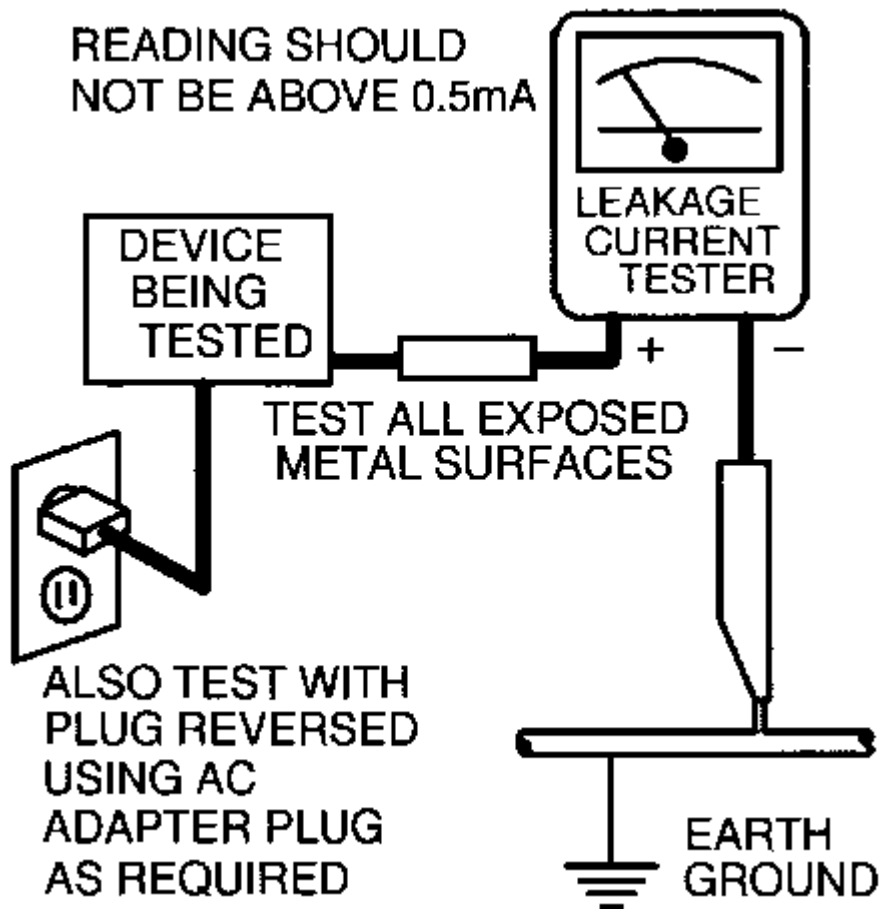

PICTURE TUBE REPLACEMENT

The primary source of X-radiation in this television receiver is the picture tube. The picture tube utilized in this chassis is specially constructed to limit X-radiation emissions. For continued X-radiation protection, the replacement tube must be the same type as the original, including suffix letter, or a Philips approved type.

PARTS REPLACEMENT

Many electrical and mechanical parts in Philips television sets have special safety related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. The use of a substitute part which does not have the same safety characteristics as the Philips recommended replacement part shown in this service manual may create shock, fire, or other hazards

TV SAFETY NOTES

SAFETY CHECKS

IMPLOSION

X-RADIATION

PICTURE TUBE REPLACEMENT

PARTS REPLACEMENT

WARNING

Before removing the CRT anode cap, turn the unit **OFF** and short the **HIGH VOLTAGE** to the **CRT DAG** ground.

SERVICE NOTE: The **CRT DAG** is not at chassis ground.

TV-VCR COMBI SAFETY NOTES

IMPORTANT SAFETY PRECAUTIONS

Prior to shipment from the factory, our products are strictly inspected for recognized product safety and electrical codes of the countries in which they are to be sold. However, in order to maintain such compliance, it is equally important to implement the following precautions when a set is being serviced.

SAFETY PRECAUTIONS FOR TV CIRCUITS

1. Before returning an instrument to the customer, always make a safety check of the entire instrument, including, but not limited to, the following items:
 - a. Be sure that no built-in protective devices are defective or have been defeated during servicing. (1) Protective shields are provided on this chassis to protect both the technician and the customer. Correctly replace all missing protective shields, including any removed for servicing convenience. (2) When reinstalling the chassis and/or other assembly in the cabinet, be sure to put back in place all protective devices, including but not limited to, nonmetallic control knobs, insulating fishpapers, adjustment and compartment covers/shields, and isolation resistor/capacitor networks. Do not operate this instrument or permit it to be operated without all protective devices correctly installed and functioning. Servicers who defeat safety features or fail to perform safety checks may be liable for any resulting damage.
 - b. Be sure that there are no cabinet openings through which an adult or child might be able to insert their fingers and contact a hazardous voltage. Such openings include, but are not limited to, (1) spacing between the picture tube and the cabinet mask, (2) excessively wide cabinet ventilation slots, and (3) an improperly fitted and/or incorrectly secured cabinet back cover.
 - c. Do a LEAKAGE CURRENT CHECK

ANY MEASUREMENTS NOT WITHIN THE LIMITS SPECIFIED HEREIN INDICATE A POTENTIAL SHOCK HAZARD THAT MUST BE ELIMINATED BEFORE RETURNING THE INSTRUMENT TO THE CUSTOMER OR BEFORE CONNECTING THE ANTENNA OR ACCESSORIES.

d. **X-Radiation and High Voltage Limits** - Because the picture tube is the primary potential source of X-radiation in solid-state TV receivers, it is specially constructed to prohibit X-radiation emissions. For continued X-radiation protection, the replacement picture tube must be the same type as the original. Also, because the picture tube shields and mounting hardware perform an X-radiation protection function, they must be correctly in place. High voltage must be measured each time servicing is performed that involves B+, horizontal deflection or high voltage. Correct operation of the X-radiation protection circuits also must be reconfirmed each time they are serviced. (X-radiation protection circuits also may be called "horizontal disable" or "hold down.") Read and apply the high voltage limits and, if the chassis is so equipped, the X-radiation protection circuit specifications given on instrument labels and in the **Product Safety & X-Radiation** Warning note on the service data chassis schematic. High voltage is maintained within specified limits by close tolerance safety-related components/adjustments in the high-voltage circuit. If high voltage exceeds specified limits, check each component specified on the chassis schematic and take corrective action.

2. Read and comply with all caution and safety-related notes on or inside the receiver cabinet, on the receiver chassis, or on the picture tube.

3. **Design Alteration Warning** - Do not alter or add to the mechanical or electrical design of this TV receiver. Design alterations and additions, including, but not limited to circuit modifications and the addition of items such as auxiliary audio and/or video output connections, might alter the safety characteristics of this receiver and create a hazard to the user. Any design alterations or additions will void the manufacturer's warranty and may make you, the servicer, responsible for personal injury or property damage resulting therefrom.

4. **Picture Tube Implosion Protection Warning** - The picture tube in this receiver employs integral implosion protection. For continued implosion protection, replace the picture tube only with one of the same type number. Do not remove, install, or otherwise handle the picture tube in any manner without first putting on shatterproof goggles equipped with side shields. People not so equipped must be kept safely away while picture tubes are handled. Keep the picture tube away from your body. Do not handle the picture tube by its neck. Some "in-line" picture tubes are equipped with a permanently attached deflection yoke; because of potential hazard, do not try to remove such "permanently attached" yokes from the picture tube.

5. **Hot Chassis Warning**

a. Some TV receiver chassis are electrically connected directly to one conductor of the ac power cord and may be serviced safely without an isolation transformer only if the ac power plug is inserted so that the chassis is connected to the ground side of the ac power source. To confirm that the ac power plug is inserted correctly, with an ac voltmeter, measure between the chassis and a known earth ground. If a voltage reading in excess of 1.0V is obtained, remove and reinsert the ac power plug in the opposite polarity and again measure the voltage potential between the chassis and a known earth ground.

b. Some TV receiver chassis normally have 85Vac (RMS) between chassis and earth ground regardless of the ac plug polarity. This chassis can be safety-serviced only with an isolation transformer inserted in the power line between the receiver and the ac power source, for both personnel and test equipment protection. Some TV receiver chassis have a secondary ground system in addition to the main chassis ground. This secondary ground system is not isolated from the ac power line. The two ground systems are electrically separated by insulation material that must not be defeated or altered.

6. Observe original lead dress. Take extra care to assure correct lead dress in the following areas: **a.** near sharp edges, **b.** near thermally hot parts - be sure that leads and components do not touch

thermally hot parts, **c.** the ac supply, **d.** high voltage, and **e.** antenna wiring. Always inspect in all areas for pinched, out of place, or frayed wiring. Check ac power cord for damage.

7. Components, parts, and/or wiring that appear to have overheated or are otherwise damaged should be replaced with components, parts, or wiring that meet original specifications. Additionally, determine the cause of overheating and/or damage and, if necessary, take corrective action to remove any potential safety hazard.

PRECAUTIONS DURING SERVICE

A. Parts identified by the  symbol are critical for safety. Replace only with part number specified.

B. In addition to safety, other parts and assemblies are specified for conformance with regulations applying to spurious radiation. These must also be replaced only with specified replacements.

Examples: RF converters, RF cables, noise blocking capacitors, and noise blocking filters, etc.

C. Use specified internal wiring. Note especially:

- 1) Wires covered with PVC tubing
- 2) Double insulated wires
- 3) High voltage leads

D. Use specified insulating materials for hazardous live parts. Note especially:

- 1) Insulation Tape
- 2) PVC tubing
- 3) Spacers
- 4) Insulators for transistors

E. When replacing ac primary side components (transformers, power cord, etc.), wrap ends of wires securely about the terminals before soldering.

F. Observe that the wires do not contact heat producing parts (heatsinks, oxide metal film resistors, fusible resistors, etc.)

G. Check that replaced wires do not contact sharp edged or pointed parts.

H. When a power cord has been replaced, check that 10-15 kg of force in any direction will not loosen it.

I. Also check areas surrounding repaired locations.

J. Use care that foreign objects (screws, solder droplets, etc.) do not remain inside the set.

K. Crimp type wire connector

When replacing the power transformer in sets where the connections between the power cord and power transformer primary lead wires are performed using crimp type connectors, in order to prevent shock hazards, perform carefully and precisely the following steps.

Replacement procedure

- 1) Remove the old connector by cutting the wires at a point close to the connector. **Important:** Do not re-use a connector (discard it).

- 2) Strip about 15 mm of the insulation from the ends of the wires. If the wires are stranded, twist the strands to avoid frayed conductors.
- 3) Align the lengths of the wires to be connected. Insert the wires fully into the connector.
- 4) Use the crimping tool to crimp the metal sleeve at the center position. Be sure to crimp fully to the complete closure of the tool.

L. When connecting or disconnecting the VCR connectors, first, disconnect the ac plug from the ac supply socket.

SAFETY CHECK AFTER SERVICING

Examine the area surrounding the repaired location for damage or deterioration. Observe that screws, parts and wires have been returned to original positions. Afterwards, perform the following tests and confirm the specified values in order to verify compliance with safety standards.


1. Clearance Distance

When replacing primary circuit components, confirm specified clearance distance (d) and (d') between soldered terminals, and between terminals and surrounding metallic parts. (See graphic below)

Table 1 : Ratings for selected area

AC Line Voltage	Region	Clearance Distance (d) (d')
110 to 130 V	USA or CANADA	> 3.2 mm (0.126 inches)

Note: This table is unofficial and for reference only. Be sure to confirm the precise values.

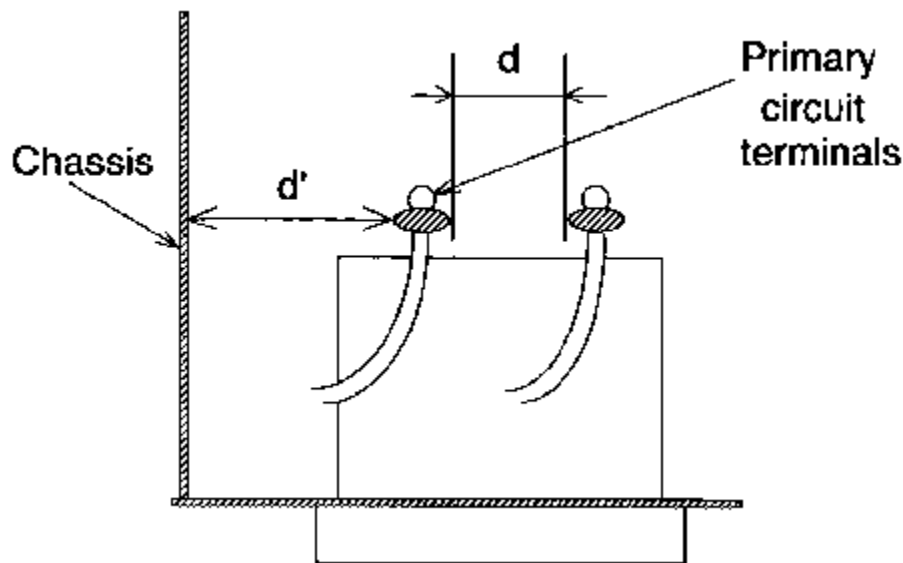

2. LEAKAGE CURRENT CHECKS

VCR SAFETY NOTES

FIRE & SHOCK HAZARD (VCR)

1. Be sure that all components are positioned in such a way to avoid possibility of shorts to adjacent components. This is especially important on those chassis which are transported to and from the repair shop.
2. Always replace all protective devices such as insulators and barriers after working on a set.
3. Check for damaged insulation on wires including the ac cord.
4. Check across-the-line components for damage and replace if necessary.
5. After re-assembly of the unit, always perform an ac leakage test on the exposed metallic parts of the cabinet such as the knobs, antenna terminals, etc. to be sure the set is safe to operate without danger of electrical shock. **Do not use a line isolation transformer during this test.** Use an ac voltmeter having 5000 ohms per volt or more sensitivity in the following manner: Connect a 1500 ohm 10 watt resistor, paralleled by 0.15 MFD ac type capacitor, between a known good earth ground (water pipe, conduit, etc.) and the exposed metallic parts, one at a time. Measure the ac voltage across the combination 1500 ohm resistor and 0.15 MFD capacitor. Reverse the ac plug on the set and repeat ac voltage measurements again for each exposed metallic part. Voltage measured must not exceed 0.6 volts R.M.S. This corresponds to 0.4 milliamp ac. Any value exceeding this limit constitutes a potential shock hazard and must be corrected immediately.

GENERAL

Power Supply-This receiver is designed for operation on 120 Volts, 60Hz alternating current (ac) only. Never connect to a supply having a different frequency or voltage.

IMPORTANT NOTICE

This device employs many circuits, components, and mechanical parts designed for protection against fire, shock and RF interference. For continued safety any servicing should be performed by qualified personnel and exact replacement parts should be used. Under no circumstances should the original design be altered.

PRODUCT SAFETY GUIDELINES FOR ALL PRODUCTS

CAUTION: Do not modify any circuit. Service work should be performed only after you are thoroughly familiar with all of the following safety checks. Risk of potential hazards and injury to the user increases if safety checks are not adhered to.

USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING.

PREVENTION OF ELECTROSTATIC DISCHARGE (ESD)

Some semiconductor solid state devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive (ES) Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor "chip" components. The following techniques should be used to help reduce the incidence of component damage caused by electrostatic discharge (ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially available discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices, place the assembly on a conductive surface such as aluminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as "antistatic (ESD protected)" can generate an electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, aluminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

CAUTION : Be sure no power is applied to the chassis or circuit and observe all other safety precautions.

8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your feet from a carpeted floor can generate static electricity (ESD) sufficient to damage an ES device.)

NOTE to CATV system Installer:

This reminder is provided to call the CATV system installer's attention to article 820-22 of the NEC that provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of cable entry as practical.

Directions For Use (DFU)

For Customer Operating Instructions, please visit our web site: www.p4c.philips.com.

A10 PTV ADJUSTMENTS

MANUAL 7615

Service Modes and Error Messages

The following topics are covered:

- Test points
- Service Modes
- Error code buffer and error codes
- The “blinking LED” procedure
- Trouble shooting tips
- Customer Service Mode

Measurements should be performed under the following conditions:

Video: color bar signal

Audio: 3kHz left, 1kHz right

Note: The measurements at the following test points were taken using a 100:1 probe:

- I142, LSB Panel
- I220, LSB Panel

Service Default Mode (SDM)

Introduction

The **Service Default Mode** (SDM) is a technical aid for the service technician. The Service Default Mode (SDM) establishes fixed, repeatable settings of customer controls, which allow consistent measurements to be made. The SDM also initiates the blinking LED procedure and, if necessary, overrides the 5V protection. This mode also allows the operating hours of the set, the software version, and error codes to be read.

The SDM places the set in the following pre-defined conditions:

- Tuning frequency set to Channel 3.
- Volume level set to 25% (of the maximum volume level).
- Other picture and sound settings set to 50% (mid-range).

The following functions are turned off in SDM (and after leaving SDM):

- Timer
- Sleep timer

The following functions are disabled during SDM (and enabled after leaving SDM):

- Parental lock

All other controls operate normally.

Entering Service Default Mode

To enter the Service Default Mode, press the following key sequence on the remote control transmitter:

0-6-2-5-9-6-MENU

Do not allow the display to time out between entries while keying the sequence.

Upon entry into the Service Default Mode, the letters “SDM” will be displayed at the upper right corner of the screen.

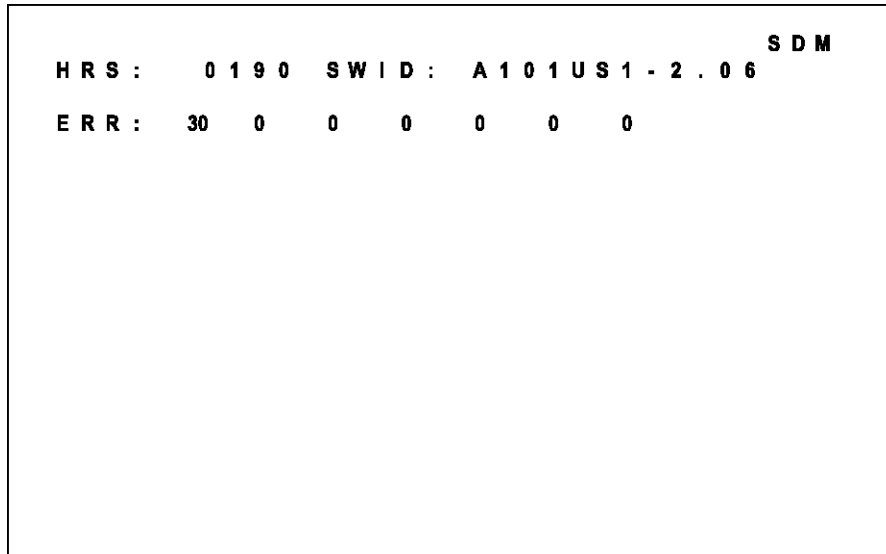


Figure 1: SDM Screen

Special SDM functions

Access to normal user menu

Pressing the “MENU” button on the remote control switches between the SDM and the normal user menus (with the SDM mode still active in the background).

Run timer, software identification, and error buffer

Press the Index or Status button on the remote control to toggle the OSD (except “SDM”) ON and OFF to prevent the OSD from interfering with measurements and oscilloscope waveforms.

Access to SAM

To access the Service Alignment Mode while press the “VOLUME +” and “VOLUME –” buttons on the local keyboard simultaneously for at least 4 seconds.

The Blinking LED Procedure

The contents of the error buffer can also be made visible through the “blinking LED” procedure. This is especially useful when there is no picture.

NOTE: If errors 1, 2, 3, or 4 occur the LED ALWAYS blinks indicating the last error which occurred, even if the set is NOT in service mode.

- When the SDM is entered, the LED will blink the number of times equal to the value of the error code. Upon entry into the SDM, the LED will blink the contents of the error-buffer. Error-codes greater than/equal to 10 are shown in the following manner:
A long blink of 750 milliseconds indicating the decimal digit, followed by a pause of 1500 milliseconds. The LED will then blink the number equal to the error code. When all error-codes are displayed, the sequence is finished with an LED display of 3 seconds. At this point the sequence will begin again.

Example:

Error code position	1	2	3	4	5
Error buffer:	12	9	6	0	0

- After entering SDM:
- The sequence will begin with 1 long blink of 750 milliseconds, then pause 1500 milliseconds, then blink twice (indicating error code 12), then the LED will pause for 3 seconds, then blink 9 times (indicating error code 9), then the LED will pause for 3 seconds, then blink 6 times (indicating error code 6), then pause 3 seconds and blink for 3 seconds again, ending the blinking sequence.

Exiting Service Default Mode

To exit the Service Default Mode, press the Power button.

Service Alignment Mode (SAM)

Introduction

The Service Alignment Mode (SAM) is used to align the set and/or adjust the option settings and to display/clear the error code buffer values.

Entering Service Alignment Mode

To enter the Service Alignment Mode (SAM), press the following key sequence on the remote control transmitter:

0-6-2-5-9-6-INDEX or STATUS

Do not allow the display to time out between entries while keying the sequence

It is also possible to enter the Service Alignment Mode by pressing the “VOLUME +” and “VOLUME -” key on the local keyboard simultaneously for at least 4 seconds when the set is in SDM.

Exit SAM:

To exit the Service Alignment Mode, press the Power button.

In SAM the following information is displayed on the screen:

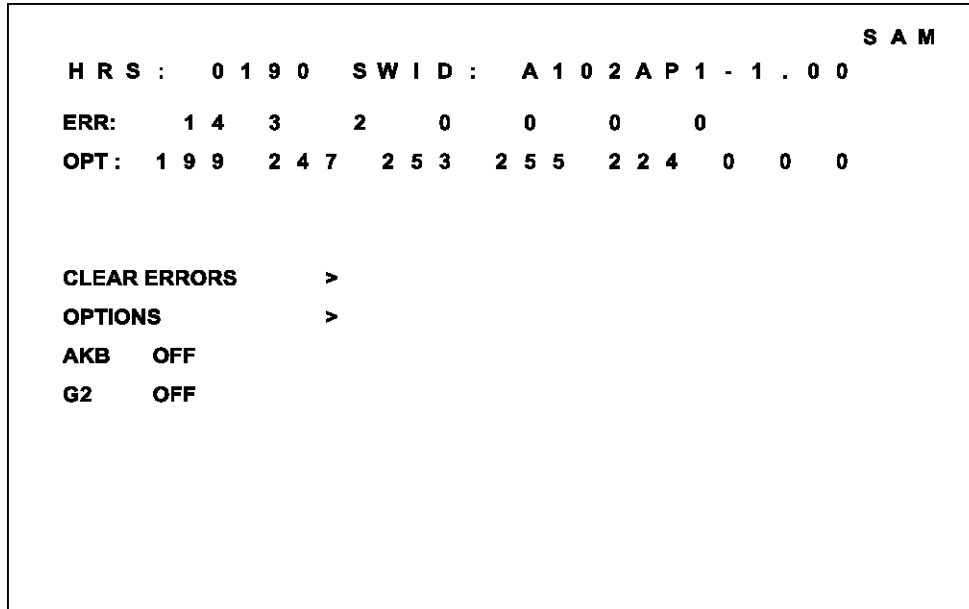


Figure 2: SAM Screen

Explanation notes/references:

1	Operation Hours (Run Timer): This display indicates the accumulated total of operational hours. (Shown in hexadecimal format)
2	Software identification of the main micro controller (A101US1-2.06) A10 is the engineering chassis name for the A10 PTV chassis 1US1 is a character combination to indicate the software type and the supported languages: 3AP1 or 3AP2 are also possible in the Asian Pacific Region. - US = United States, AP = Asian Pacific 1 = Main Software language version number 2.06 = sub-version number
3	Error buffer (7 errors possible): Displays the 7 most recent errors. The most recent error is displayed at the upper left.
4	Option bytes (8 codes possible): Summary of options is explained below.
5	Sub menus are listed in a scroll menu.

SAM Menu Control

Menu items may be selected using the cursor UP/DOWN keys.

- The selected item will be highlighted.
- When not all menu items will fit on the screen, pressing the cursor UP/DOWN keys on the remote transmitter will display the next/previous menu items.

With the cursor LEFT/RIGHT keys, it is possible to:

- (de)activate the selected menu item (e.g. GEOMETRY)
- change the value of the selected menu item (e.g., VER-SLOPE)
- activate the selected submenu (e.g., SERV-BLK)

Access to normal user menu

Pressing the "MENU" button on the remote control switches between the SAM and the normal user menus (with the SAM mode still active in the background). Pressing the "MENU" key in a submenu will return the screen to the previous menu.

The Menus and Submenus

Clear Errors

Erases the contents of the error buffer. Select the CLEAR ERRORS menu item and press the cursor LEFT or cursor RIGHT key. The contents of the error buffer are cleared.

The functionality of the OPTIONS and ALIGNMENTS (TUNER, WHITE TONE, GEOMETRY, SOUND, and SMART SETTING) submenus are described in the service adjustments.

Error code buffer and error codes

Explanation of the Error code buffer

The error code buffer contains all errors detected since the last time the buffer was erased. The buffer is written from left to right. When an error occurs that is not yet in the error code buffer, the error code will appear at the left side and all other errors shift one position to the right.

The error code buffer will be cleared in the following cases:

- by activating CLEAR ERRORS in SAM menu
- exiting SDM or SAM with the "Standby" command on the remote control
- upon automatic reset when content has not changed for 50 consecutive hours

By leaving SDM or SAM via the power switch, the error buffer will not be reset.

Examples:

ERROR: 0 0 0 0 0 0 : No errors detected

ERROR: 6 0 0 0 0 0 : Error code 6 is the last and only detected error

ERROR: 9 6 0 0 0 0 : Error code 6 was first detected and error code 9 is the last detected (newest) error

The contents of the error buffer can also be displayed by use of the "blinking LED" procedure, if no picture is available. See explanation of "The blinking LED procedure" below.

Error code definition

In case of non-intermittent faults, clear the error buffer before starting the repair, to make sure “old” error codes are not present. If possible check the entire content of the error buffers. In some situations an error code is only the result of another error code (and not the actual cause).

Note: a fault in the protection detection circuitry can also lead to a protection.

Error codes 1,2, 3, and 4 are protection codes, and in this case the supplies of some circuits will be switched off. Also in protection, the LED will blink the number of times equivalent to the most recent error code.

Error code table

Code Number	Error Description
00	Not an Error
01	Too high I-beam or East/West protection
02	Vertical protection
03	X-Ray protection
04	5 volt protection
05	- not used
06	General IIC error
07	BC loop not stabilized
08	Bocma TDA888X IIC error
09	Bocma IC 8v failure
10	NVM IIC communication error
11	Wrong NVM type
12	Microp internal RAM error
13	Main tuner IIC failure
14	Sound IC failure
15	SRAM test failure
16	PIP Tuner IIC failure
17	ECO Pip IC or DW Pip IC failure
18	I/O expander I2C error
19	Gemstar Guide Plus board
20	V-chip located on the DW Pip
21	Non-Volatile clock
22	Incredible picture (YUV) CR
23	Bocma DoubleWindow TDA888X error
24	- not used
25	- not used
26	- not used
27	Virtual Dolby
28	- not used
29	- not used
30	CSP i2c error
31	CSP NVM i2c error
32	CSP NVM error - not valid data
33	CSP dac i2c error

A10 PTV MODEL LISTINGS AND SOFTWARE

MODEL	REGION	CHASSIS	SOFTWARE
43P8341/37	(USA Model)	PTV914, Fighter +	1US1 (see B)
43PP925/61	(Korea Model)	- - - -	3AP2 (see D)
43PP925/97	(Taiwan & Philippines Model)	- - - -	3AP1 (see D)
50P8341/37	(USA Model)	PTV915, Fighter +	1US1 (see B)
50P8342/37	(USA Model, Sears)	PTV916, Fighter +	1US1 (see B)
50PP241/76	(LATAM Model)	PTV918	1US1 (see C)
55P8241/37	(USA Model)	PTV910, Fighter	1US1 (see A)
55P8288/37	(USA Model, Best Buy)	PTV910, Fighter	1US1 (see A)
55P8341/37	(USA Model)	PTV915, Fighter +	1US1 (see B)
55P8342/37	(USA Model, Sears)	PTV916, Fighter +	1US1 (see B)
55PP241/76	(LATAM Model)	PTV918	1US1 (see C)
55PP925/61	(Korea Model)	- - - -	3AP2 (see D)
55PP925/97	(Taiwan & Philippines Model)	- - - -	3AP1 (see D)
60P8241/37	(USA Model)	PTV910, Fighter	1US1 (see A)
60P8288/37	(USA Model, Best Buy)	PTV910, Fighter	1US1 (see A)
60P8341/37	(USA Model)	PTV915, Fighter +	1US1 (see B)
60P8342/37	(USA Model, Sears)	PTV916, Fighter +	1US1 (see B)
60PP241/76	(LATAM Model)	PTV918	1US1 (see C)
64P8341/37	(USA Model)	PTV915, Fighter +	1US1 (see B)
64P8342/37	(USA Model, Sears)	PTV916, Fighter +	1US1 (see B)

Option Codes - NAFTA

A = USA Fighter, (1US1 Software)

B = USA Fighter +, (1US1 Software)

C = NAFTA Mexico, (1US1 Software)

	1US1 CODE DESCRIPTIONS	A	B	C
SBNP	AUTO STANDBY NO PICTURE	OFF	OFF	OFF
CVI	COMPONENT VIDEO INPUT	ON	ON	ON
C169	COMPRESS 16:9 MODE AVAILABLE	OFF	OFF	OFF
E149	EXPAND 14:9 MODE AVAILABLE	OFF	OFF	OFF
SMCK	SMART CLOCK	ON	ON	ON
AV3	SIDE AV SOURCE	OFF	ON	OFF
CBFL	COMB FILTER	ON	ON	ON
IPIX	INCREDIBLE PICTURE	ON	ON	ON
IPMU	INCREDIBLE PICTURE VIA MENU ITEM	ON	ON	ON
VDBY	VIRTUAL DOLBY ENABLED	OFF	OFF	OFF
PLST	PROGRAM LIST	ON	ON	ON
SOSD	SMART OSD	ON	ON	ON
BLMU	BLUE MUTE	OFF	OFF	OFF
PIPC	PIP CONTROL	ON	ON	ON
PIPT	PIP TUNER	OFF	ON	OFF
VSLC	VERTICAL SLICING	ON	ON	ON
SURF	SURF FEATURE AVAILABLE	ON	ON	ON
CCAP	CLOSED CAPTION	ON	ON	ON
DNRM	DNR FUNCTION AVAILABLE	ON	ON	ON
NVCK	NON VOLATILE CLOCK	OFF	OFF	ON
VMUT	VIDEO BLANKING DURING CHANNEL CH	ON	ON	ON
TIME	TIMER FEATURE AVAILABLE	ON	ON	ON
AAVL	AVL AVAILABLE	ON	ON	ON
FUNN	FINE TUNING MENU ITEM	OFF	OFF	OFF
VCBK	V-CHIP BLOCK UNRATED MENU	ON	ON	ON
VBNR	V-CHIP BLOCK NO RATED MENU	ON	ON	ON
USRC	REMOTE A/B MENU ITEM	OFF	OFF	OFF
BNUM	NUMERICS DISPLAYED IN MENUS	ON	ON	ON
ROTI	ROTATION/TILT	OFF	OFF	OFF
SNIC	SOUND BOARD PRESENT	OFF	OFF	OFF
TMWIN	TIMEOUT FOR DIGIT ENTRY ON=5SEC OFF=2SEC	OFF	OFF	OFF
INCF	INTERNAL COMB FILTER PRESENT	ON	ON	ON
NVM	NVM CORRUPTION	ON	ON	ON
1US1LOW	PTV CLUSTER SELECT	ON	OFF	ON
1US1HIGH	PTV CLUSTER SELECT	OFF	ON	OFF
CL12	12/24 HOUR CLOCK ON=12 OFF=24	ON	ON	OFF
HWBMS	HARDWARE BLUE MUTE STREAK	OFF	OFF	OFF
OB1	CAN BE USED TO ADJUST OPTION BYTES AT ONCE	75	79	75
OB2		181	183	181
OB3		238	238	255
OB4		209	209	209
OB5		208	176	160
OB6-OB8		0	0	0

Option Codes - Asia Pacific

D = Taiwan & Philippines, (3AP1 Software)

Korea, (3AP2 Software)

	3AP1 & 3AP2 CODE DESCRIPTIONS	D
ABSY	AUTO STANDBY AFTER NO INTERACTION	OFF
SBNP	AUTO STANDBY NO PICTURE	ON
CVI	COMPONENT VIDEO INPUT	ON
C169	COMPRESS 16:9 MODE AVAILABLE	OFF
E149	EXPAND 14:9 MODE AVAILABLE	OFF
HWBMS	HARDWARE BLUE MUTE STREAK	ON
SMCK	SMART CLOCK	ON
AV3	SIDE AV SOURCE	ON
AUSB	AUTO STANDBY AUTO ON	ON
CBFL	COMB FILTER	ON
IPIX	INCREDIBLE PICTURE	ON
IPMU	INCREDIBLE PICTURE VIA MENU ITEM	ON
VDBY	VIRTUAL DOLBY ENABLED	ON
PITN	PHILIPS TUNER	OFF
PLST	PROGRAM LIST	ON
SOSD	SMART OSD	ON
BLMU	BLUE MUTE	OFF
PIPC	PIP CONTROL	ON
PIPS	PIP SURF	ON
PIPT	PIP TUNER	ON
ISUR	INCREDIBLE SURROUND	ON
W4x3	DOUBLE WINDOW WITH 4:3 MAIN PICTURE AVAILABLE	ON
W169	DOUBLE WINDOW TWO COMPRESSED 16:9 AVAILABLE	OFF
VSLC	VERTICAL SLICING	ON
SURF	SURF FEATURE AVAILABLE	ON
CCAP	CLOSED CAPTION	ON
DNRM	DNR FUNCTION AVAILABLE	ON
VMUT	VIDEO BLANKING DURING CHANNEL CH	ON
TIME	TIMER FEATURE AVAILABLE	ON
AAVL	AVL AVAILABLE	ON
CHLK	CHILD LOCK FEATURE AVAILABLE	ON
ROTI	ROTATION/TILT	OFF
SNIC	SOUND BOARD PRESENT	ON
TMWIN	TIMEOUT FOR DIGIT ENTRY ON=5SEC OFF=2SEC	OFF
INCF	INTERNAL COMB FILTER PRESENT	ON
NVM	NVM CORRUPTION	ON
HWBMS	HARDWARE BLUE MUTE STREAK	OFF
OB1	CAN BE USED TO ADJUST OPTION BYTES AT ONCE	99
OB2		246
OB3		251
OB4		253
OB5		112
OB6-OB8		0

Option Codes - Late Production Change

Late Production SSM Panels with HWBMS "ON"

A = USA Fighter, (1US1 Software)

B = USA Fighter +, (1US1 Software)

C = NAFTA Mexico, (1US1 Software)

D = Taiwan & Philippines, (3AP1 Software) - Korea, (3AP2 Software)

		A	B	C	D
HWBMS	HARDWARE BLUE MUTE STREAK	ON	ON	ON	ON
OB1	CAN BE USED TO ADJUST OPTION BYTES AT ONCE	75	79	75	99
OB2		181	183	181	246
OB3		238	238	255	251
OB4		209	209	209	253
OB5					
OB6-OB8		0	0	0	0

Gray Scale Alignment

Gray Scale alignment will be necessary after changing the SSB (Small Signal Board) or the CRTs.

Enter the Service Alignment Mode by entering 0-6-2-5-9-6-(Status or Index).

G2 Setup

Preferred Method

1. Connect a Black Level signal to the set.
2. Preset all G2 controls on the Focus/G2 Combo Block to minimum (fully CCW)
3. Connect an Oscilloscope to the Collector of each output transistor on the Green CRT board. Set the probe to times 10.
4. Adjust the Green G2 control until the Black Level is at 200V.
5. Repeat steps 3 and 4 for the Red and Blue CRTs.

Alternate Method

1. Connect a Black Level signal to the set.
2. Preset all G2 controls on the Focus/G2 Combo Block to minimum (fully CCW).
3. Turn each G2 control clockwise until each CRT is barely illuminated.

Gray Scale Setup

1. Connect a Gray Scale pattern to the set.
2. Preset the registers as shown below.

NORMAL RED	26
NORMAL GREEN	56
NORMAL BLUE	59
NORMAL BLACK LEVEL RED	10
NORMAL BLACK LEVEL GREEN	13
DELTA COOL RED	-6
DELTA COOL GREEN	-7
DELTA COOL BLUE	4
DELTA COOL BLACK LEVEL RED	2
DELTA COOL BLACK LEVEL GREEN	1
DELTA WARM RED	6
DELTA WARM GREEN	0
DELTA WARM BLUE	-8
DELTA WARM BLACK LEVEL RED	-2
DELTA WARM BLACK LEVEL GREEN	-1
CATHODE DR	12

3. Set Brightness, Color, and Sharpness controls to 40 and Picture control to maximum.
4. Adjust the NORMAL BLACK LEVEL controls to set the correct gray scale in the dark areas of the picture.
5. Adjust the NORMAL RED AND BLUE controls to set the correct gray scale in the light areas of the picture.
6. Use the Menu button on the Remote to back out to the main service menu.
7. Turn the set off using the Power Button on the Remote or the front of the set.

Customer Service Mode (CSM)

All PTV900 series sets are equipped with the "Customer Service Mode" (CSM). CSM is a special service mode that can be activated and deactivated by the customer, by request of the service technician/dealer in order to identify the status of the set. This CSM is a 'read only' mode, therefore modifications in this mode are not possible.

Entering the Customer Service Mode

The Customer Service Mode can be switched on:

- By pressing the MUTE button on the remote control and any key on the local keyboard (Channel Up, Channel Down, VOL +, VOL -) on the TV simultaneously for at least 4 seconds.

The following menu will appear.

```

1  HRS:      044A      SWID:      A101US1-2.06      CSM
2  CODES:    33      16      0      0      0      0      0
3  OPT: 79      183      283      209      176      0      0      0
4
5
6
7
8
9
10 SOURCE: 3
11 SOUND: MONO
12 VOLUME: 2
13 BALANCE: 1
14 HUE: -18
15 COLOR: 31
16 BRIGHTNESS: 27
17 CONTRAST: 40
18 SPEAKERS: ON

```

Figure 3: CSM Screen

When the CSM is activated:

- picture and sound settings are set to nominal levels
- Modes that interfere with the behavior of the set are switched off (sleep timer, auto standby, etc.)

Exit the Customer Service Mode

The Customer Service Mode will be switched off after:

- Pressing any key on the remote control (except “Channel Up” or “Channel Down”)
- Switching off the TV set by pressing the Power button on the remote control or the local keyboard.

Exiting CSM resets the TV set back to its initial values.

The Customer Service Mode Information Screen

Upon entry into the Customer Service Mode the following screen will appear.

1	HRS:	044A	SWID:	A101US1-2.06	CSM
2	CODES:	33	16	0	0 0 0 0
3	OPT:	79	183	283	209 176 0 0 0
4					11 SOUND: MONO
5					12 VOLUME: 2
6					13 BALANCE: 1
7					14 HUE: -18
8					15 COLOR: 31
9					16 BRIGHTNESS: 27
10	SOURCE:	3			17 CONTRAST: 40
					18 SPEAKERS: ON

Figure 4: CSM Screen

The Customer Service Menu shows the following information:

- **Line 1: "HRS : nnnnn" and SWID : "A10BBC-X.Y"**

HRS:

Indicates the accumulated total of operational hours. (Shown in hexadecimal format.) (Standby hours are not counted as operating hours).

SWID:

Software identification of the main micro controller (example: A10US1-2.7)

A10 is the engineering chassis name for the PTV900 series chassis

- **1US1** is character combination to indicate the software type and the supported languages:
3AP1 or **3AP2** are also possible for the Asian Pacific regions.
- **US** = USA/NAFTA, **AP** = Asian Pacific
- **1** = Main Software language version number
- **2.7** = sub-version number

- **Line 2: "CODES: xx xx xx xx xx xx xx "**

Error code buffer (see explanation of error codes above) Displays the last 7 errors of the error code buffer.

- **Line 3: "OPT xxx xxx xxx xxx xxx xxx xxx "**

Option bytes

Option bits control the software and hardware functionality of the A10.0. An option byte or option number represents 8 of those bits. Each option number is displayed as a number between 0 and 255. The set may not work correctly when an incorrect option code is set. See Service Adjustments for more information on correct option settings

- **Line 4: NOT USED**

- **Line 5: "NO SIGNAL"**

Indicates that the set is not receiving an "ident" signal on the selected source.

- no or bad antenna signal; connect a proper antenna signal
- antenna not connected; connect the antenna
- no channel / preset is stored at this program number; go to the INSTALL menu and store a proper channel at this program number
- the tuner is faulty (in this case the CODES line will contain number 13 or 16); check the tuner and replace/repair if necessary

Note: On some models, (if the BM option is ON), BLUE MUTE is displayed when no signal is received.

- **Line 6: "TIMER ON"**

Indicates that the on/off timer is running.

The following Complaints may be caused by the activation of the sleep timer:

The set may turn on from standby or may switch to a different channel without using either the remote control or the local keyboard.

To switch off the activation timer:

Select "TIMER" in the "FEATURE" menu.

Select "ACTIVATE" in the "TIMER" menu.

Set to "OFF" with the left/right cursor keys.

- **Line 7: NOT AVAILABLE**

- **Line 8: "NOT PREFERRED"**

Indicates that at least one channel is deleted as a preferred channel (by default, all channels are skipped).

Note that "SKIPPED" will always be displayed in CSM unless all the channels are not skipped.

To add a channel as a selected channel to the list of preferred channels:

Select "INSTALL" menu

Select "CHANNEL EDIT"

Select "ADD/DELETE"

Set to "ADD" with the left/right cursor keys

- **Line 9: "HOTEL MODE ON"**

Indicates that the Hotel mode has been activated.

- **Line 10: "SOURCE:"**

Indicates which SOURCE is installed for this preset.

EXT1, SVHS2, EXT2, Tuner.

- **Line 11: "SOUND"**

Indicates which sound mode is installed for this preset.

Mono, NICAM, Stereo, L1, L2, SAP, Virtual or Digital

- **Line 12: "VOLUME"**

Value indicates level at entry CSM.

- **Line 13: "BALANCE"**

Value indicates level at entry CSM.

- **Line 14: "HUE"**
Value indicates level at entry CSM.
- **Line 15: "COLOR"**
Value indicates level at entry CSM.
- **Line 16: "BRIGHTNESS"**
Value indicates level at entry CSM.
- **Line 17: "CONTRAST"**
Value indicates level at entry CSM.
- **Line 18: "SPEAKERS"**
Indicates is the Speakers are On or Off.

Convergence Procedures

The set should be warmed up for at least 20 minutes prior to making any Geometry or Convergence adjustments.

A signal must be applied to the set while performing Convergence or Geometry alignments. This is necessary to provide the correct horizontal and vertical sync to the Convergence panel. Failure to do so will result in an out of convergence picture when signal is applied to the set.

The Serviced Technician should sit at least 5 to 10 feet from the front of the screen while doing Convergence. Ensure that you are eye level with the area of the screen you are adjusting.

When performing Digital Convergence, the adjustments are interactive. A change in one quadrant will affect adjacent areas of the screen. Several passes through the Convergence sequence may be necessary. When doing Convergence, it is advised to follow the sequence pattern when going from on adjustment location to another. Pressing the Right Cursor key will sequence the Icon through a preloaded sequence.

When the Convergence error is small, a touch up Convergence will be all that is necessary. Do not adjust Green Geometry while in this mode. A complete in-depth Convergence is required when the Small Signal Module (SSM) or the Convergence Memory IC, has been replaced. If the SSB (Small Signal Board) or the Large Signal Board (LSB) has been replaced, a complete in-depth Geometry should be completed before Convergence is adjusted. The Geometry alignment should not be necessary if the SSB or LSB have not been changed.

Screen Templates

When performing a complete in-depth Convergence alignment, a Screen Template is necessary to obtain the correct Geometry. The correct Templates are listed below:

43 INCH	ST4168
50 INCH	ST4169
55 INCH	ST4170
60 INCH	ST4171
64 INCH	ST4172

Touch-up Convergence adjustments

Enter the Digital Convergence Mode (DCM) by entering 0-6-2-5-9-7-(Status or Index) on the Remote control. The following menu will appear:

Select an active channel or Aux Input. A signal must be applied to the set when performing convergence. If any Customer Adjustments need to be made, the Menu button can be used to toggle between the Customer Menu and DCM. The MPOSD ADJUST is used to center the Customer Convergence grid. A highlighted cross will appear along with the Convergence alignment grid. The highlighted cross should be centered onto the center of the Convergence grid.

To perform a Touch Up Convergence, highlight SELECTION and press the right cursor button on the remote. The following menu will appear:

Selections STORE, RESTORE FACTORY, and RESTORE DEFAULT are not shown after selecting SELECTION. Press the cursor down button on the Remote for these selections to appear. RESTORE FACTORY loads Convergence defaults from the Factory Loaded section of the Convergence Memory IC. RESTORE DEFAULT loads Convergence defaults from the sets software.

To perform a Touch-up Convergence:

1. Enter the Convergence Mode and select RED TO GREEN or BLUE TO GREEN. Do not select GREEN (Green Geometry) without placing a Template over the screen. To perform Green Geometry, refer to the Complete in-depth Convergence.
2. Use the Cursor buttons on the Remote to Navigate from one adjustment point to another. Press the Status or Index button on the Remote to select ADJUST. Use the cursor buttons on the Remote to adjust the Red to Green or Blue to Green. Press the Status or Index button again to navigate to the next adjustment location.
3. After Convergence alignments are complete, press the Menu button on the Remote to return to the SELECTION menu.
4. Highlight the STORE selection and press the right cursor key on the Remote to save changes.
5. Use the GREEN TO RED or GREEN TO BLUE selections to perform convergence when the Green CRT has been replaced.

Complete in-depth Convergence

SCREEN CENTERING

1. Make sure a signal is applied to the set.
2. Enter the Convergence mode by entering 0-6-2-5-9-7-(Status or Index). Select an active channel or input. If the Customer settings need to be adjusted, pressing the Menu button will access the Customer menu.
3. Place a Template over the screen.
4. Select GREEN in the SELECTION menu.
5. Place a jumper across connector 1005 on the SSM to defeat convergence drive.
6. Using the centering rings on the Green CRT, center the convergence pattern onto the center point of the Convergence Template.
7. Press the Menu button on the Remote to return to the SELECTION menu.
8. Select RED TO GREEN in the menu.
9. Center the Red pattern onto the Green pattern.
10. Select BLUE TO GREEN in the SELECTION menu.
11. Center the Blue pattern onto the Green pattern.
12. Remove the Jumper on connector 1005.

Note: If a CRT has been replaced, it is only necessary to perform Screen Centering for the CRT being replaced.

GREEN GEOMETRY

1. Make sure a signal is applied to the set.
2. Enter the Convergence mode by entering 0-6-2-5-9-7-(Status or Index). Use the Menu button to toggle between DCM and Customer Mode. Select an active channel or input while in the Customer Mode.
3. Place a Template over the Screen.
4. Select GREEN in the SELECTION menu.
5. The Icon will appear in the center of the screen. Press the Right Cursor key on the remote to move the Icon to the next adjustment location. At each location press the Status or Index button to enter the ADJUST mode. Using the Cursor keys, adjust the Icon onto the adjustment point on the template. It is recommended that the two outside vertical lines not be adjusted in the first two passes.
6. Continue to follow the pattern and make corrections until the Convergence Crosshatch pattern matches the Template.
7. Press the Menu button to return to the SELECTION menu.
8. Use the Cursor down key to highlight the STORE selection.
9. Press the Right cursor key to save the alignments.
10. Remove the Template.

RED CONVERGENCE

1. Select RED TO GREEN in the SELECTION menu.
2. Adjust the Red crosshatch pattern onto the green pattern in the same manner that Green was adjusted to the Template.
3. Save the alignments.

BLUE CONVERGENCE

1. Select BLUE TO GREEN in the SELECTION menu.
2. Adjust the Blue crosshatch pattern onto the green pattern in the same manner that Green was adjusted to the Template.
3. Save the alignments.

Complete in-depth Geometry

To activate the Service Alignment Mode, enter 0-6-2-5-9-6-(Status or Index) using the Remote Control. Press Status or Index toggle to the Customer menu. Select an active channel. Pressing the Status or Index button will bring up the SAM mode.

1. Apply a Crosshatch pattern to the set and select that input.
2. Defeat Convergence by shorting the two pins of connector 1005 on the SSM.
3. Press the Cursor-down key on the remote and select Geometry with the Right cursor key.
4. Adjust the Screen Geometry as necessary.

The following are default values:

VER.AMPL	30
VER.SLOPE	34
SERV.BLK	OFF
HOR.SHIFT	32
HOR.BOW	20
HOR.PARALLEL	31
EW.WIDTH	22
EW.PARA	21
EW.TRAP	19
EW.UCORN	6
EW.LCORN	0
H60.WIDTH	2
H60.PARA	0
H60.SHIFT	7
V60.AMPL	0
VER.SCOR	18
VER.SHIFT	35
VER.ZOOM	32
VER.SCROLL	32

To save changes, use the Menu button on the Remote to back out to the main menu. Then turn the set off using the power button on the Remote or the front of the set. This will save any changes made.

Troubleshooting Tips

The Power Supply Circuit

When the set is turned On, the Main Switch Mode power supply is turned On. This supply produces the +130 volt,+32 volt,-32 volt, two +15 volt, and Audio supplies. When IC 7302 develops a normal steady state operation, the 130 volt supply is sampled by resistors 3324,3323,and 3322.

This sample voltage is then sent to Shunt regulator 7303 which drives the feedback optoisolator 7303.The feedback voltage on Pin 14 is then compared with an internal 2.5 volt reference by comparator "C". Comparator "C" then sets the reference voltage on the inverting side of comparator "B" to control the On time of the drive at Pin 3.If the voltage on Pin 14 increases due to the 130 volt supply increasing, the On time of the pulse on Pin 3 will be reduced. If the 130 volt supply decreases, the voltage on Pin 14 would decrease, causing the On time of the pulse on Pin 3 to increase. This is used to keep the 130 volt supply at the correct voltage. Variable resistor 3322 is used to adjust the 130 volt supply to the correct level.

The overvoltage protection circuit of the IC will shut the IC down if the VCC level on Pin 1 exceeds 17 volts.

To troubleshoot this circuit, first check the On/Off line from the Small Signal Panel to ensure that it is going Low. Then check for the presence of startup voltage on Pin 1 of the regulator IC 7302.If the IC is working correctly, this voltage will be changing from 9.4 to 14.5 volts. If the startup voltage is not present, check the startup resistor 3300 and the bridge rectifier. If the voltage on Pin 1 is changing, check the drive signal on Pin3.Then check for signal on the gate and drain of 7301.An excessive load on the secondary, a short on the 130 volt line for example, would cause the supply to pulse with little or no voltage on the secondary.

Picture problems

Picture too dark or too bright

- Press "Smart Picture" button on the remote control. If this improves the picture, increase / decrease the brightness value or increase / decrease the contrast value.
- Enter the Customer Service Mode. If this improves the picture, exit Customer Service Mode, then Increase / decrease the brightness value or increase / decrease the contrast value.

White line around picture elements and text

- Press "Smart Picture" button on the remote control. If this improves the picture, decrease the sharpness value.
- Enter the Customer Service Mode. If this improves the picture. Decrease the sharpness value.

Snowy picture

- Snow is an antenna or antenna connector problem. Check tuner and AGC.

Black and white picture

- Press the "Smart Picture" button on the remote control. If this improves the picture, increase the color value.
- Enter the Customer Service Mode. If this improves the picture. Increase the color value.

Menu text not sharp enough

- Press the "Smart Picture" button on the remote control. If this improves the picture, decrease the contrast value.
- Enter the Customer Service Mode. If this improves the picture. Decrease the contrast value.

Sound problems

No sound or sound too loud (after channel change / switching on)

- Enter the Customer Service Mode. If the volume is OK, increase / decrease the volume level.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 43P8341

First Published: 09-23-02

Rev. Date: 10-25-02


Print Date: 2004-10-04

Electrical Diagrams

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

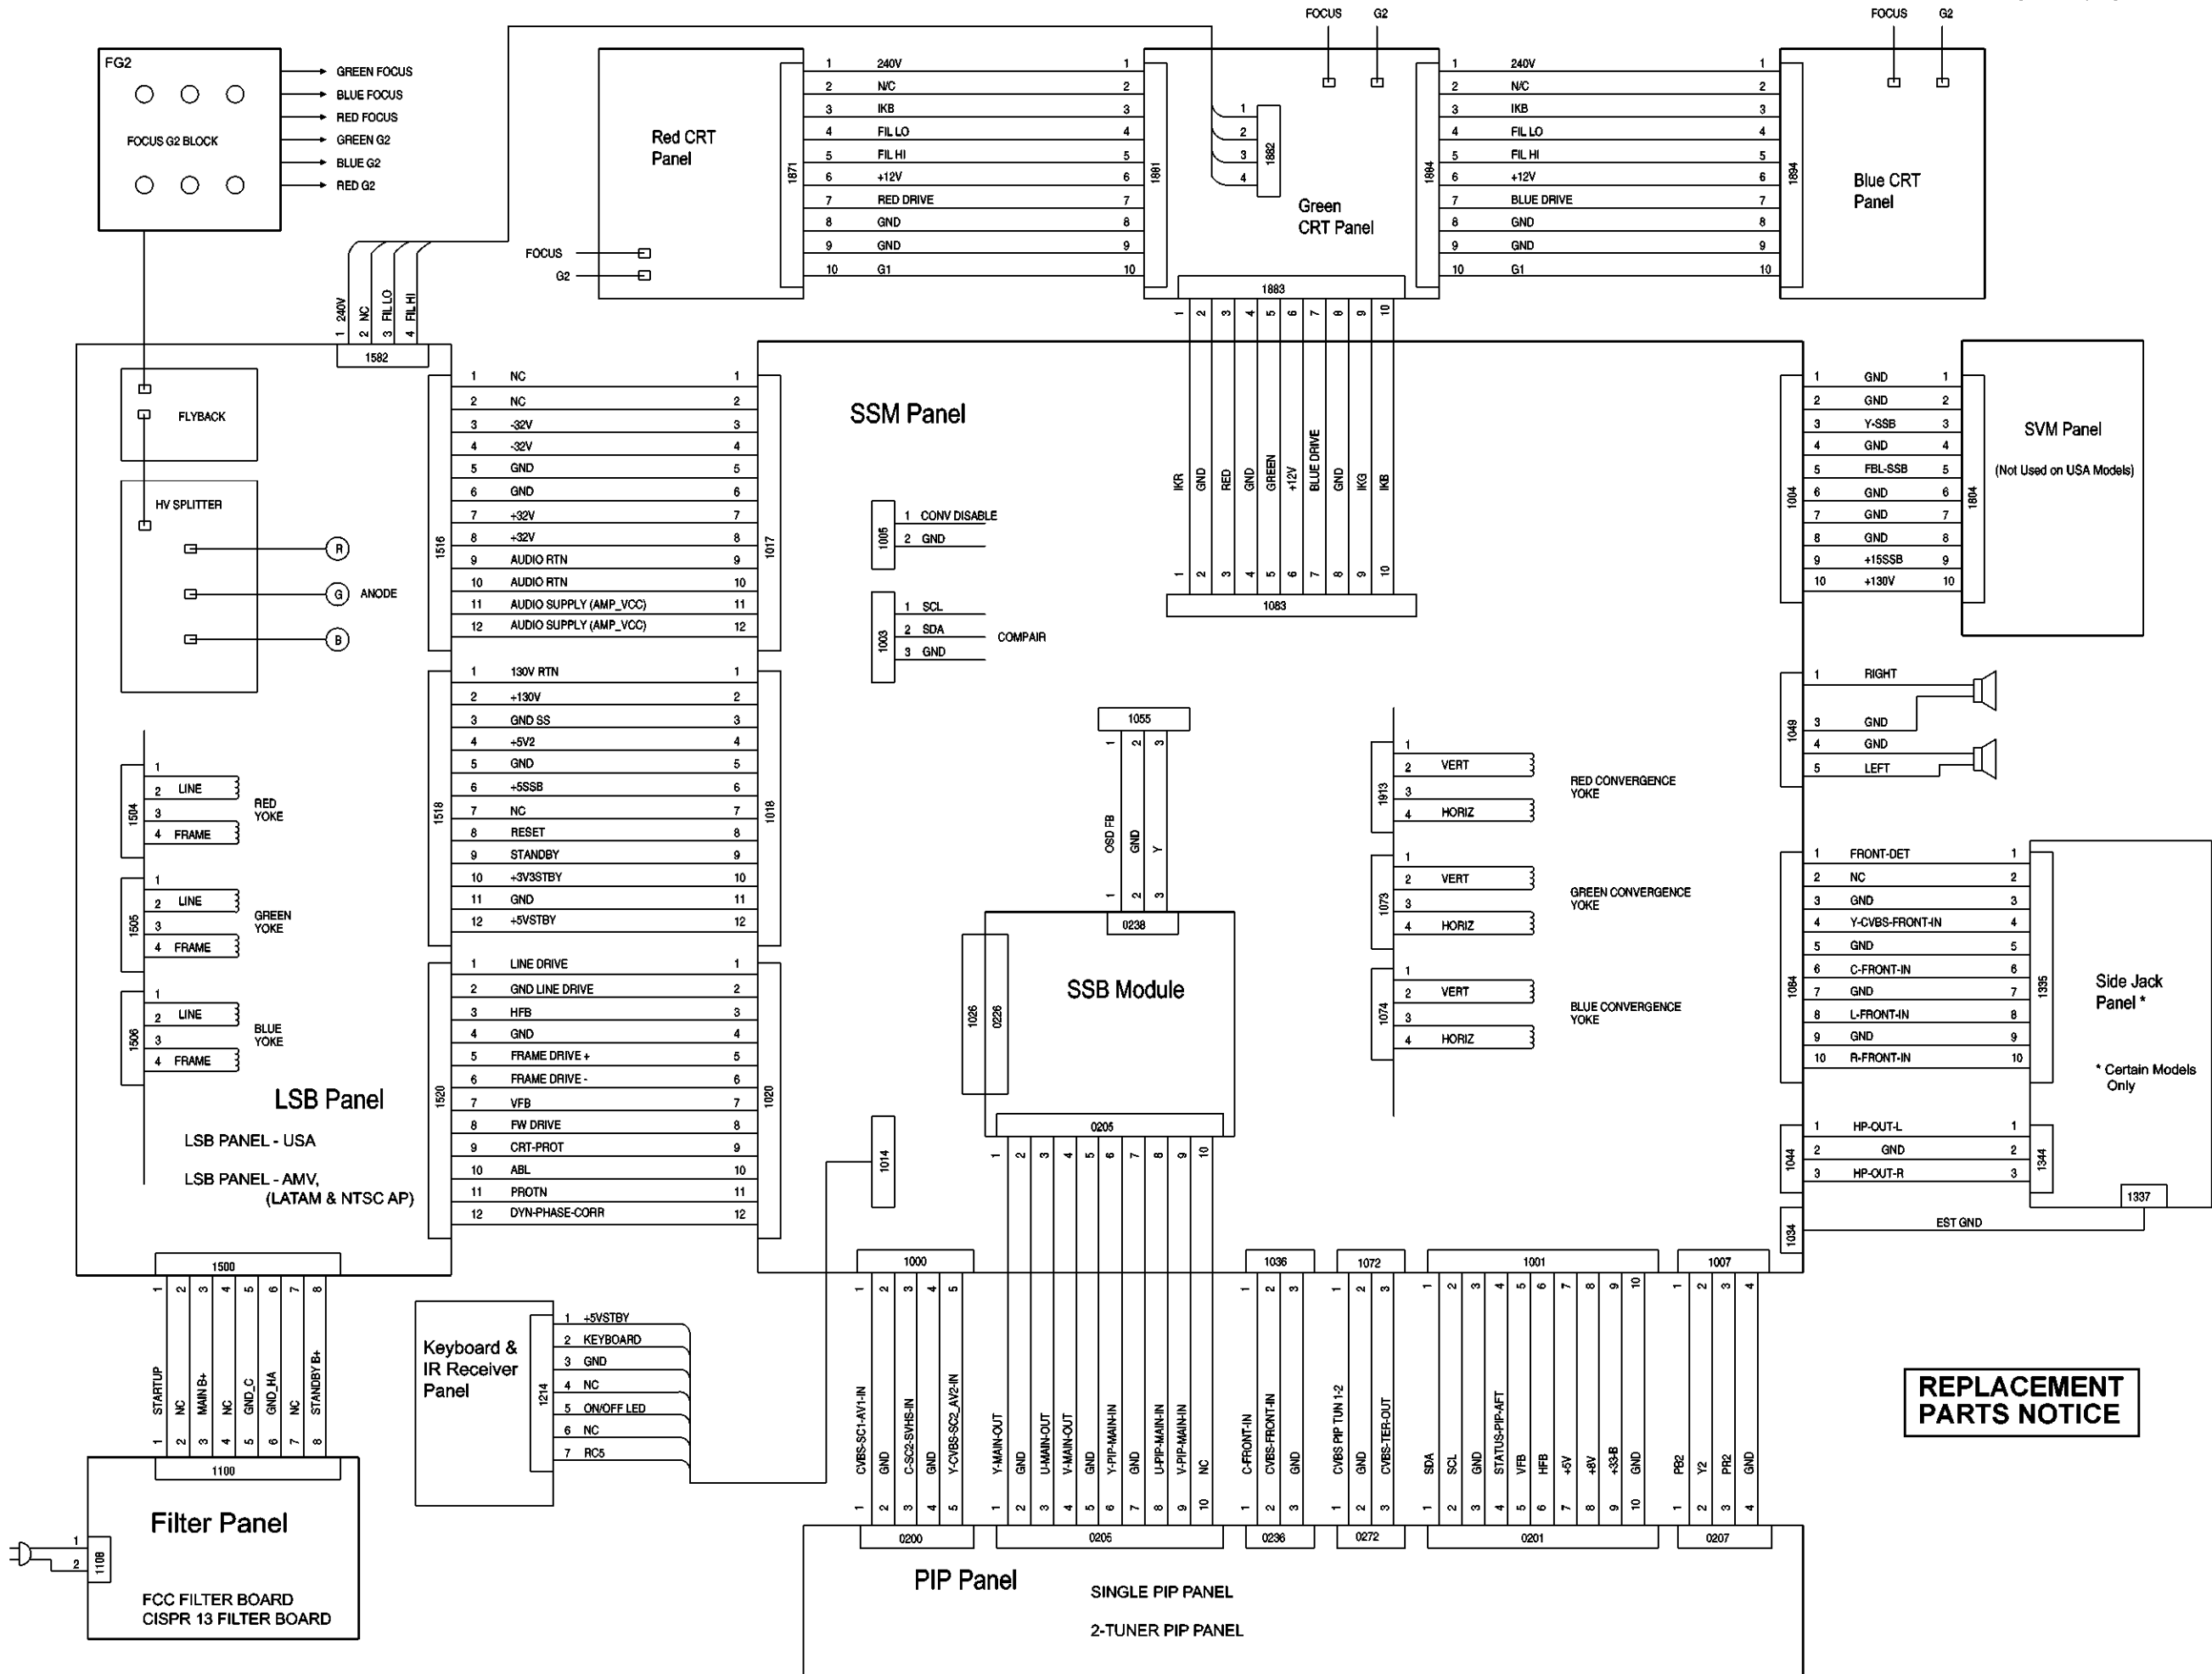

*** PFC Filter Panel ONLY**

*** PFC Filter Panel ONLY**

	CISPR_13 FILTER PANEL	CISPR_13 FILTER PANEL W/O AC SW.	FCC FILTER PANEL	PFC FILTER PANEL
5381				X
5401	X			
0031		X		
5441			X	

NOTES

- CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
- RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
- SAFETY TRIANGLE REPRESENTS CECC REPLACEMENT PART ONLY.
- * FOR COMPONENT USAGE, SEE TABLE.

Ref Des	5381	5401	0031	5441
5381				
5401				
0031				
5441				


Ref Des	5381 PFC FILTER	5401 FILTER CISPR 13	0031 FIL CISPR 13 W/O AC	5441 FILTER FCC
0104	YES	NOT USED	NOT USED	NOT USED
1005	YES	YES	YES	NOT USED
1102	YES	NOT USED	NOT USED	NOT USED
1104	YES	YES	NOT USED	NOT USED
1106	YES	YES	NOT USED	NOT USED
2001	YES	YES	YES	NOT USED
2002	NOT USED	NOT USED	NOT USED	YES
2101	YES	NOT USED	NOT USED	NOT USED
2104	YES	NOT USED	NOT USED	NOT USED
2105	YES	NOT USED	NOT USED	NOT USED
2109	YES	NOT USED	NOT USED	NOT USED
2110	YES	NOT USED	NOT USED	NOT USED
2111	YES	NOT USED	NOT USED	NOT USED
2112	YES	NOT USED	NOT USED	NOT USED
2113	YES	NOT USED	NOT USED	NOT USED
2114	YES	NOT USED	NOT USED	NOT USED
2115	YES	NOT USED	NOT USED	NOT USED
2116	YES	NOT USED	NOT USED	NOT USED
2117	YES	NOT USED	NOT USED	NOT USED
2118	YES	NOT USED	NOT USED	NOT USED
2119	YES	NOT USED	NOT USED	NOT USED
2120	YES	NOT USED	NOT USED	NOT USED

Ref Des	5381 PFC FILTER	5401 FILTER CISPR 13	0031 FIL CISPR 13 W/O AC	5441 FILTER FCC
2214	YES	NOT USED	NOT USED	NOT USED
2215	NOT USED	NOT USED	NOT USED	YES
2216	NOT USED	YES	YES	NOT USED
2217	NOT USED	NOT USED	NOT USED	YES
2218	NOT USED	YES	YES	NOT USED
3000	NOT USED	NOT USED	NOT USED	YES
3001	NOT USED	NOT USED	NOT USED	YES
3002	NOT USED	NOT USED	NOT USED	YES
3004	YES	YES	YES	NOT USED
3010	NOT USED	YES	YES	YES
3105	YES	NOT USED	NOT USED	NOT USED
3107	YES	NOT USED	NOT USED	NOT USED
3108	YES	NOT USED	NOT USED	NOT USED
3109	YES	NOT USED	NOT USED	NOT USED
3110	YES	NOT USED	NOT USED	NOT USED
3111	YES	NOT USED	NOT USED	NOT USED
3112	YES	NOT USED	NOT USED	NOT USED
3113	YES	NOT USED	NOT USED	NOT USED
3114	YES	NOT USED	NOT USED	NOT USED
3115	YES	NOT USED	NOT USED	NOT USED
3116	YES	NOT USED	NOT USED	NOT USED
3117	YES	NOT USED	NOT USED	NOT USED

Ref Des	5381 PFC FILTER	5401 FILTER CISPR 13	0031 FIL CISPR 13 W/Q AC	5441 FILTER FCC
3118	YES	NOT USED	NOT USED	NOT USED
3119	YES	NOT USED	NOT USED	NOT USED
3120	YES	NOT USED	NOT USED	NOT USED
3121	YES	NOT USED	NOT USED	NOT USED
3123	YES	NOT USED	NOT USED	NOT USED
3124	YES	NOT USED	NOT USED	NOT USED
3125	YES	NOT USED	NOT USED	NOT USED
3126	YES	NOT USED	NOT USED	NOT USED
3127	YES	NOT USED	NOT USED	NOT USED
3128	YES	NOT USED	NOT USED	NOT USED
3130	YES	NOT USED	NOT USED	NOT USED
3131	YES	NOT USED	NOT USED	NOT USED
3132	YES	NOT USED	NOT USED	NOT USED
3133	YES	NOT USED	NOT USED	NOT USED
3134	YES	NOT USED	NOT USED	NOT USED
5001	YES	YES	YES	NOT USED
5105	YES	NOT USED	NOT USED	NOT USED
5107	YES	NOT USED	NOT USED	NOT USED
5108	YES	NOT USED	NOT USED	NOT USED
5109	YES	NOT USED	NOT USED	NOT USED
5111	YES	NOT USED	NOT USED	NOT USED
5113	YES	NOT USED	NOT USED	NOT USED

Ref Des	5381 PFC FILTER	5401 FILTER CISPR 13	0031 FIL CISPR 13 W/O AC	5441 FILTER FCC
6103	YES	NOT USED	NOT USED	NOT USED
6104	YES	NOT USED	NOT USED	NOT USED
7102	YES	NOT USED	NOT USED	NOT USED
7104	YES	NOT USED	NOT USED	NOT USED
9000	NOT USED	NOT USED	YES	YES
9001	NOT USED	NOT USED	YES	YES
9002	NOT USED	NOT USED	NOT USED	YES
9003	NOT USED	NOT USED	NOT USED	YES
9100	YES	NOT USED	NOT USED	NOT USED
9101	NOT USED	YES	YES	YES
9102	NOT USED	YES	YES	YES

LSB PANEL SCHEMATIC (Section 2 of 3)

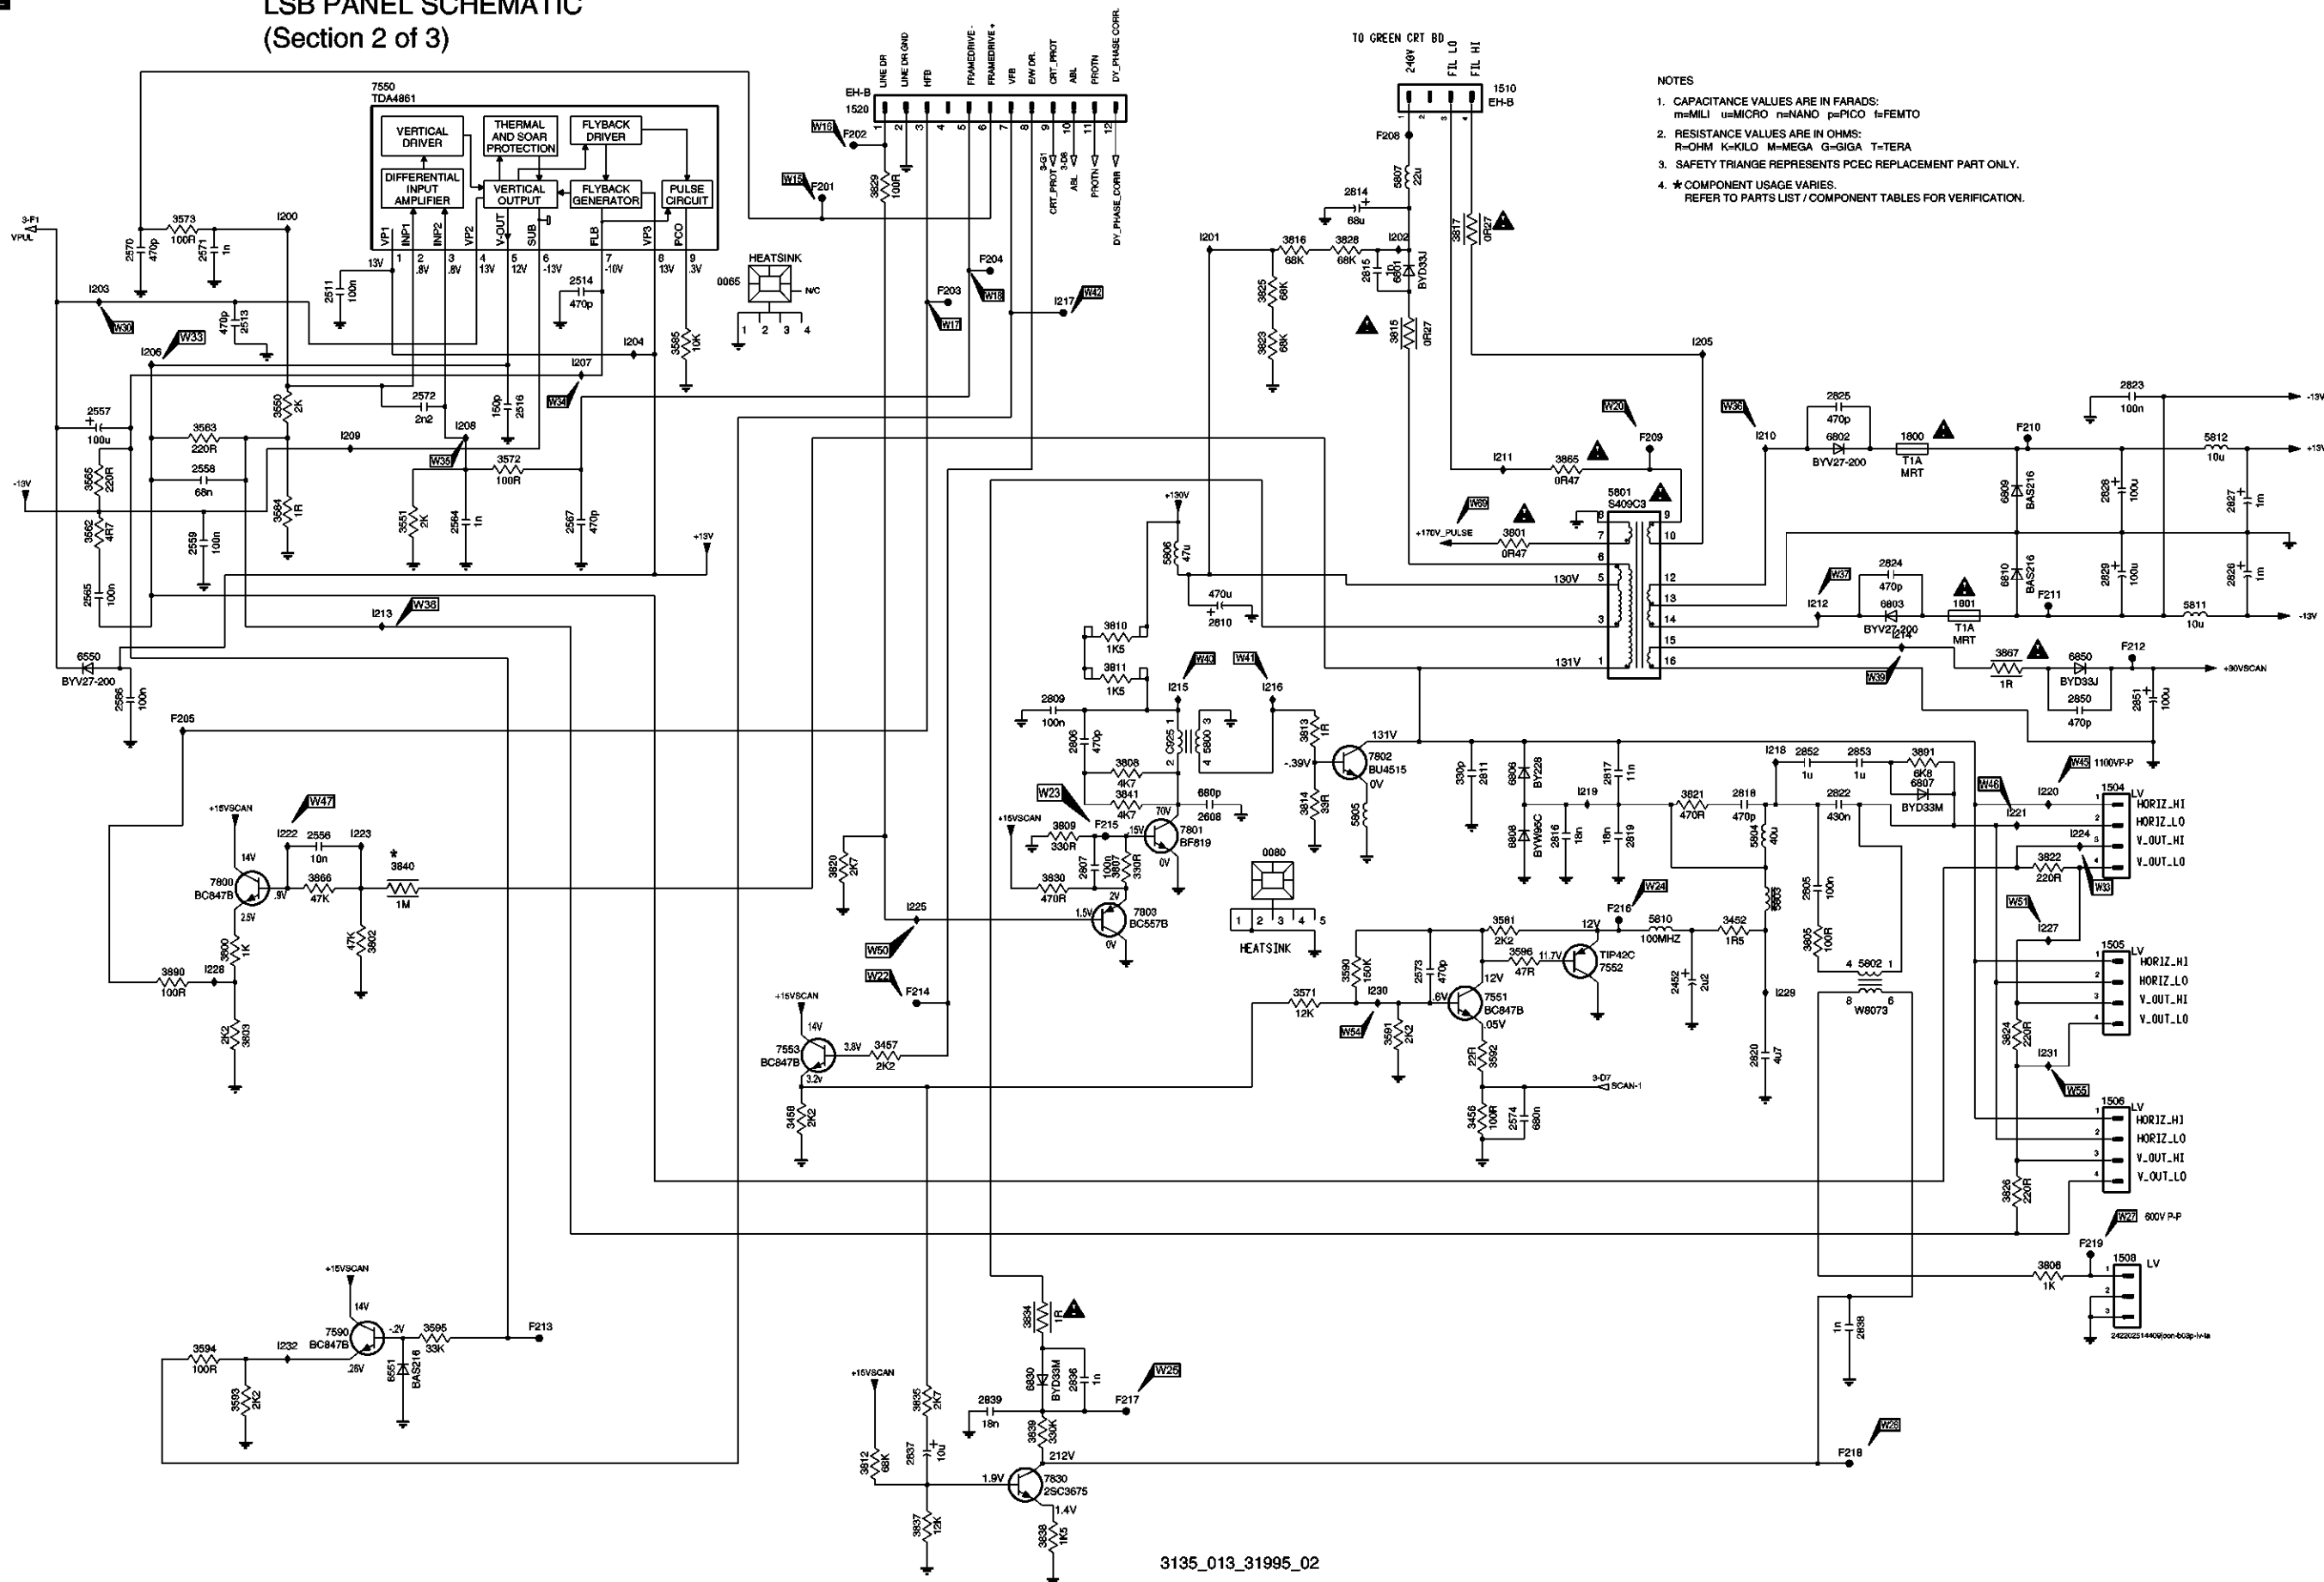


3

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
n=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ★ COMPONENT USAGE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.




1

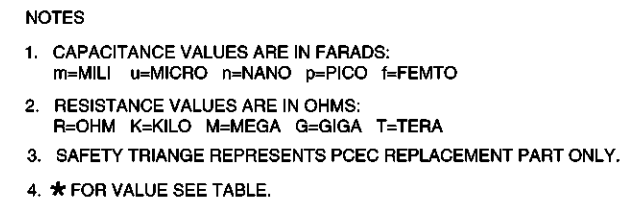


3135 013 32037 01

2


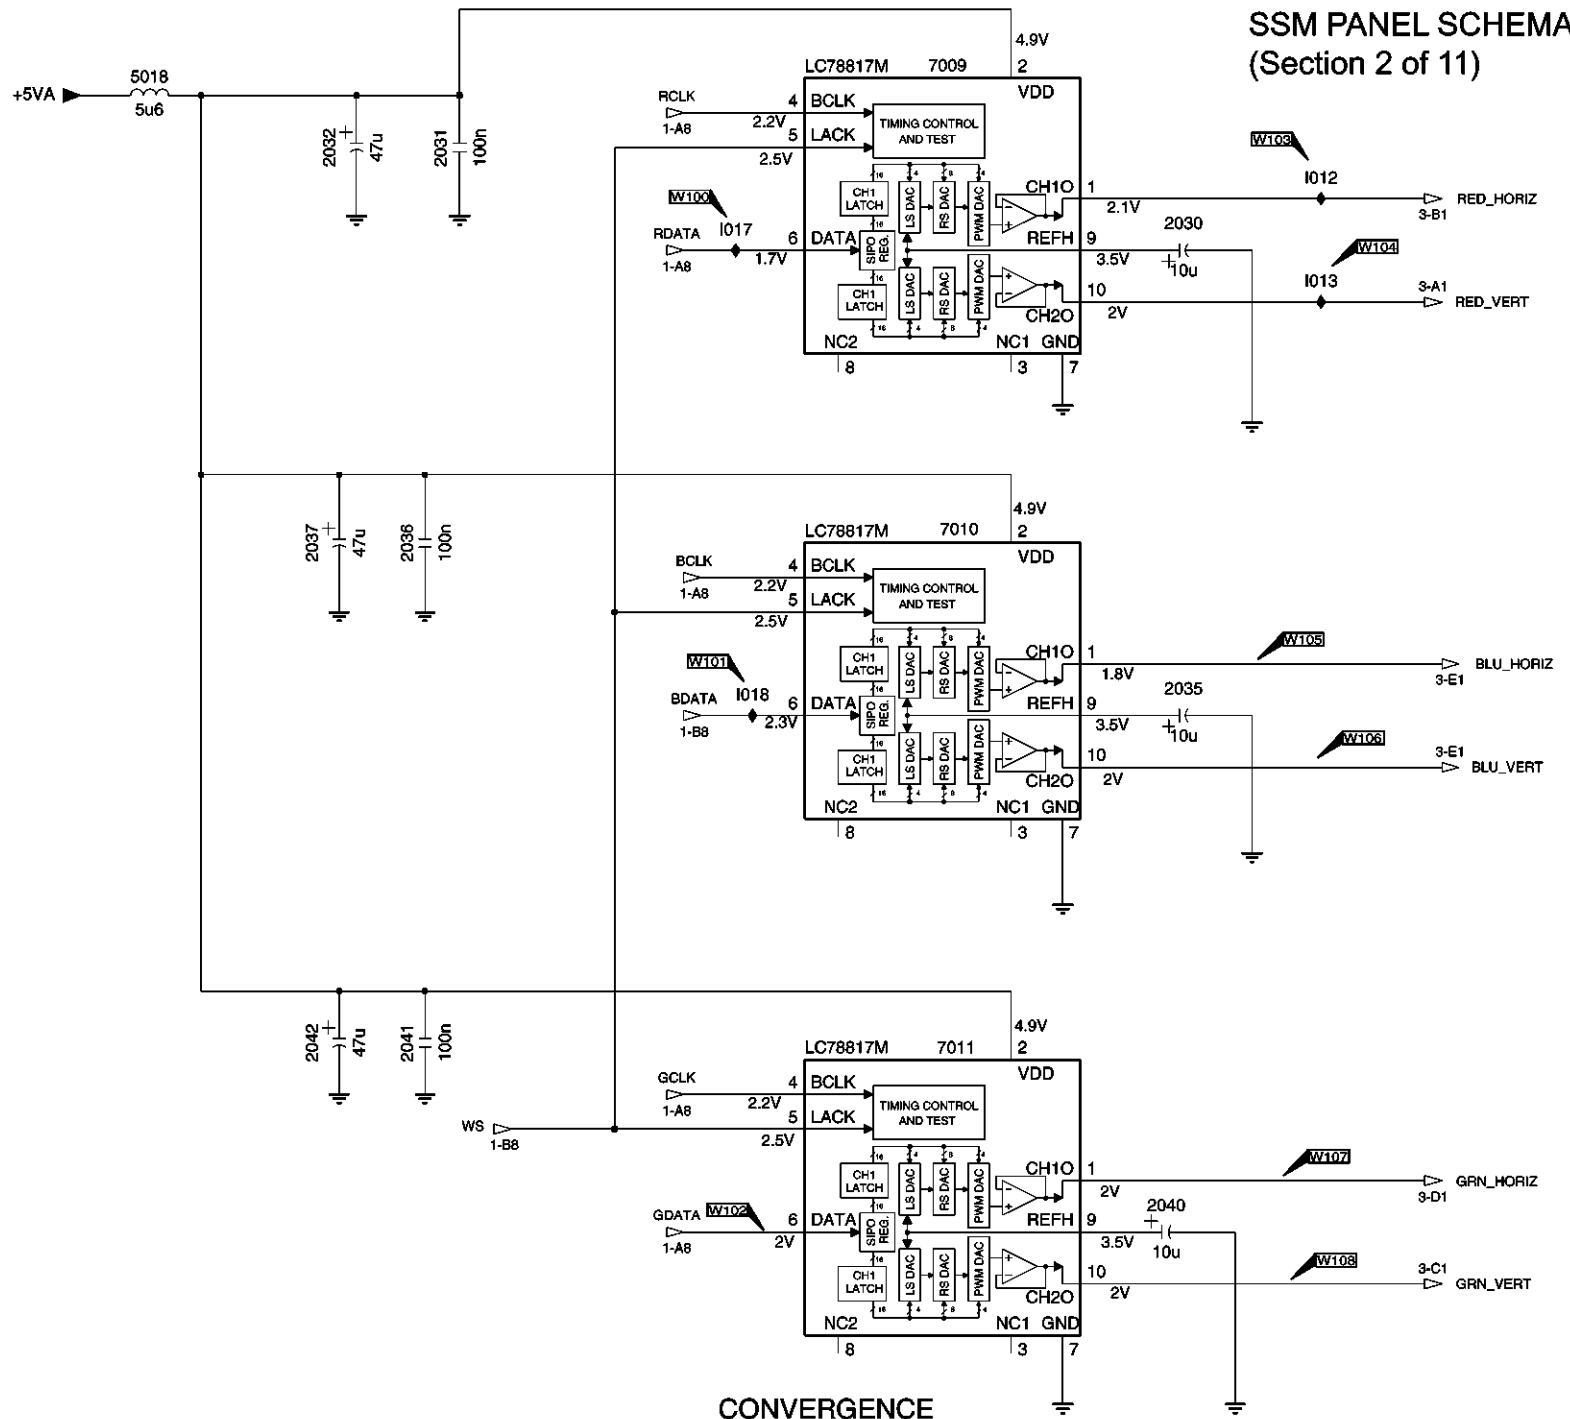


0012
HEATSINK

1 2 3

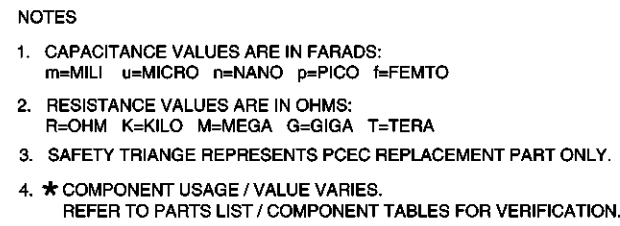

4


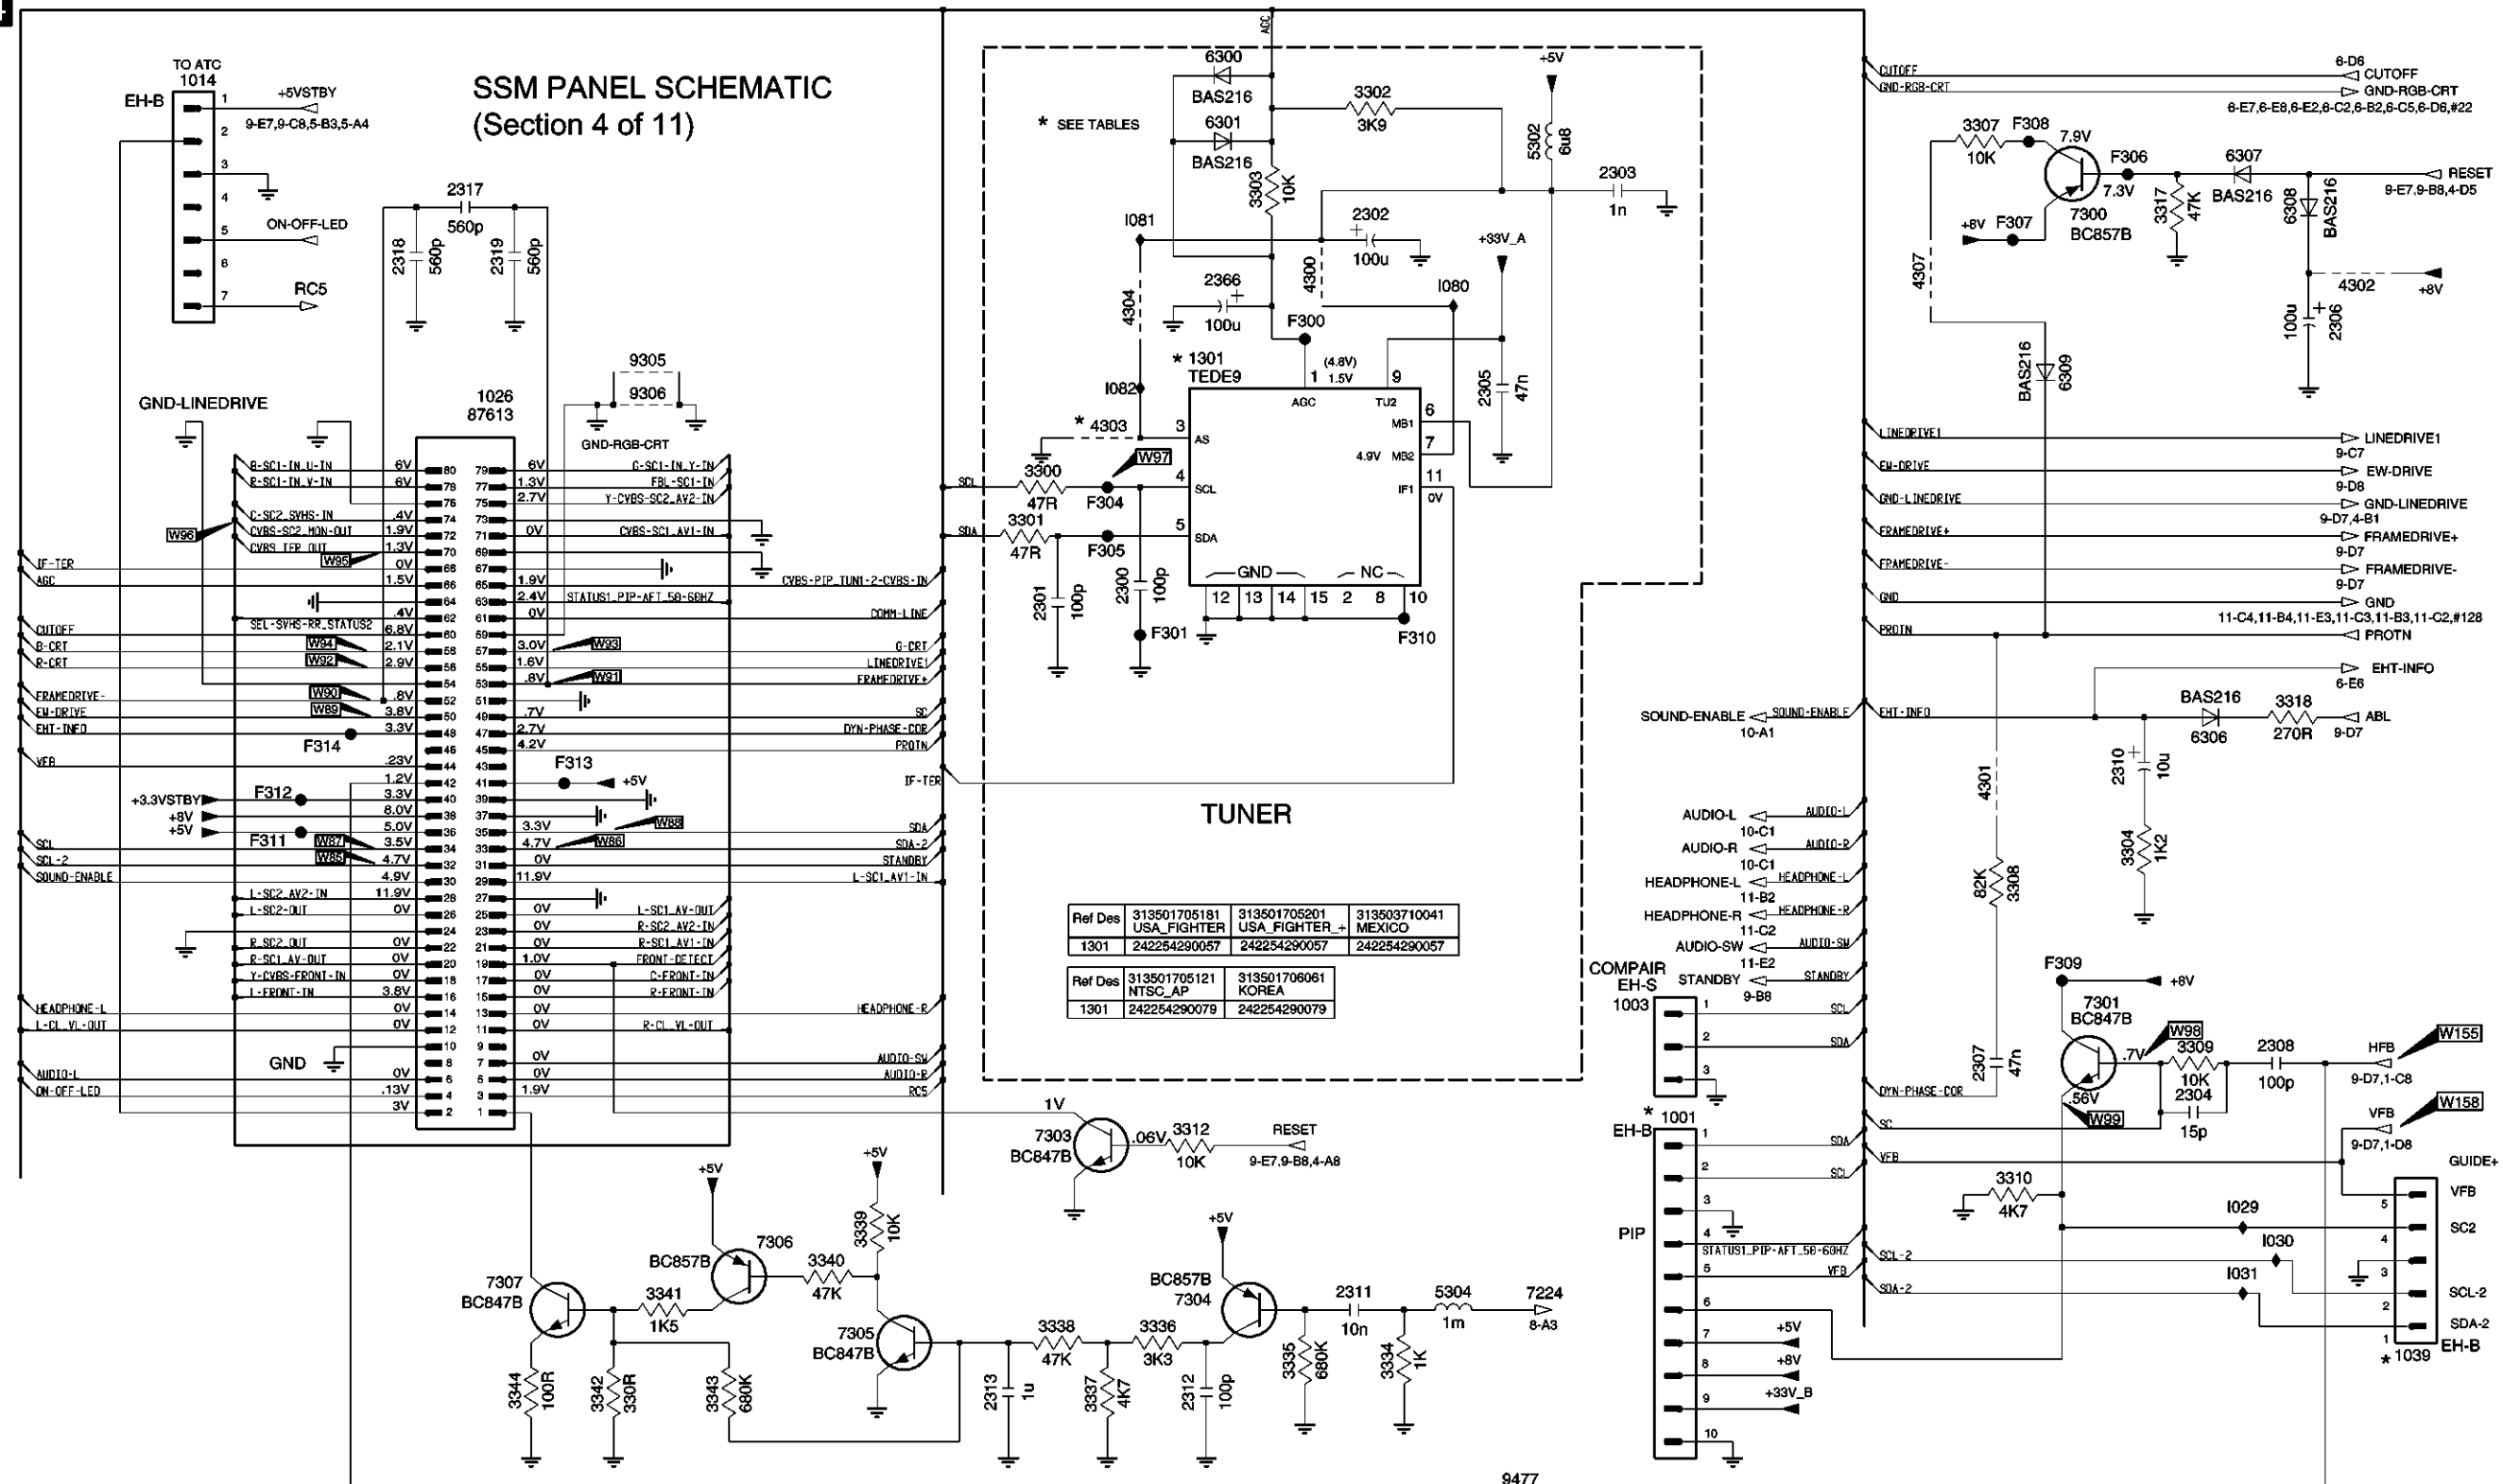
SSM PANEL SCHEMATIC
(Section 4 of 11)

Ref Des	313501705121 NTSC_AP	313501705181 USA_FIGHTER	313501705201 USA_FIGHTER +	313501706061 KOREA	313503710041 MEXICO
1001	YES	YES	YES	YES	YES
1039	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED
4303	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED

3135 013 32037 01


5

SSM PANEL SCHEMATIC (Section 5 of 11)

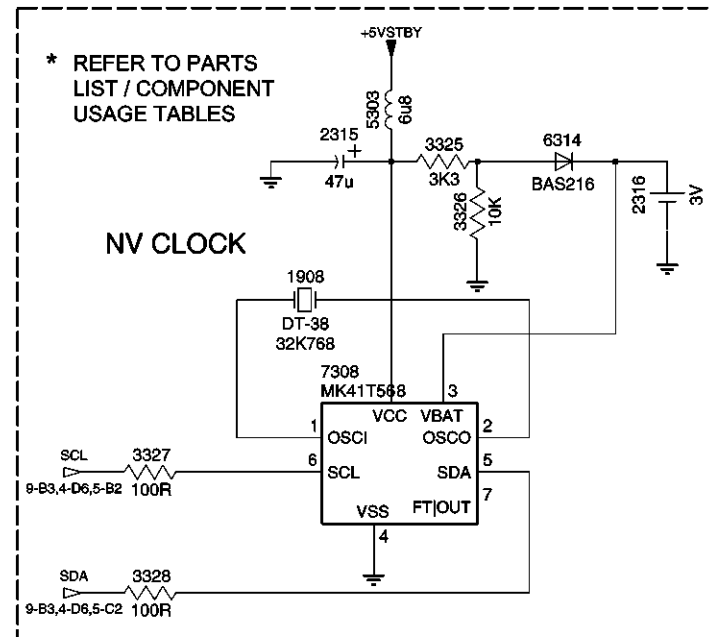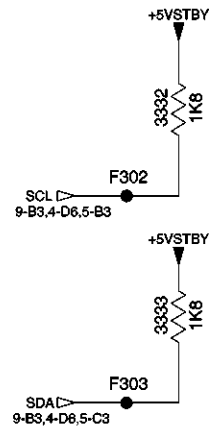

Ref Des	313501705121 NTSC_AP	313501705181 USA_FIGHTER	313501705201 USA_FIGHTER_+	313501706061 KOREA	313503710041 MEXICO
1908	NOT USED	NOT USED	NOT USED	NOT USED	YES
2315	NOT USED	NOT USED	NOT USED	NOT USED	YES
2316	NOT USED	NOT USED	NOT USED	NOT USED	YES
3325	NOT USED	NOT USED	NOT USED	NOT USED	YES
3326	NOT USED	NOT USED	NOT USED	NOT USED	YES
3327	NOT USED	NOT USED	NOT USED	NOT USED	YES
3328	NOT USED	NOT USED	NOT USED	NOT USED	YES
5303	NOT USED	NOT USED	NOT USED	NOT USED	YES
6314	NOT USED	NOT USED	NOT USED	NOT USED	YES
7308	NOT USED	NOT USED	NOT USED	NOT USED	YES

3135 013 32037 01

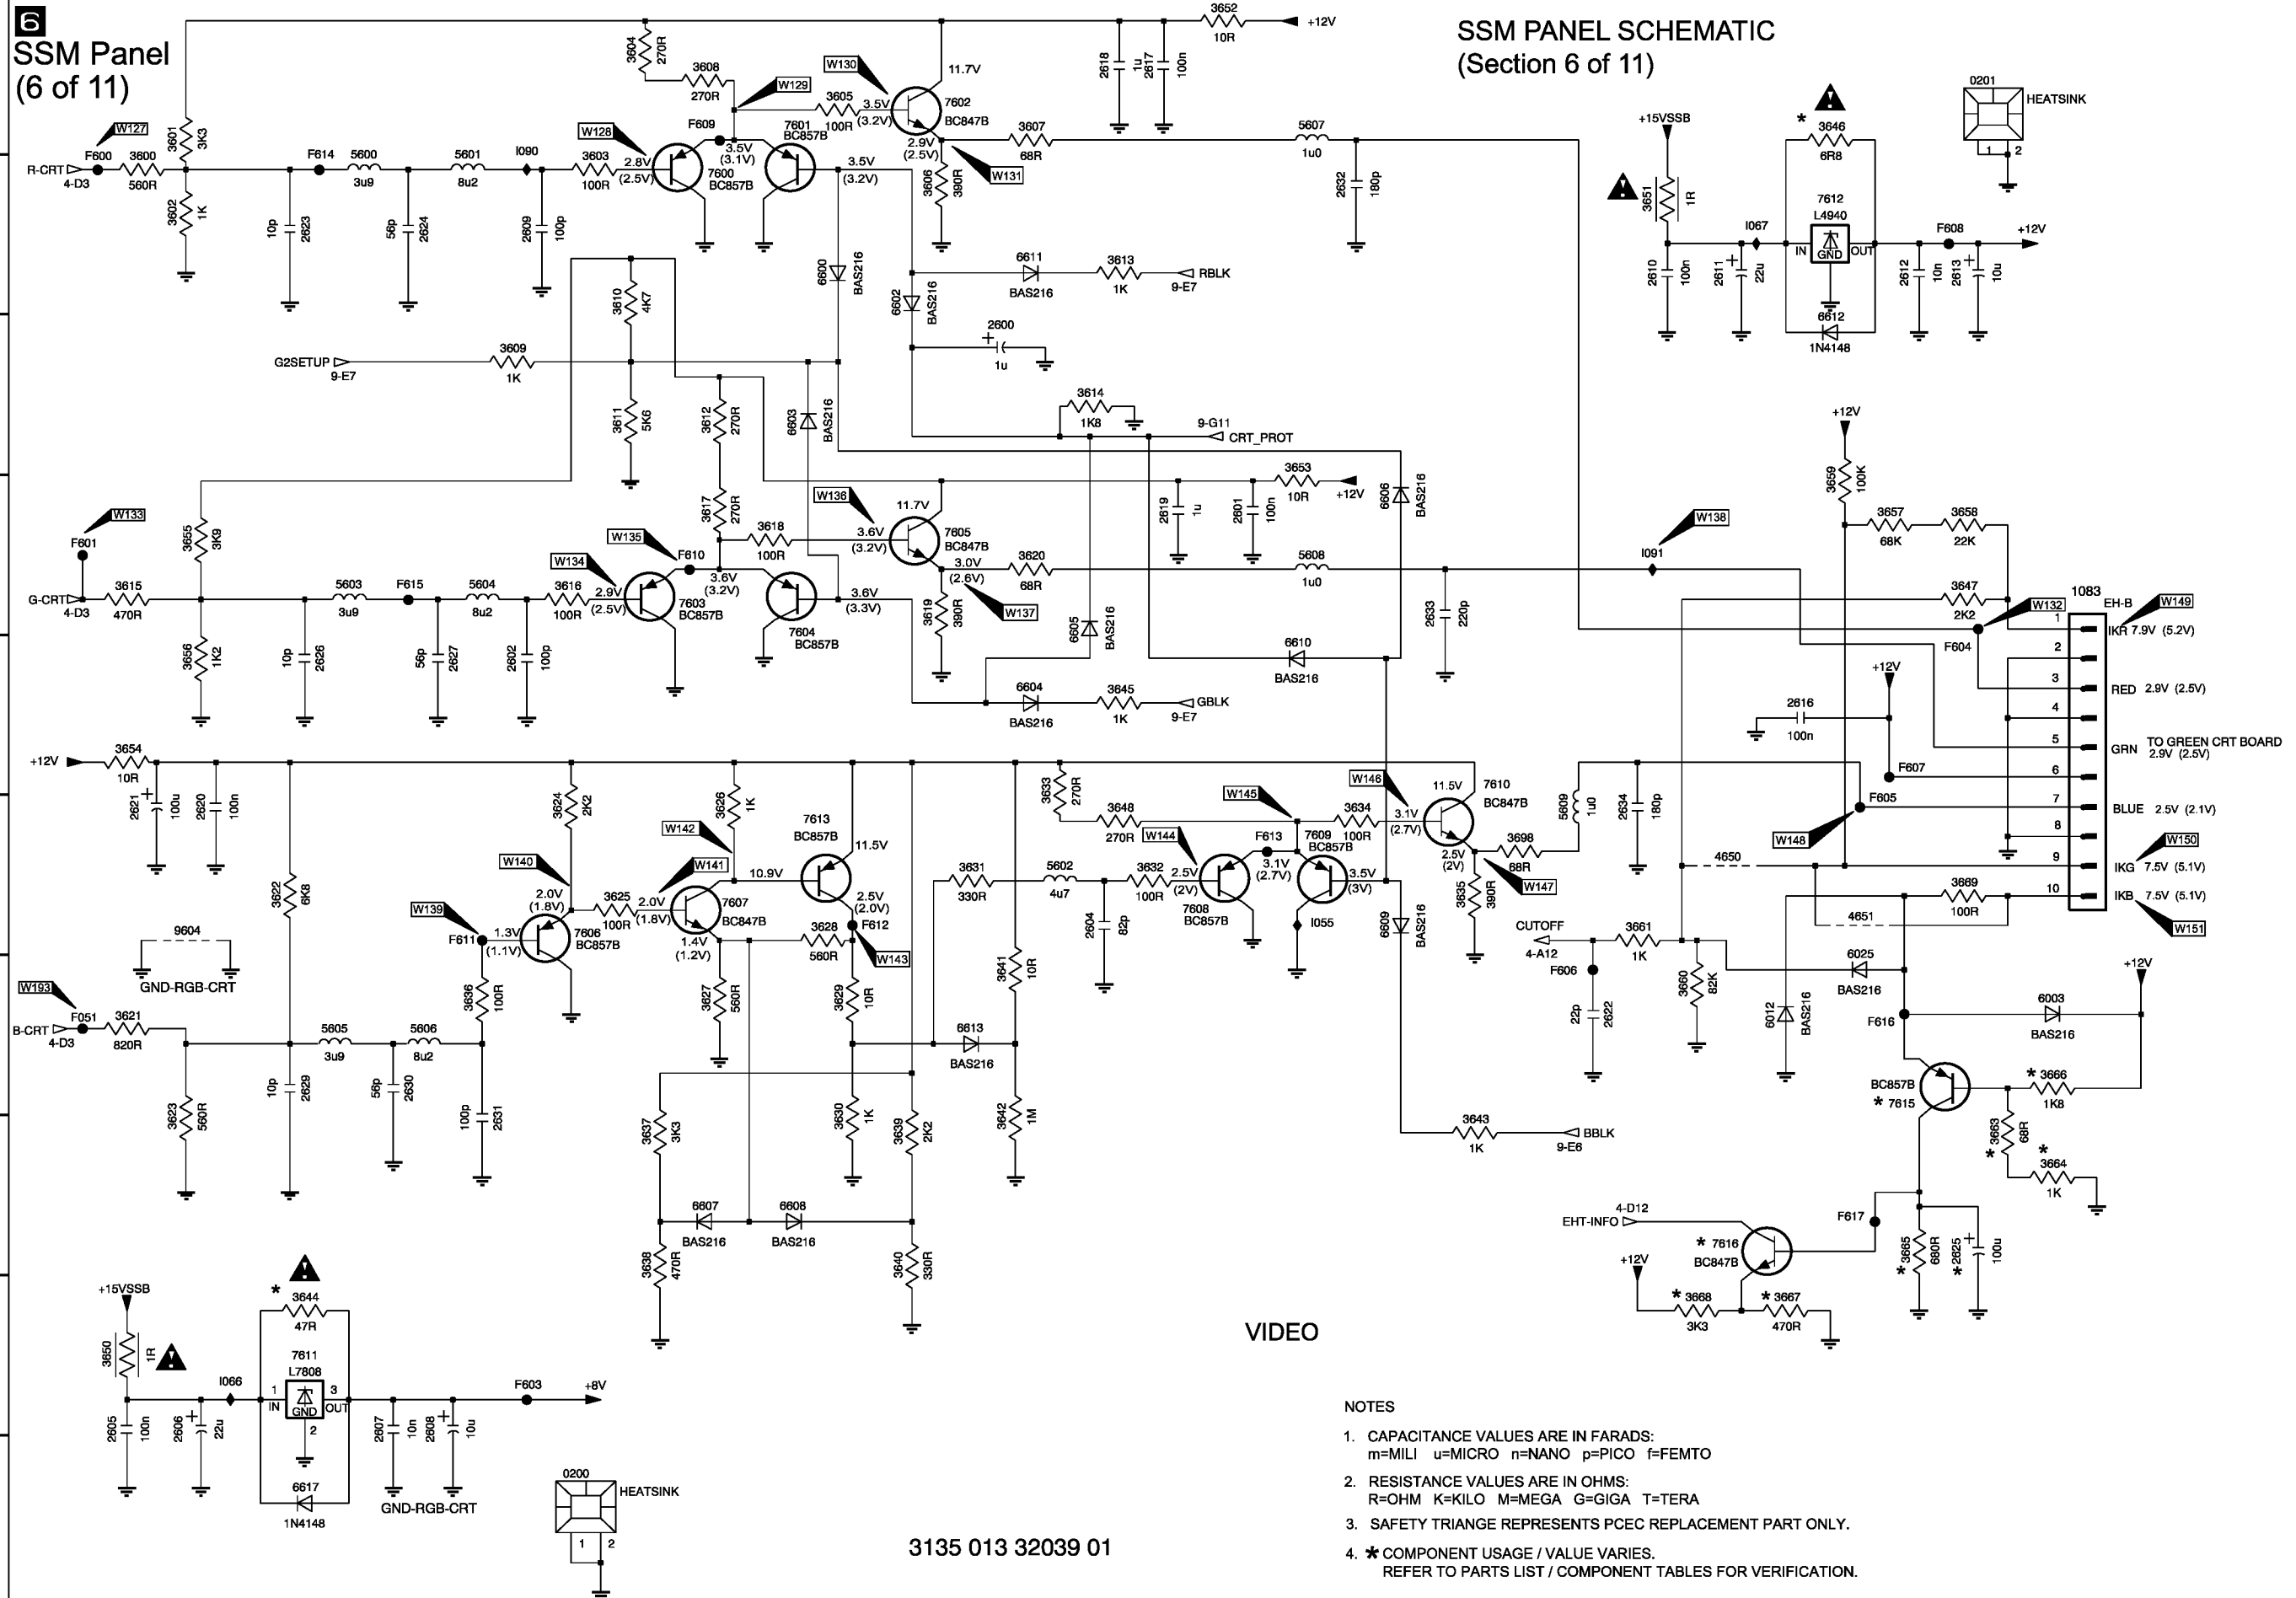


VIDEO


- NOTES**
1. CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
 2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
 3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
 4. ★ COMPONENT USAGE / VALUE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.

7


SSM PANEL SCHEMATIC (Section 7 of 11)

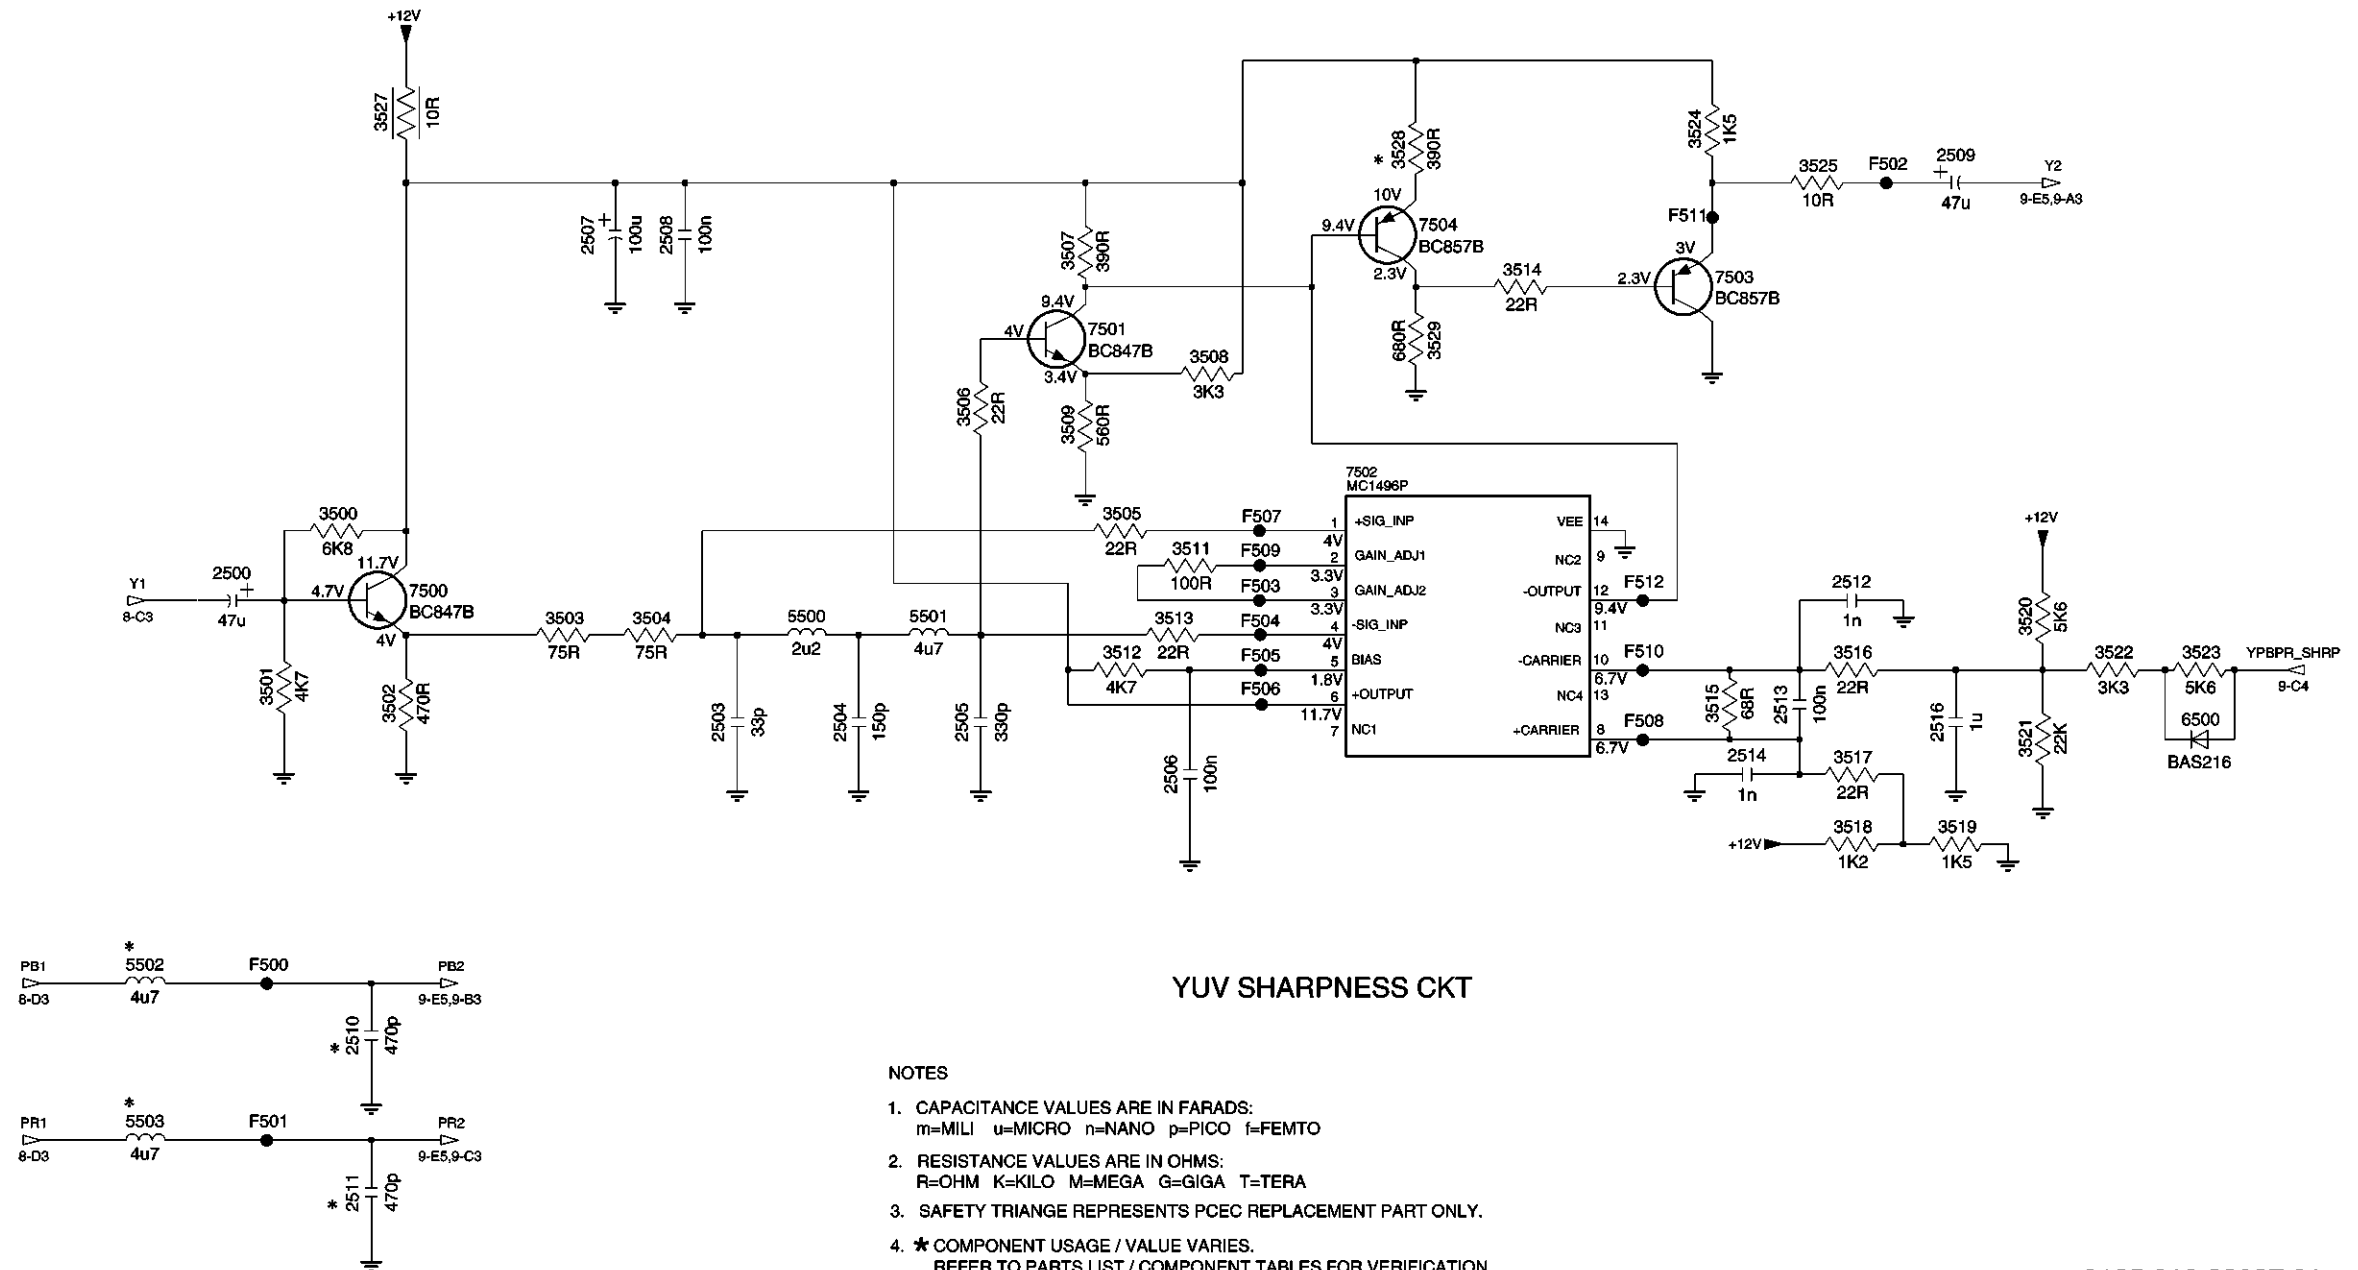


8

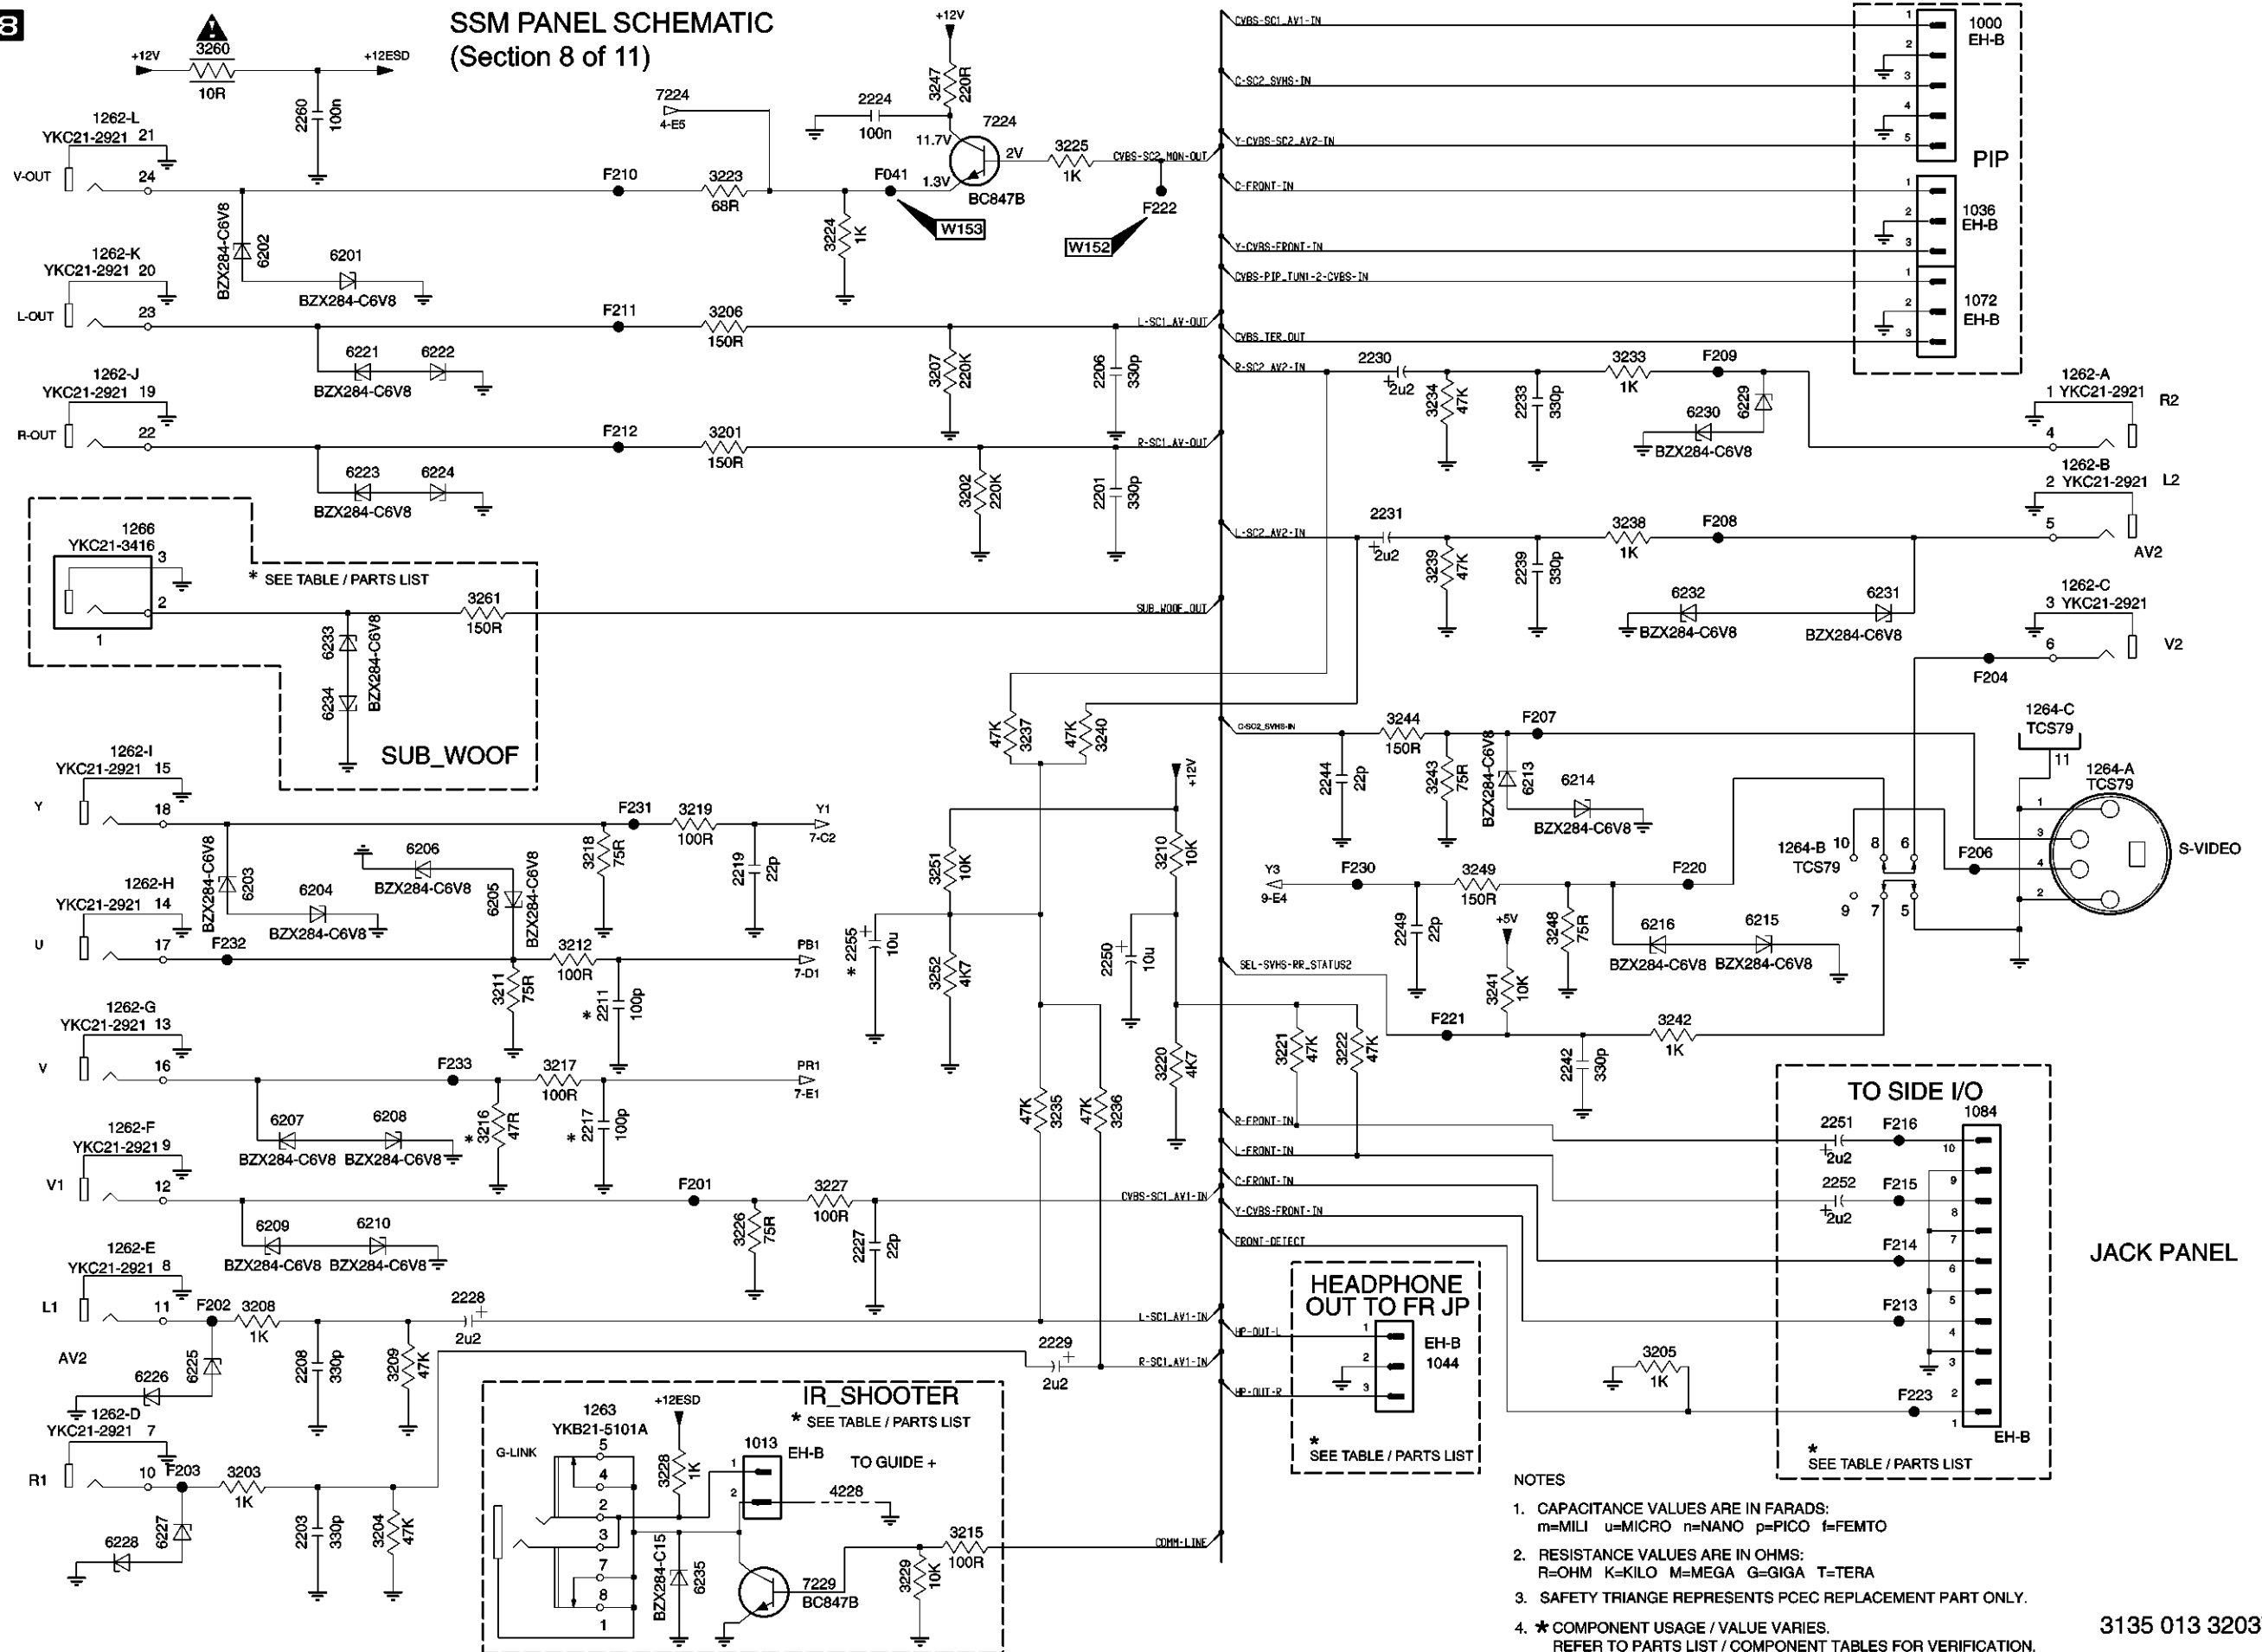SSM PANEL SCHEMATIC
(Section 8 of 11)

SSM PANEL SCHEMATIC (Section 9 of 11)

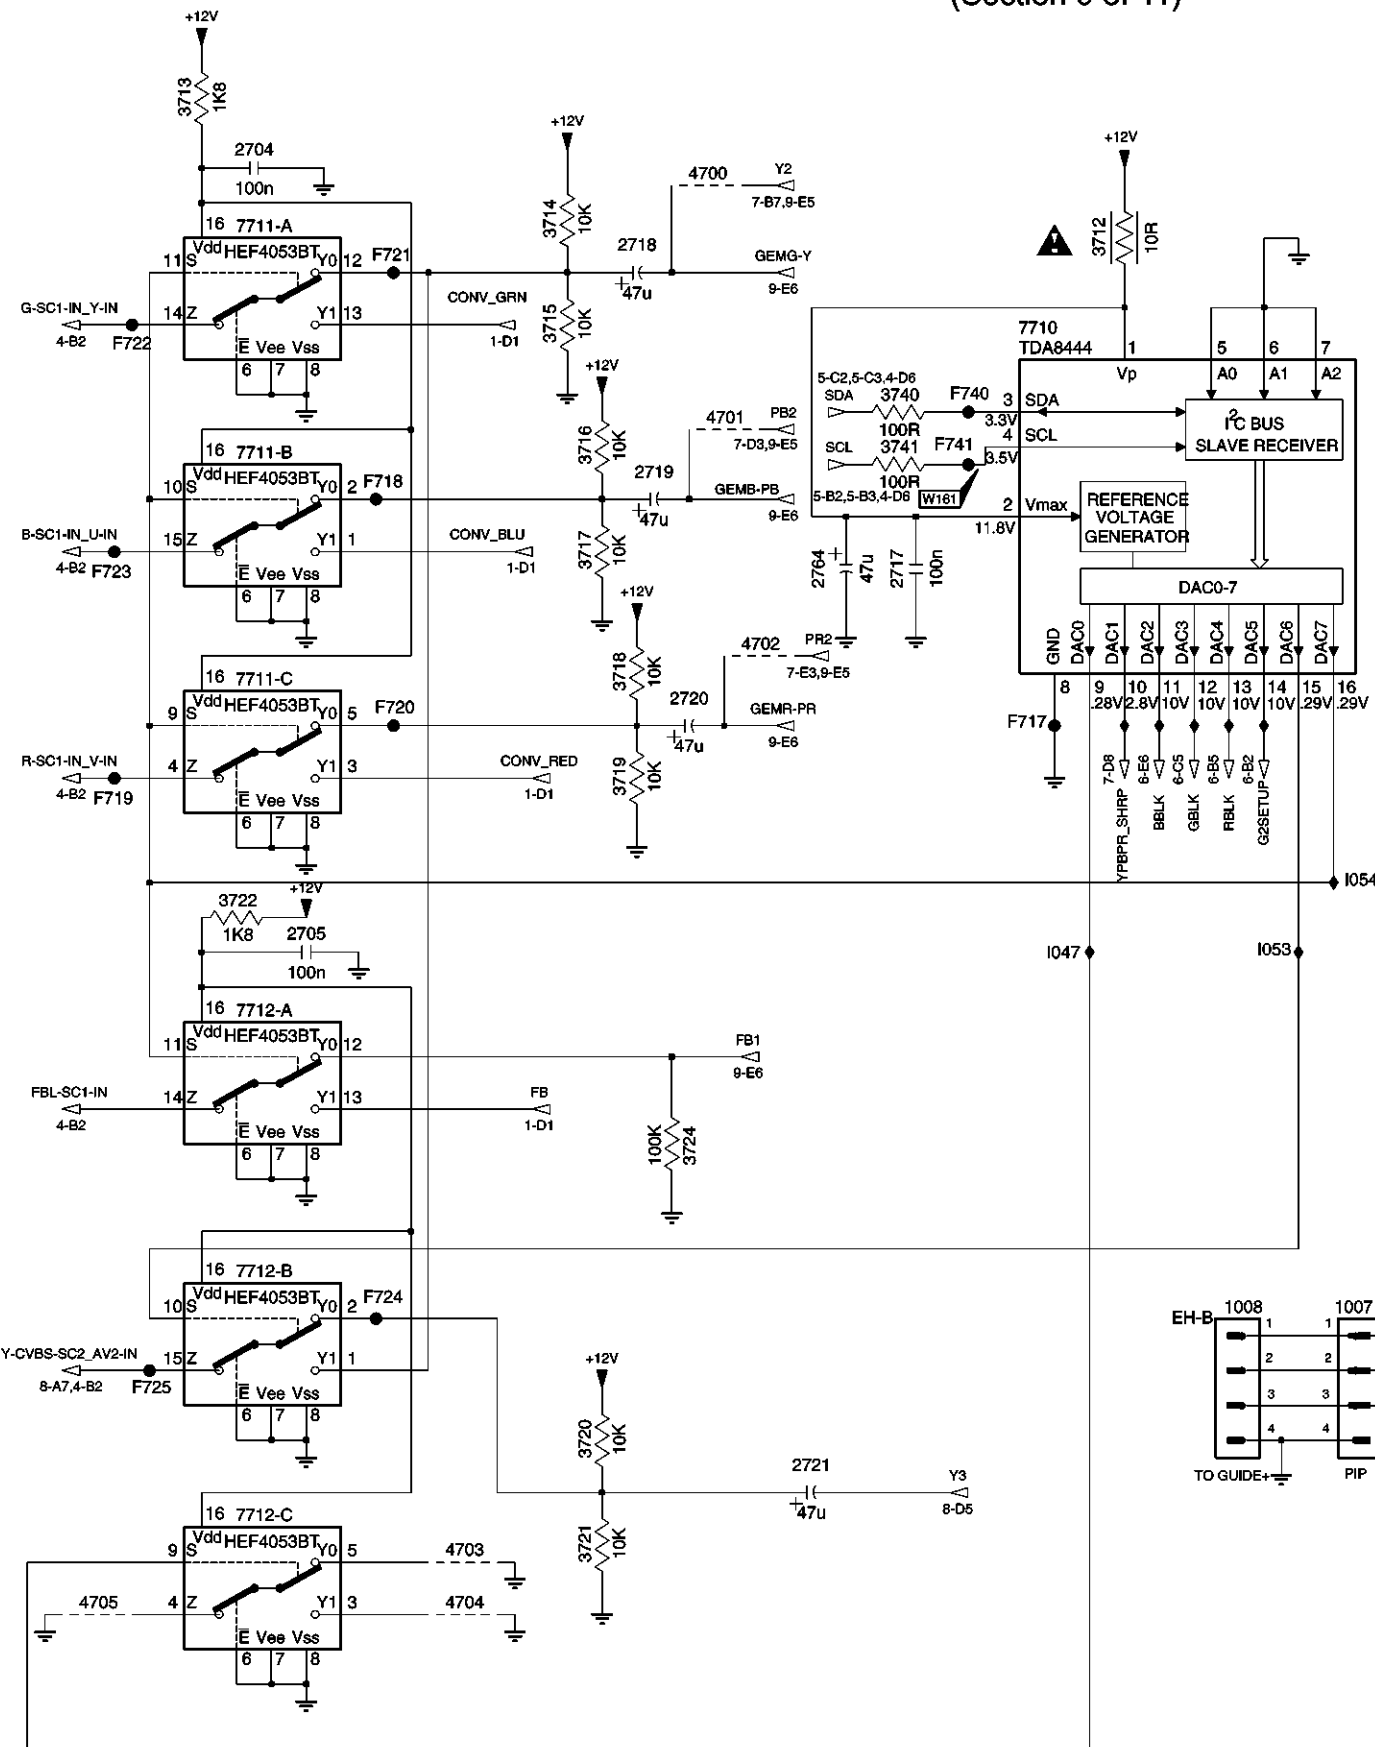


YUV/RGB SWITCHING

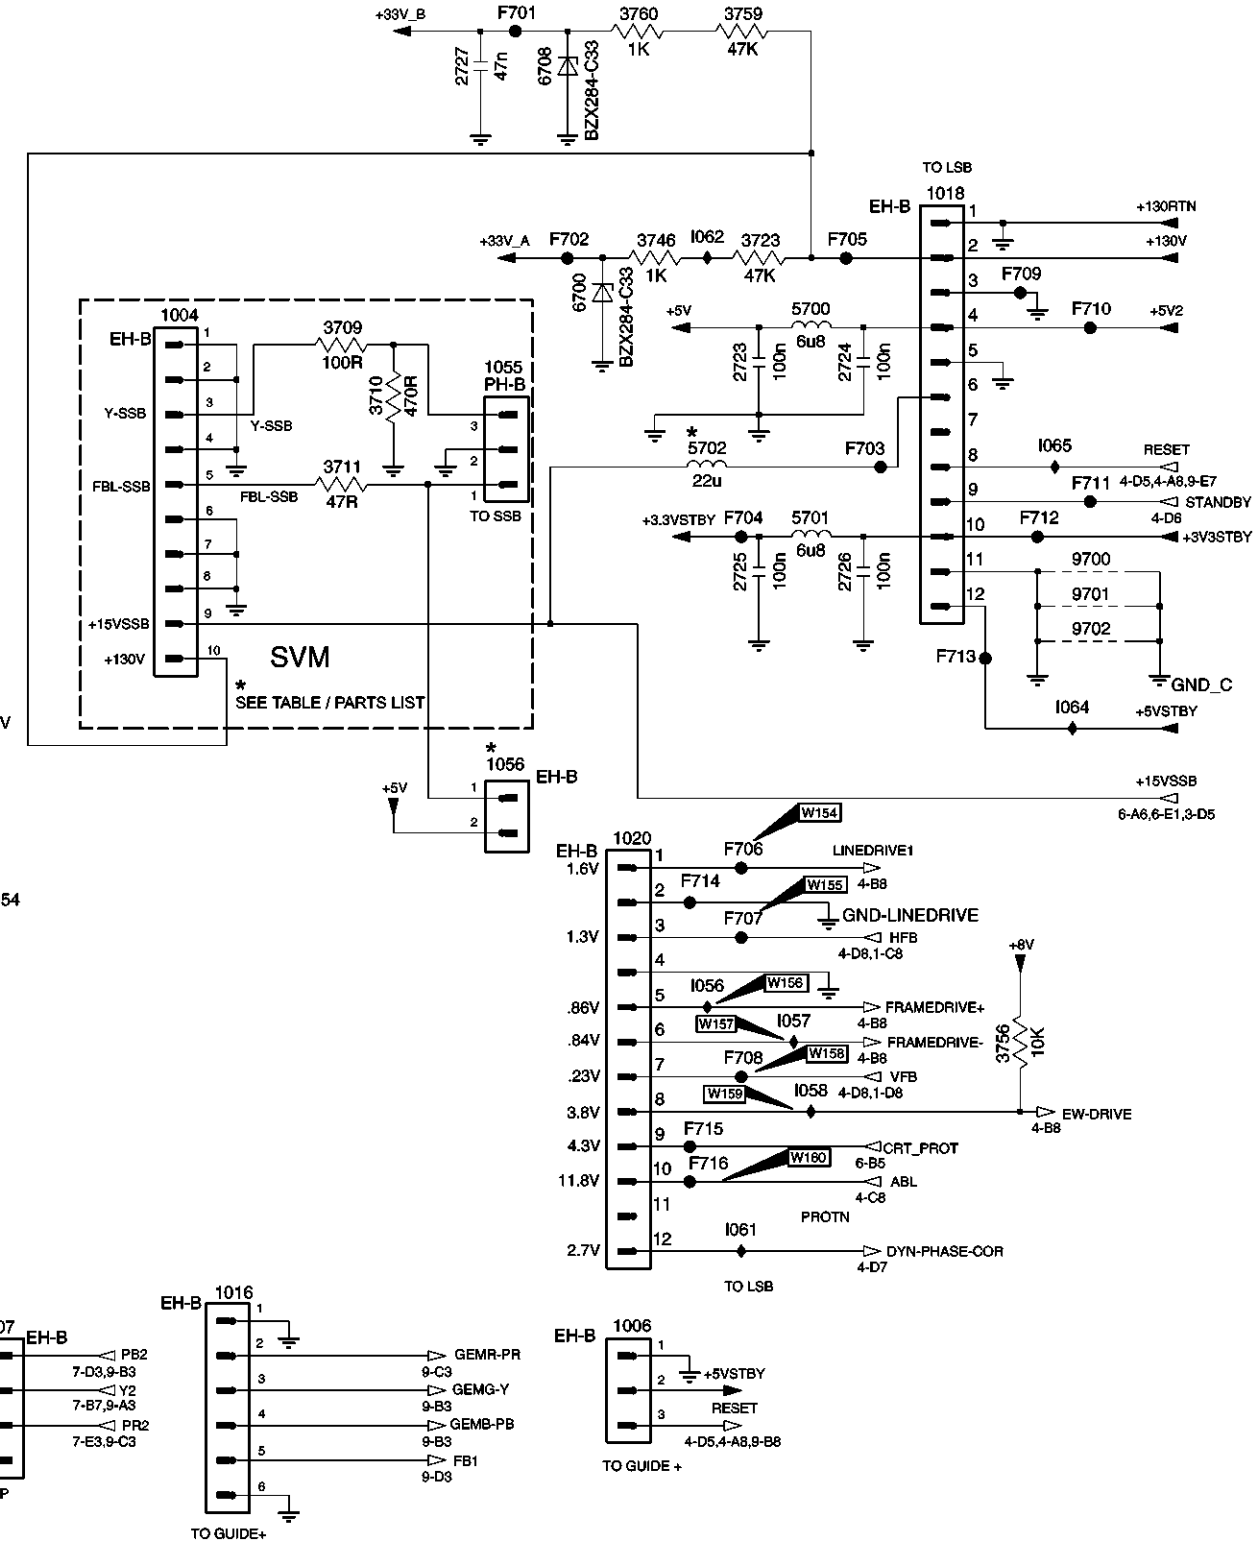

NOTES

1. CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * COMPONENT USAGE / VALUE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.

SSM PANEL SCHEMATIC (Section 10 of 11)

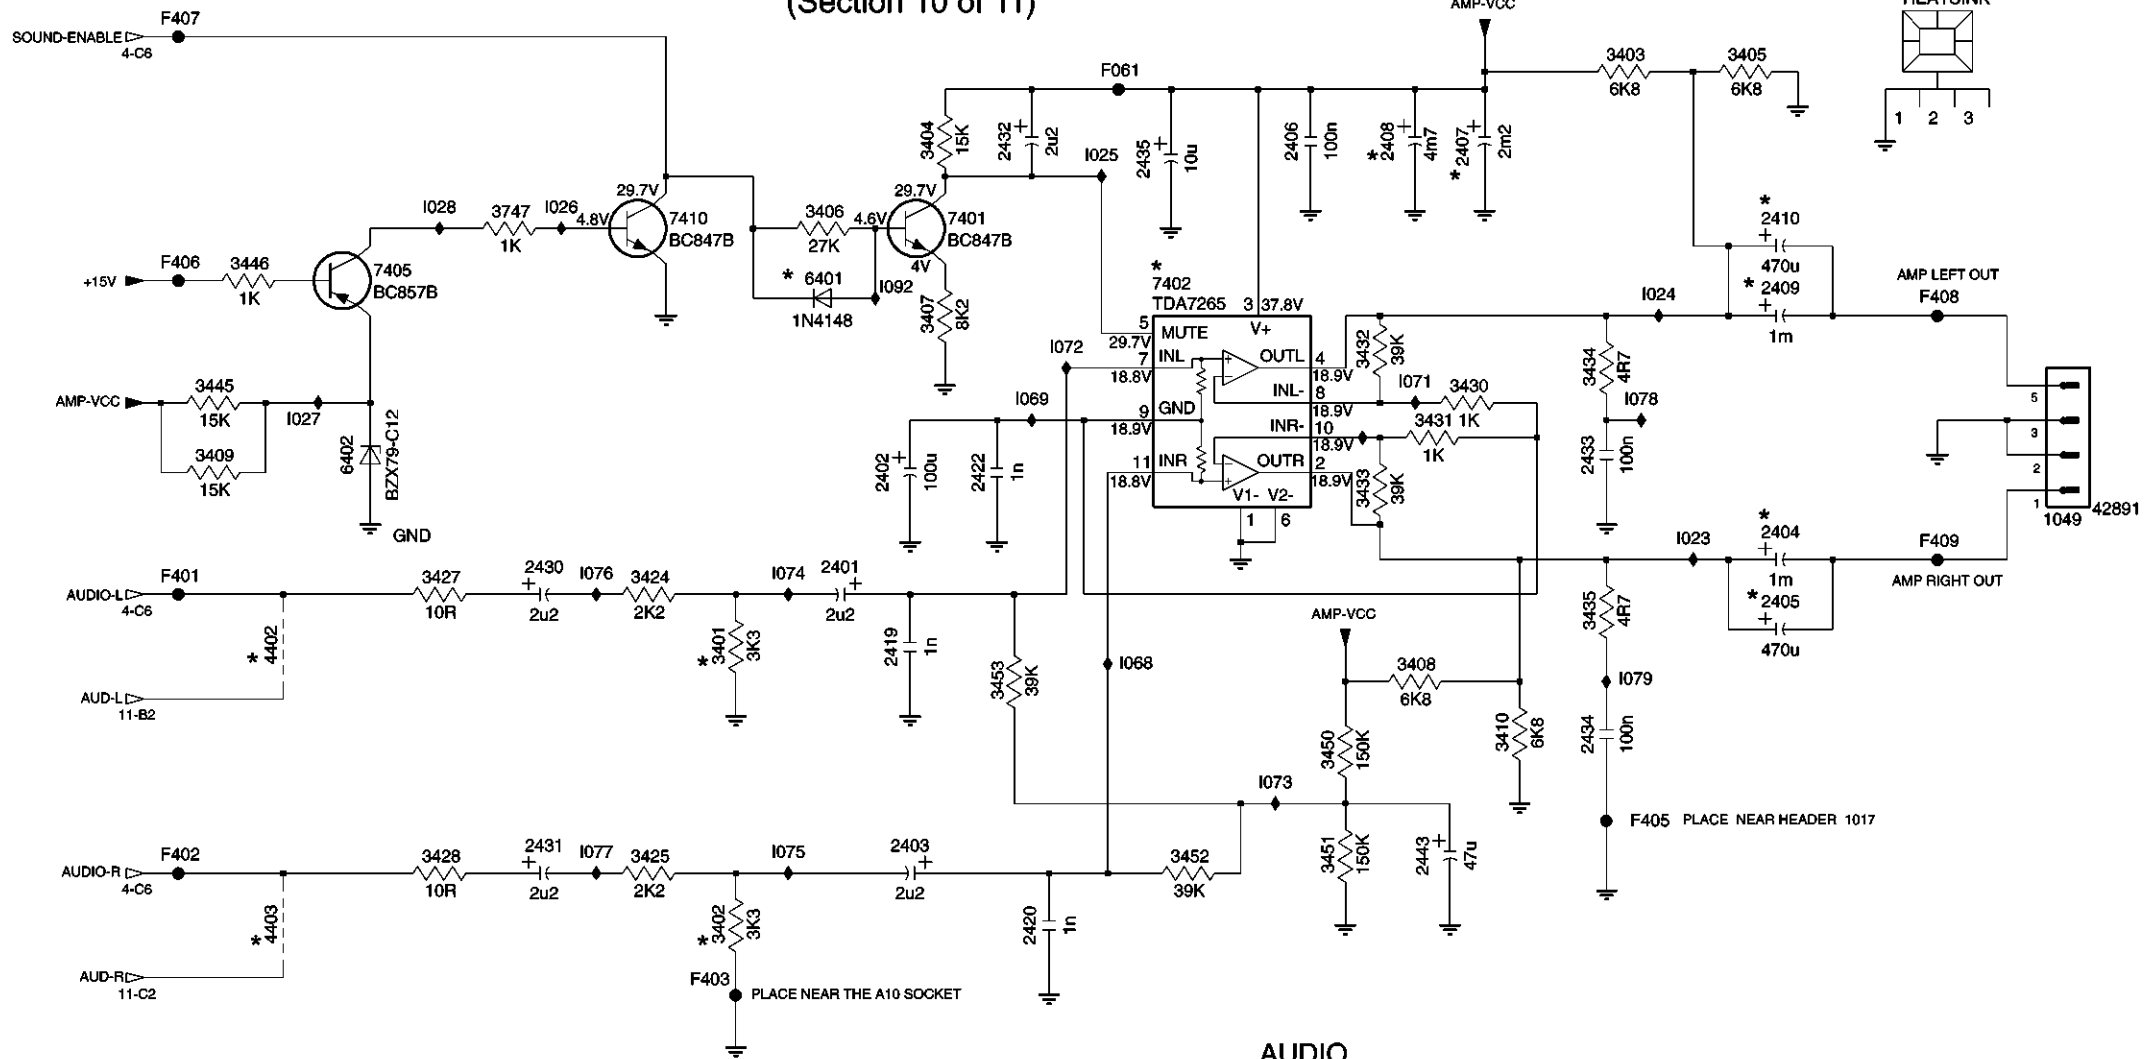


AUDIO

NOTES


1. CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. ★ COMPONENT USAGE / VALUE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.

Ref Des	313501705121 NTSC_AP	313501705181 USA_FIGHTER	313501705201 USA_FIGHTER_+	313501706061 KOREA	313503710041 MEXICO
2404	YES	NOT USED	NOT USED	YES	NOT USED
2405	NOT USED	YES	YES	NOT USED	YES
2407	NOT USED	YES	YES	NOT USED	YES
2408	YES	NOT USED	NOT USED	YES	YES
2409	YES	NOT USED	NOT USED	YES	NOT USED
2410	NOT USED	YES	YES	NOT USED	YES
3401	YES	NOT USED	NOT USED	YES	NOT USED
3402	YES	NOT USED	NOT USED	YES	NOT USED
4402	NOT USED	YES	YES	NOT USED	YES
4403	NOT USED	YES	YES	NOT USED	YES
6401	NOT USED	NOT USED	NOT USED	NOT USED	NOT USED

SSM PANEL SCHEMATIC (Section 11 of 11)

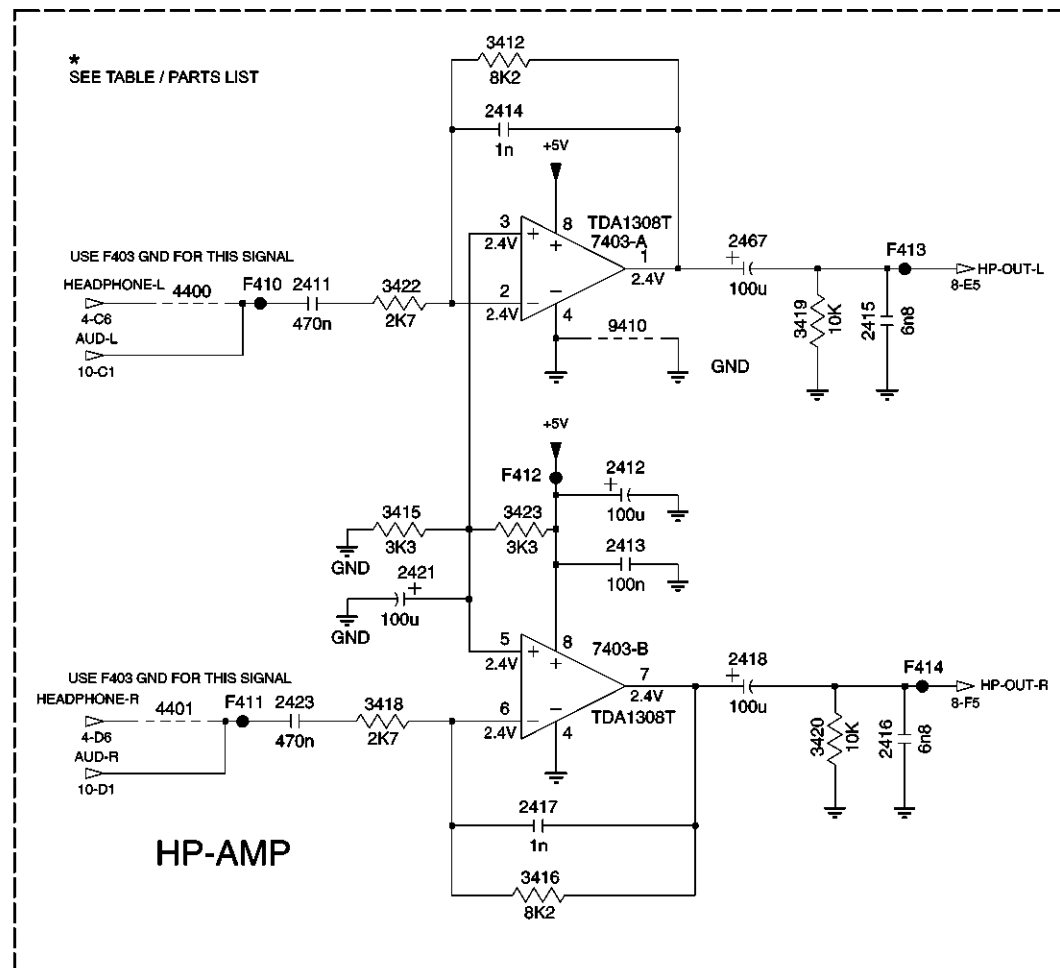

Ref Des	313501705121 NTSC_AP	313501705181 USA_FIGHTER	313501705201 USA_FIGHTER_+	313501706061 KOREA	313503710041 MEXICO
2411	YES	NOT USED	YES	YES	YES
2412	YES	NOT USED	YES	YES	YES
2413	YES	NOT USED	YES	YES	YES
2414	YES	NOT USED	YES	YES	YES
2415	YES	NOT USED	YES	YES	YES
2416	YES	NOT USED	YES	YES	YES
2417	YES	NOT USED	YES	YES	YES
2418	YES	NOT USED	YES	YES	YES
2421	YES	NOT USED	YES	YES	YES
2423	YES	NOT USED	YES	YES	YES
2440	YES	NOT USED	NOT USED	YES	NOT USED
2441	YES	NOT USED	NOT USED	YES	NOT USED
2442	YES	NOT USED	NOT USED	YES	NOT USED
2467	YES	NOT USED	YES	YES	YES
3412	YES	NOT USED	YES	YES	YES
3415	YES	NOT USED	YES	YES	YES
3416	YES	NOT USED	YES	YES	YES
3418	YES	NOT USED	YES	YES	YES
3419	YES	NOT USED	YES	YES	YES
3420	YES	NOT USED	YES	YES	YES
3422	YES	NOT USED	YES	YES	YES
3423	YES	NOT USED	YES	YES	YES
3440	YES	NOT USED	NOT USED	YES	NOT USED
3441	YES	NOT USED	NOT USED	YES	NOT USED
3442	YES	NOT USED	NOT USED	YES	NOT USED
3443	YES	NOT USED	NOT USED	YES	NOT USED
3444	YES	NOT USED	NOT USED	YES	NOT USED
3447	YES	NOT USED	NOT USED	YES	NOT USED
4400	YES	NOT USED	YES	YES	NOT USED
4401	YES	NOT USED	YES	YES	NOT USED
7403-A	YES	NOT USED	YES	YES	YES
7403-B	YES	NOT USED	YES	YES	YES
7415	YES	NOT USED	NOT USED	YES	NOT USED
9410	YES	NOT USED	YES	YES	YES

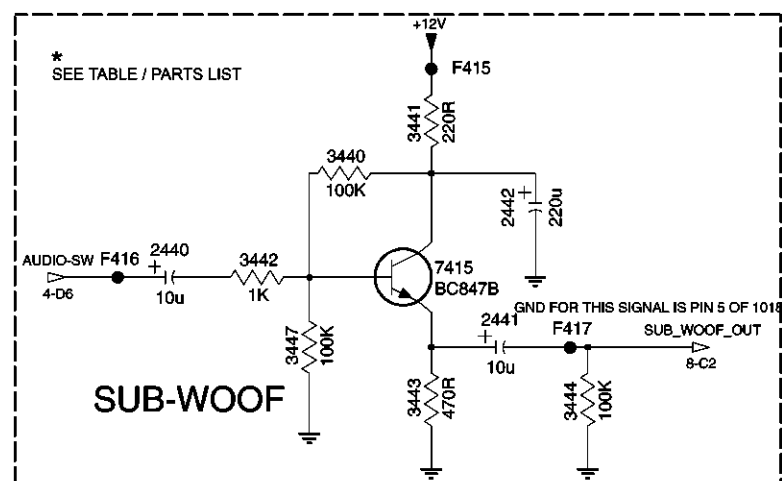


NOTES

- CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
- RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
- SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
- * COMPONENT USAGE / VALUE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.

SSB Module (1 of 7)

C1 IF-VIDEO-SYNC-CHROMA

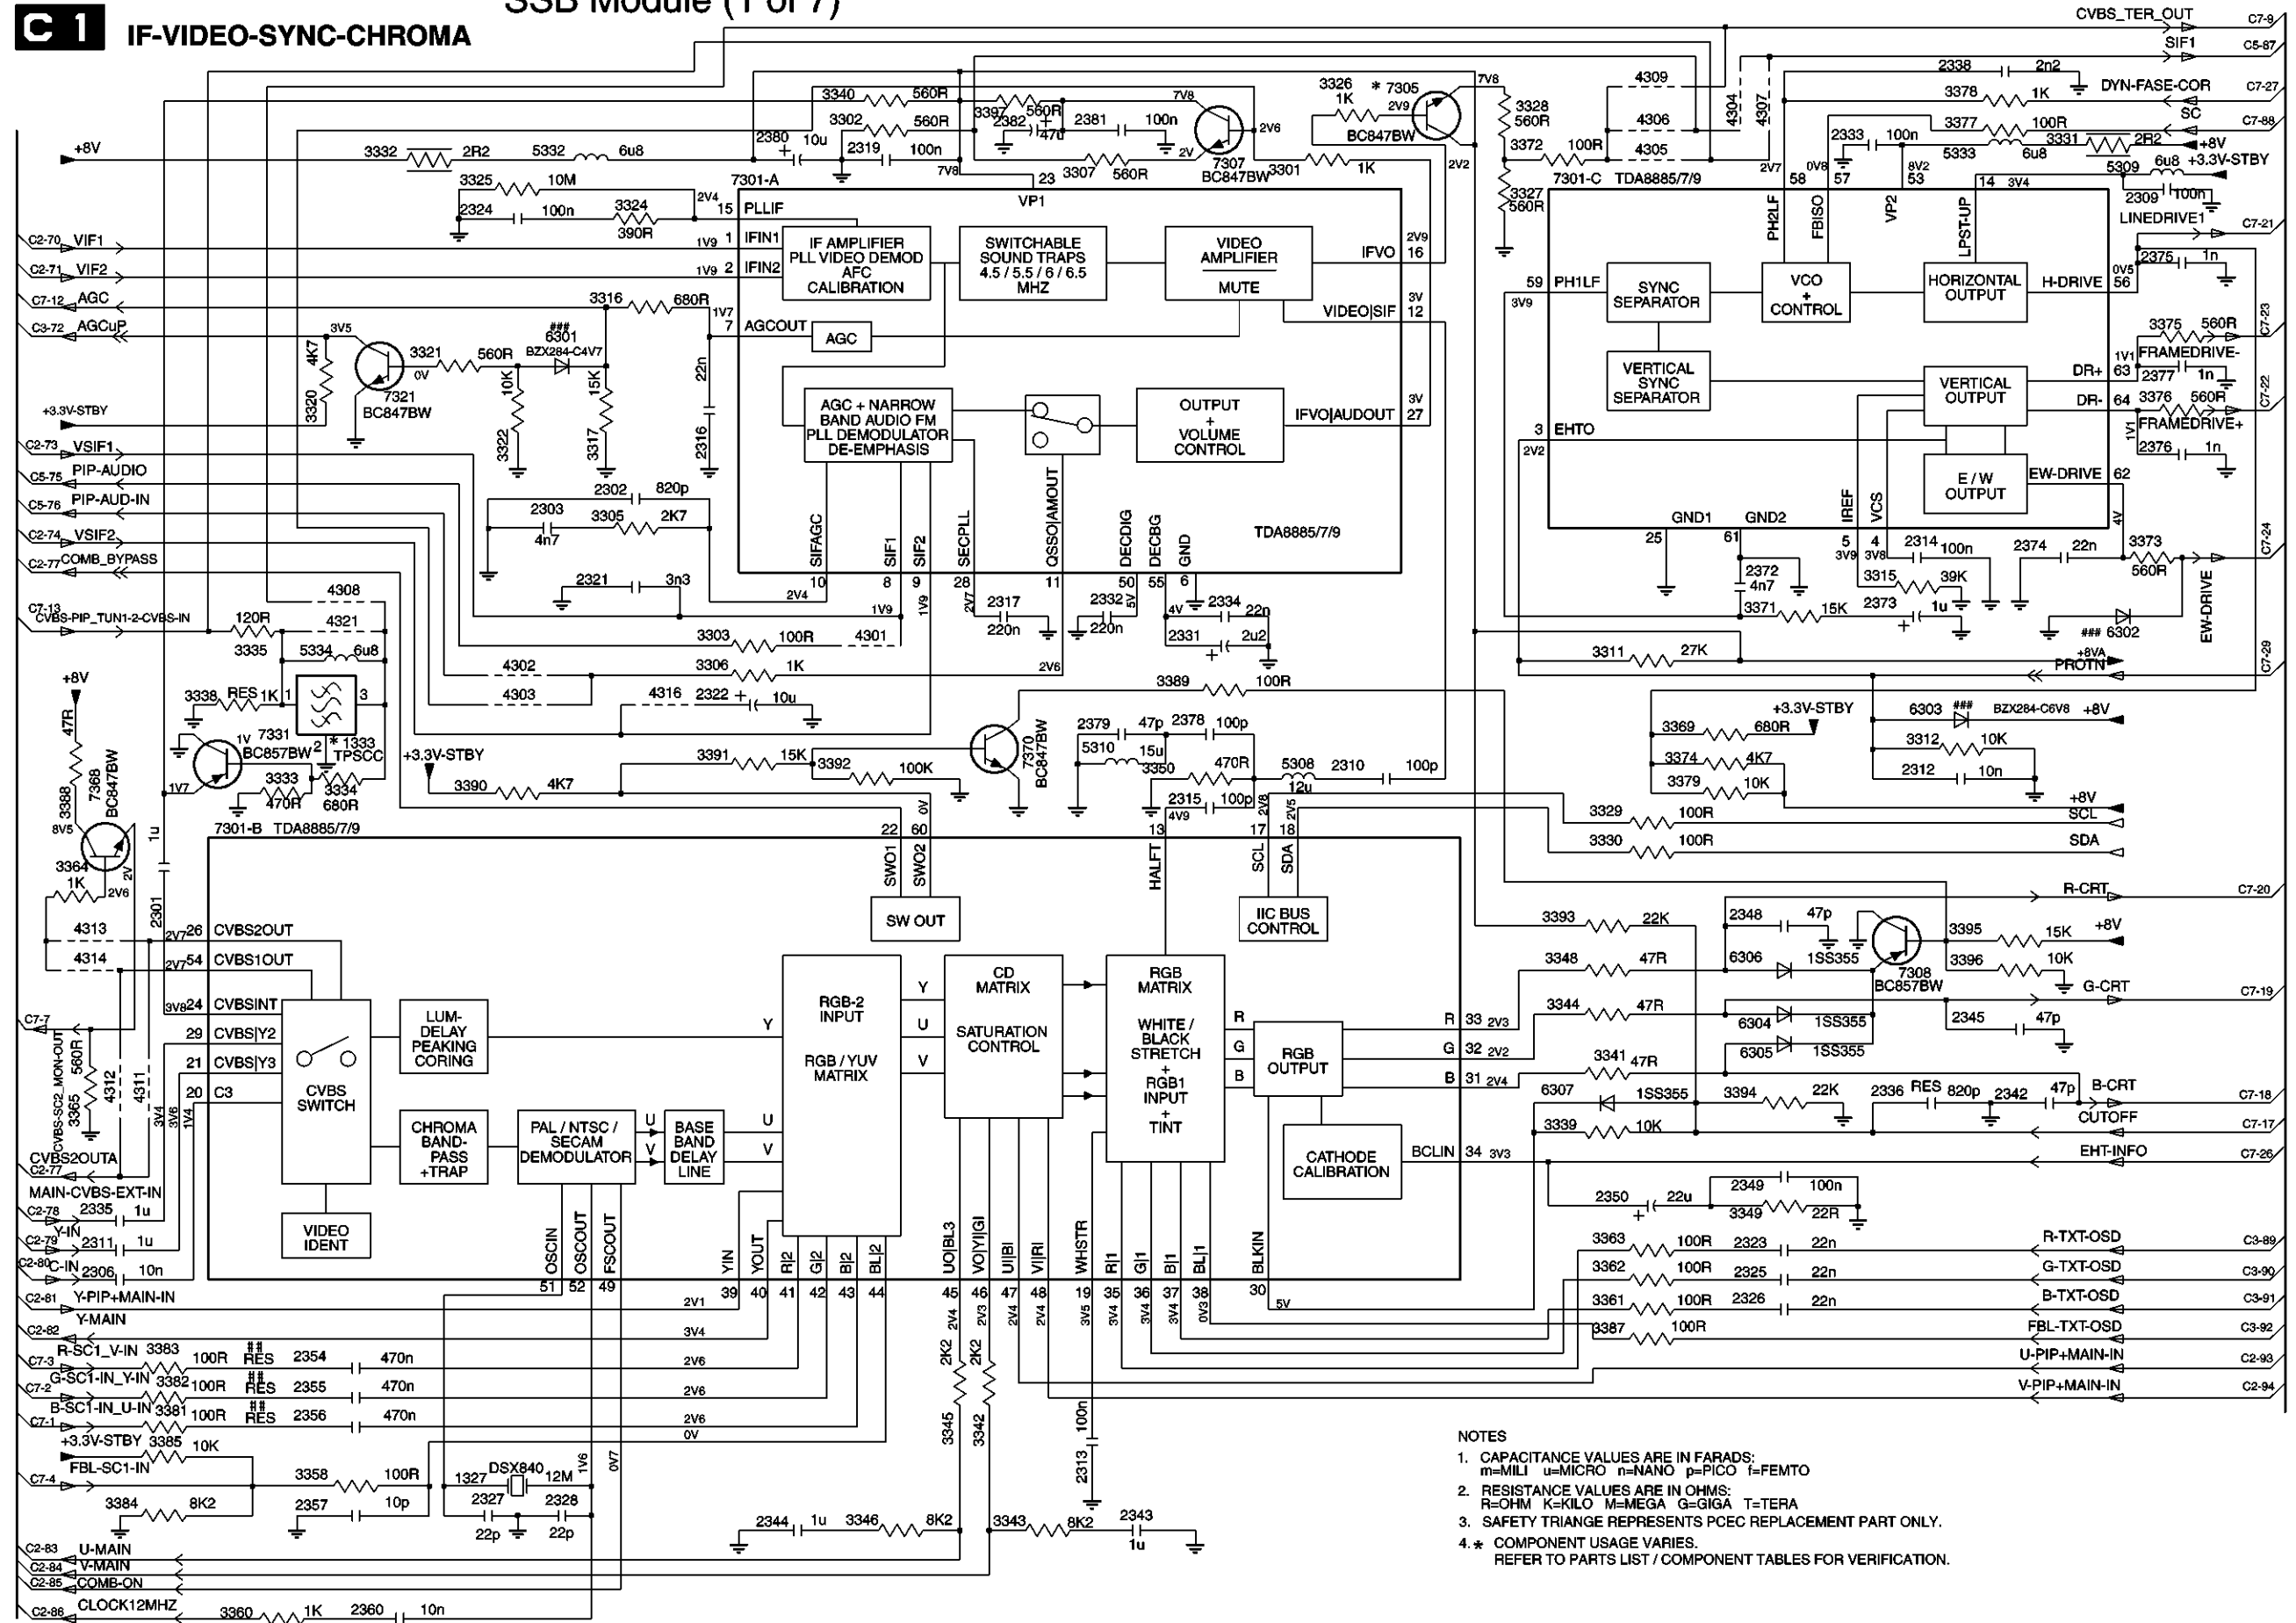

NOTES

- CAPACITANCE VALUES ARE IN FARADS:
m=MILLI u=MICRO n=NANO p=PICO f=FEMTO
- RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
- SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
- * COMPONENT USAGE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.

1327 H3	3363 G8
1333 D2	3364 E1
2301 E1	3365 F1
2302 C3	3369 D9
2303 C3	3371 D9
2306 G1	3372 A8
2309 B11	3373 C11
2310 D7	3374 D9
2311 G1	3375 B11
2312 D10	3376 B11
2313 H6	3377 A10
2314 C10	3378 A10
2315 D6	3379 D9
2316 C4	3381 G1
2317 C5	3382 G1
2319 A5	3383 G1
2321 C3	3384 H1
2322 D4	3385 H1
2323 G9	3387 G8
2324 B3	3388 D1
2325 G9	3389 D6
2326 G9	3390 D3
2327 H3	3391 D4
2328 H3	3392 D4
2331 D6	3393 E8
2332 C6	3394 F9
2333 A9	3395 E10
2334 C6	3396 E10
2335 F1	3397 A5
2336 F10	4301 D5
2338 A10	4302 D3
2342 F10	4303 D3
2343 H6	4304 A9
2344 H4	4305 A8
2345 E10	4306 A8
2348 E9	4307 A9
2349 F8	4308 C2
2350 F8	4309 A8
2354 G2	4311 F1
2355 G2	4312 F1
2356 G2	4313 E1
2357 H2	4314 E1
2360 H2	4316 D4
2372 C9	4321 D2
2373 C10	5308 D7
2374 C10	5309 A11
2375 B11	5310 D6
2376 C11	5312 A3
2377 B11	5333 A10
2378 D6	5334 D2
2379 D6	6301 B3
2380 A4	6302 D11
2381 A6	6303 D10
2382 A5	6304 E9
3301 A7	6305 F9
3302 A5	6306 E9
3303 D4	6307 F8
3305 C3	7301-A A4
3306 D4	7301-B E1
3307 A6	7301-C A8
3311 D8	7305 A7
3312 D10	7307 A6
3315 C10	7308 E10
3316 B3	7321 B2
3317 C3	7331 D2
3320 C2	7368 D1
3321 B2	7370 D5
3322 C3	
3324 B3	
3325 A3	
3326 A7	
3327 B8	
3328 A8	
3329 D8	
3330 E8	
3331 A10	
3332 A2	
3333 D2	
3334 D2	
3335 D2	
3338 D1	
3339 F8	
3340 A4	
3341 F8	
3342 G5	
3343 H5	
3344 E8	
3345 G5	
3346 H5	
3348 E8	
3349 F9	
3350 D6	
3358 H2	
3360 H2	
3361 G8	
3362 G8	

SSB Module (2 of 7)

C2 VIDEO_FEATURES

A

B


C

D

E


F

G

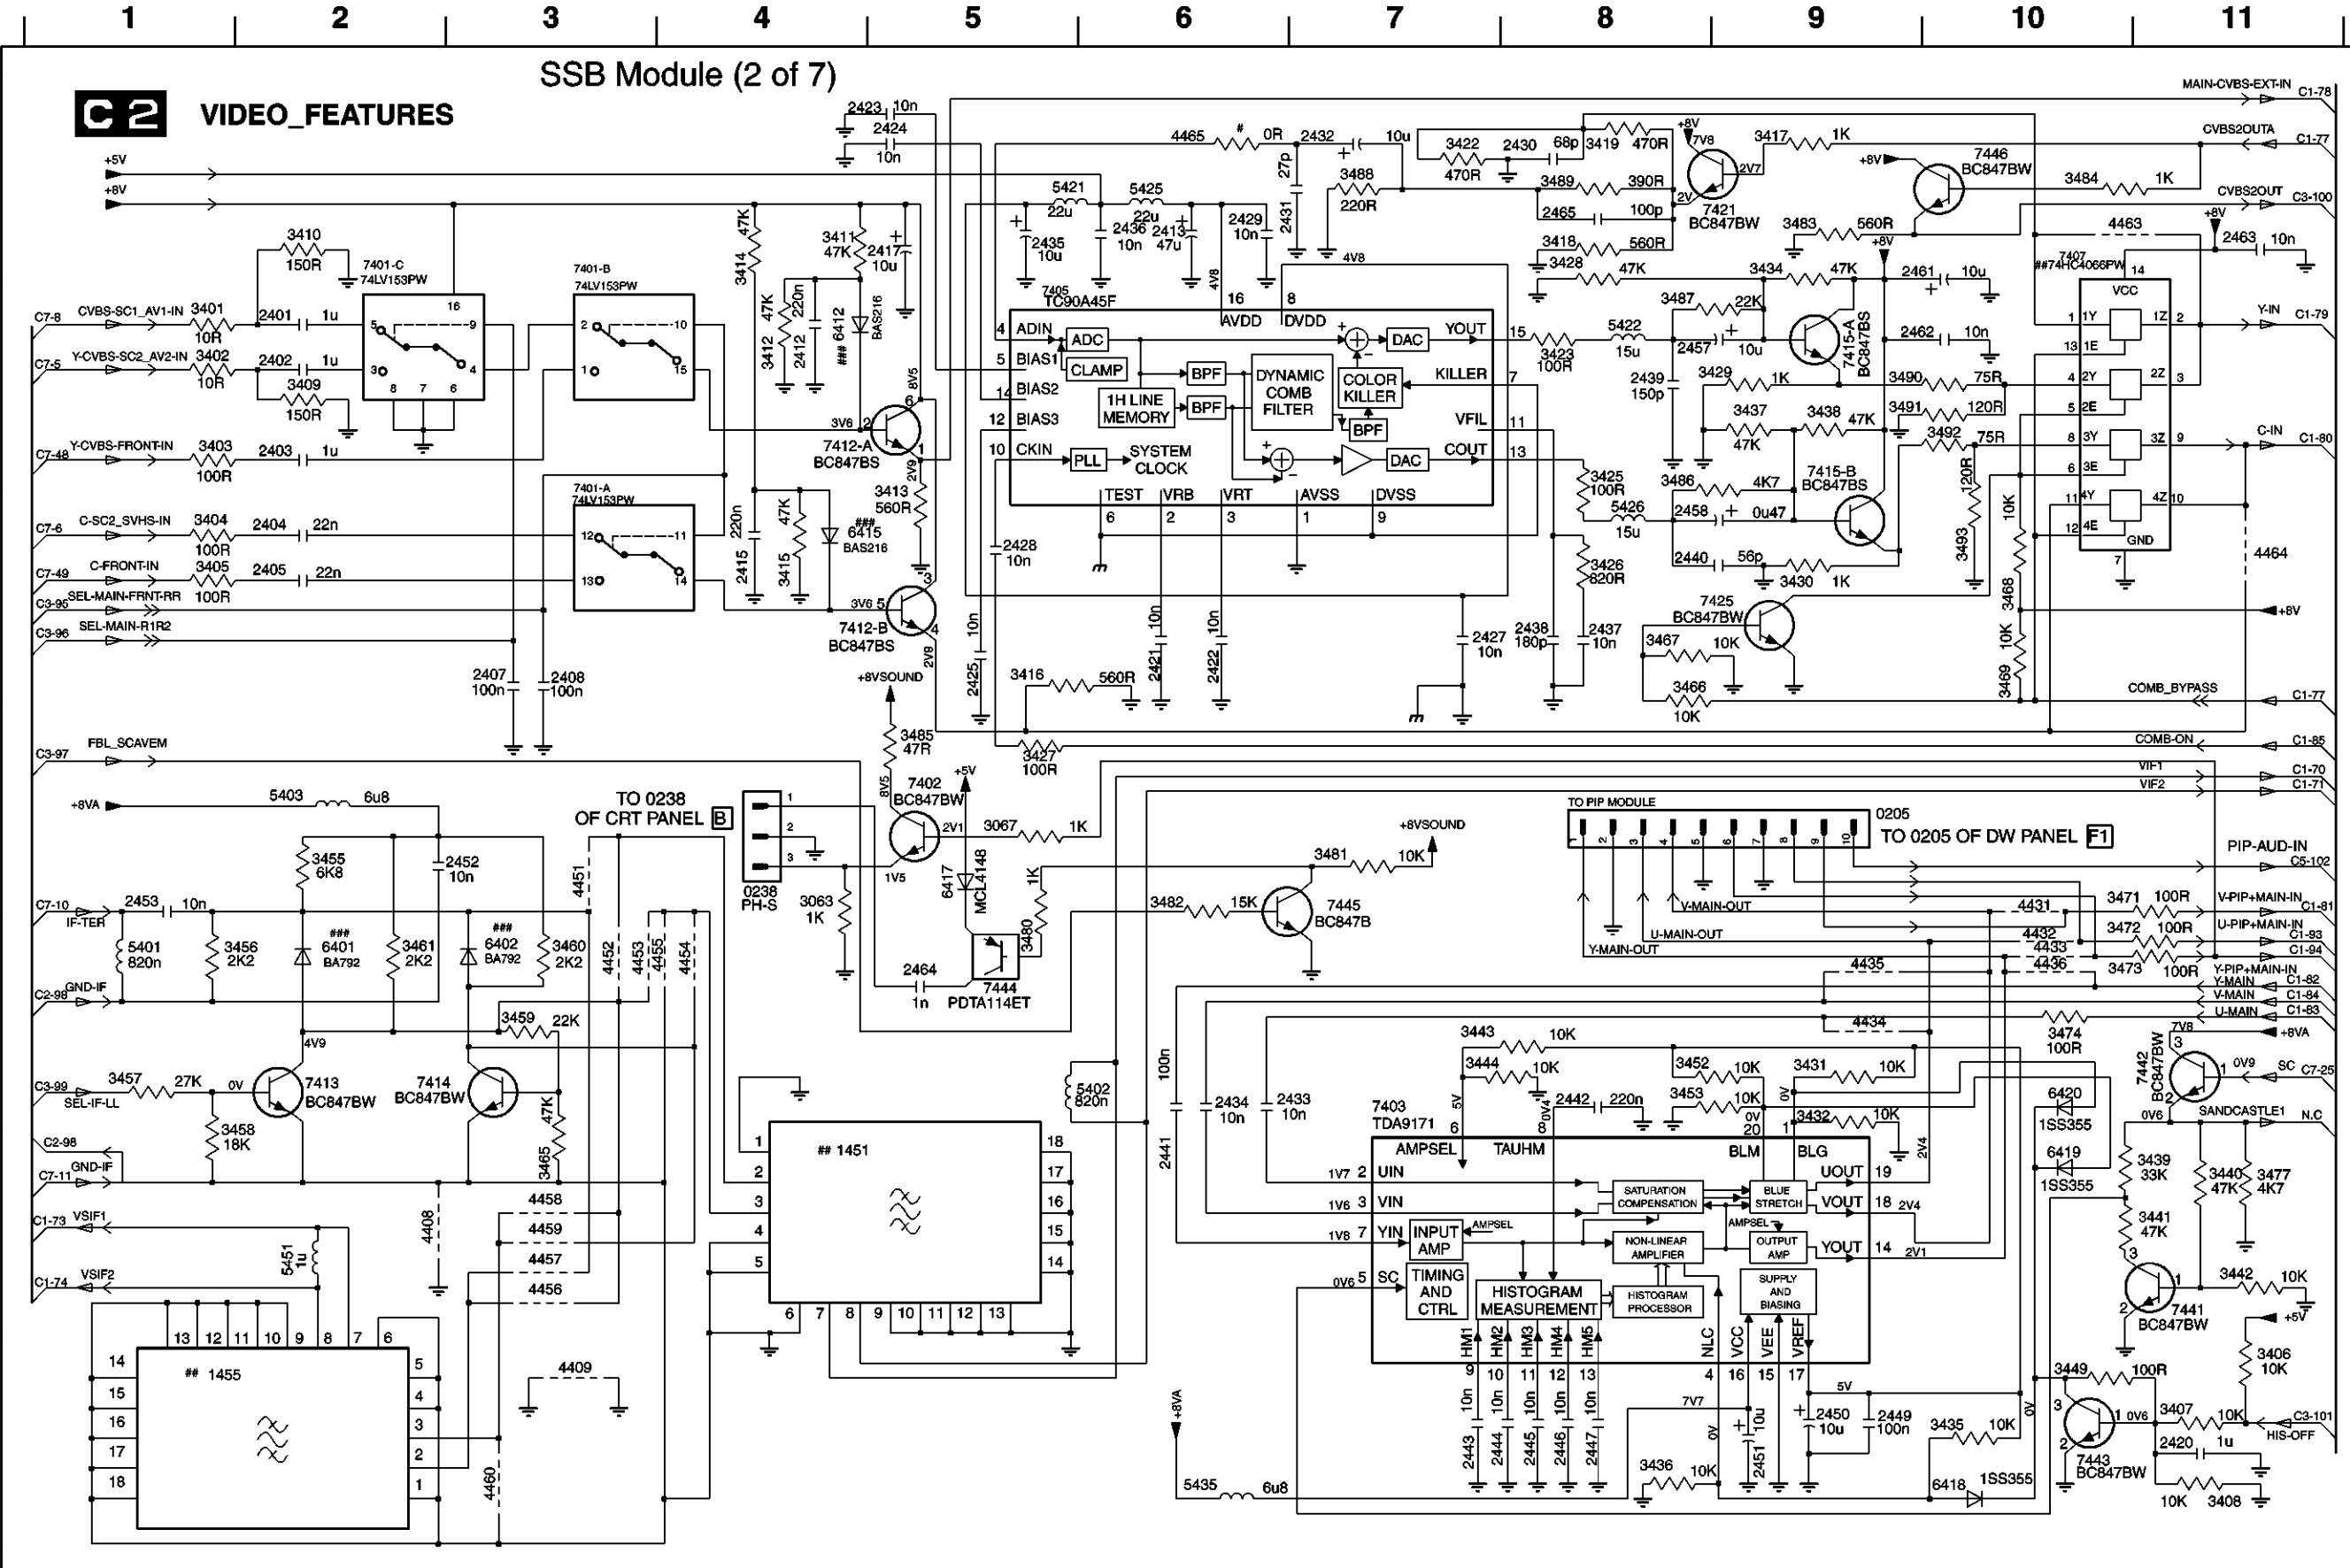

0205 D9	3436 G8	7412-B C4
0238 D4	3437 B9	7413 E2
1451 F4	3438 B9	7414 E3
1455 G2	3439 F11	7415-A B9
2401 B2	3440 F11	7415-B B9
2402 B2	3441 F11	7421 A9
2403 B2	3442 F11	7425 C8
2404 C2	3443 E7	7441 F11
2405 C2	3444 E7	7442 E11
2407 C3	3449 G10	7443 G10
2408 C3	3452 E8	7444 E5
2412 B4	3453 E8	7445 D7
2413 A6	3455 D2	7446 A10
2415 C4	3456 E2	
2417 A5	3457 E1	
2420 G11	3458 E2	
2421 C6	3459 E3	
2422 C6	3460 E3	
2423 A4	3461 E2	
2424 A5	3465 F3	
2425 C5	3466 C8	
2427 C7	3467 C8	
2428 C5	3468 C10	
2429 A6	3469 C10	
2430 A8	3471 D10	
2431 A6	3472 E10	
2432 A7	3473 E10	
2433 E7	3474 E10	
2434 E6	3477 F11	
2435 A5	3480 E5	
2436 A6	3481 D7	
2437 C8	3482 D6	
2438 C8	3483 A9	
2439 B8	3484 A10	
2440 C8	3485 D5	
2441 F6	3486 B8	
2442 E8	3487 B8	
2443 G7	3488 A7	
2444 G7	3489 A8	
2445 G8	3490 B9	
2446 G8	3491 B9	
2447 G8	3492 B10	
2449 G9	3493 C10	
2450 G9	4408 F2	
2451 G9	4409 G3	
2452 D3	4431 D10	
2453 D1	4432 E10	
2457 B8	4433 E10	
2458 C8	4434 E9	
2461 A9	4435 E9	
2462 B9	4436 E10	
2463 A11	4451 D3	
2464 E5	4452 E3	
2465 A8	4453 E3	
3063 D4	4454 E4	
3067 D5	4455 E4	
3401 B1	4456 F3	
3402 B1	4457 F3	
3403 B1	4458 F3	
3404 C1	4459 F3	
3405 C1	4460 G3	
3406 G11	4463 A10	
3407 G11	4464 C11	
3408 G11	4465 A6	
3409 B2	5401 E1	
3410 A2	5402 E6	
3411 A4	5403 D2	
3412 B4	5421 A5	
3413 B5	5422 B8	
3414 A4	5425 A6	
3415 C4	5426 C8	
3416 C5	5435 G6	
3417 A9	5451 F2	
3418 A8	6401 E2	
3419 A8	6402 E3	
3422 A7	6412 B4	
3423 B8	6415 C4	
3425 B8	6417 D5	
3426 C8	6418 G10	
3427 D5	6419 F10	
3428 A8	6420 E10	
3429 B9	7401 A2	
3430 C9	7402 D5	
3431 E9	7403 E7	
3432 E9	7405 B5	
3434 A9	7407 A10	
3435 G10	7412-A B4	

SSB Module (3 of 7)

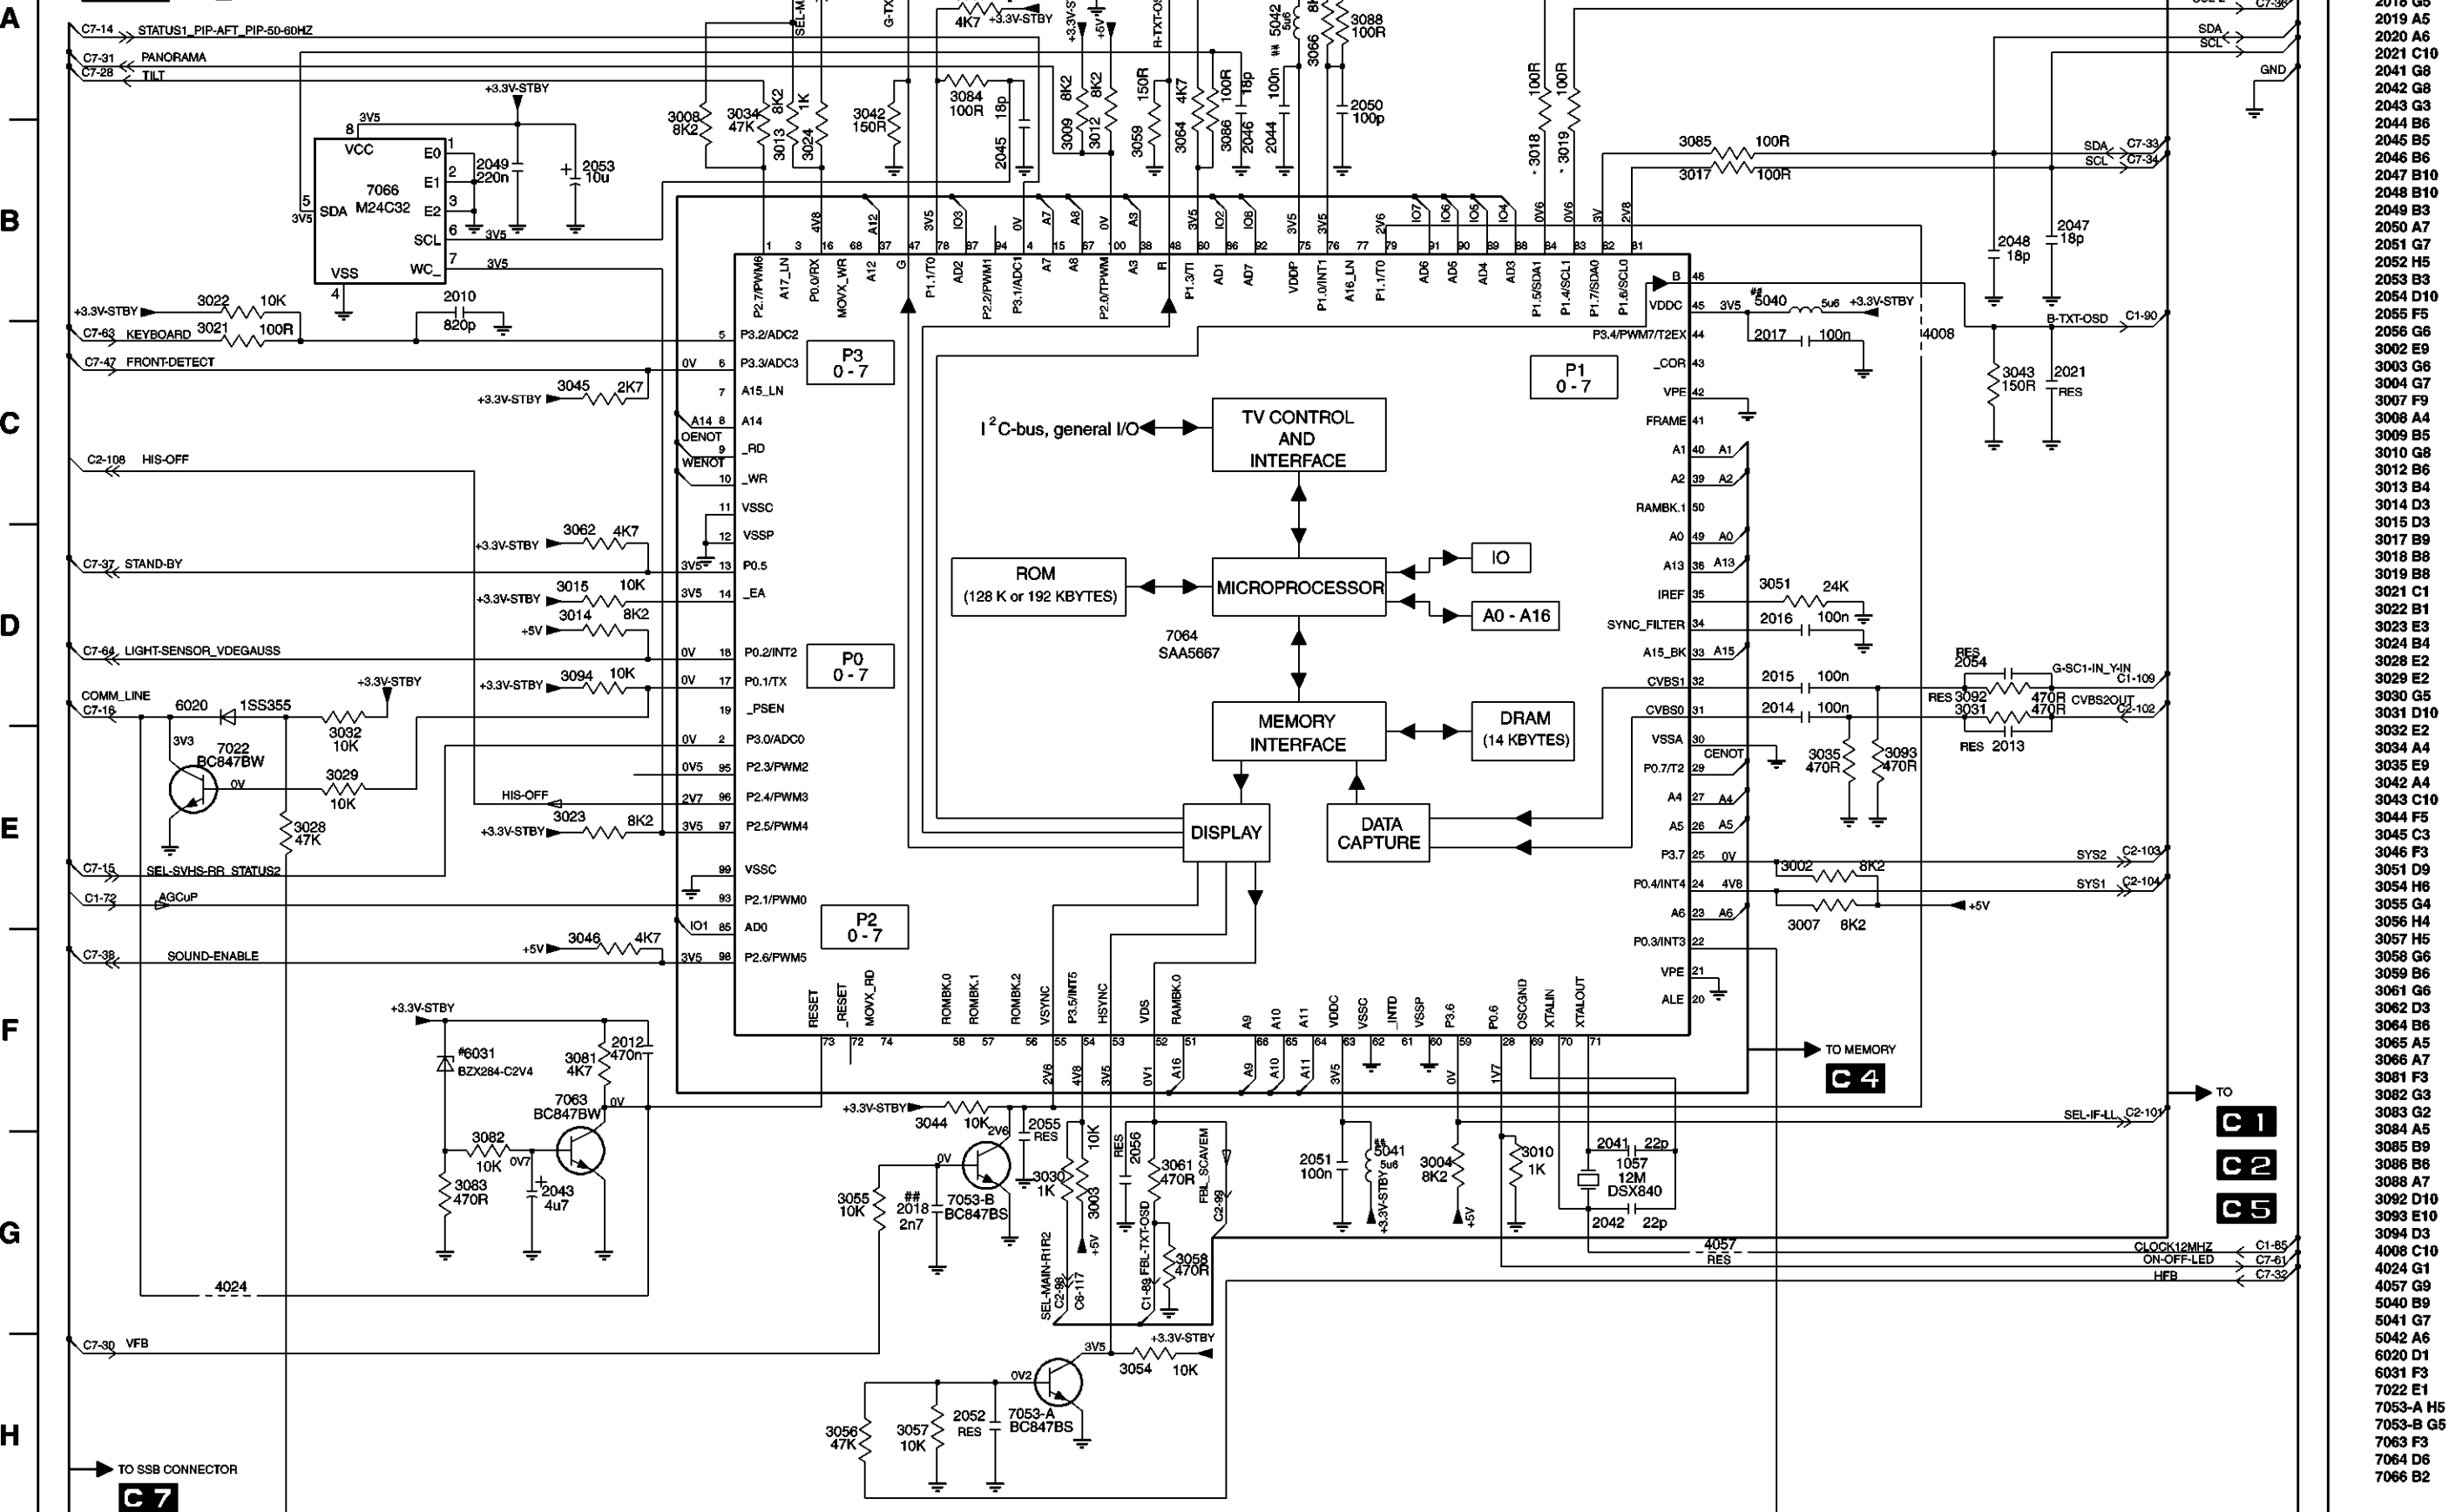C3 U_CONT

1


2


3

4

C 4**MEMORY****SSB Module (4 of 7)****NOTES**

1. CAPACITANCE VALUES ARE IN FARADS:
m=MILI u=MICRO n=NANO p=PICO f=FEMTO
2. RESISTANCE VALUES ARE IN OHMS:
R=OHM K=KILO M=MEGA G=GIGA T=TERA
3. SAFETY TRIANGLE REPRESENTS PCEC REPLACEMENT PART ONLY.
4. * COMPONENT USAGE VARIES.
REFER TO PARTS LIST / COMPONENT TABLES FOR VERIFICATION.

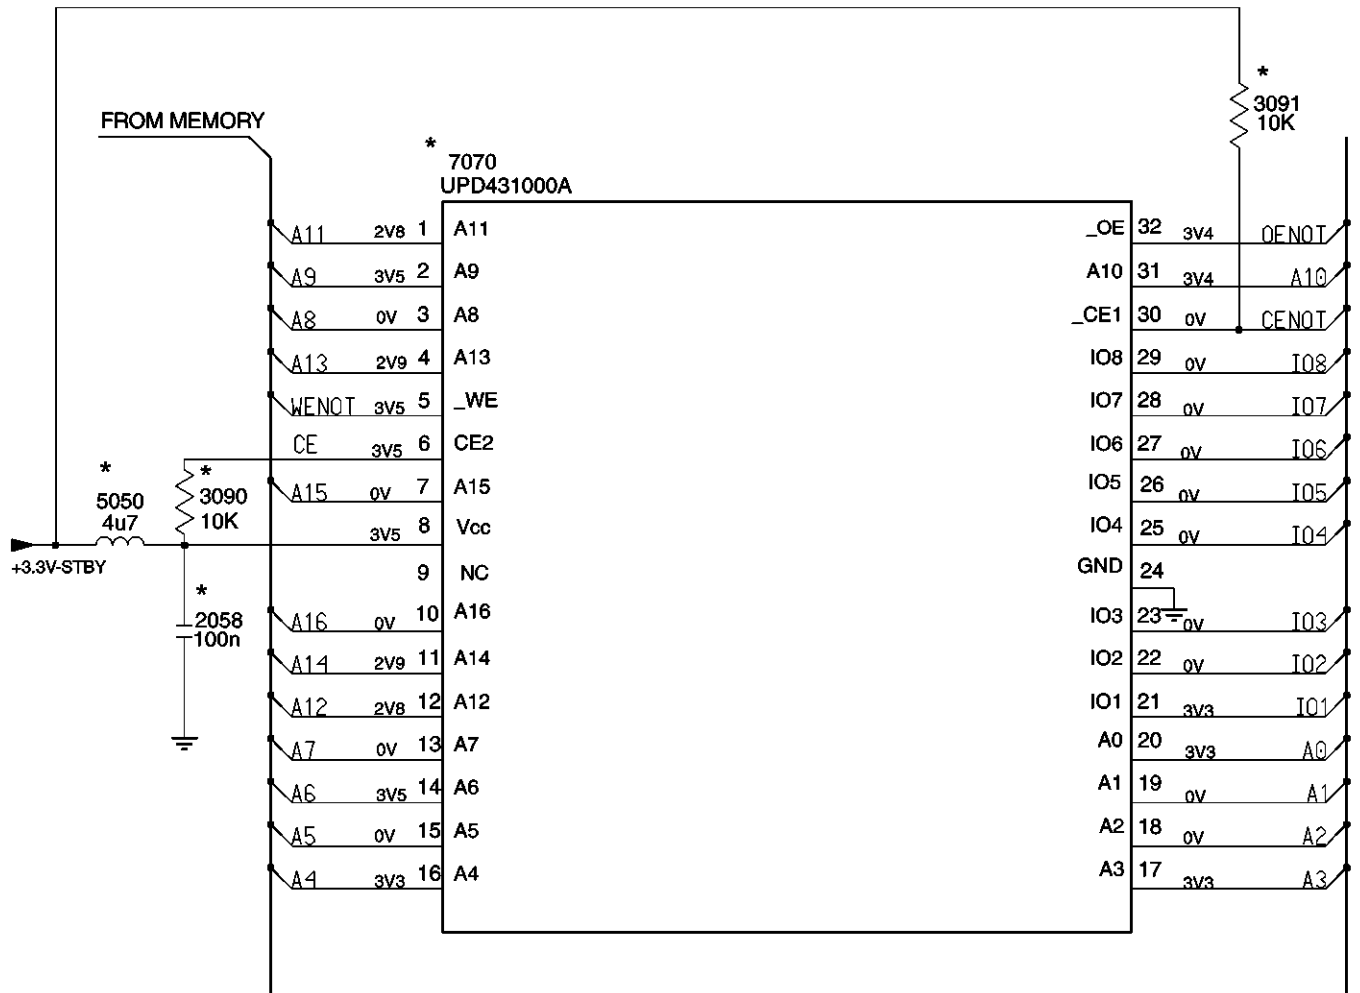

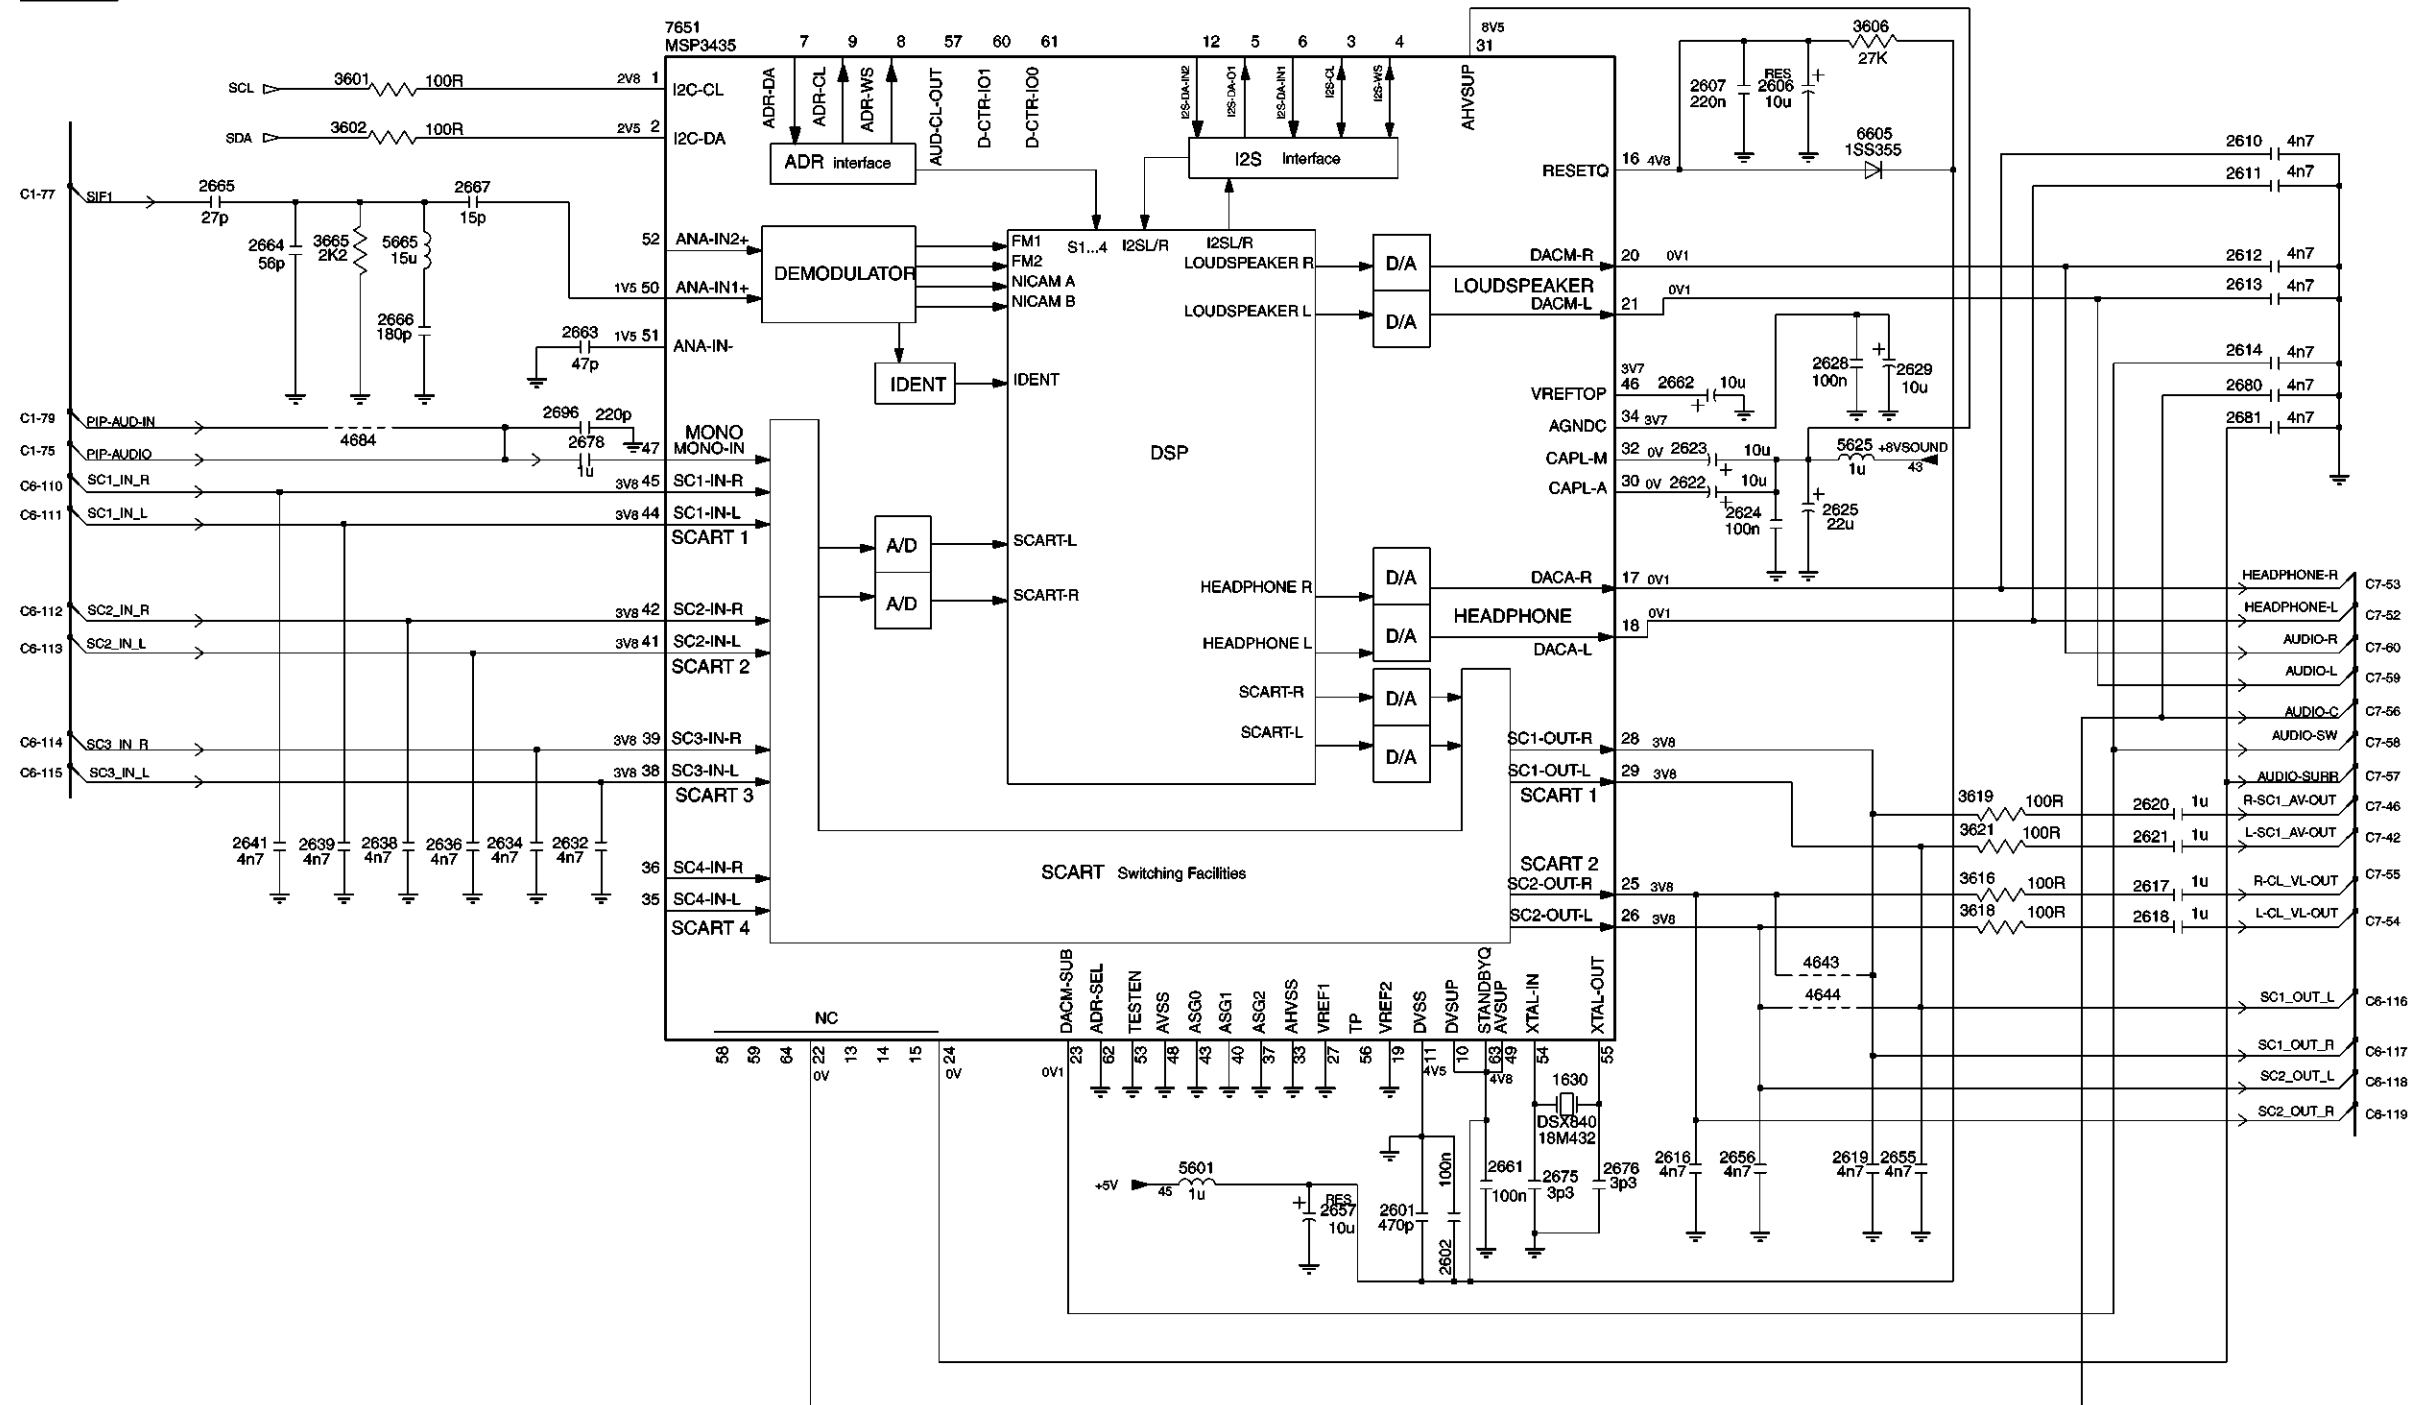


1

2

3

4

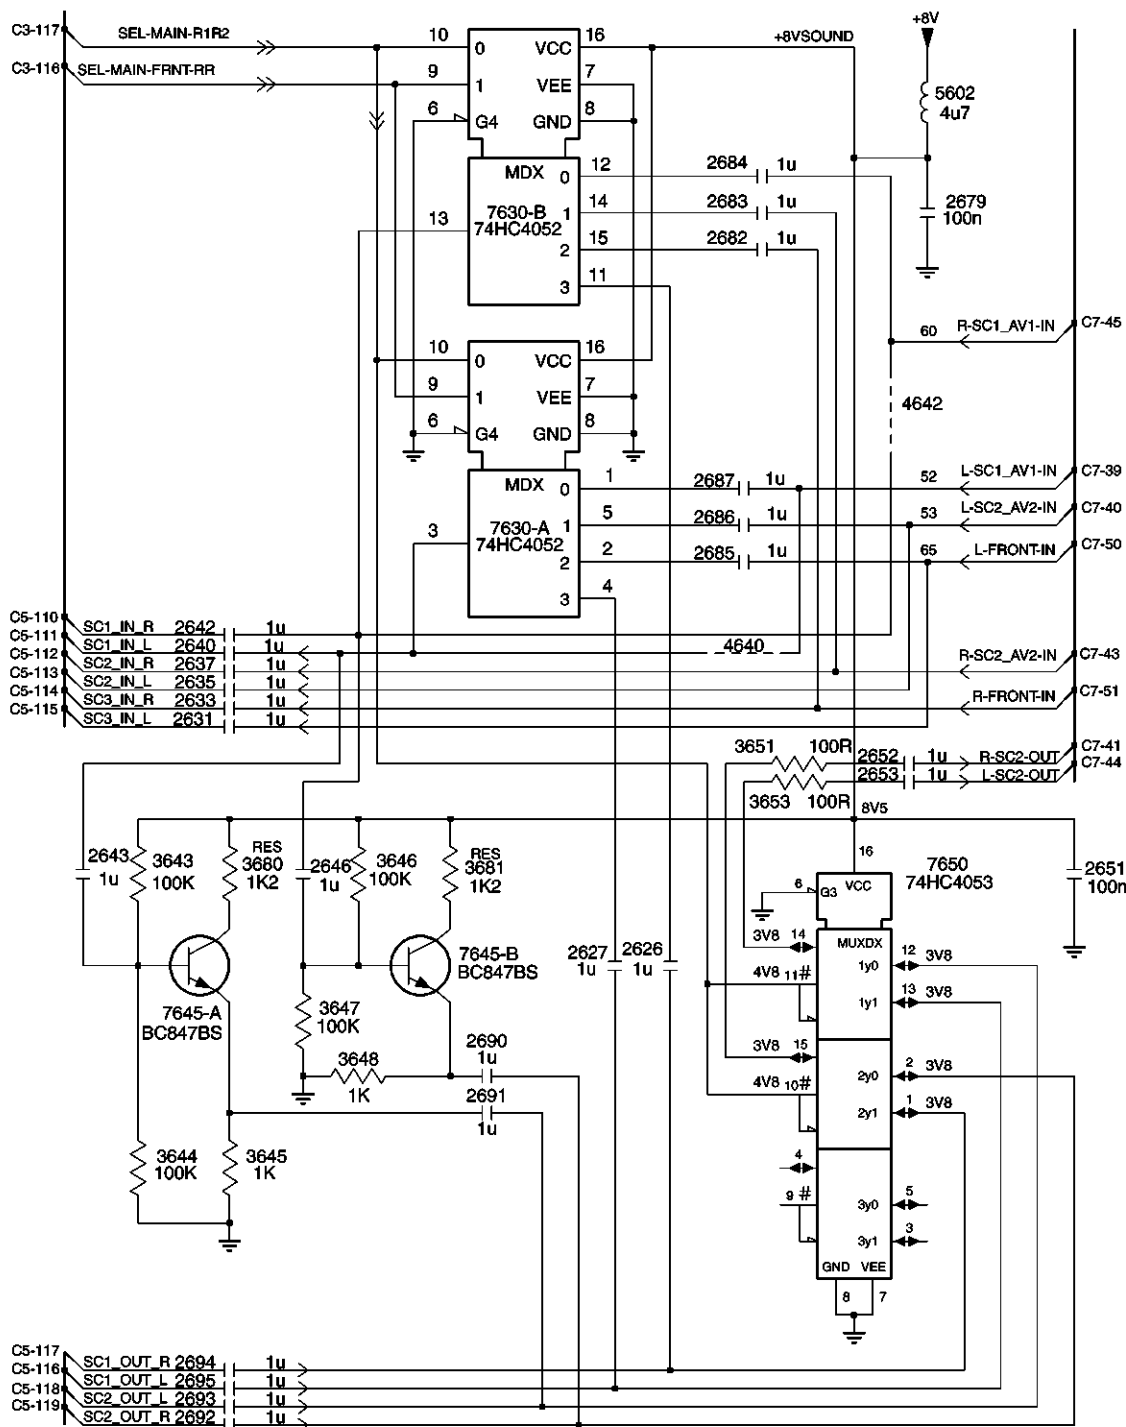C6**AUDIO PROCESSING****SSB Module (6 of 7)**

2626 E3
 2627 E3
 2631 D1
 2633 D1
 2635 D1
 2637 D1
 2640 D1
 2642 D1
 2643 E1
 2646 E2
 2651 E4
 2652 D4
 2653 D4
 2679 B4
 2682 B3
 2683 B3
 2684 B3
 2685 C3
 2686 C3
 2687 C3
 2690 E2
 2691 F2
 2692 F1
 2693 F1
 2694 F1
 2695 F1
 3643 E1
 3644 F1
 3645 F1
 3646 E2
 3647 E2
 3648 E2
 3651 D3
 3653 D3
 3680 E1
 3681 E2
 4640 D3
 4642 C4
 5602 B4
 7630-A C2
 7630-B B2
 7645-A E1
 7645-B E2
 7650 E4


1

2


3

4


5

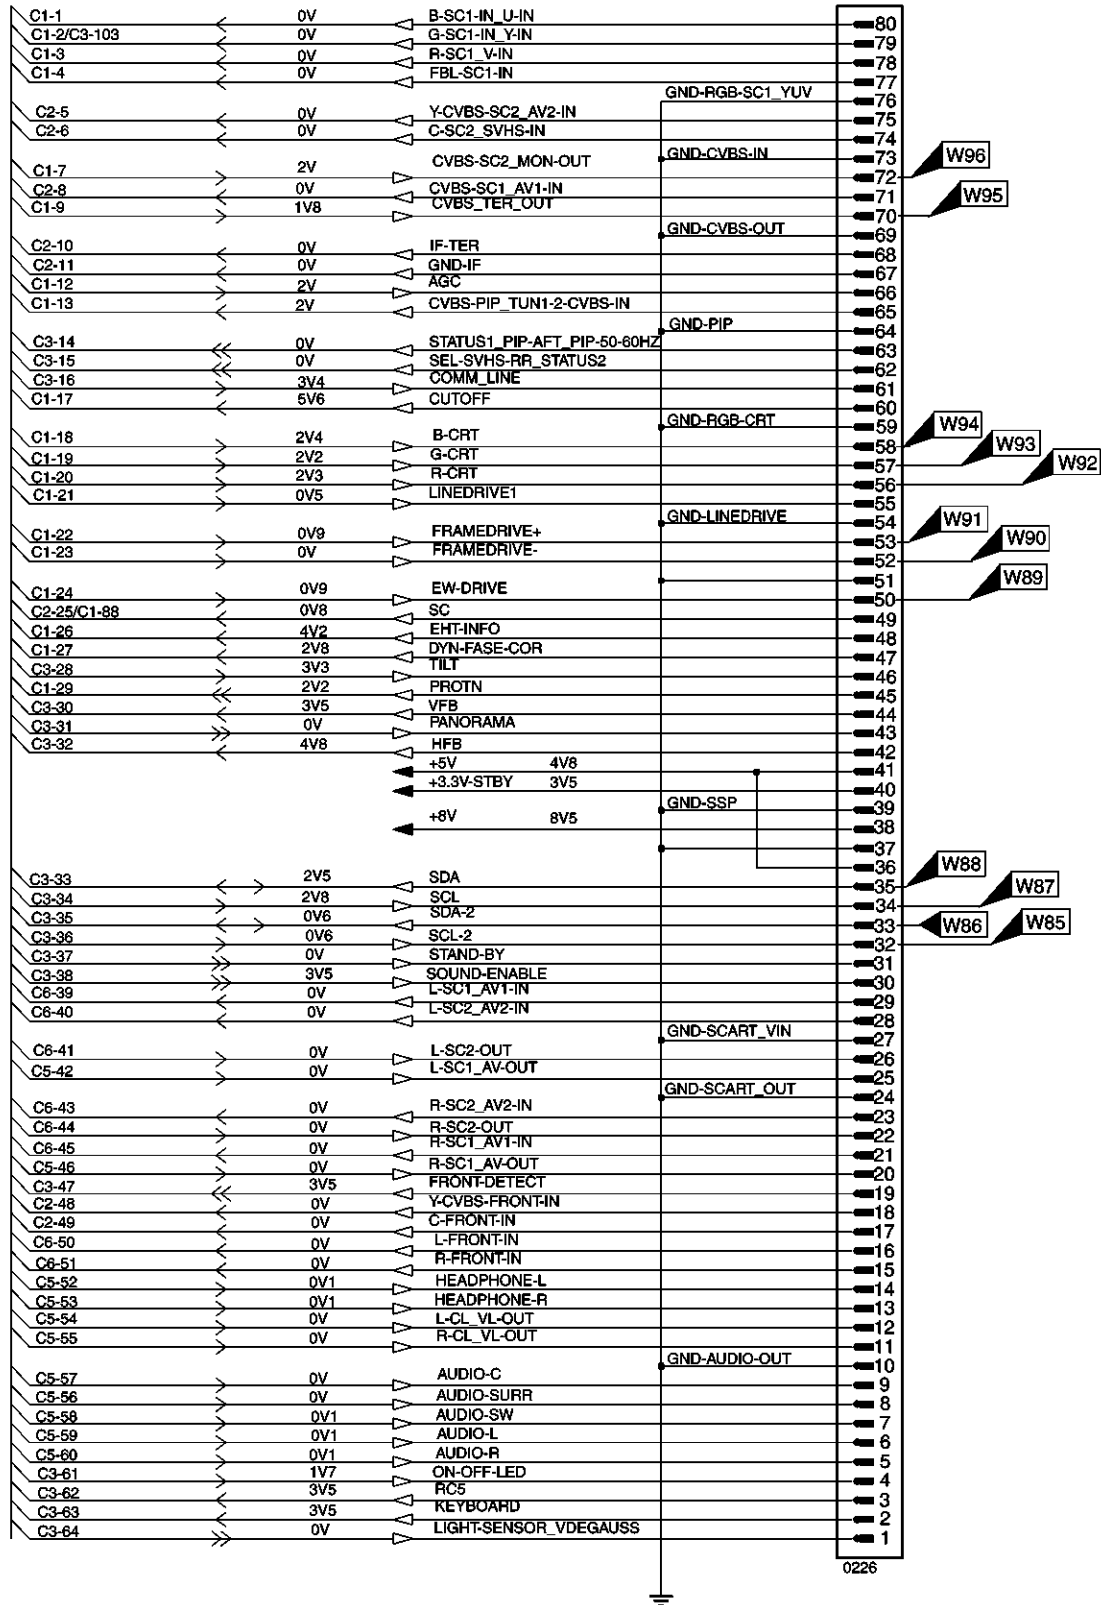
C7**SSB Module (7 of 7)****SSB_CONNECTOR**TO 0226 OF SSP TUNER **A 4**


KEYBOARD CIRCUIT

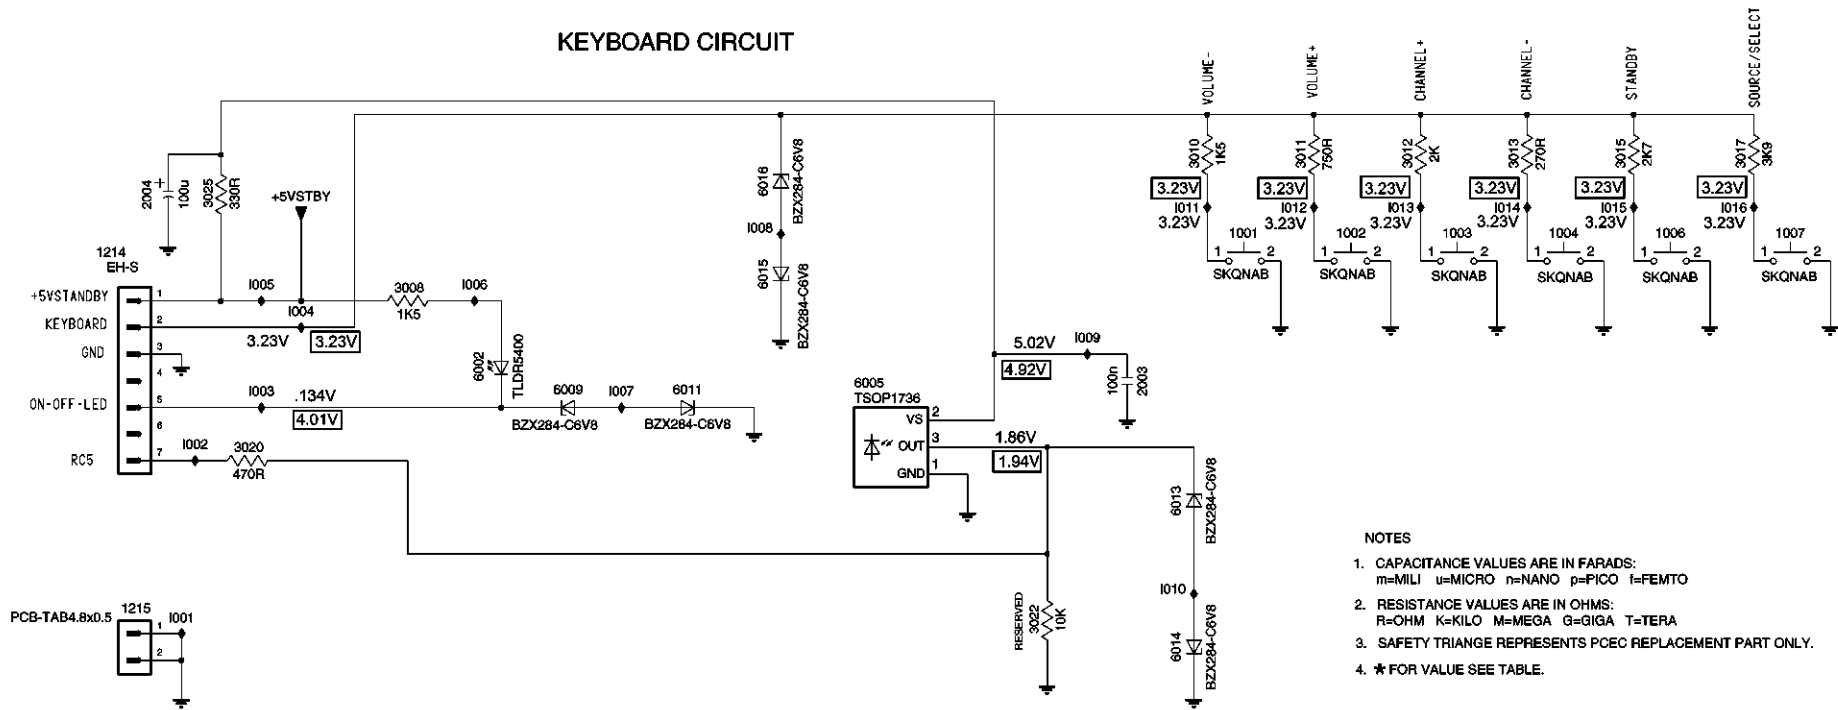

SIDE JACK PANEL SCHEMATIC

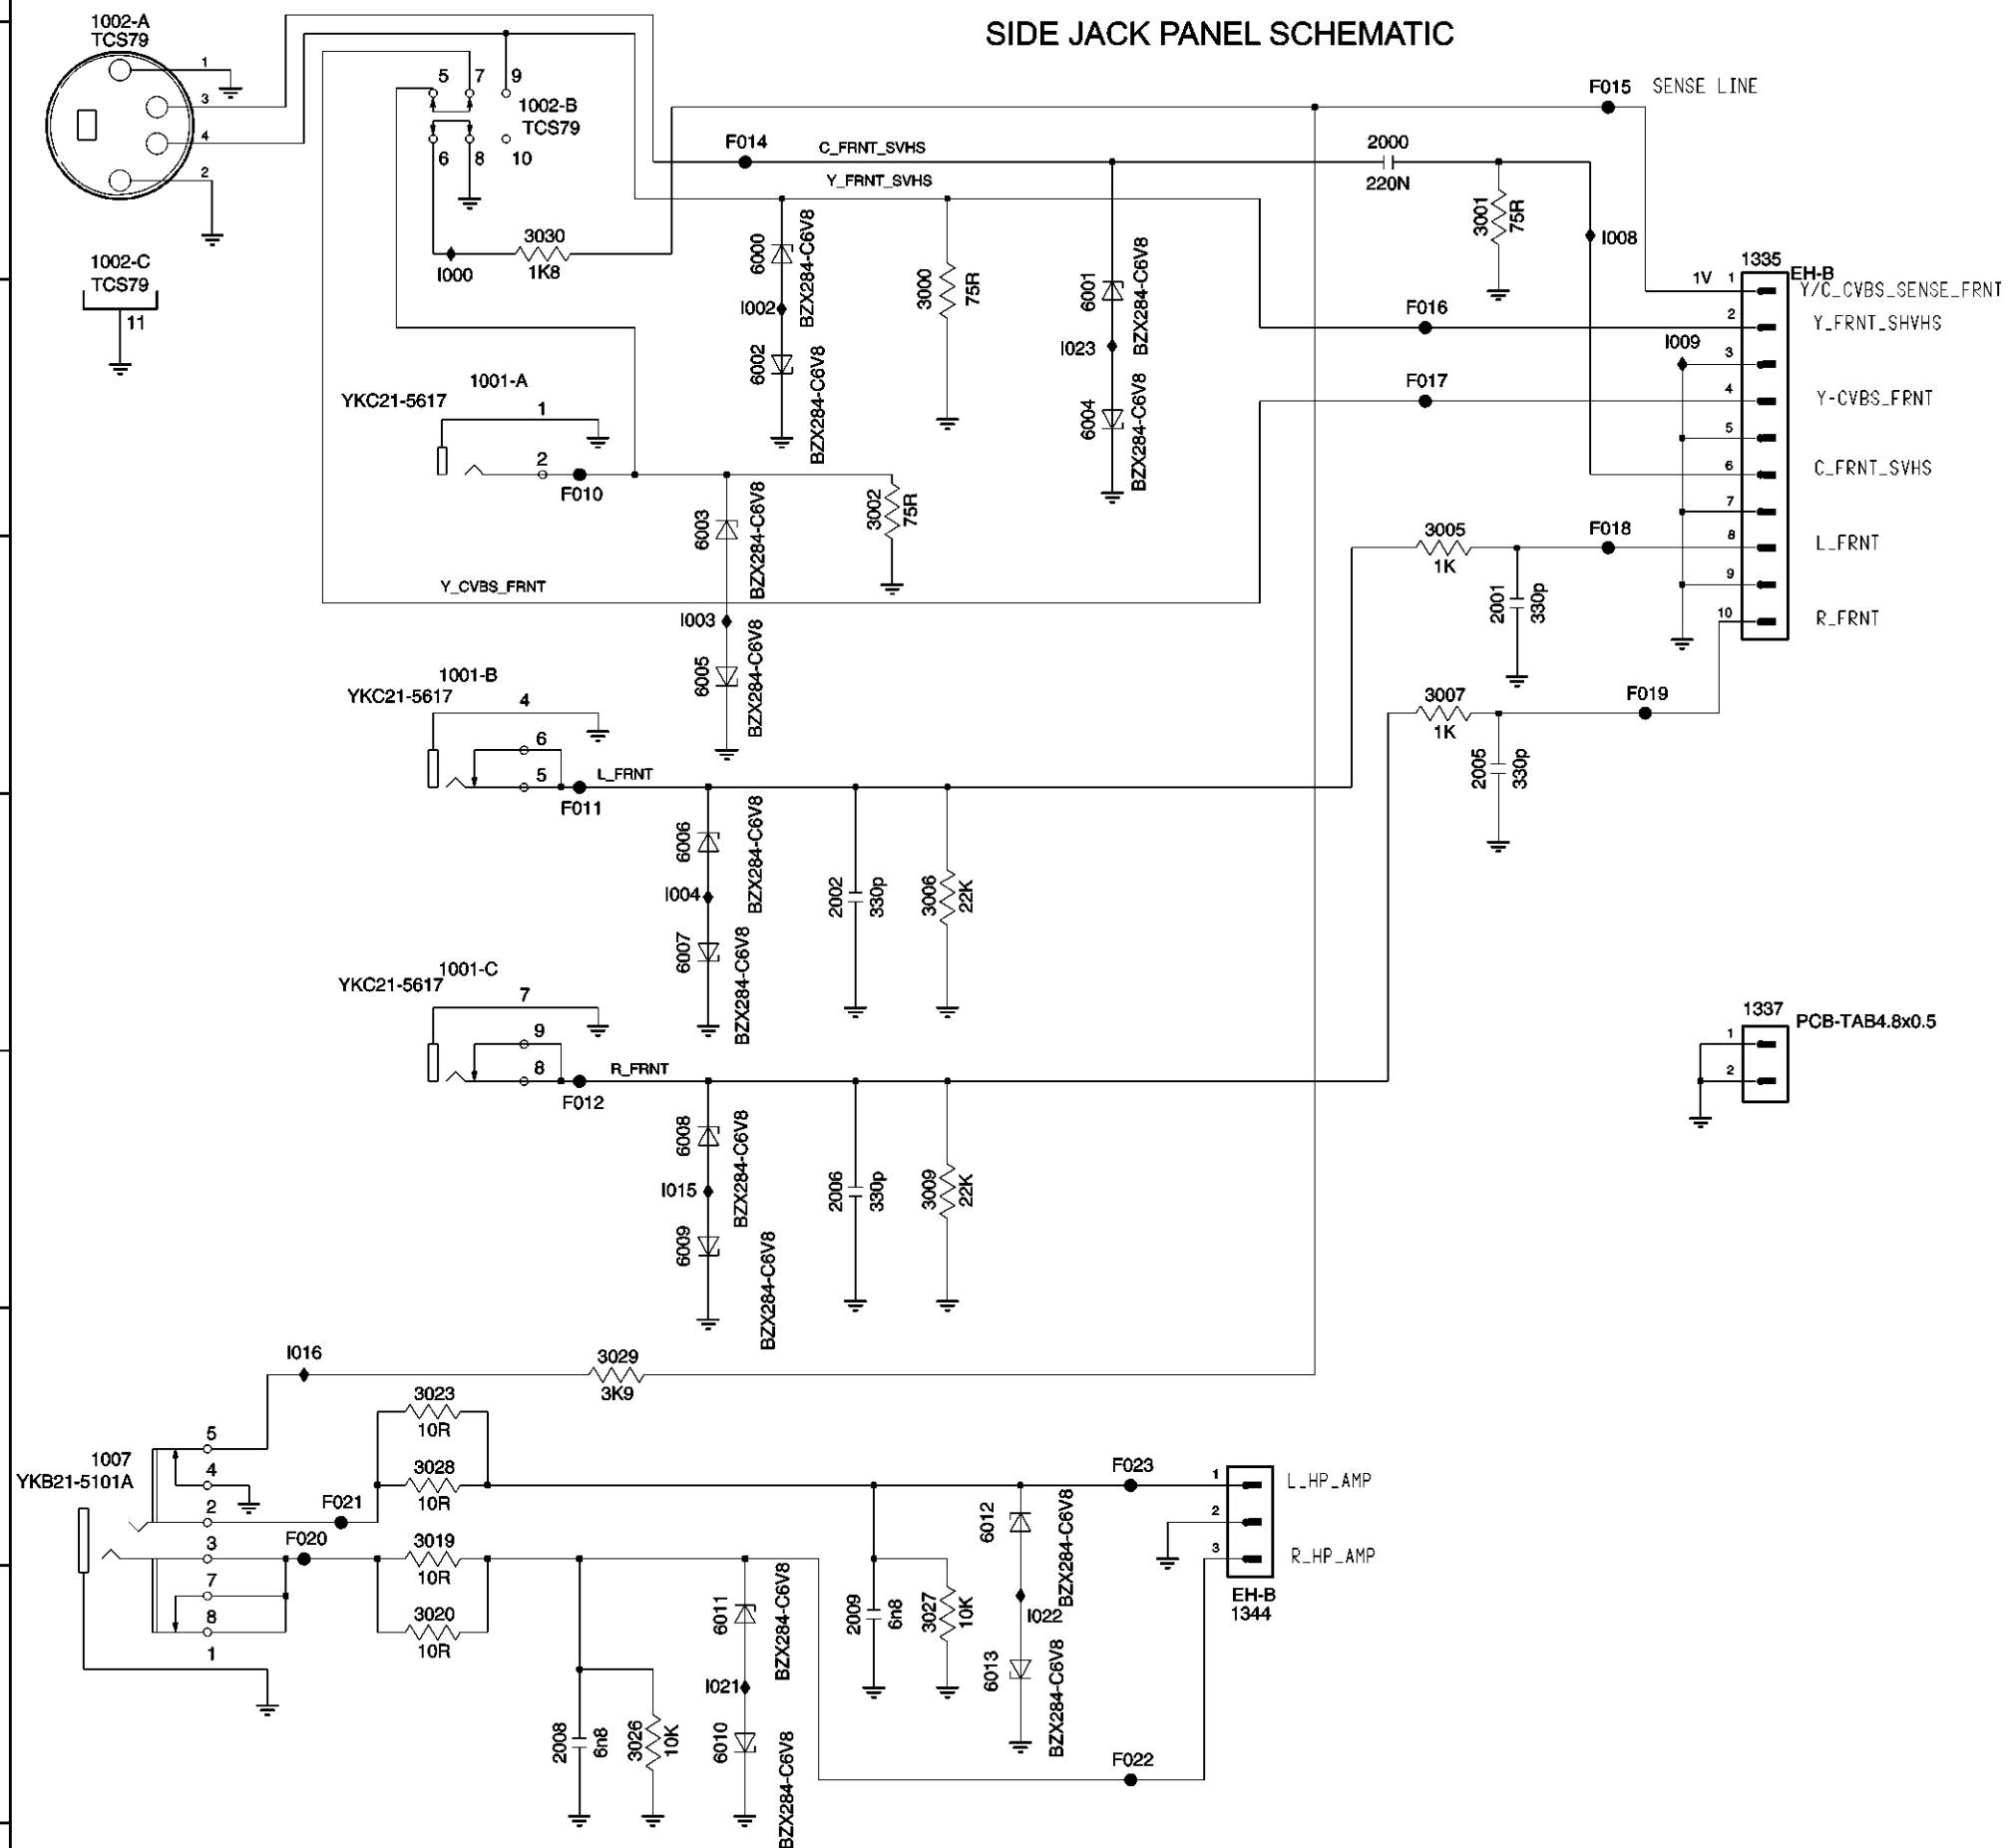

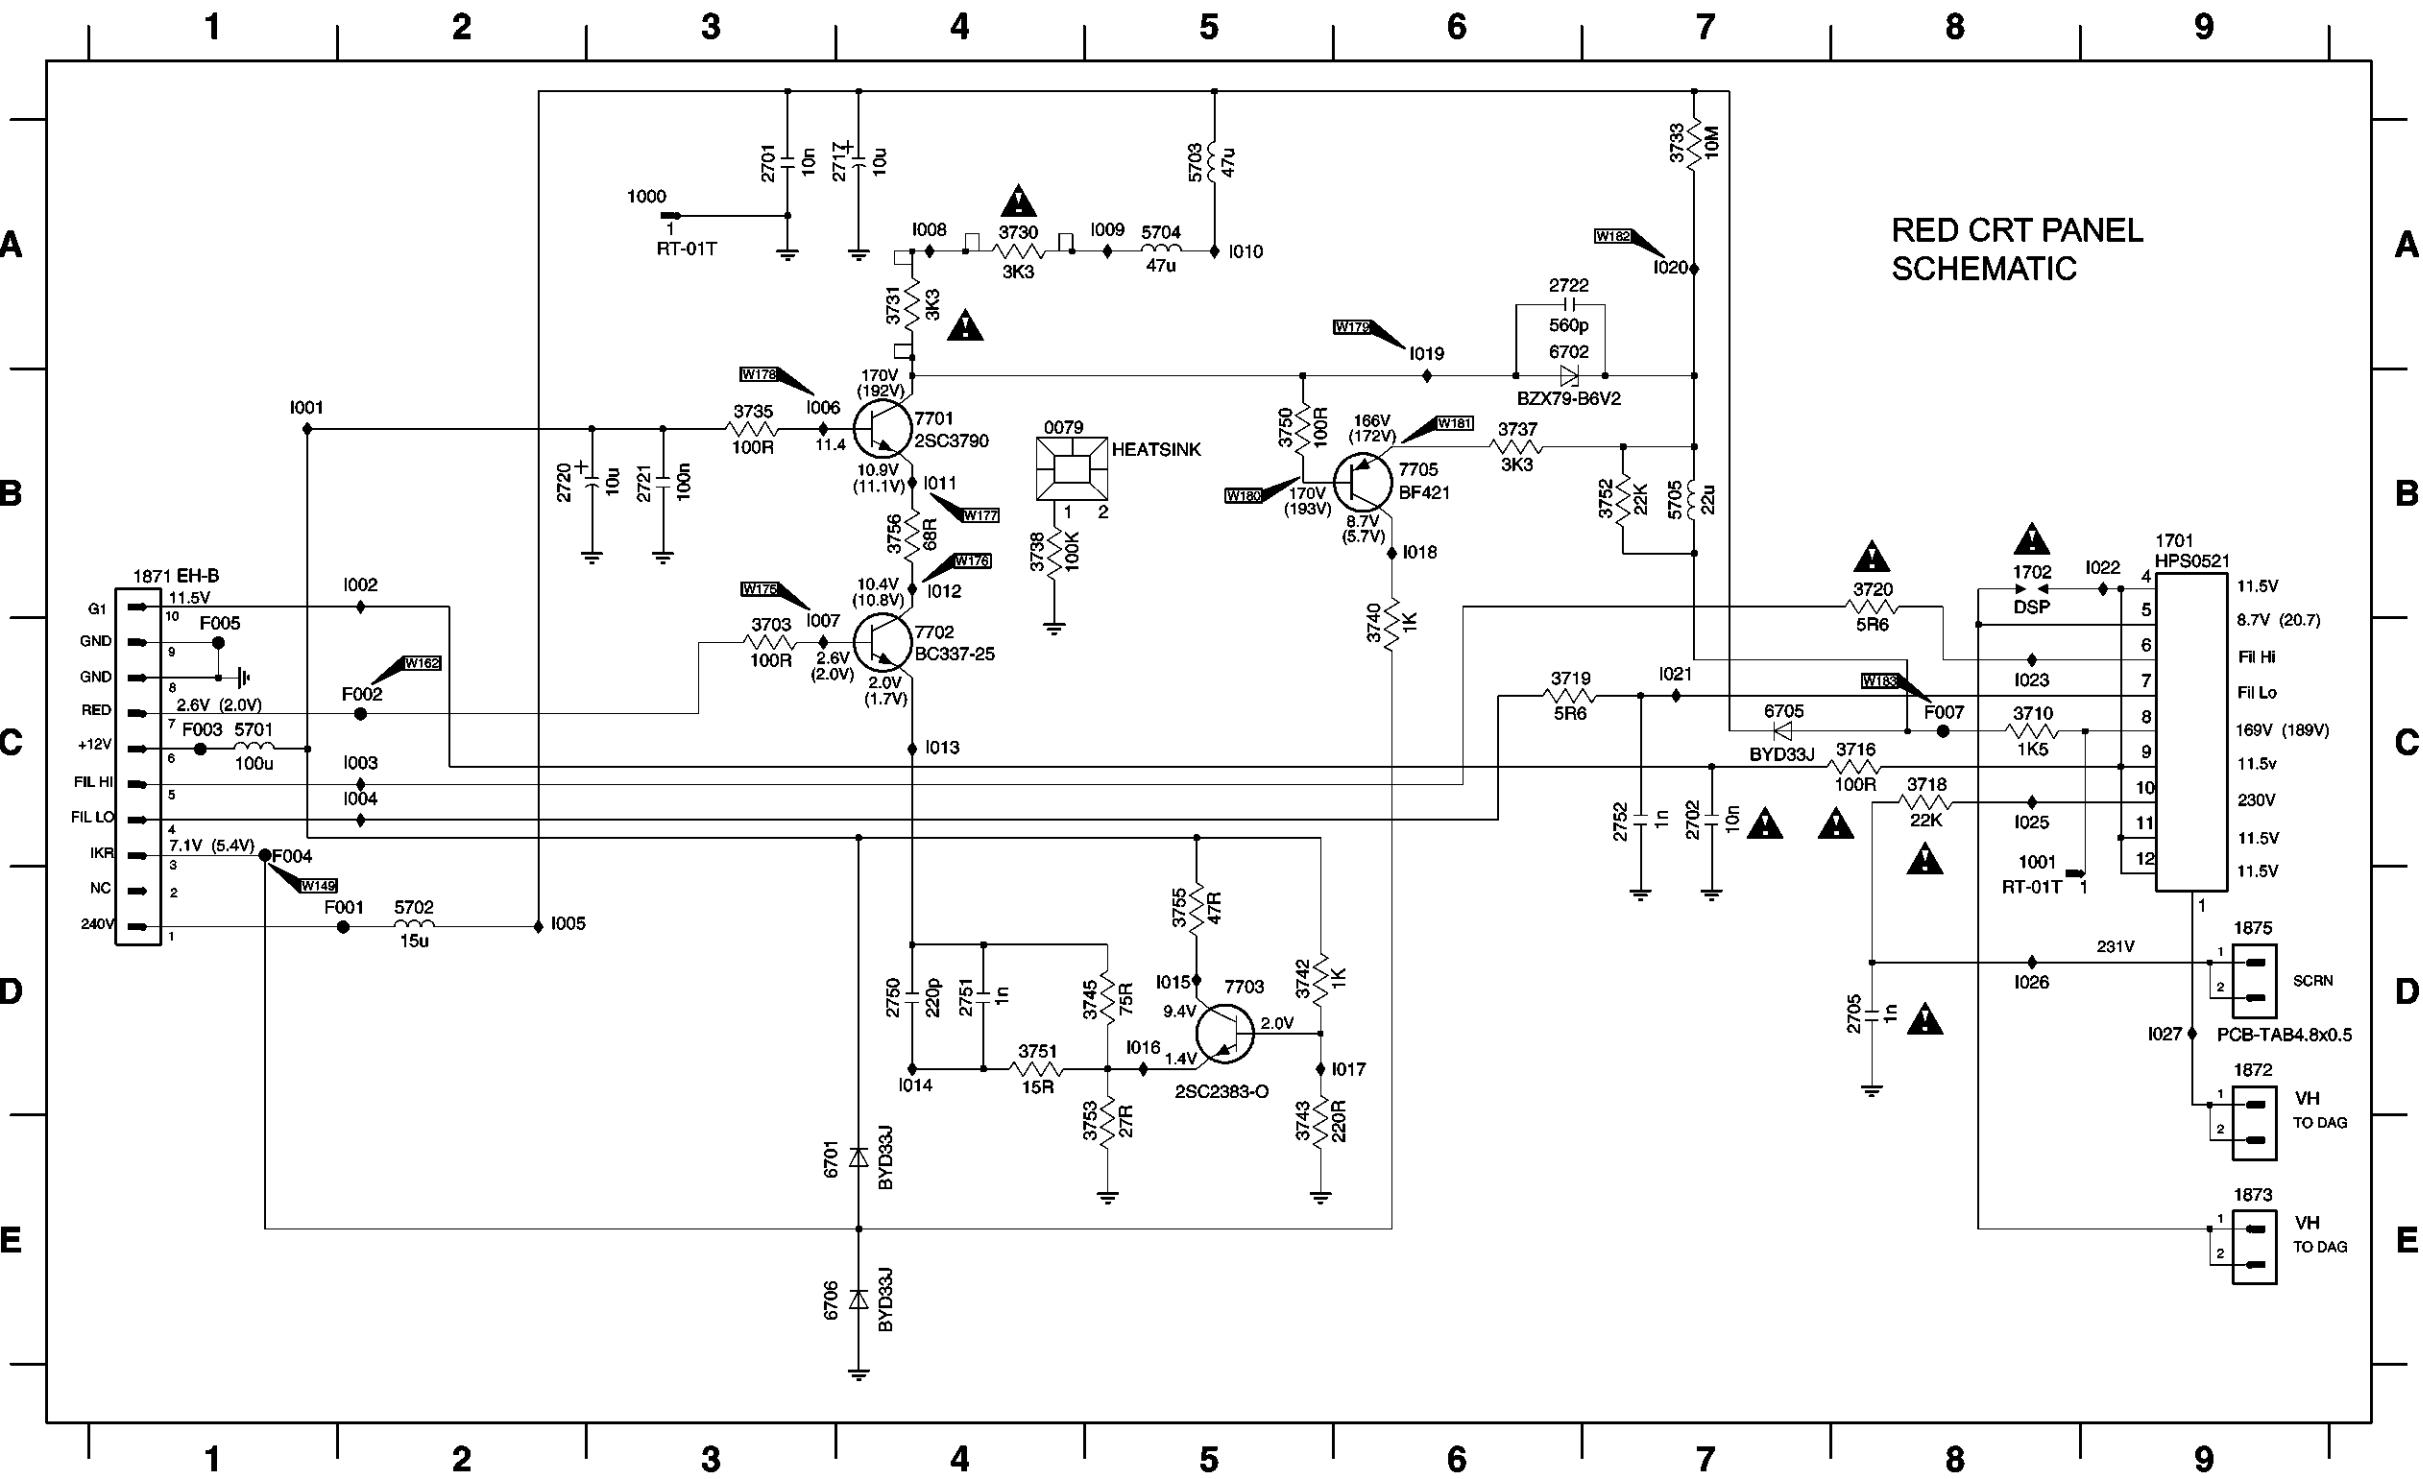

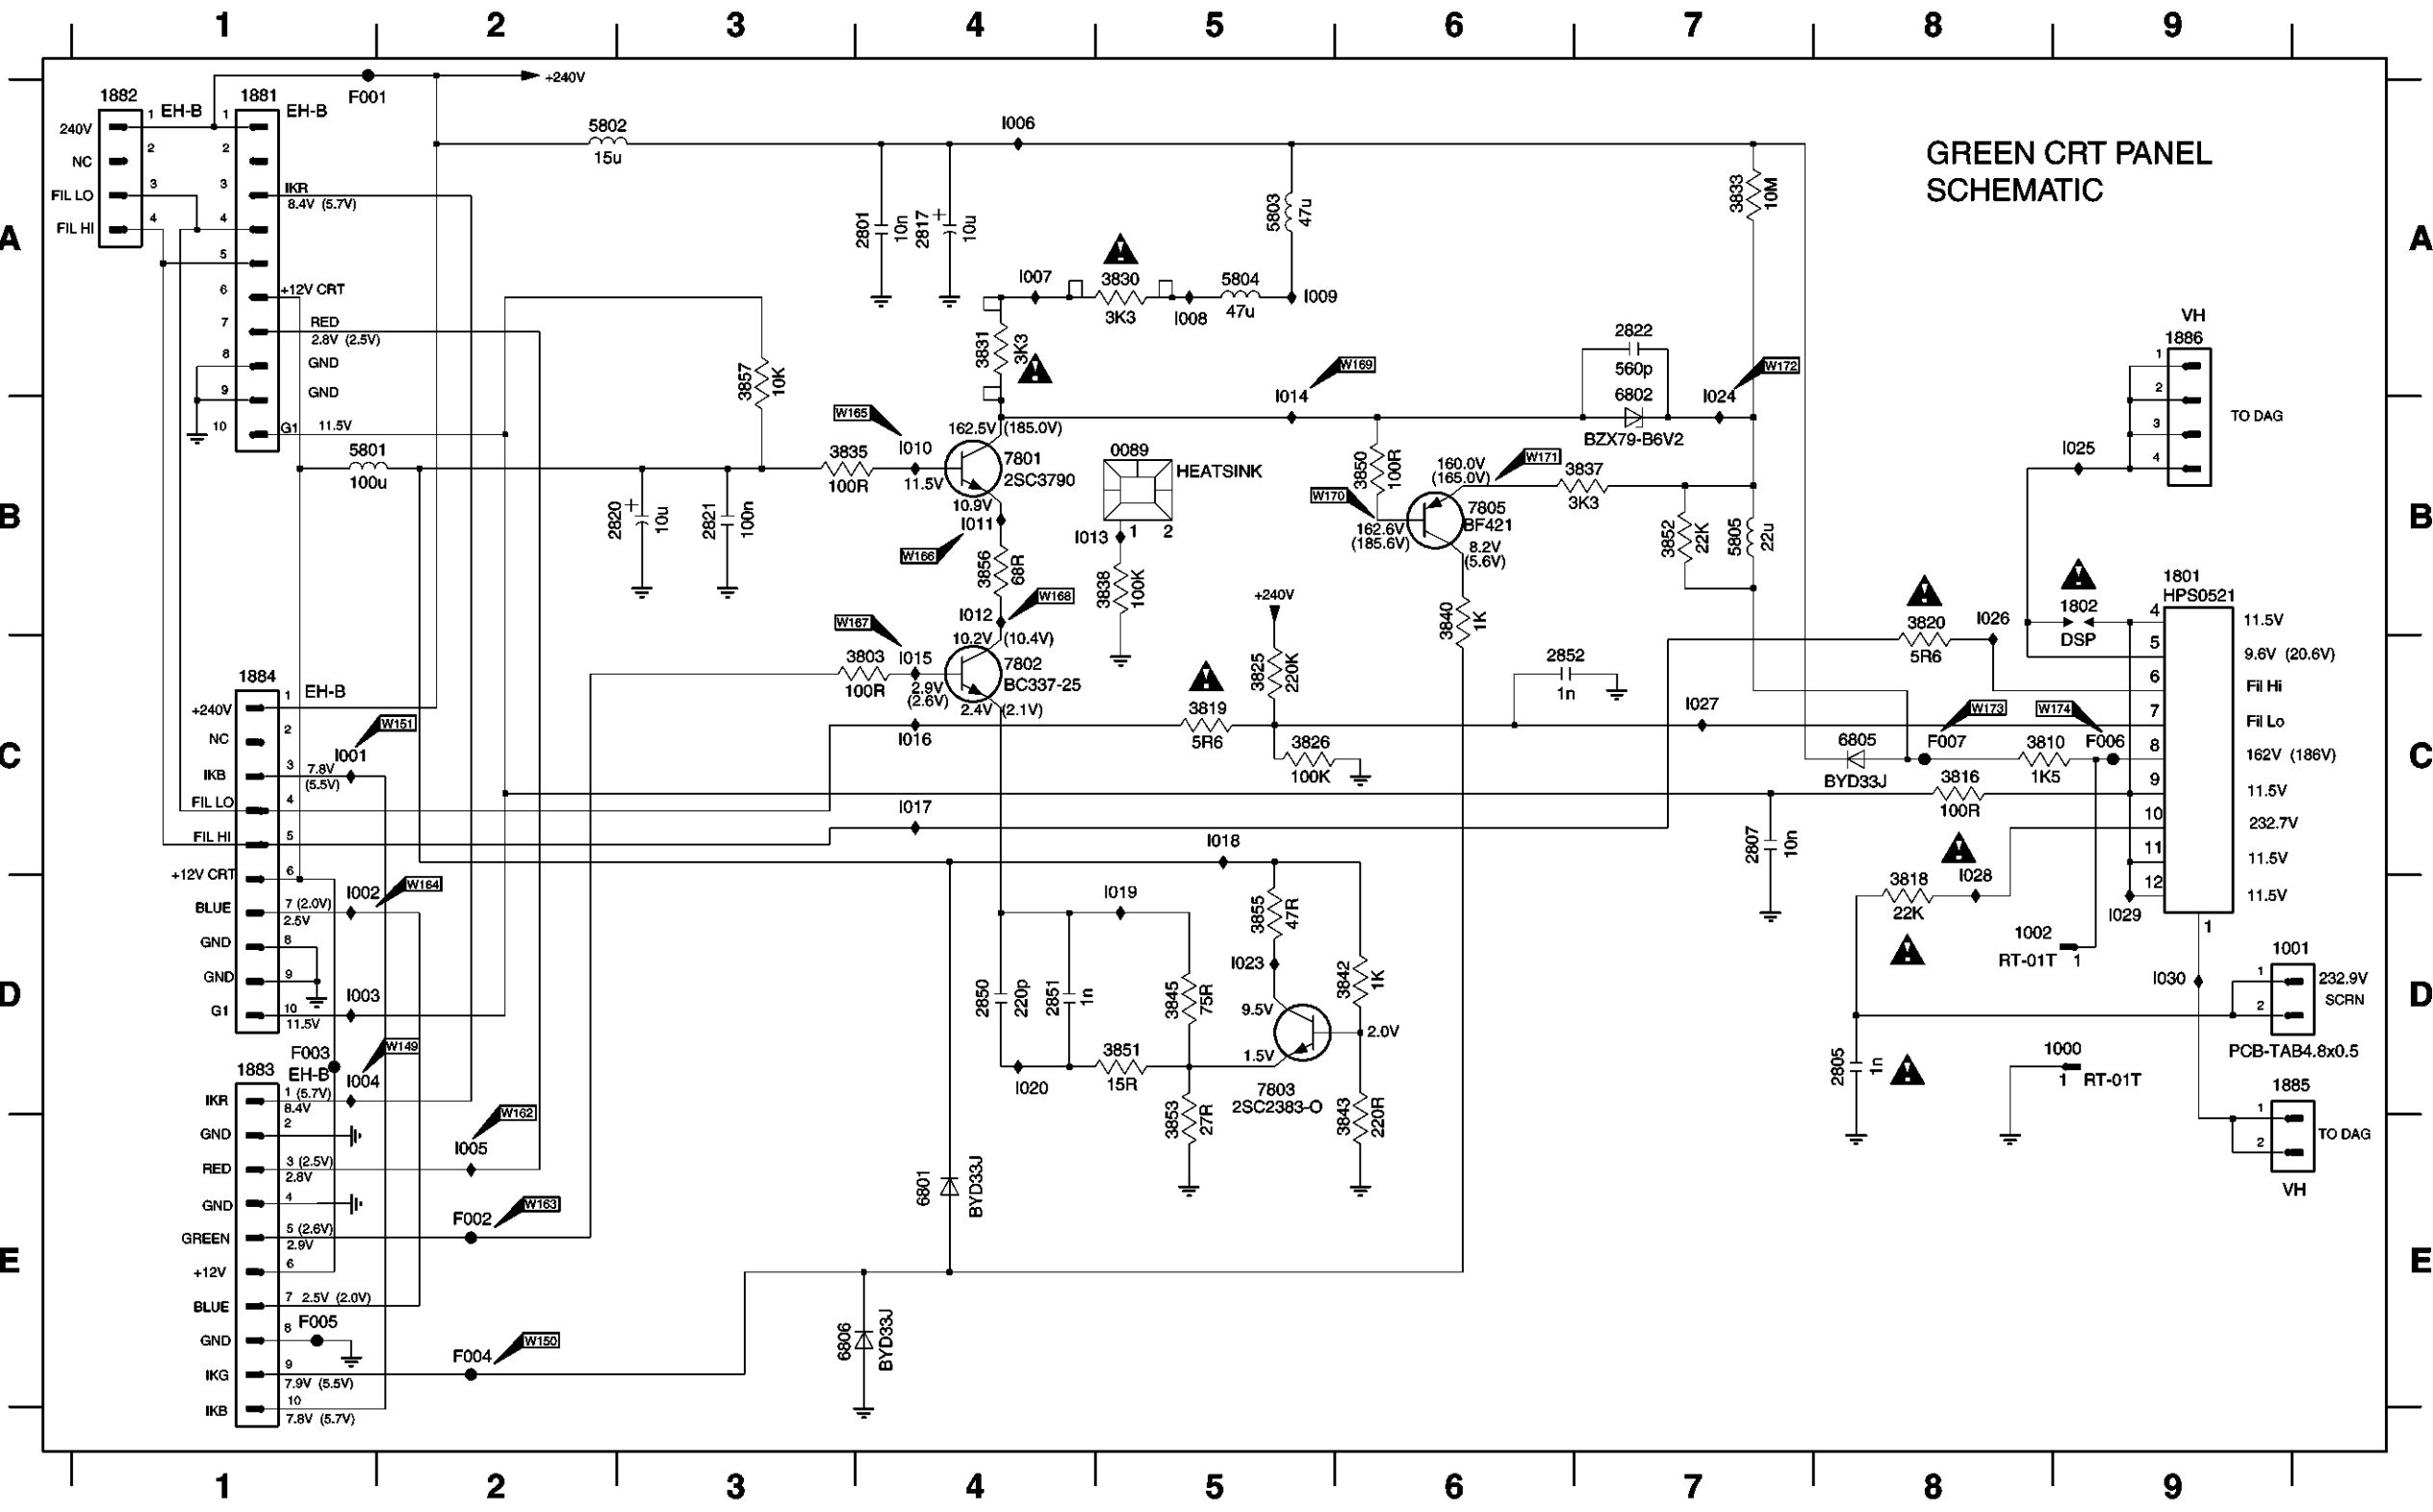

A

B

C

D

E


A

B

C

D

E

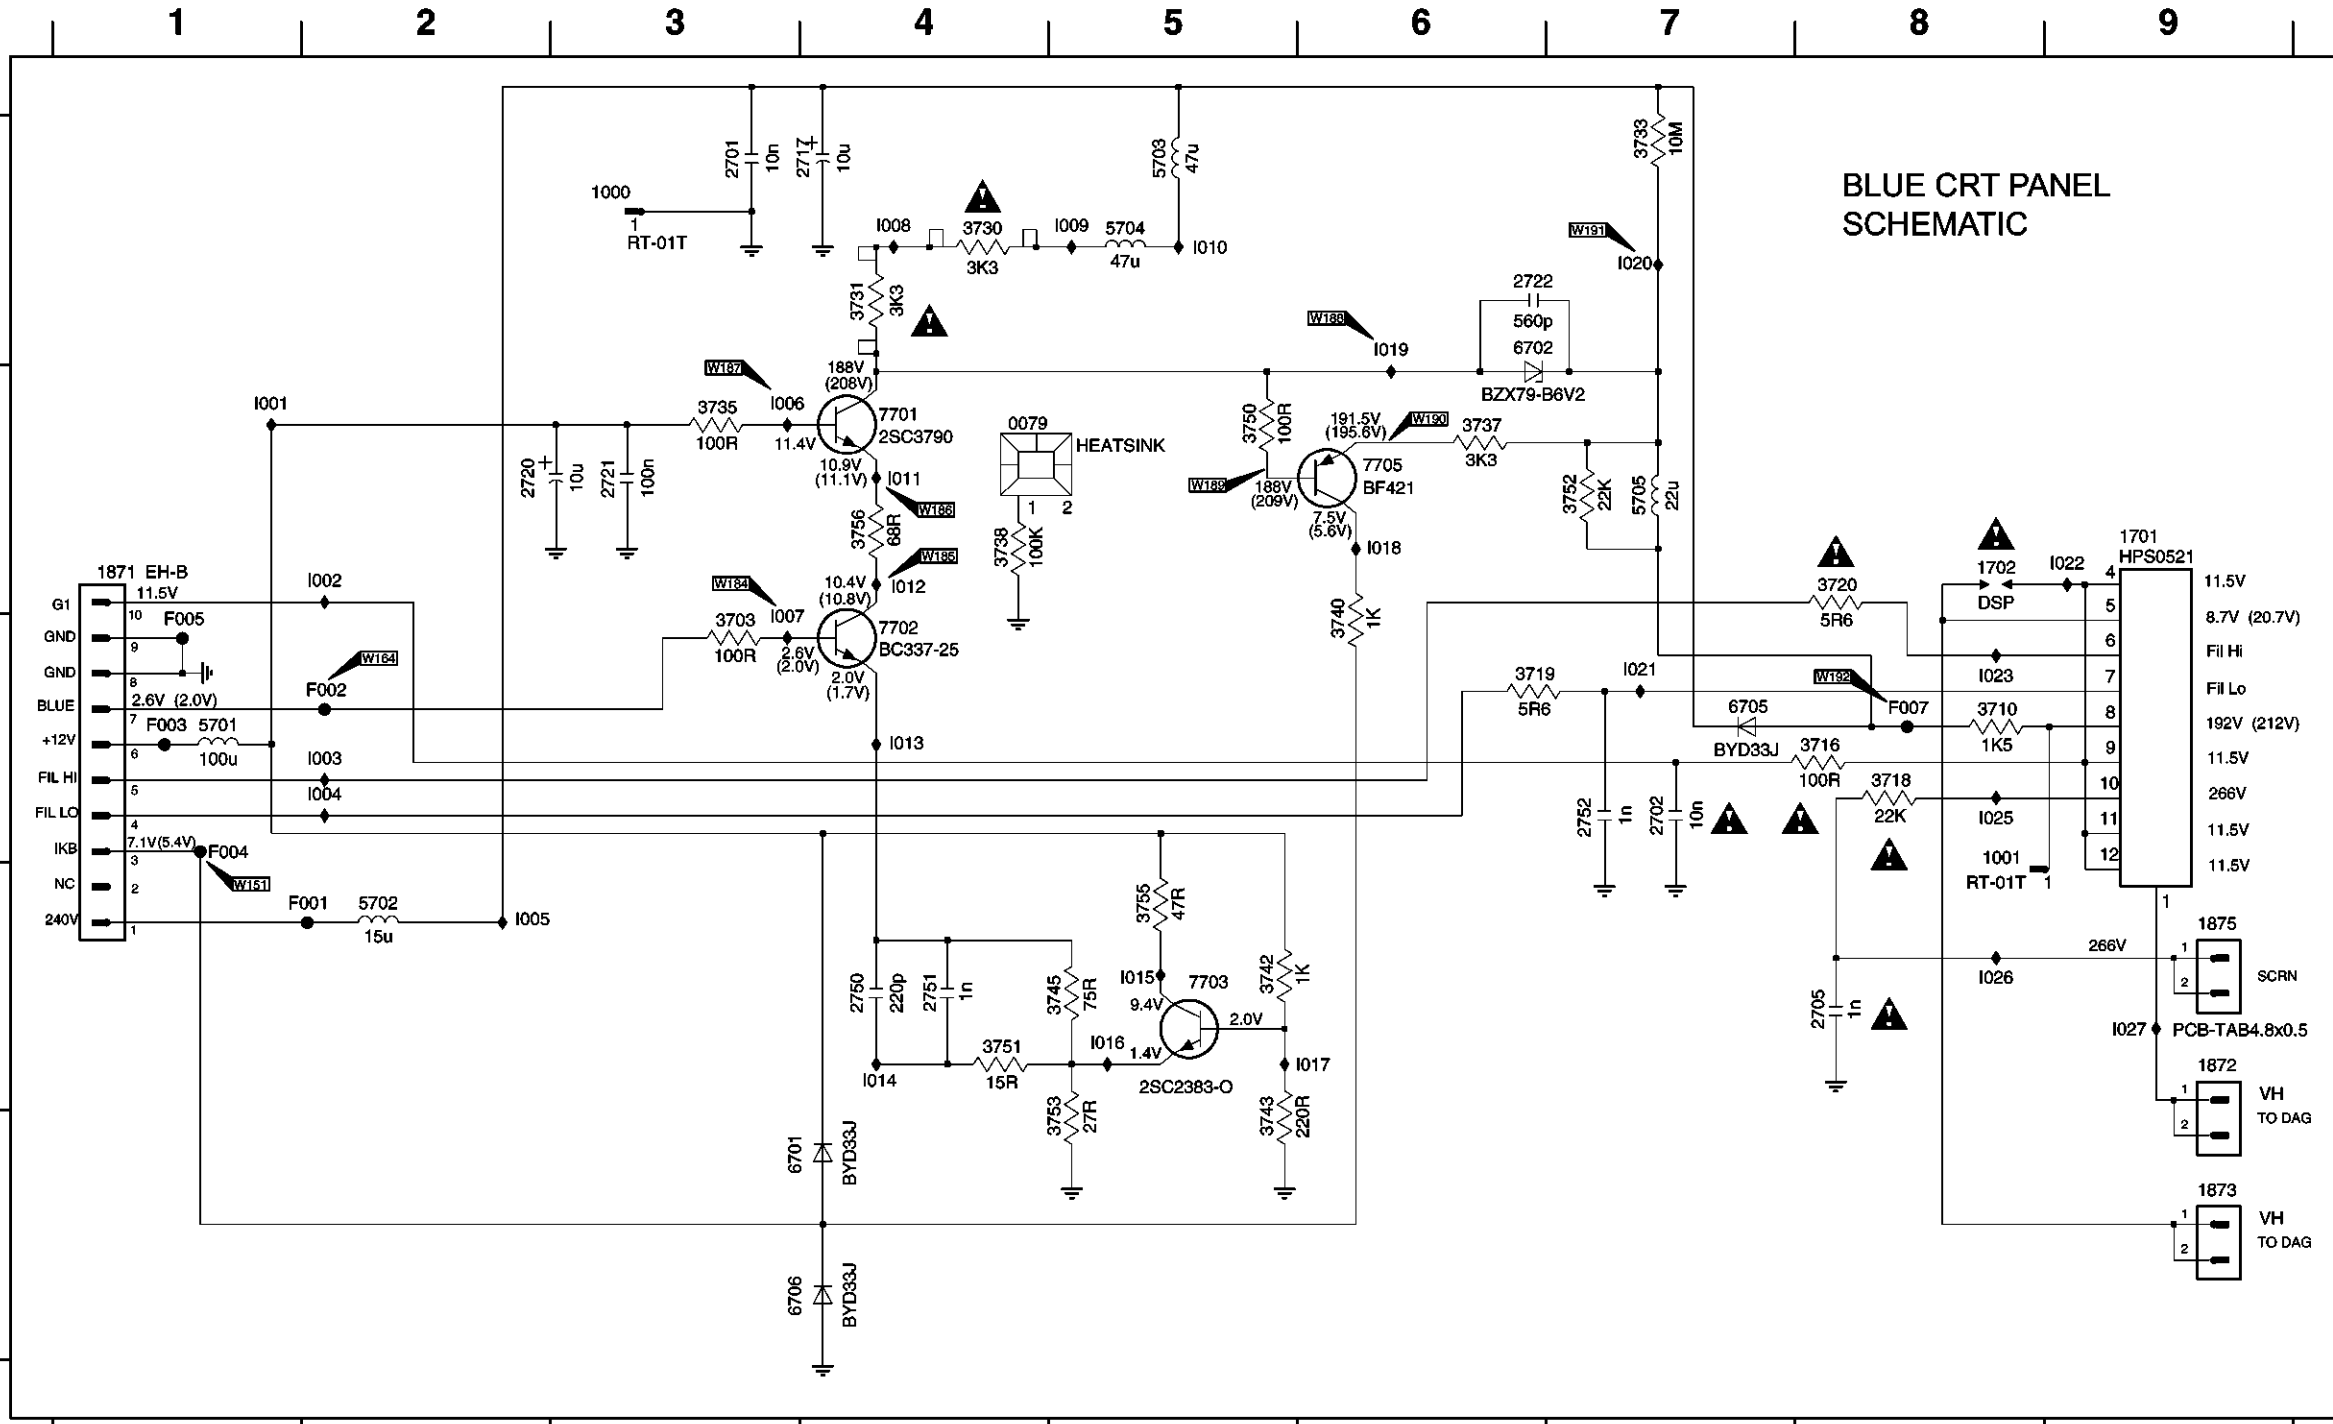


BLUE CRT PANEL
SCHEMATIC

PIP Panel Schematic (1 of 2)

L1 2ND FRONT END

2 Tuner PIP Panel

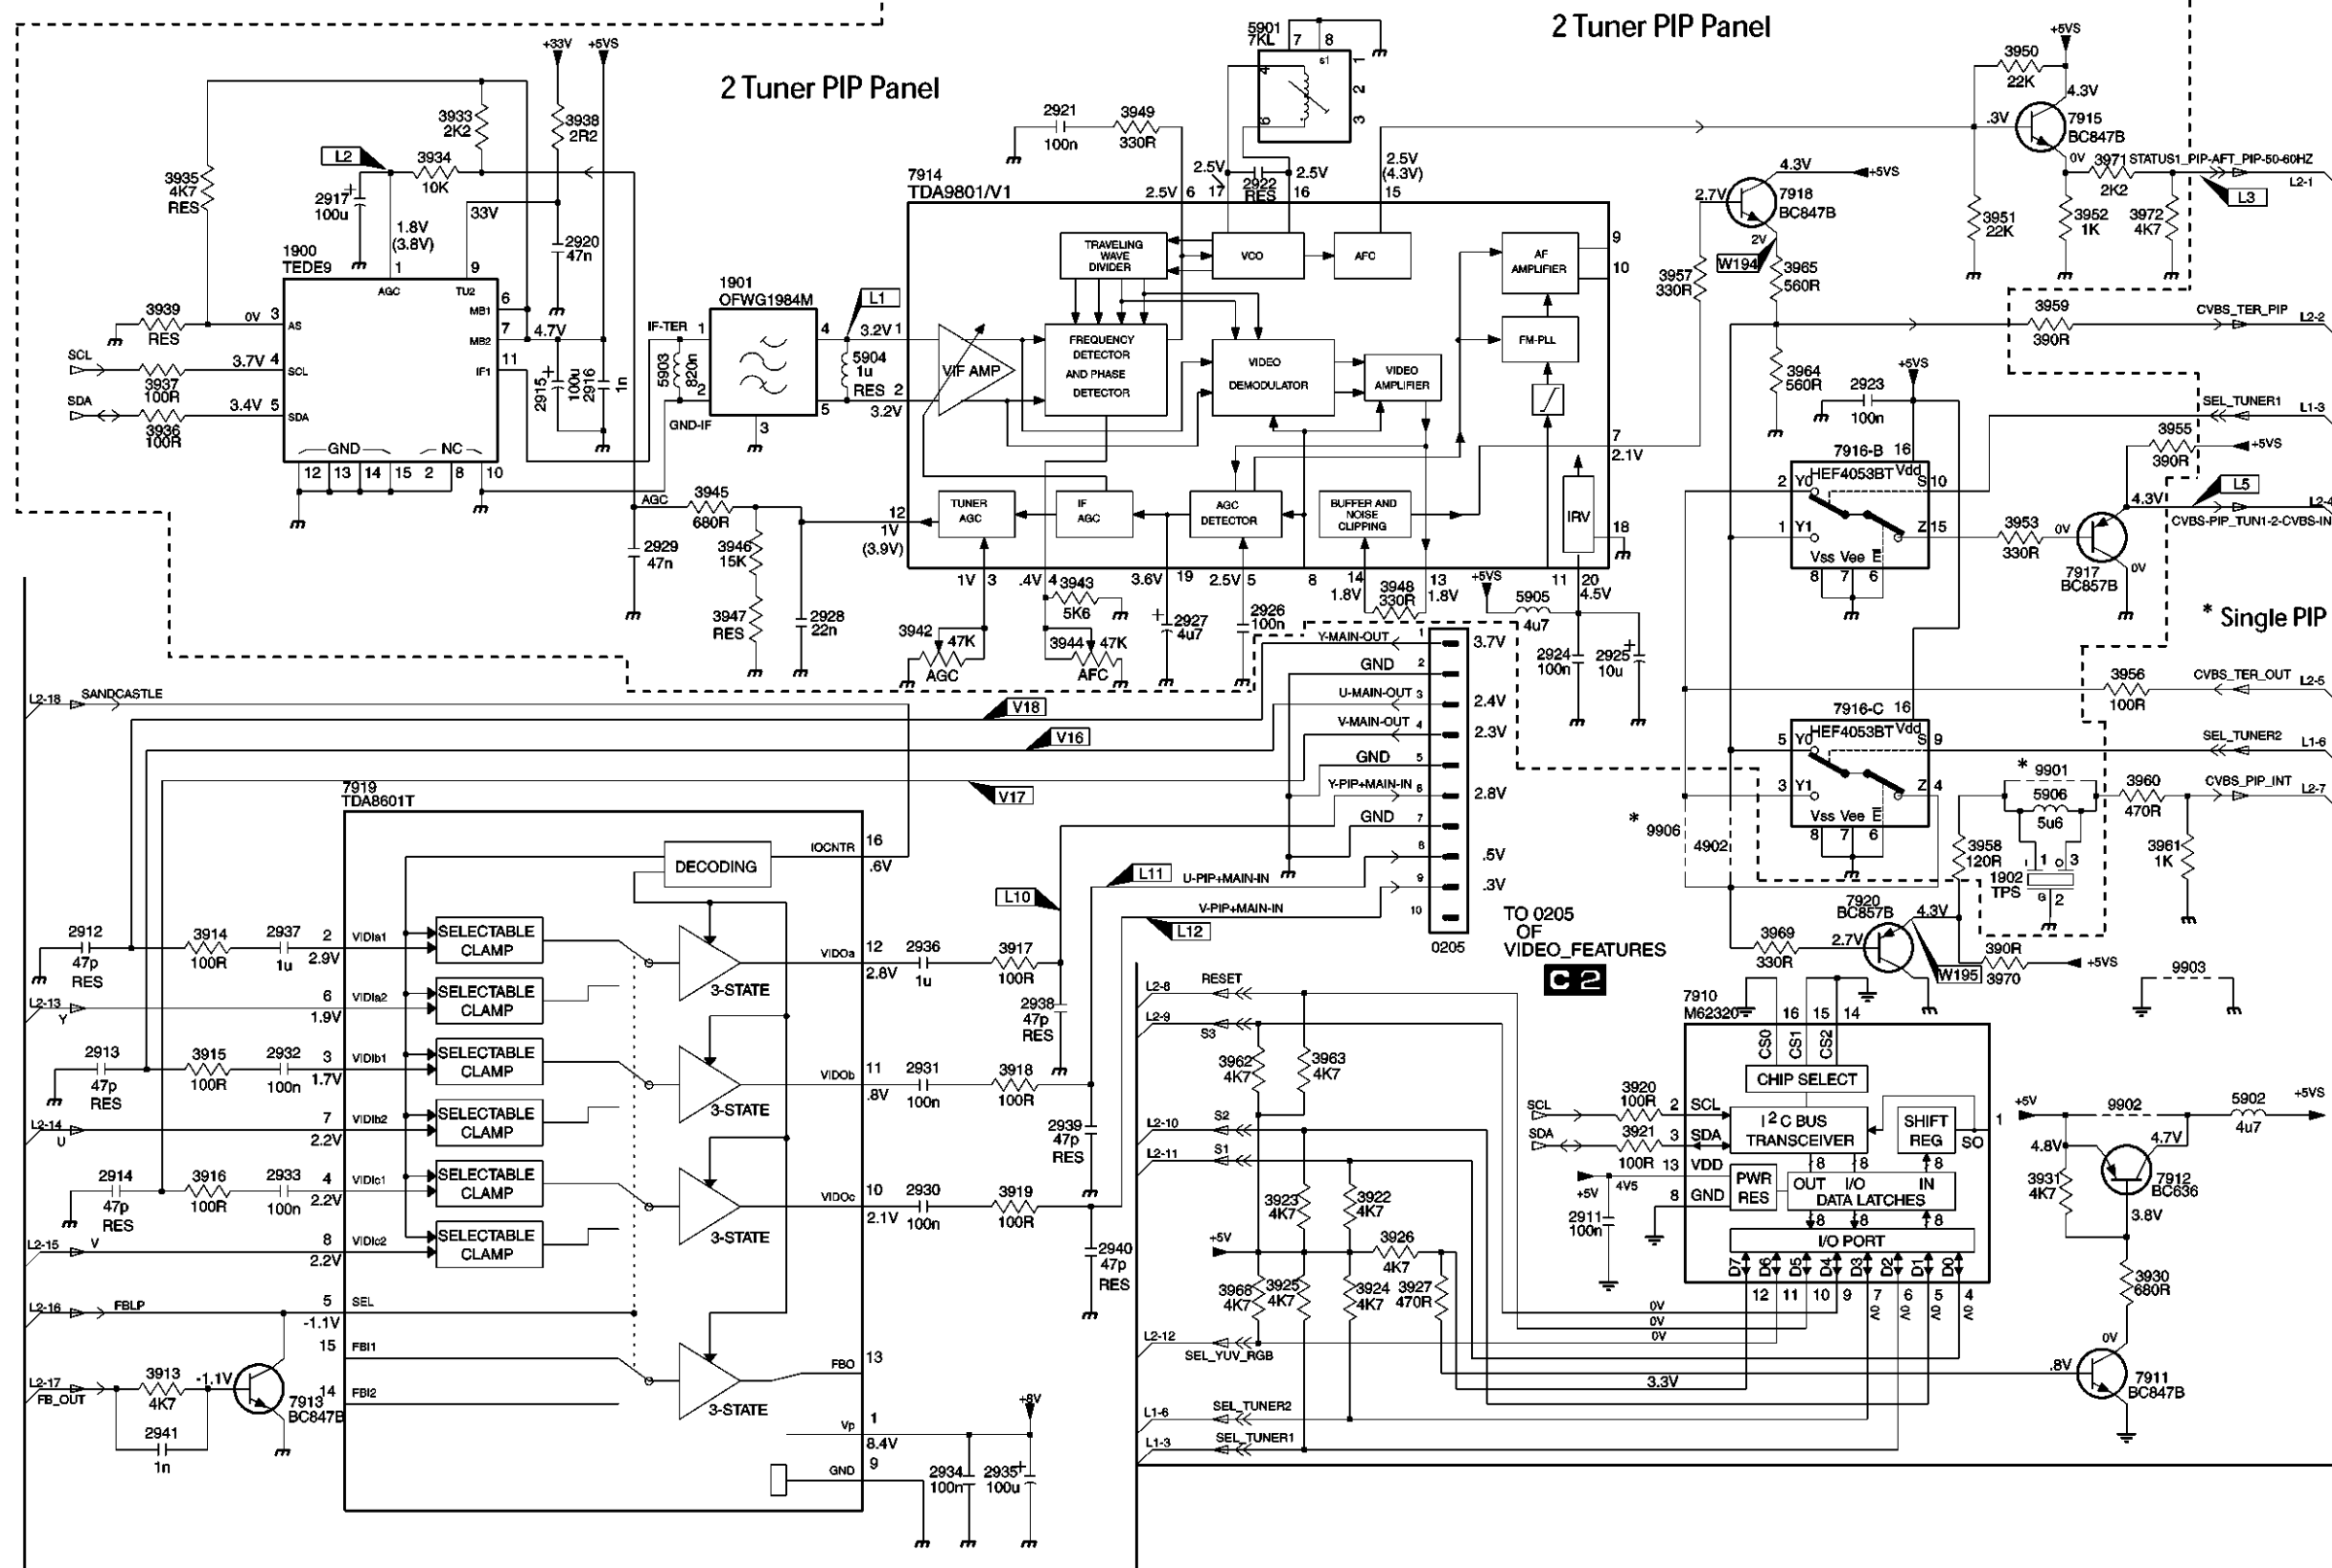


0205 D8
1900 B2
1901 B4
1902 E10
2911 F9
2912 E1
2913 E2
2914 F2
2915 B4
2916 B4
2917 A3
2920 B4
2921 A6
2922 A7
2923 B10
2924 D8
2925 D9
2926 C7
2927 C7
2928 C5
2929 C4
2930 F5
2931 F5
2932 E2
2933 F2
2934 G6
2935 G6
2936 E5
2937 E2
2938 E6
2939 F6
2940 F6
2941 G2
3913 G2
3914 E2
3915 E2
3916 F2
3917 E6
3918 F6
3919 F6
3920 F9
3921 F9
3922 F8
3923 F7
3924 G8
3925 G7
3926 F8
3927 G8
3930 G11
3931 F11
3933 A3
3934 A3
3935 A2
3936 C2
3937 B2
3938 A4
3939 B2
3942 C5
3943 C6
3944 C6
3945 C4
3946 C5
3947 C5
3948 C8
3949 A6
3950 A11
3951 B10
3952 A11
3953 C11
3955 C11
3956 D11
3957 B9
3958 D10
3959 B11
3960 D11
3961 D11
3962 E7
3963 E7
3964 B10
3965 B10
3968 G7
3969 E9
3970 E10
3971 A11
3972 A11
4902 D9
5901 A7
5902 F12
5903 B4
5904 B5
5905 C8
5906 D11
7910 E9
7911 G11
7912 F11
7913 G2
7914 A5
7915 A11
7916-B C10
7916-C D10


7917 C11
7918 A9
7919 D3
7920 E10
9901 D11
9902 F11
9903 E11
9906 D9


PIP Panel Schematic (2 of 2)


L2
PIP COLOUR

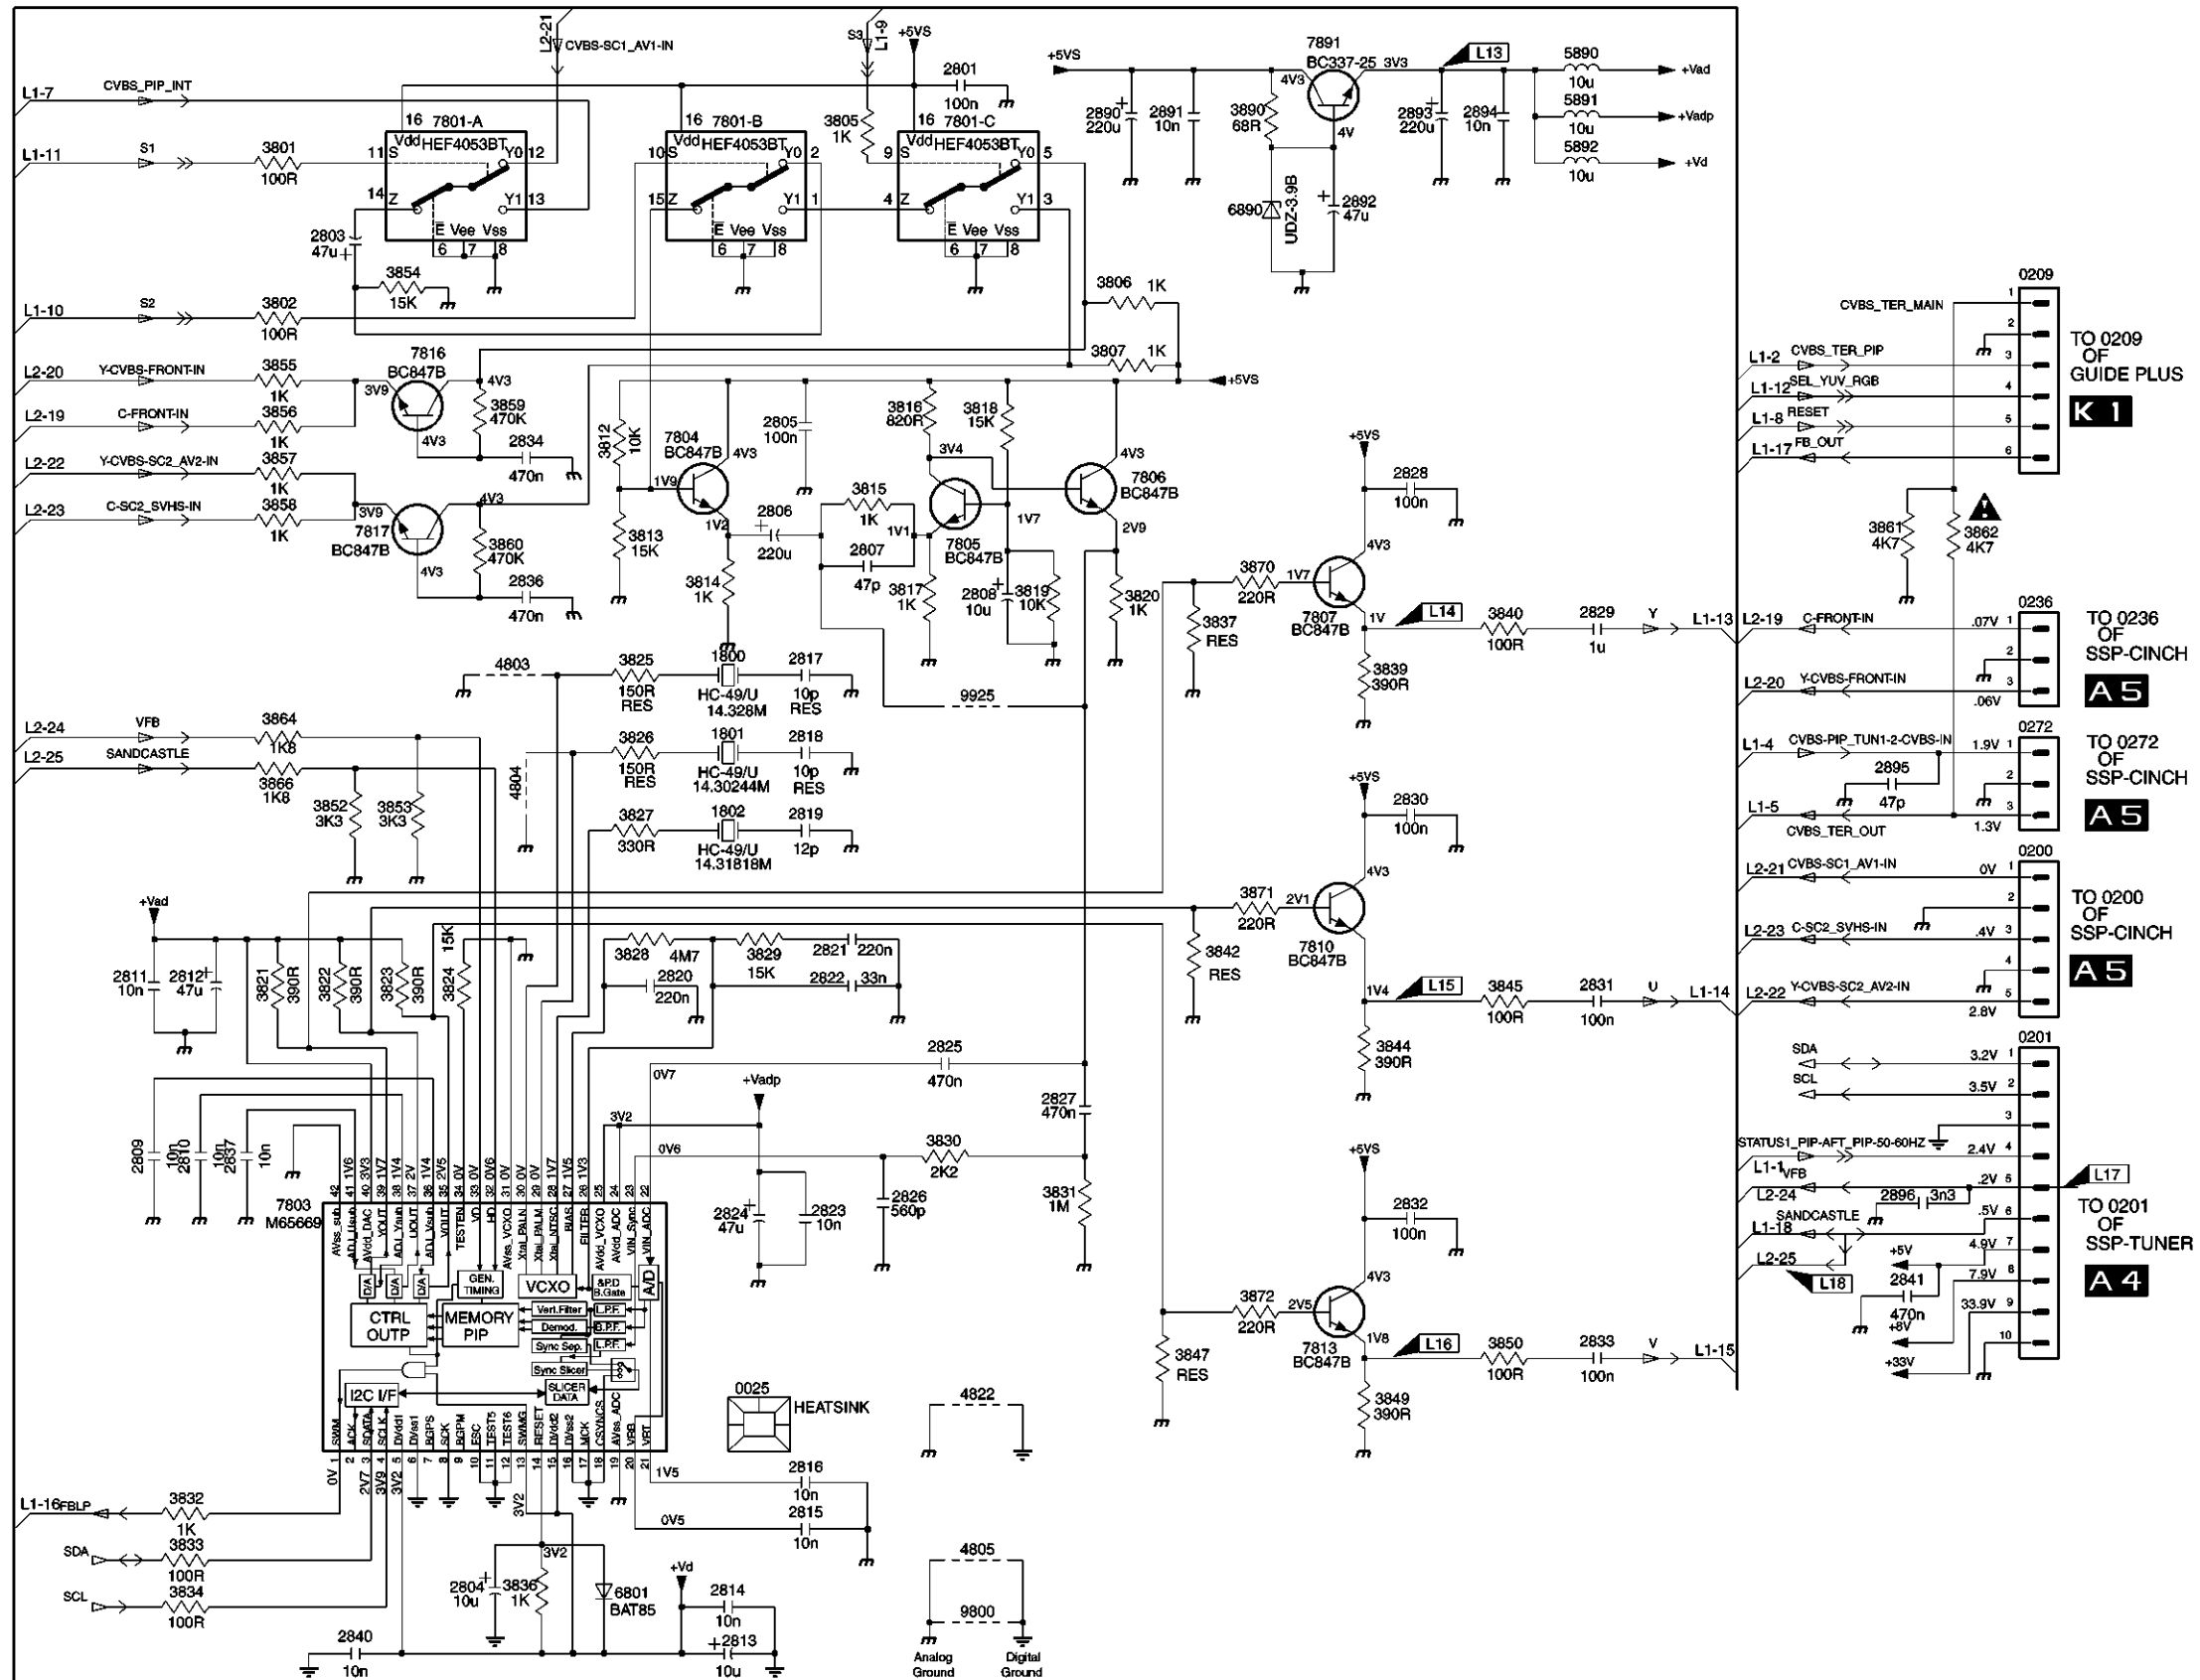


0025 G5	3861 C11
0200 E11	3862 C11
0201 E11	3864 D3
0209 B11	3866 D3
0236 C11	3870 C8
0272 D11	3871 E8
1800 D5	3872 G8
1801 D5	3890 A8
1802 D5	4803 D4
2801 A6	4804 D4
2803 B4	4805 H7
2804 H4	4818 D6
2805 C6	4822 G7
2806 C6	5890 A9
2807 C6	5891 A9
2808 C7	5892 A9
2809 F3	6801 H5
2810 F3	6890 B8
2811 F3	7801-A A4
2812 F3	7801-B A5
2813 H5	7801-C A6
2814 H5	7803 G4
2815 H6	7804 C5
2816 H6	7805 C7
2817 D6	7806 C7
2818 D6	7807 D8
2819 D6	7810 E8
2820 F5	7813 G8
2821 E6	7816 B4
2822 E6	7817 C4
2823 F6	7891 A8
2824 F5	9800 H7
2825 F6	
2826 F6	
2827 F7	
2828 C8	
2829 C9	
2830 E8	
2831 E9	
2832 F8	
2833 G9	
2834 C4	
2836 C4	
2837 F3	
2840 H4	
2841 G11	
2890 A7	
2891 A7	
2892 B8	
2893 A9	
2894 A9	
2895 D11	
2896 F11	
3801 A3	
3802 B3	
3805 A6	
3806 B7	
3807 B7	
3812 C5	
3813 C5	
3814 C5	
3815 C6	
3816 B6	
3817 C6	
3818 B7	
3819 C7	
3820 C7	
3821 F3	
3822 F4	
3823 F4	
3824 F4	
3825 D5	
3826 D5	
3827 D5	
3828 E5	
3829 E5	
3830 F6	
3831 F7	
3832 H3	
3833 H3	
3834 H3	
3836 H4	
3837 C8	
3839 D8	
3840 C9	
3842 E8	
3844 E8	
3845 E9	
3847 G7	
3849 G8	
3850 G9	
3852 D4	
3853 D4	
3854 B4	
3855 B3	
3856 C3	
3857 C3	
3858 C3	
3859 B4	
3860 C4	

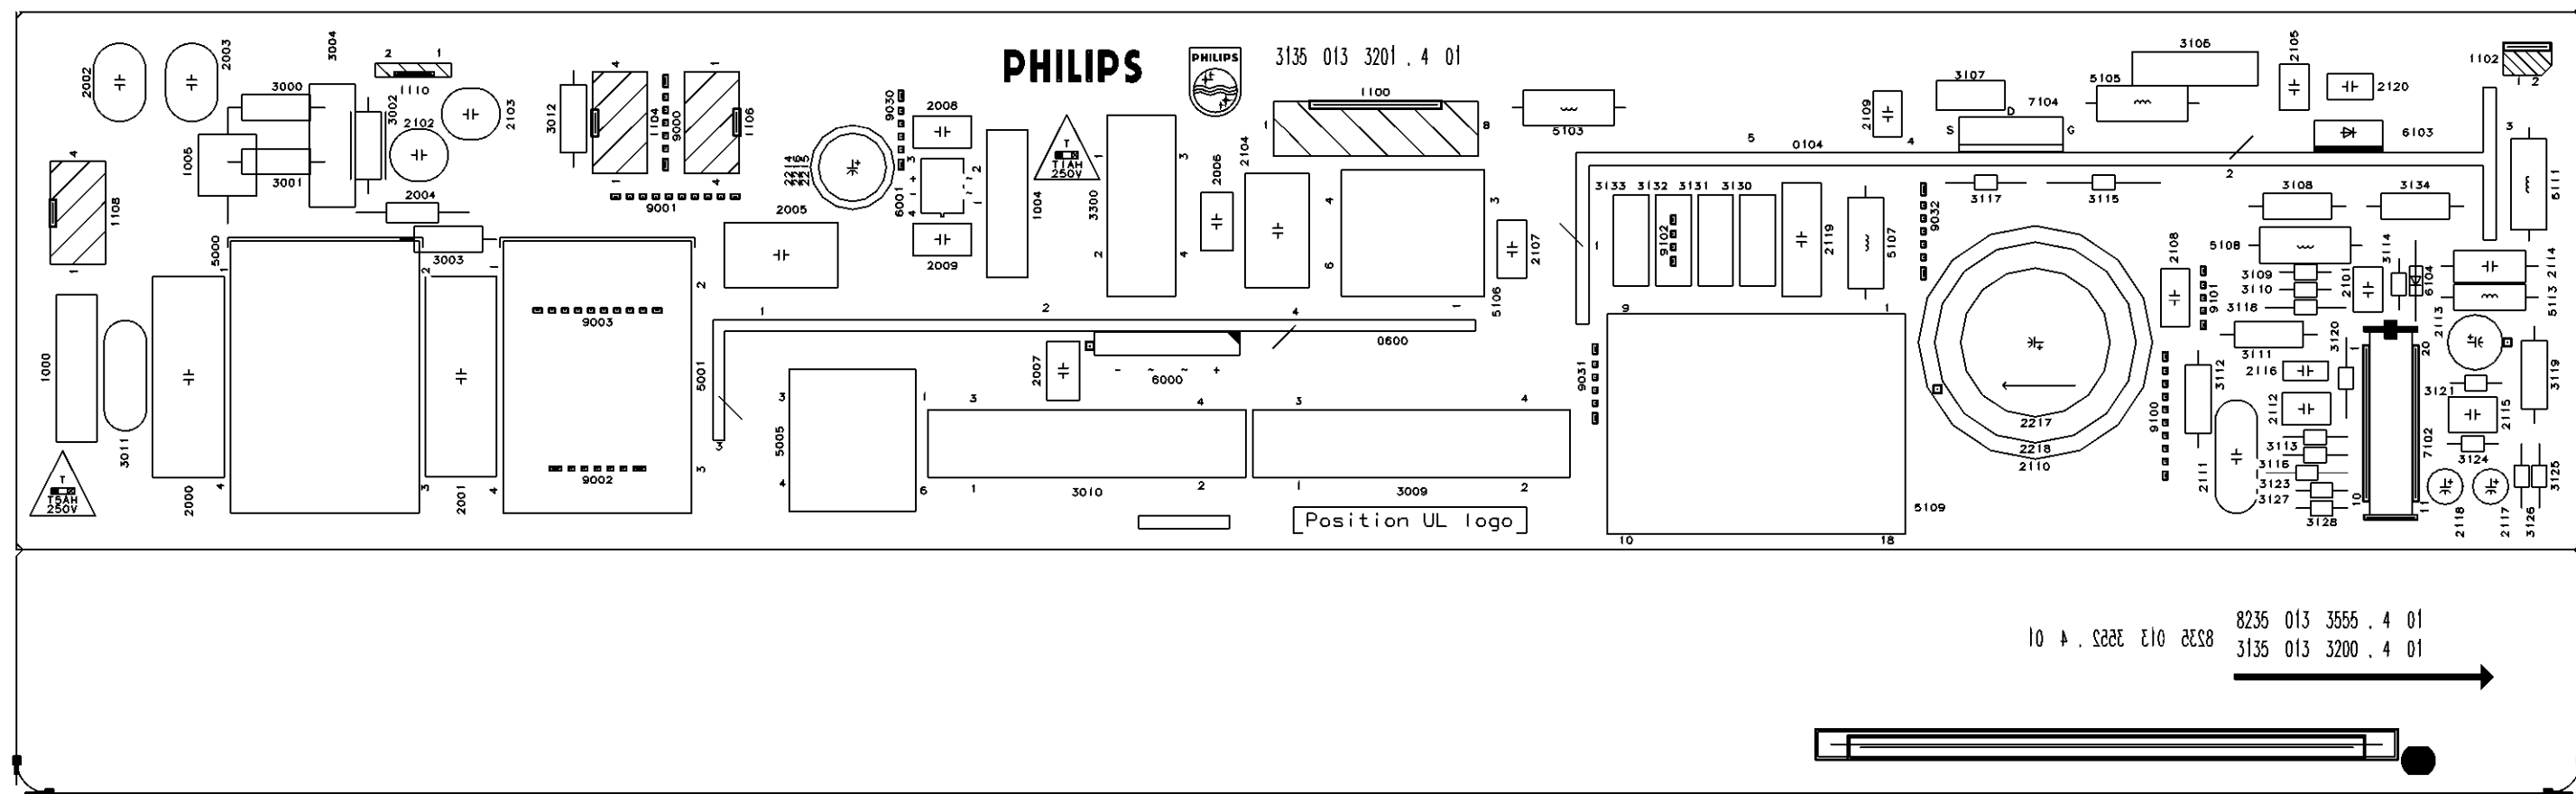





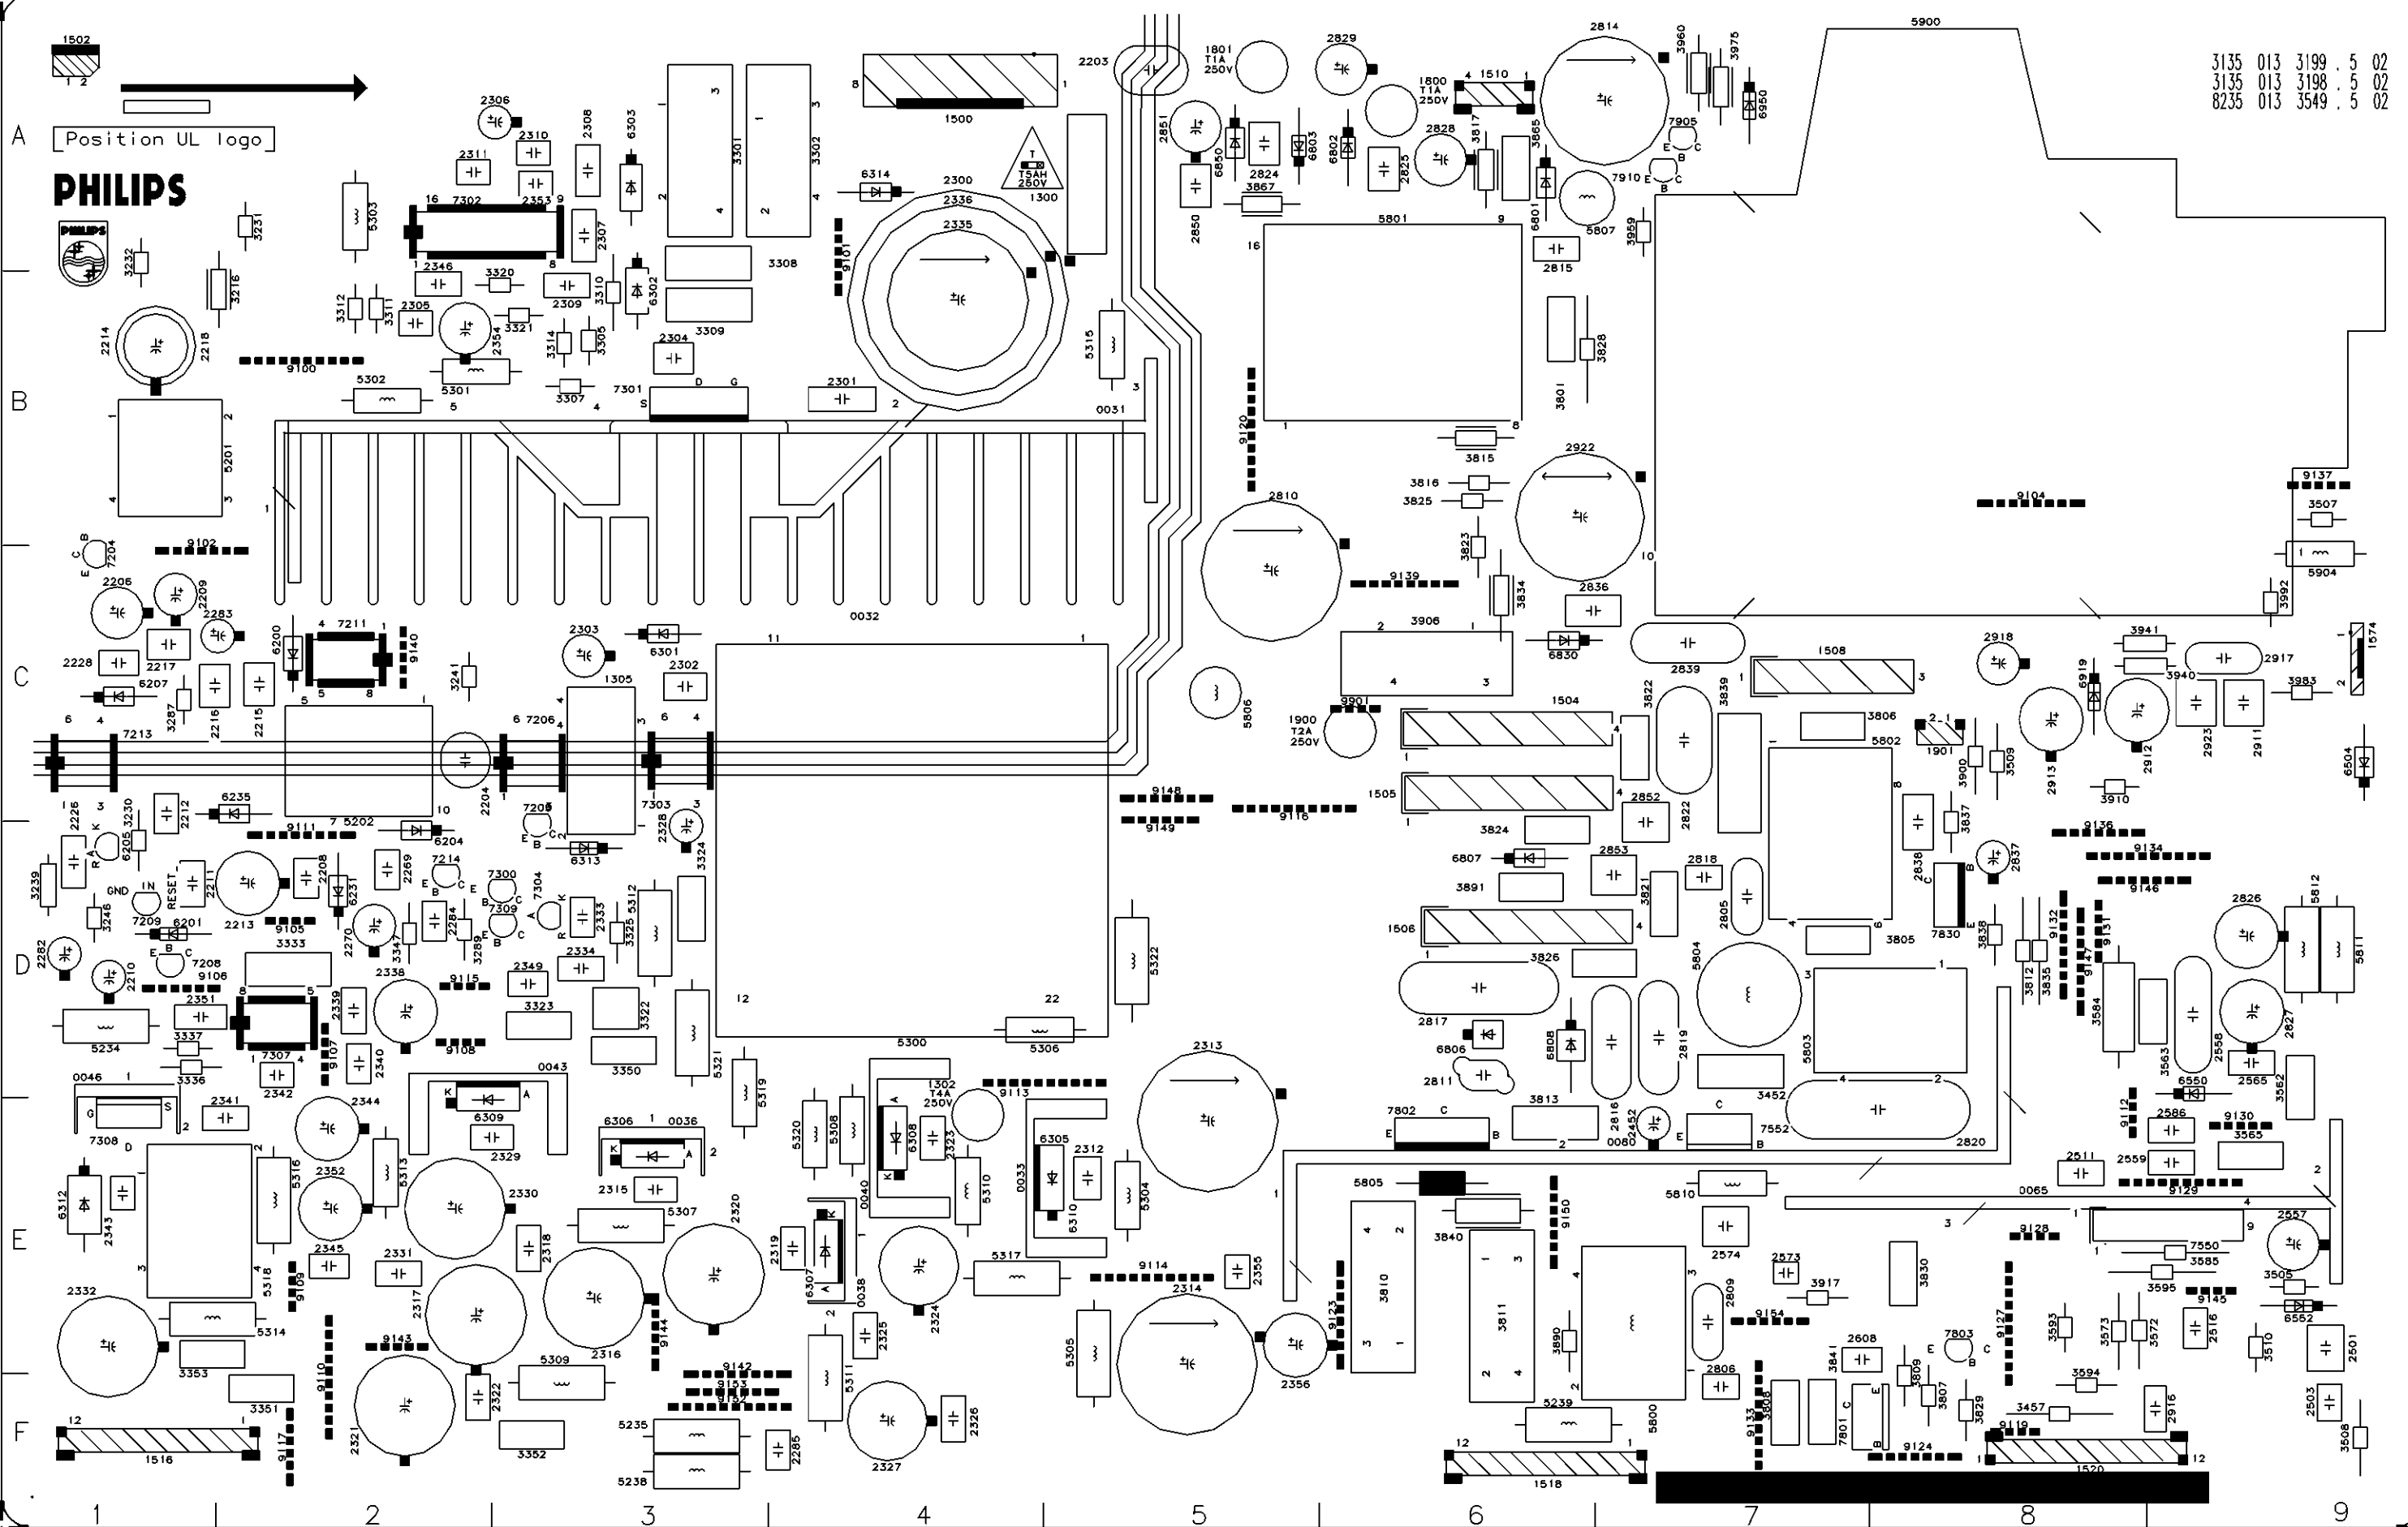

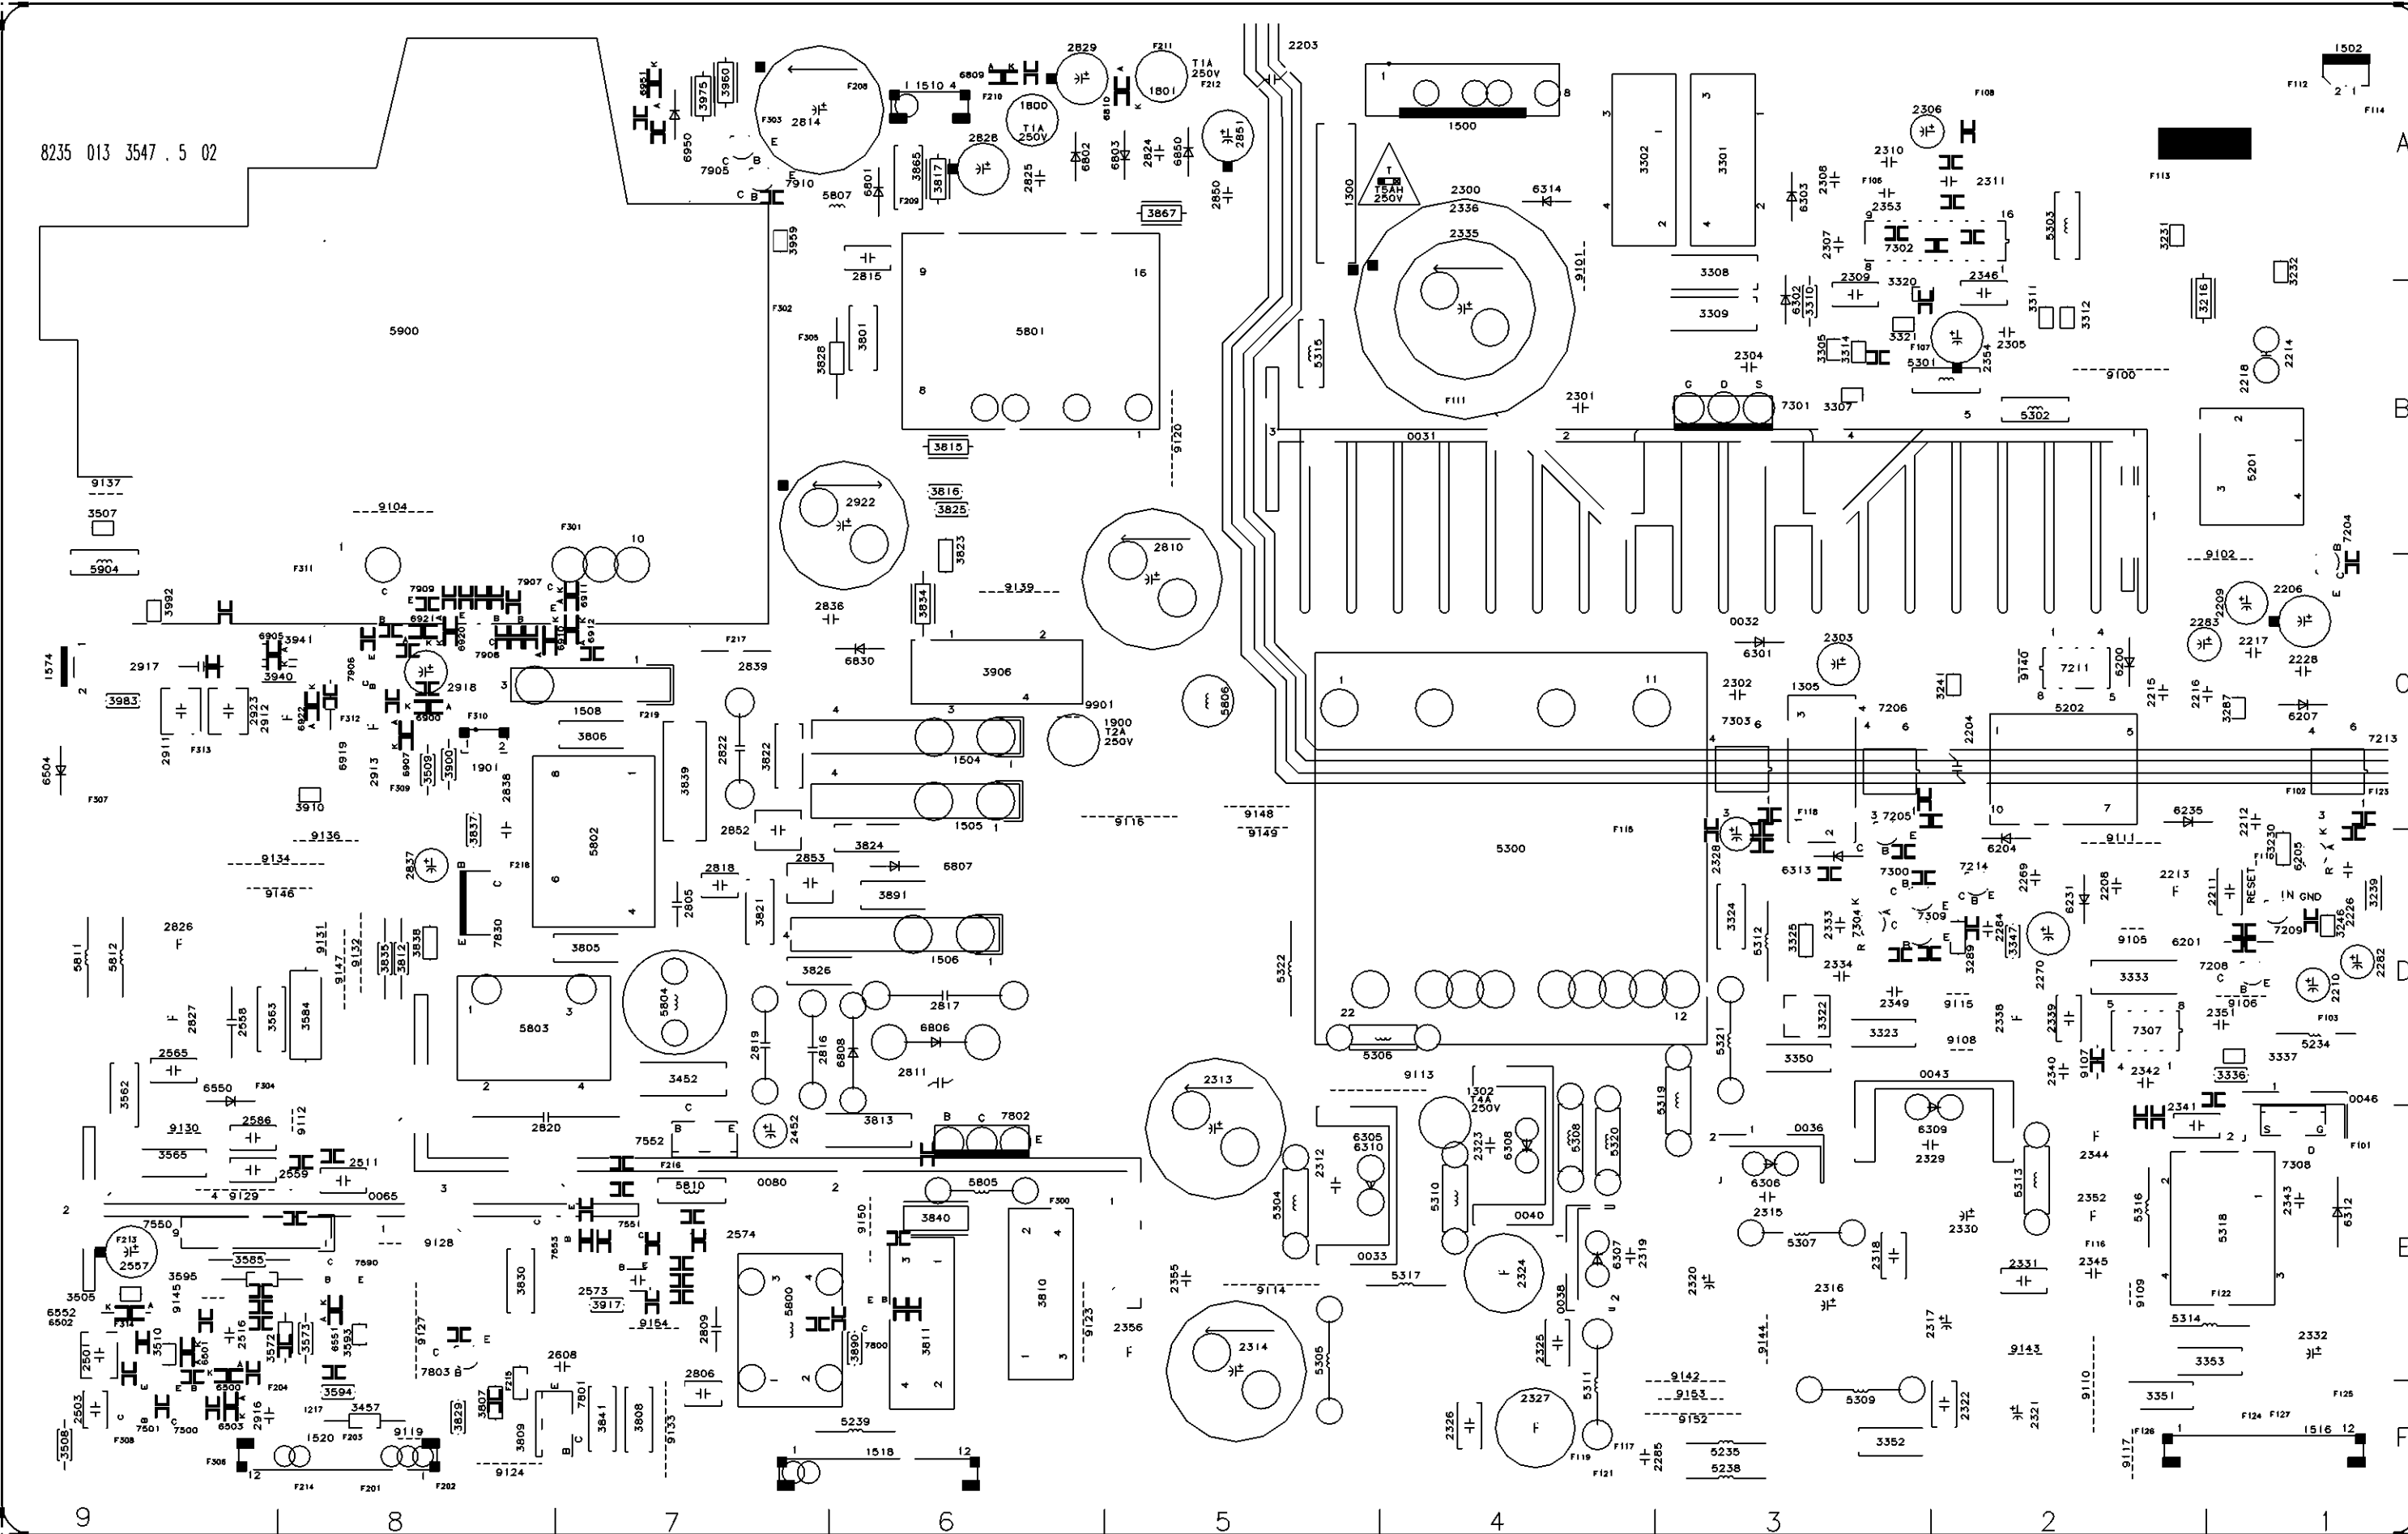





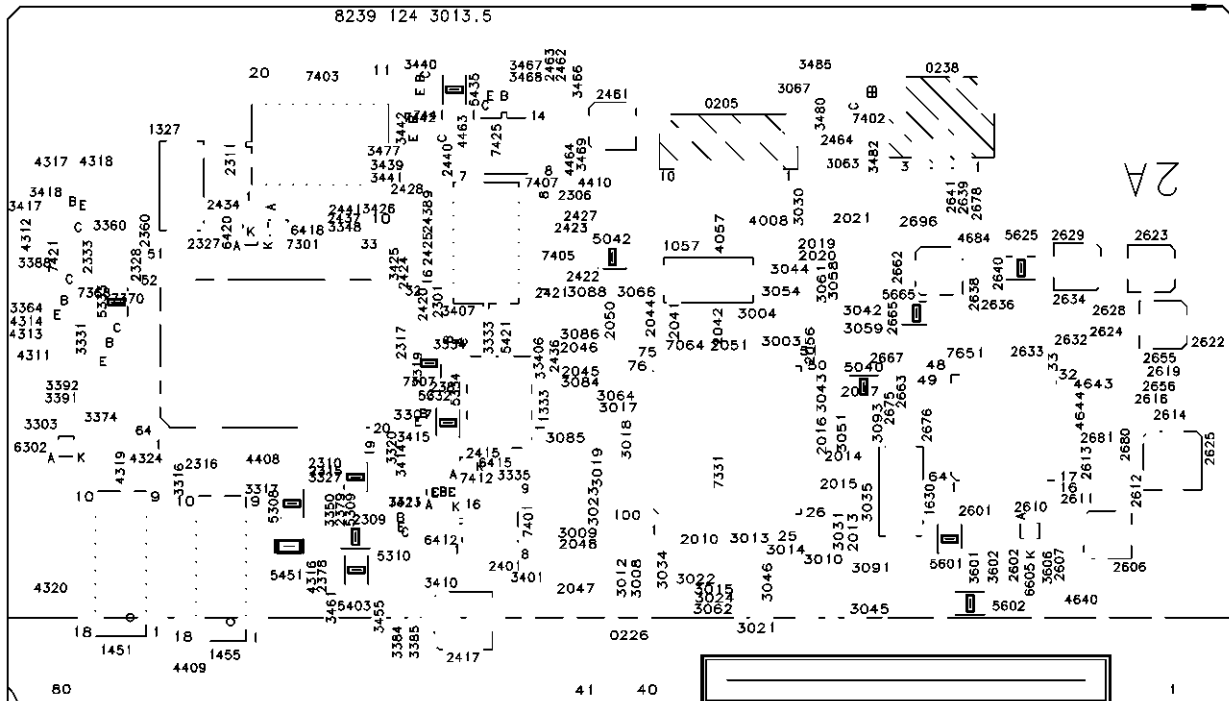

2B


PANEL : 3139 123 5305.5 WK037.5




Keyboard Panel CBA

TOP VIEW







7615 Electrical Diagrams page 39

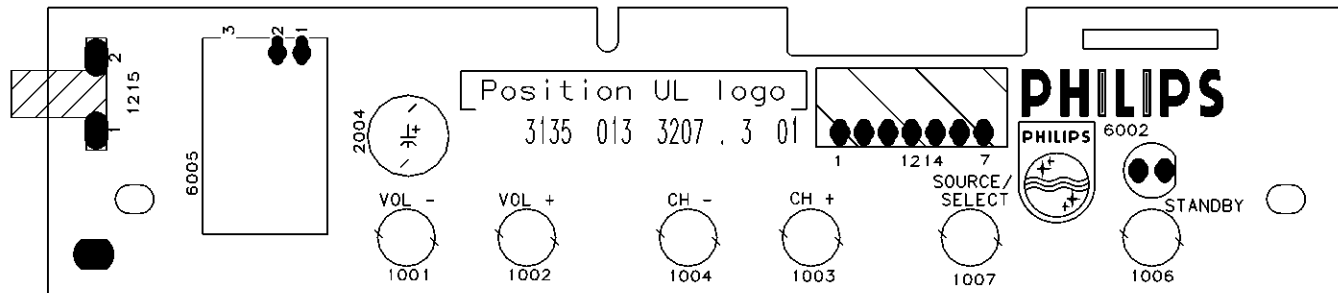


BOTTOM VIEW

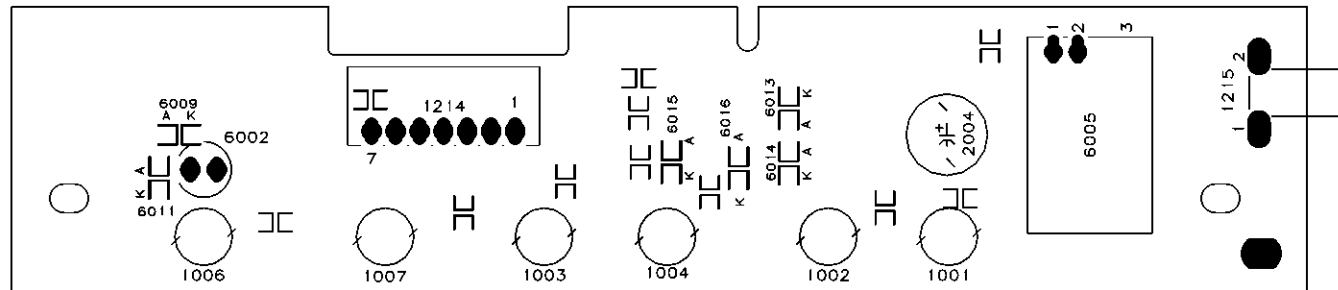


SIDE JACK PANEL
3135 013 3217 . 2 01
PHILIPS

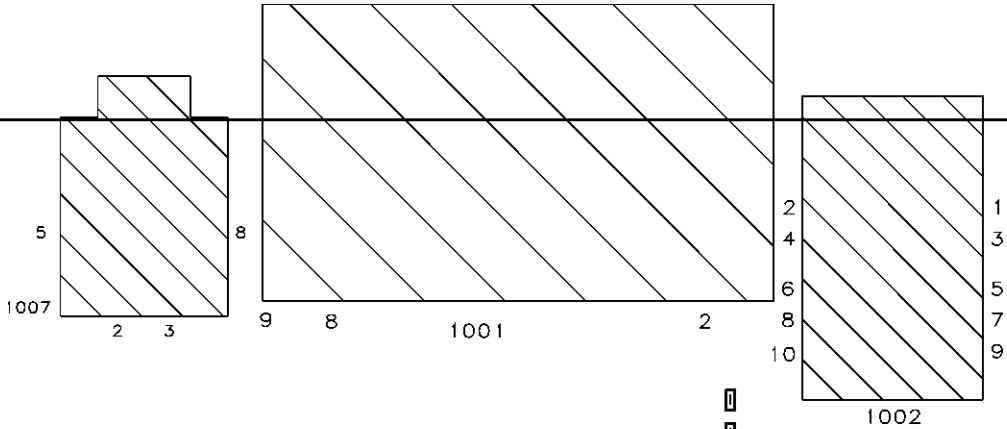


Position UL logo

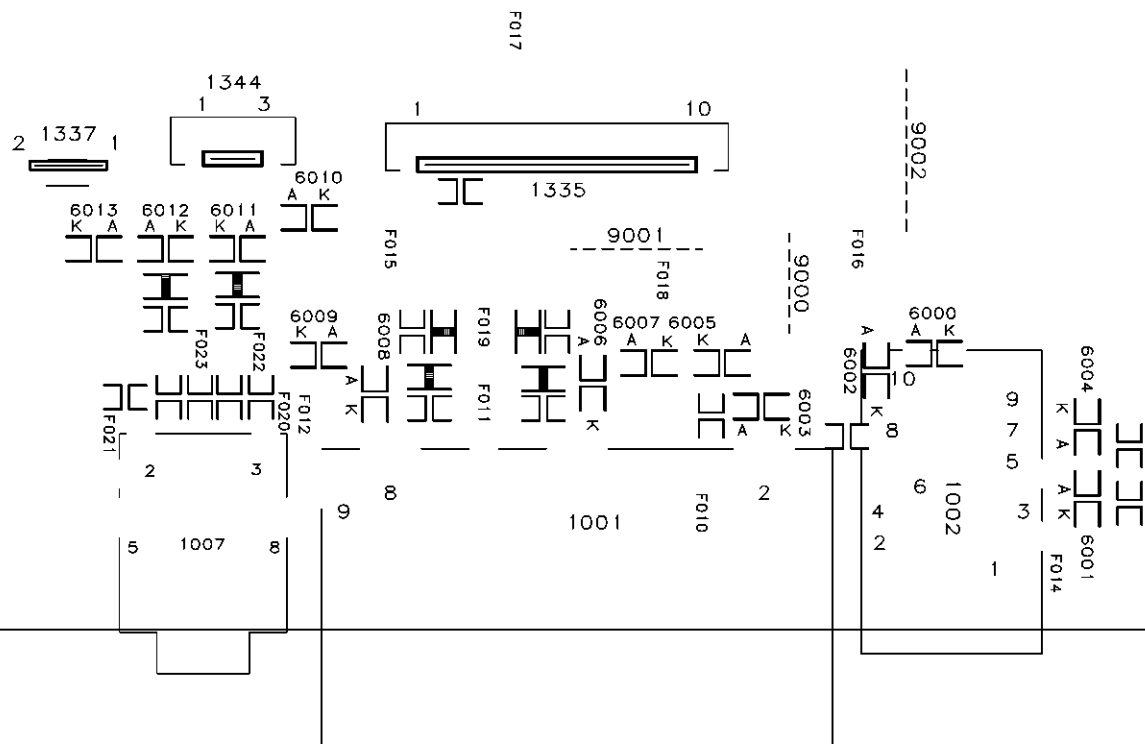



Red and Blue CRT Panel CBA (Component Side)

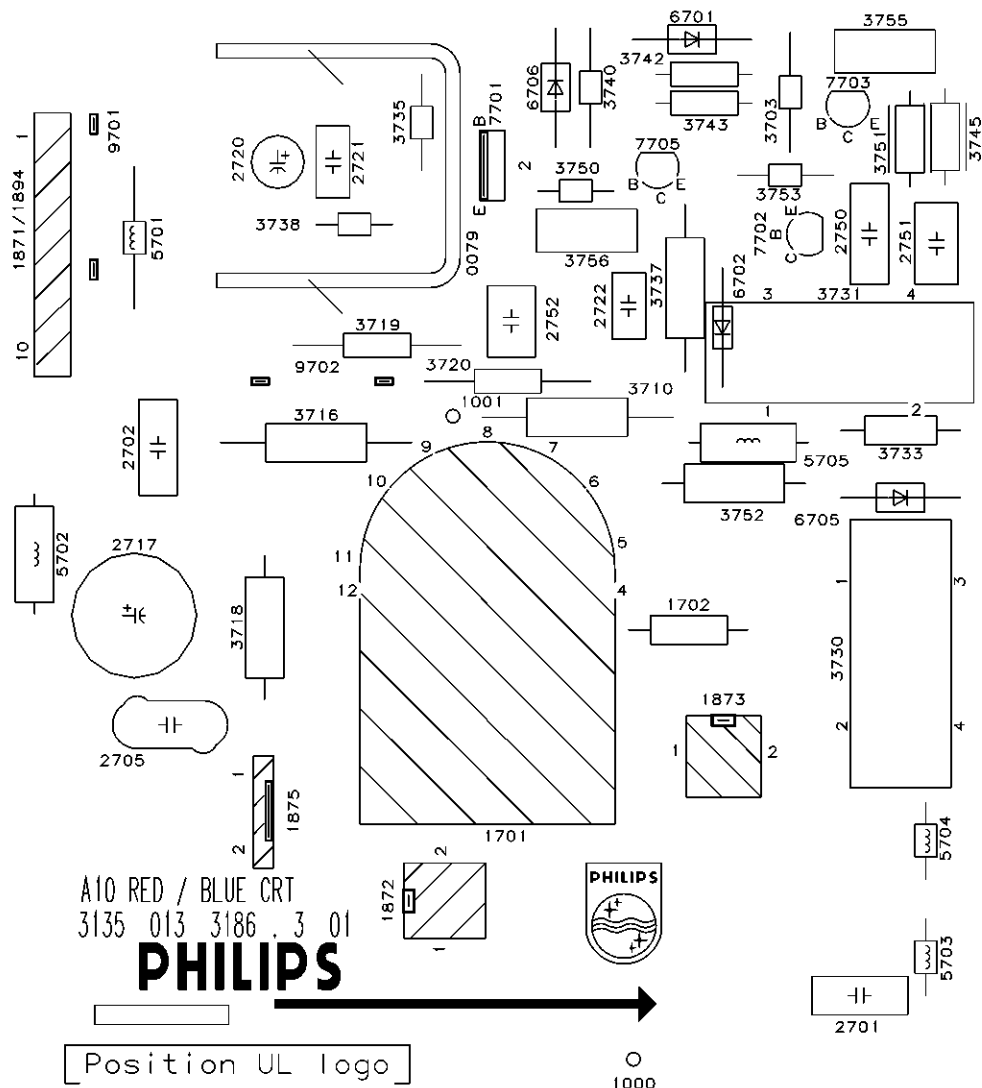

Green CRT Panel CBA (Component Side)

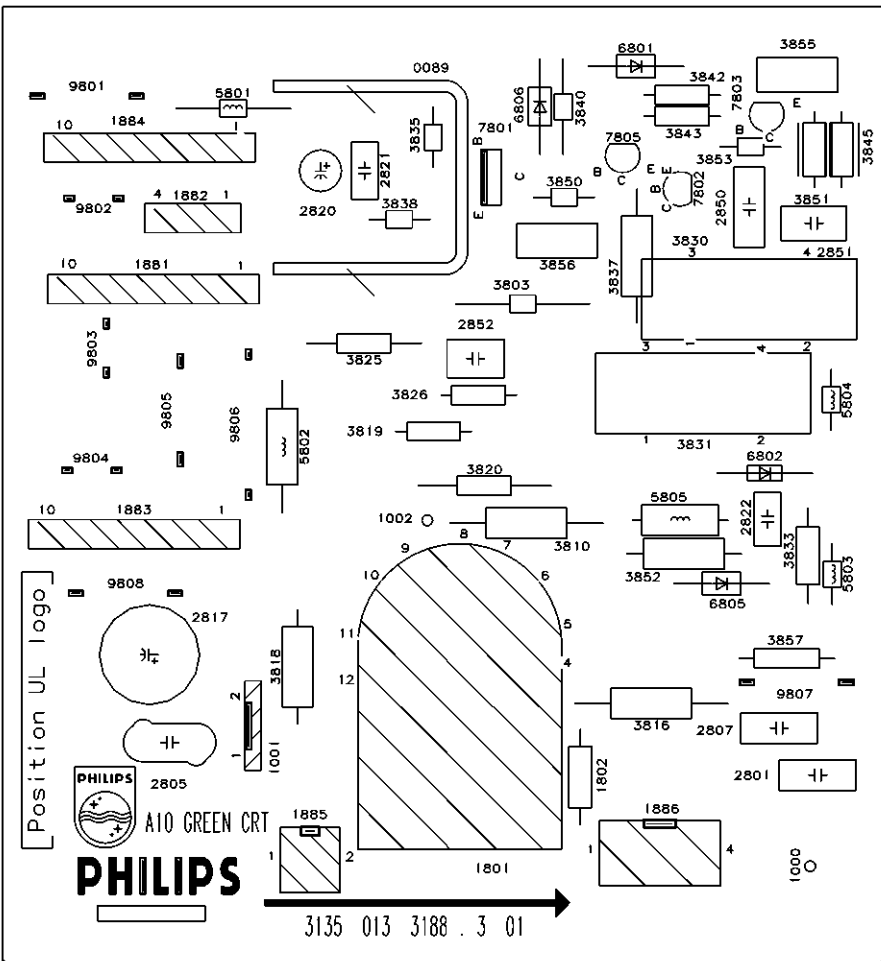

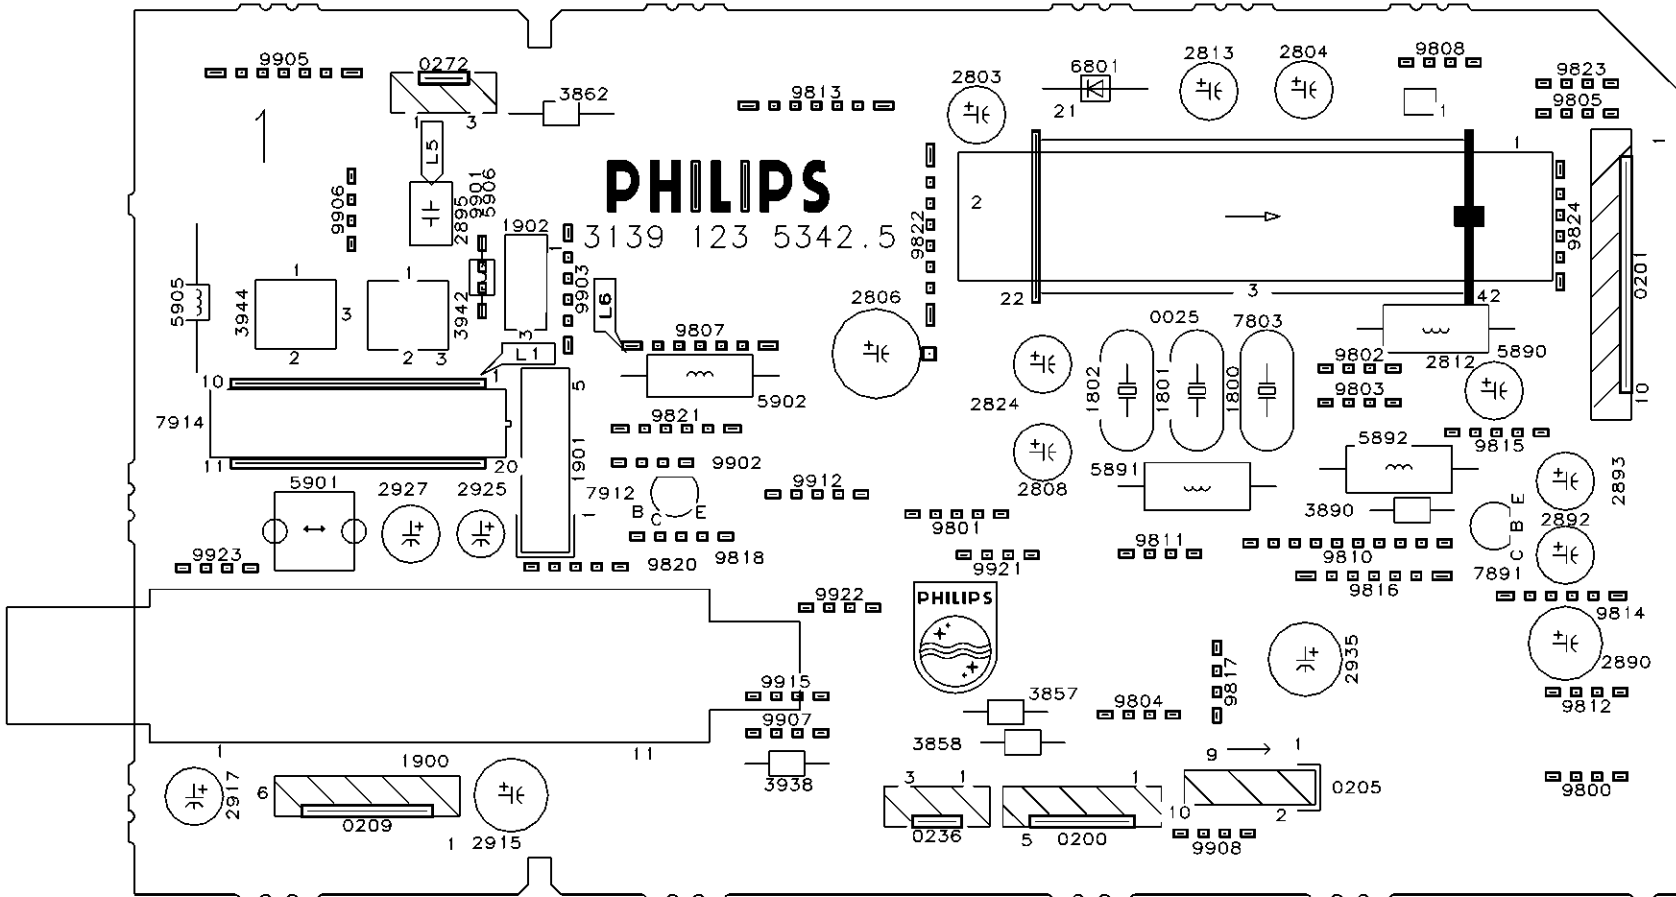

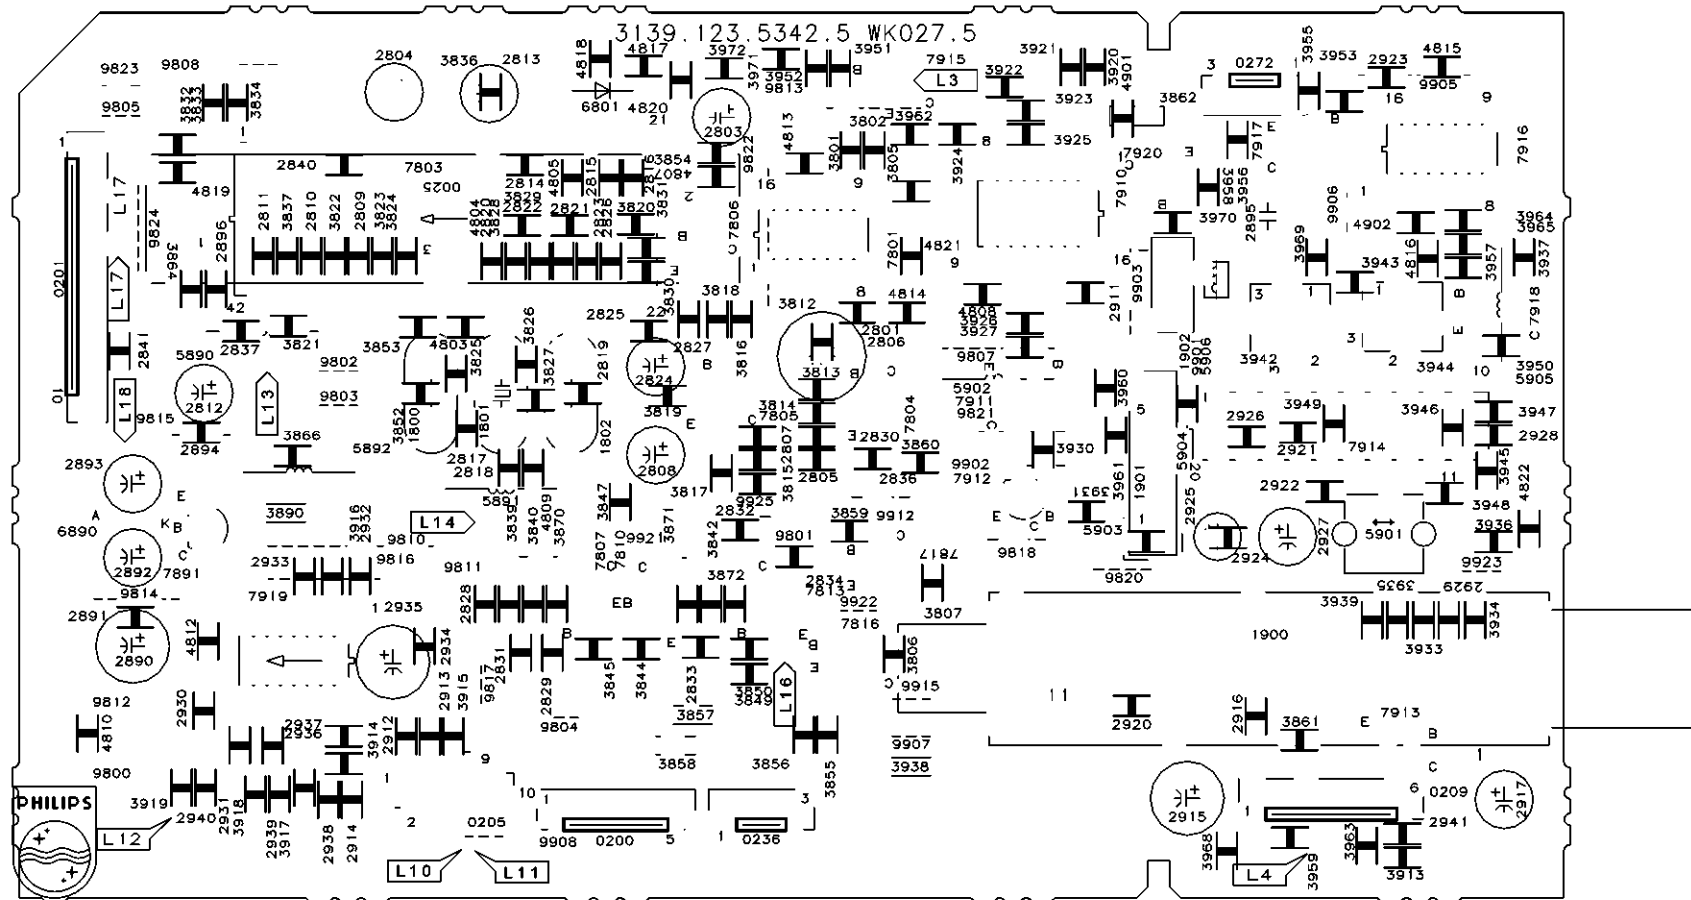

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 43P8341

First Published: 09-23-02

Rev. Date: 10-25-02











Print Date: 2004-10-04













Scope Patterns













REFER TO SAFETY GUIDELINES













SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.













CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING



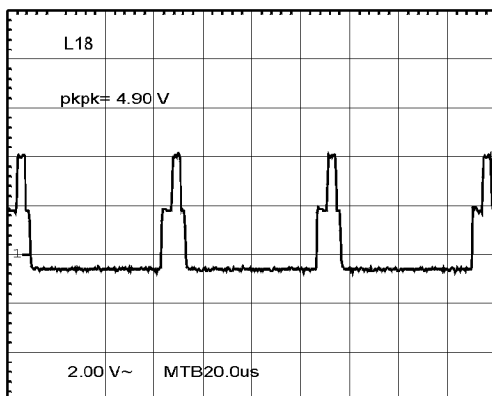
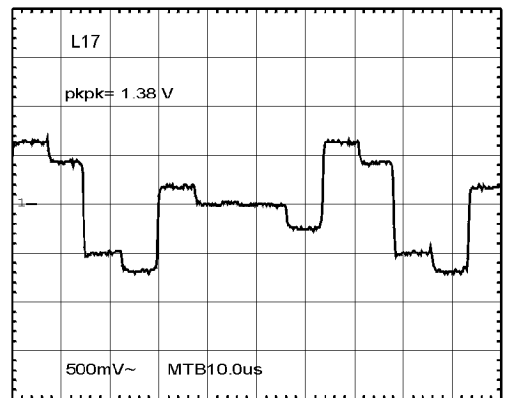
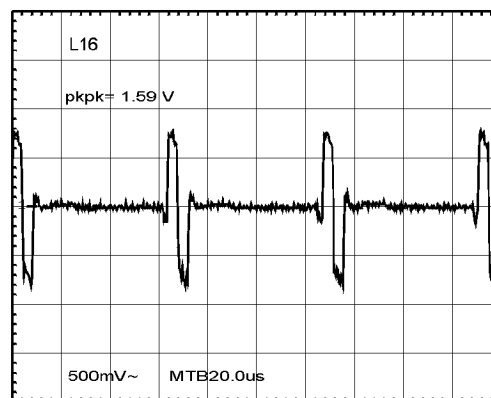
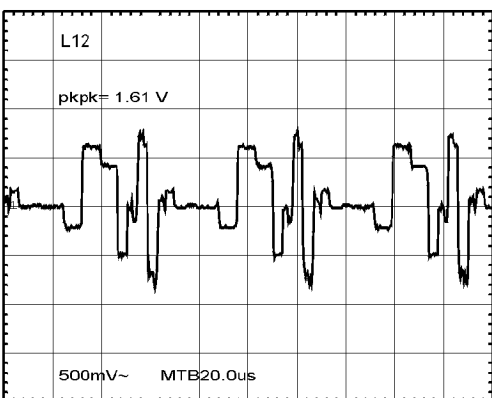
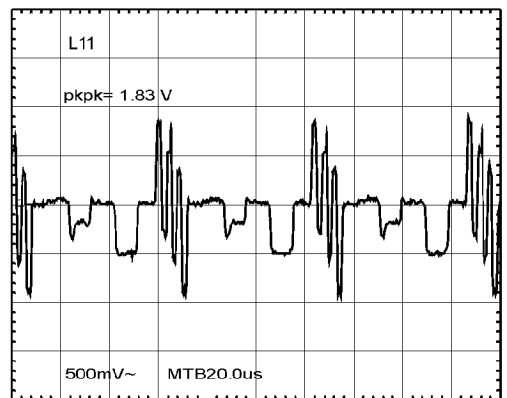
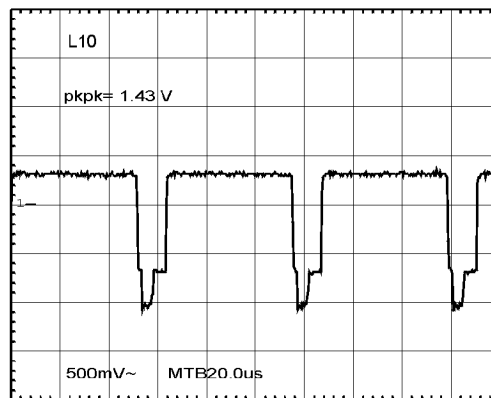
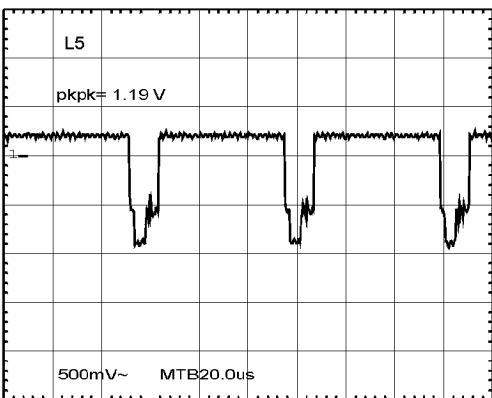
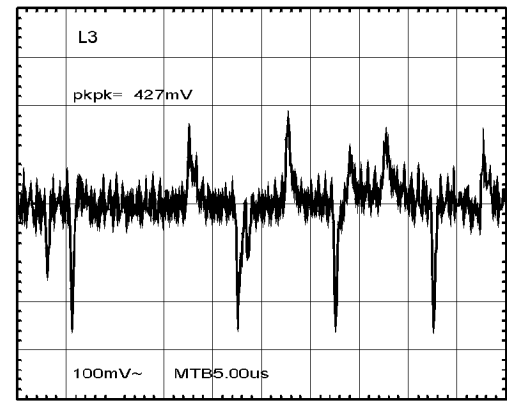
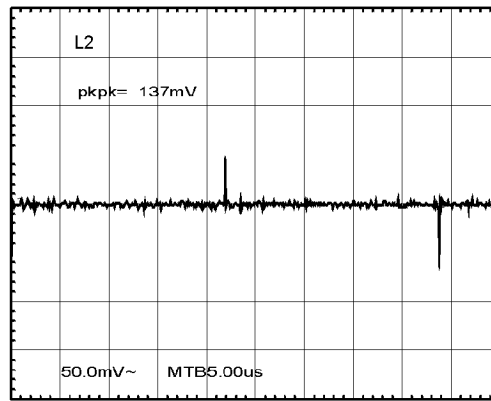
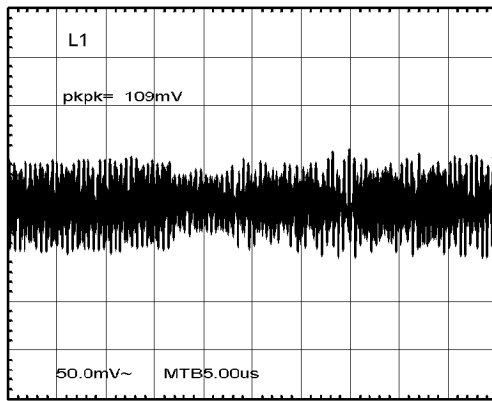


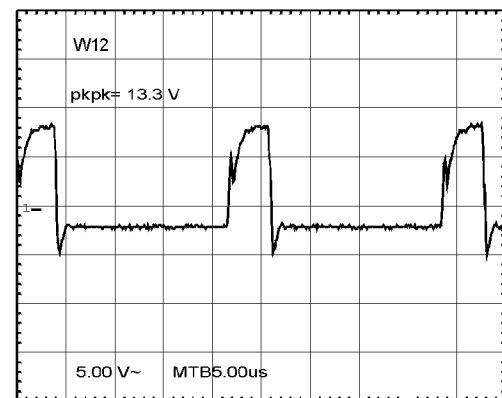
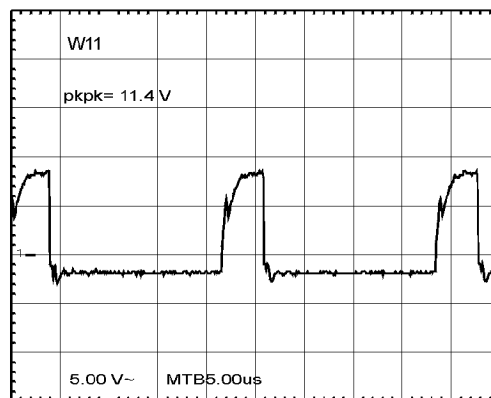
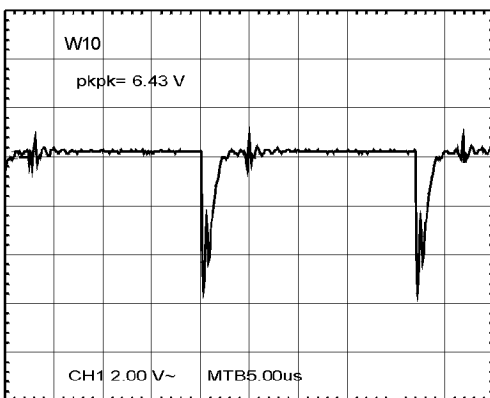
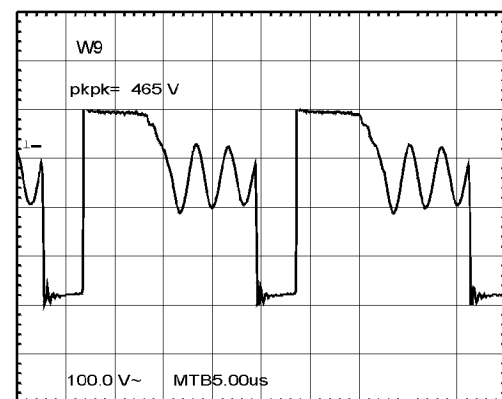
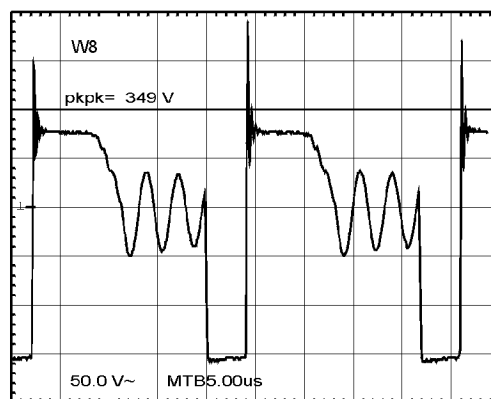
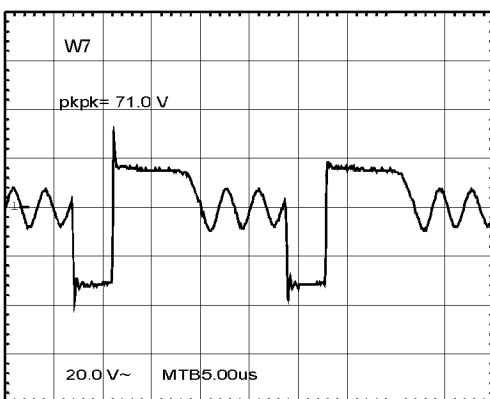
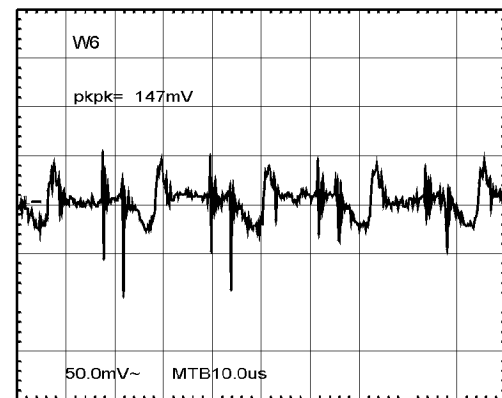
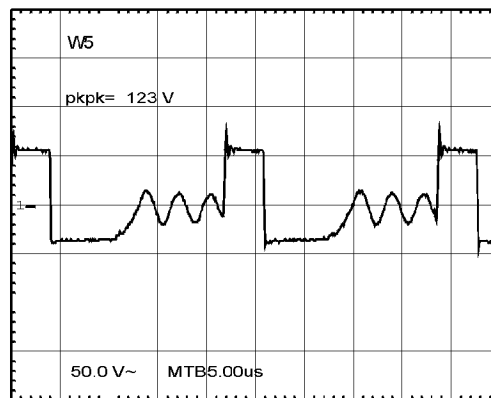
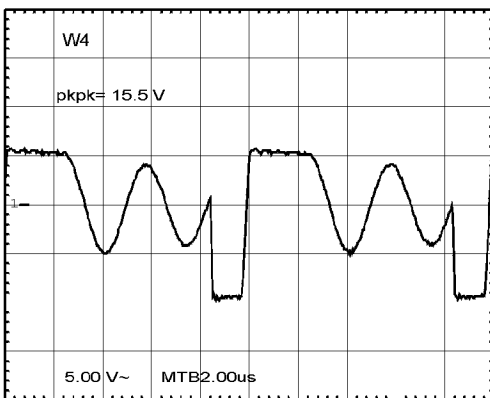
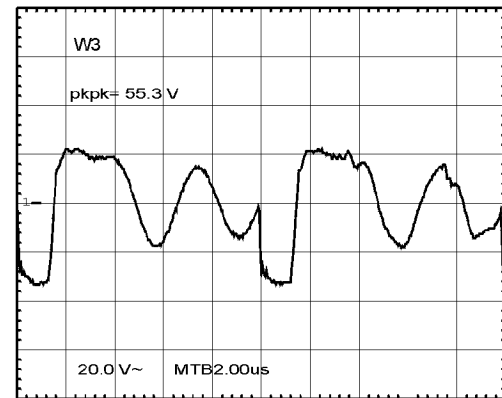
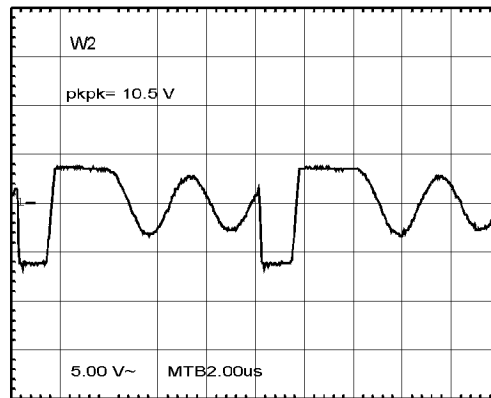
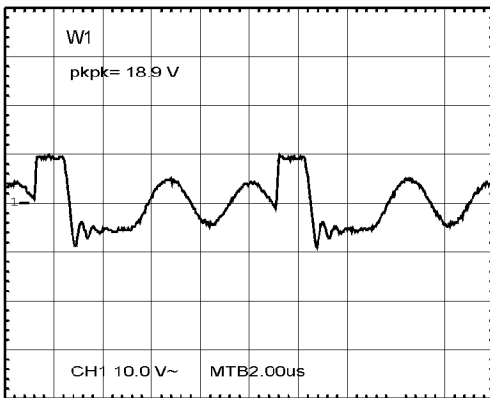


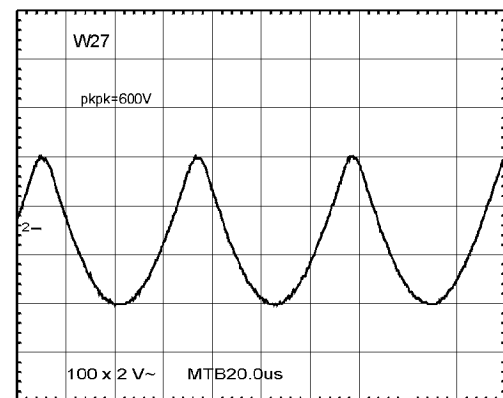
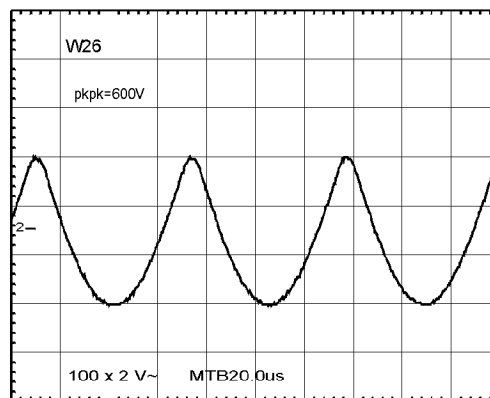
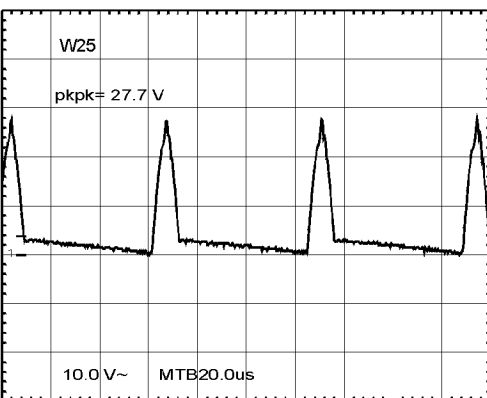
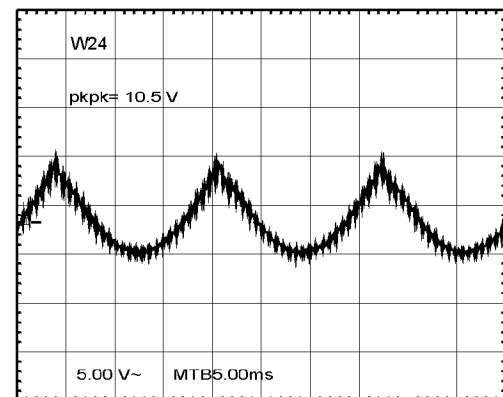
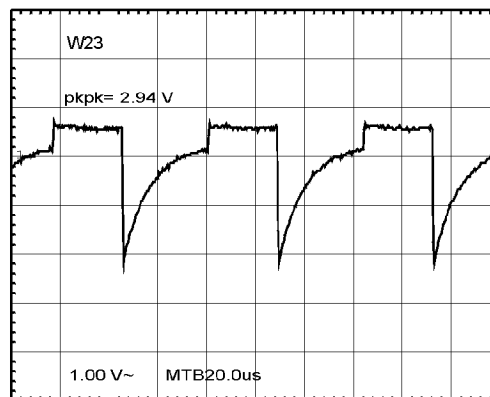
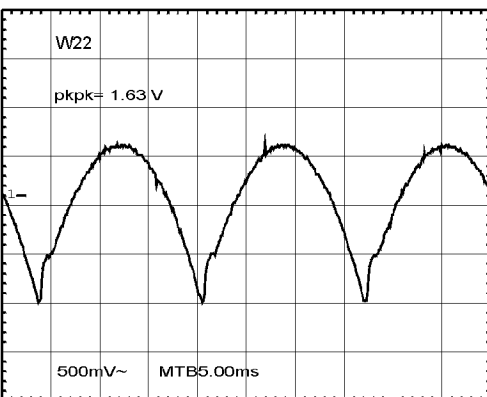
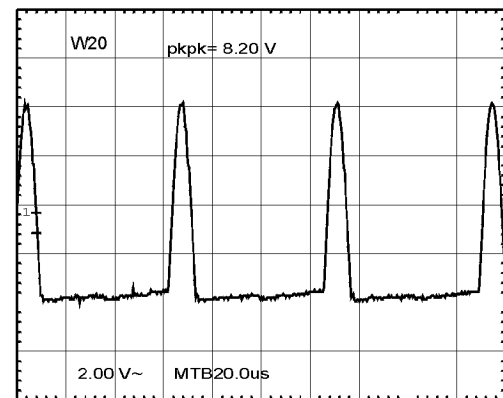
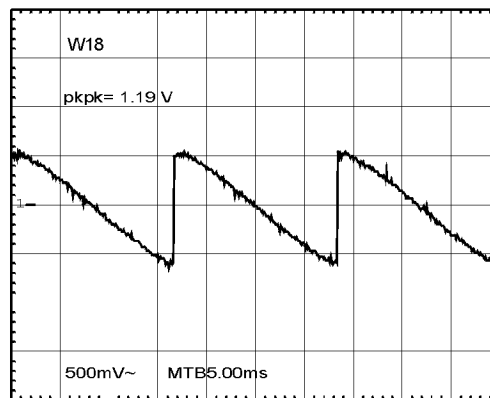
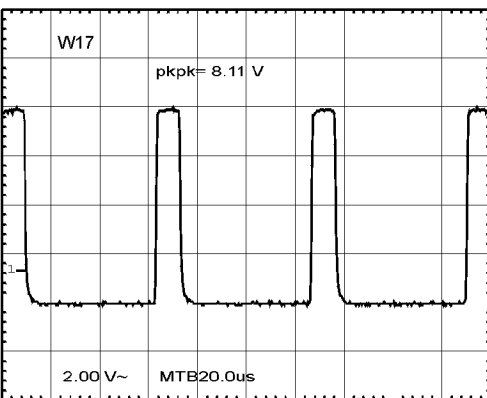
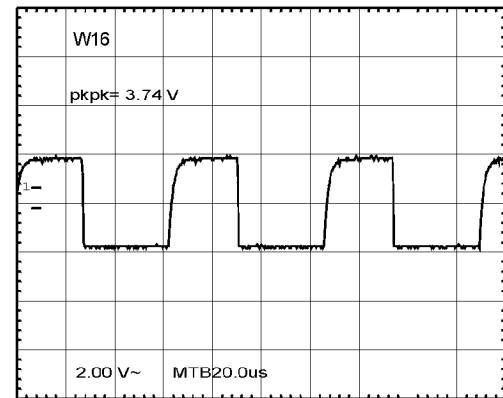
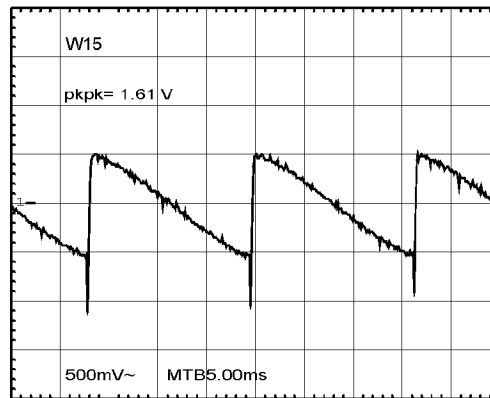
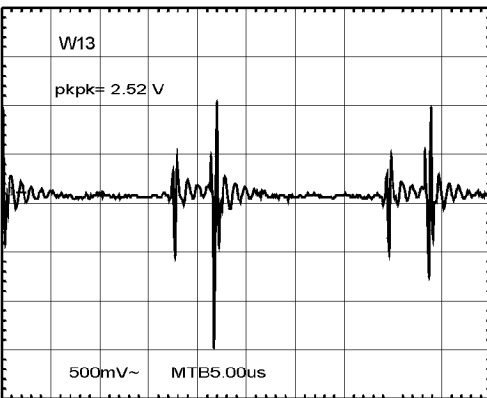


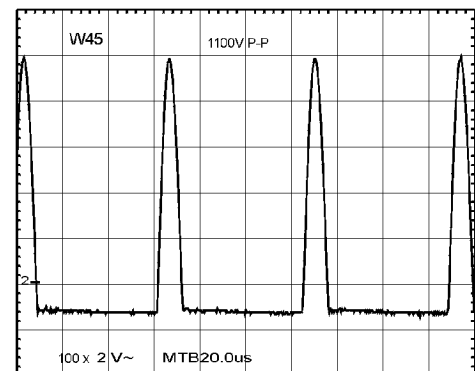
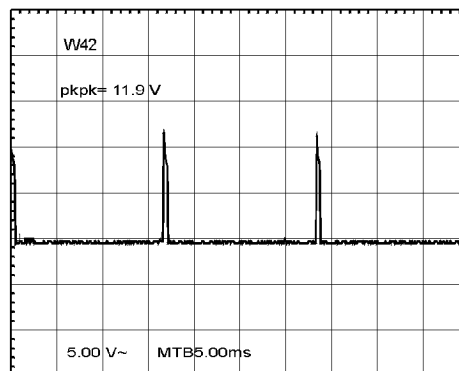
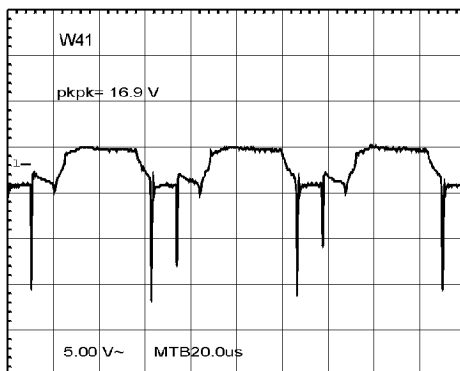
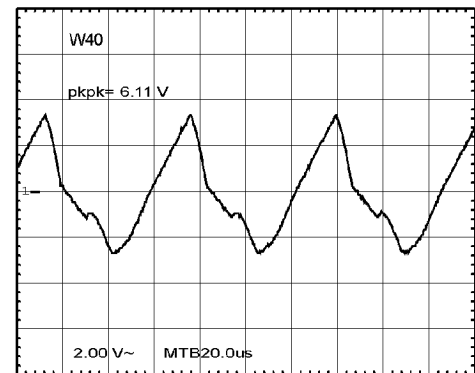
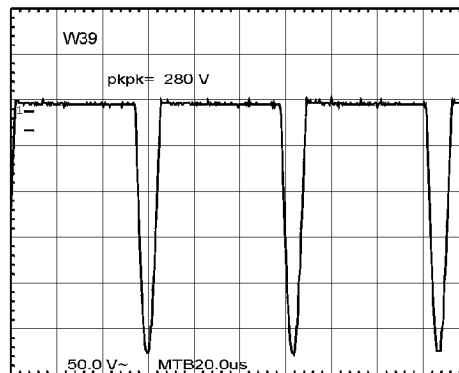
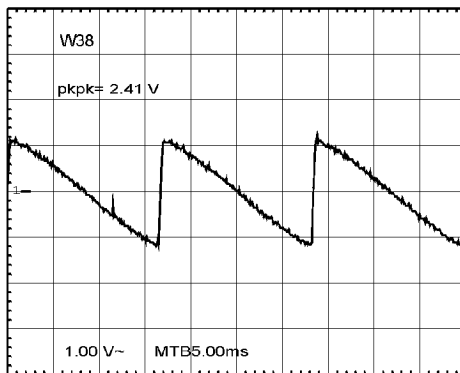
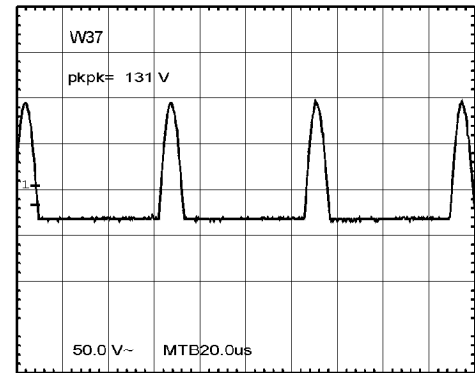
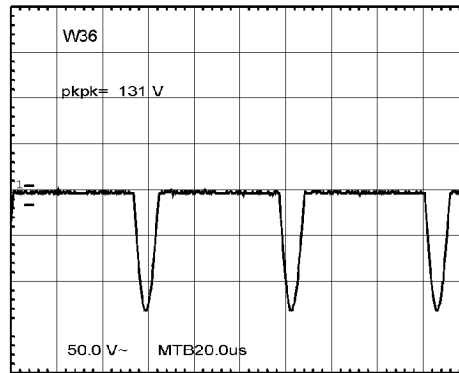
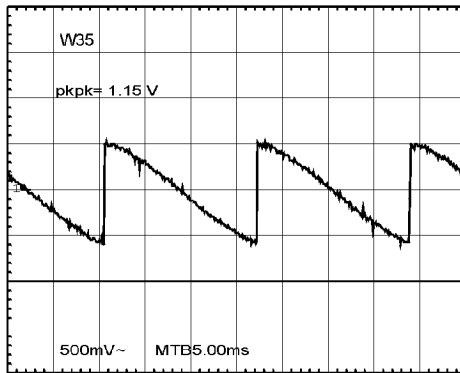
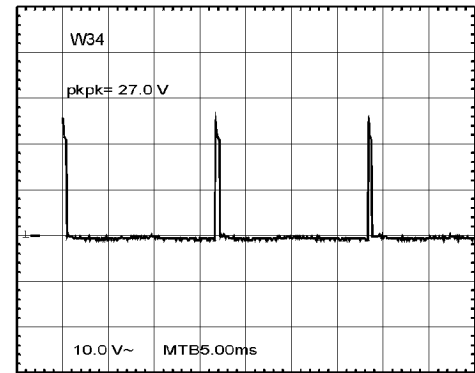
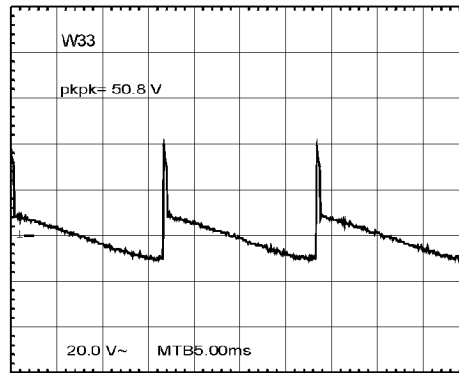
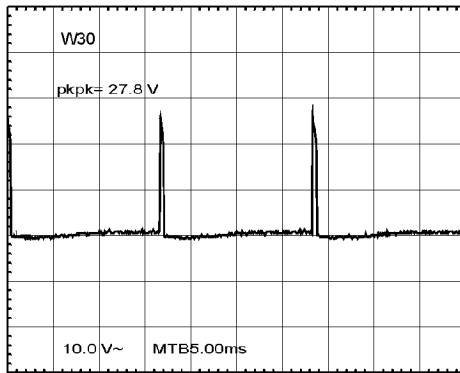


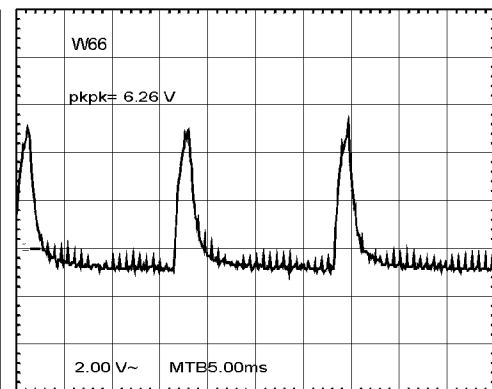
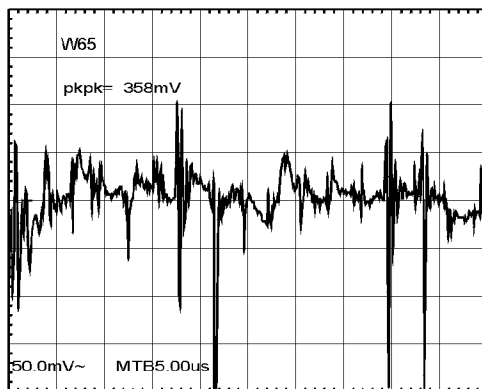
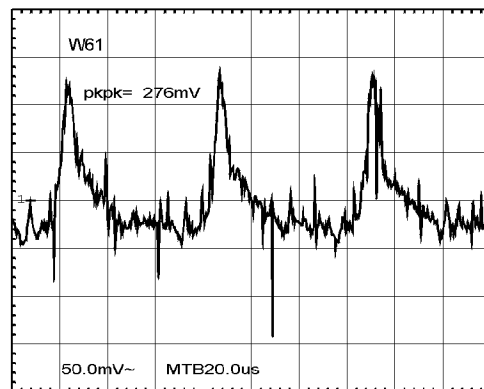
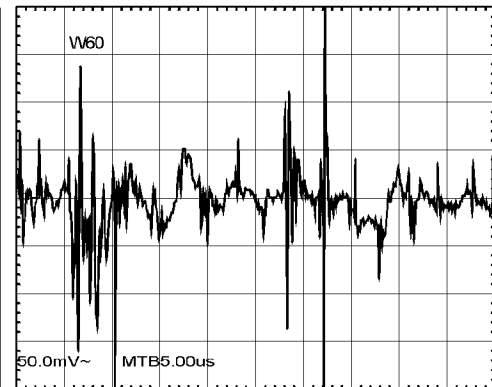
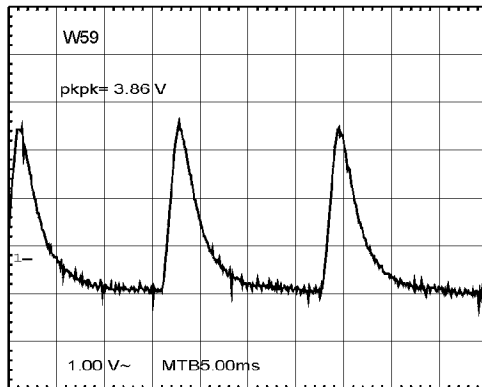
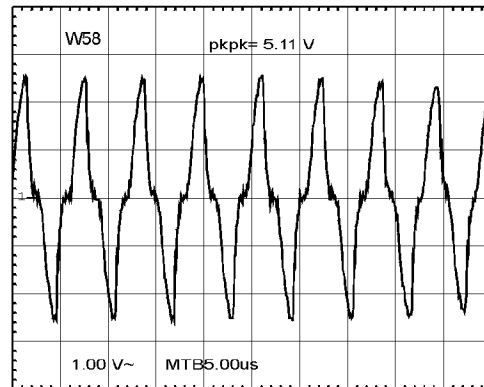
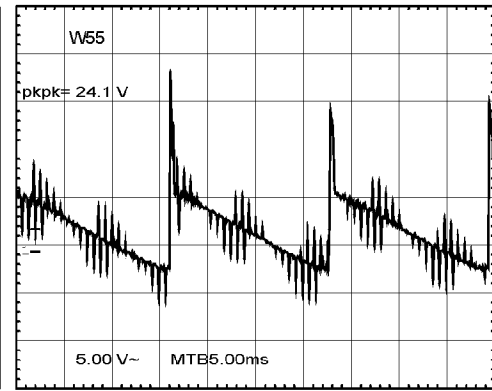
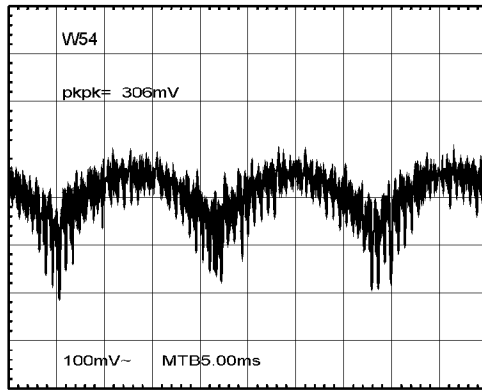
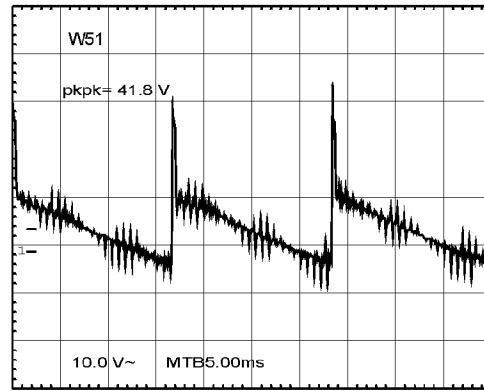
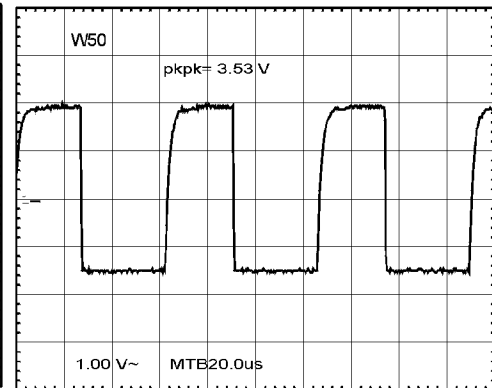
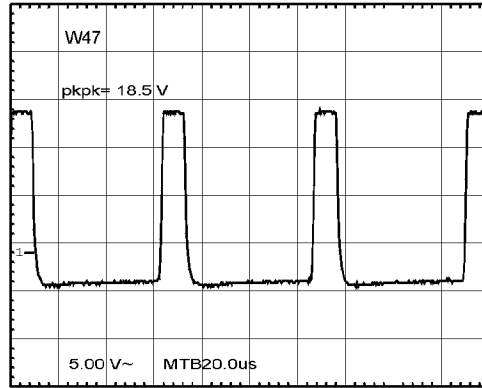
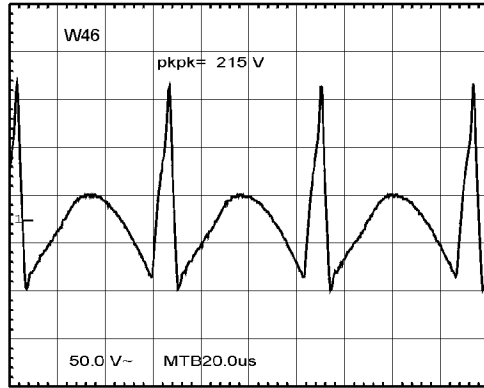


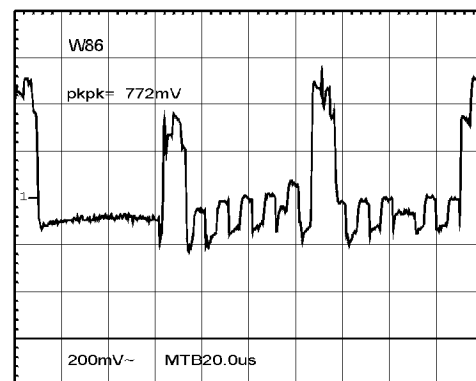
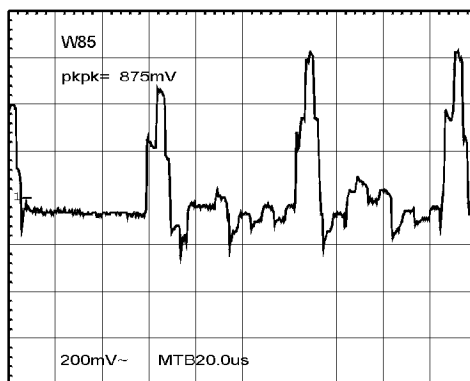
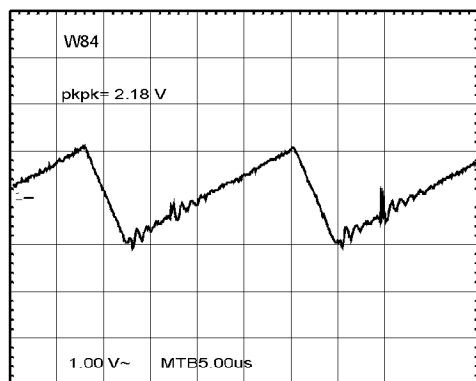
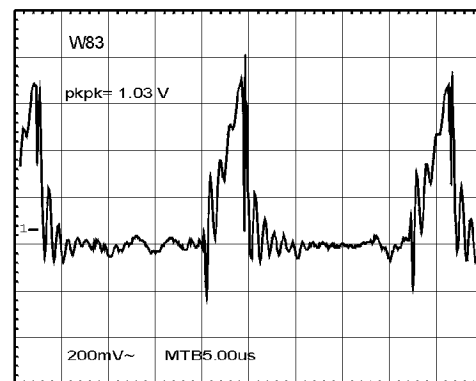
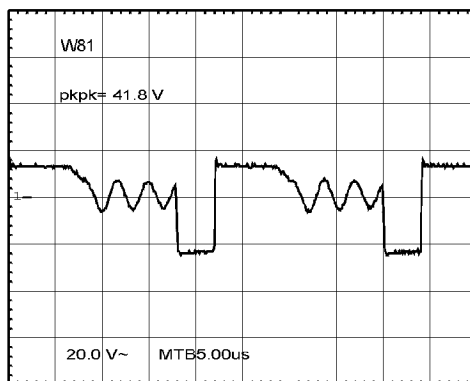
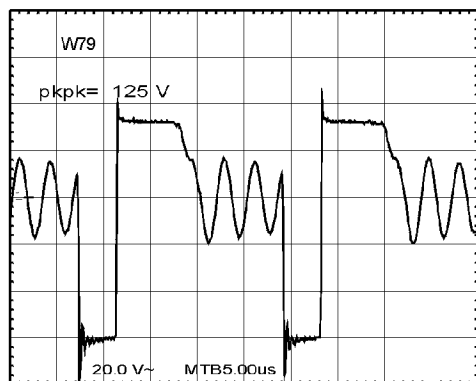
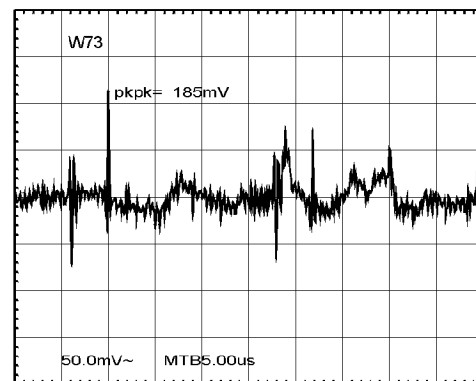
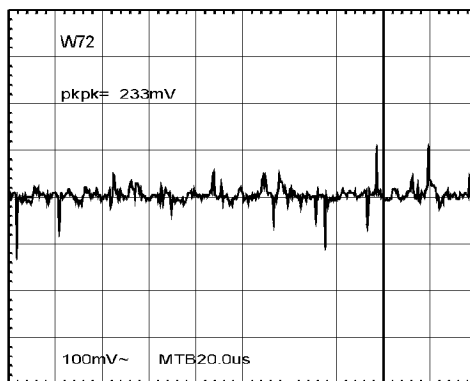
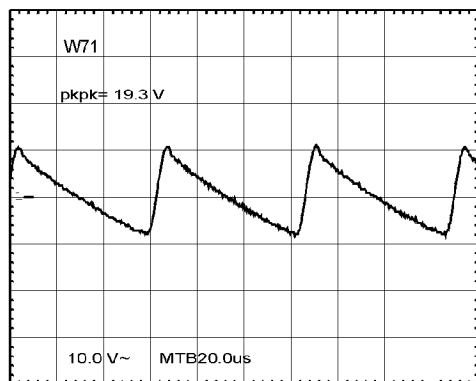
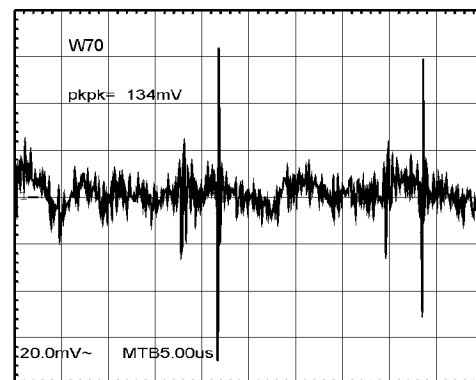
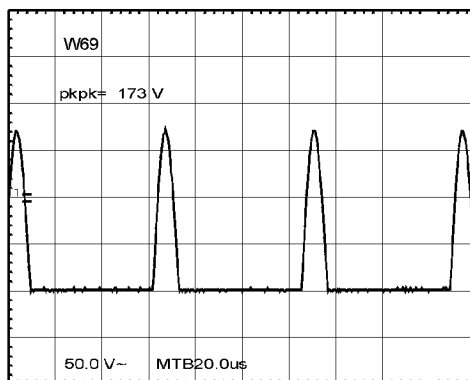
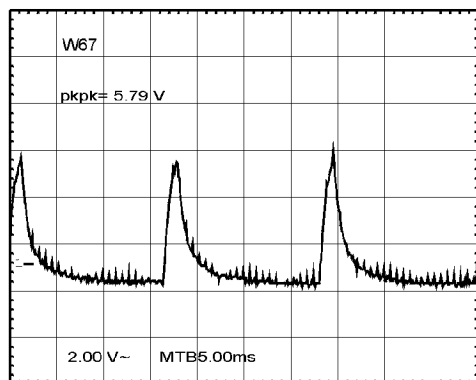


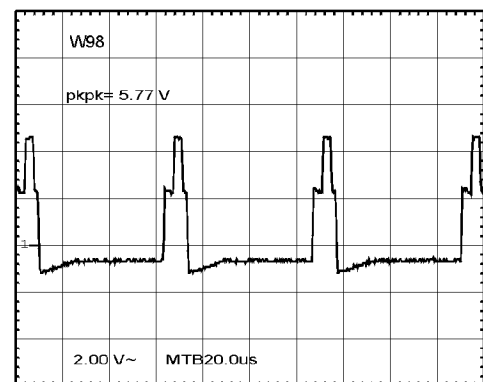
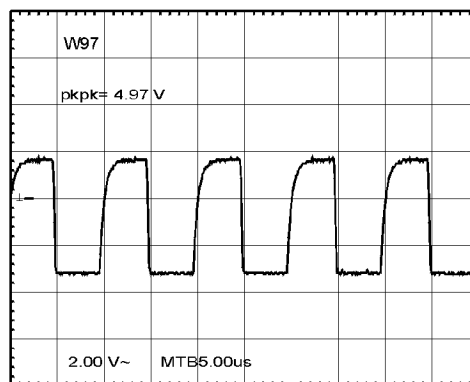
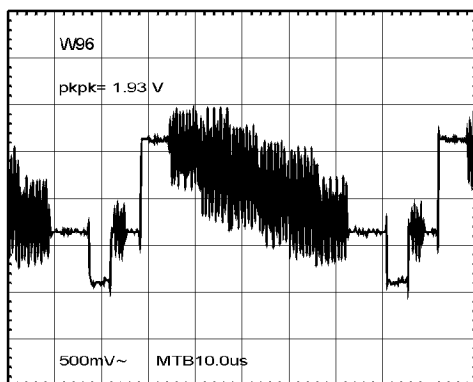
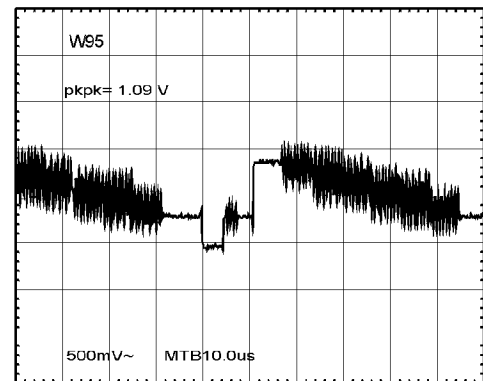
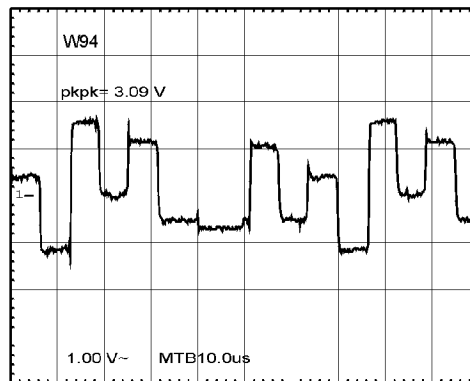
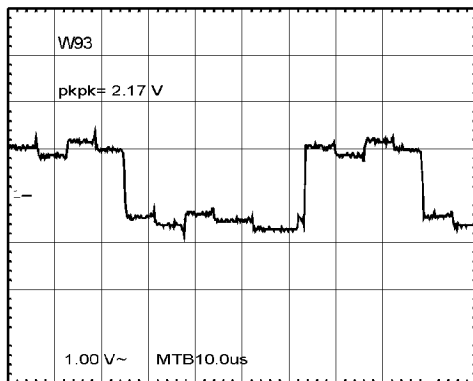
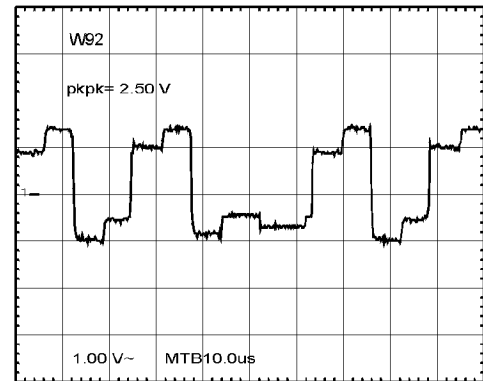
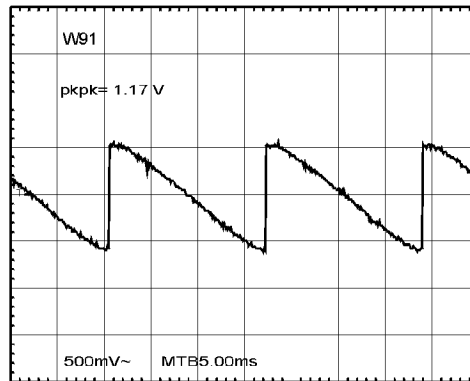
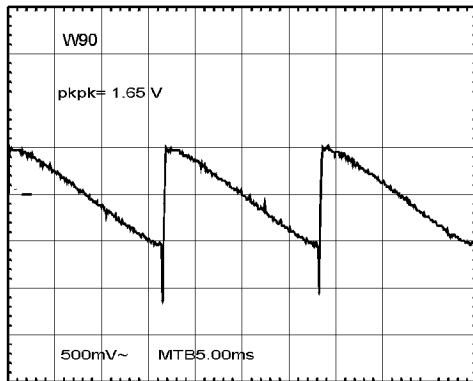
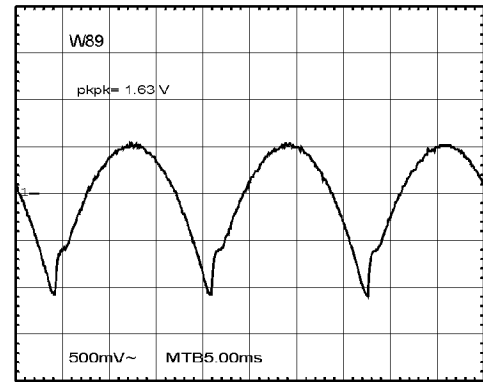
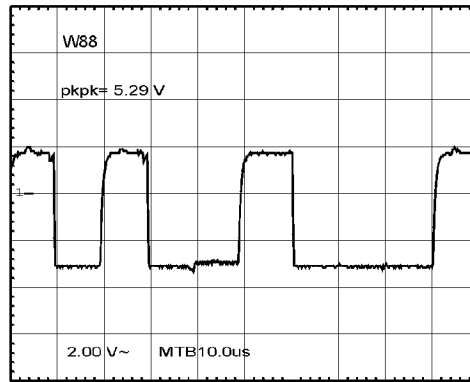
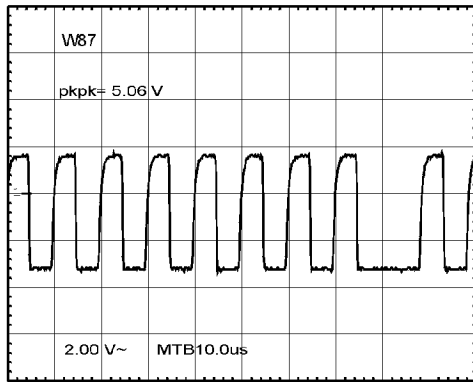


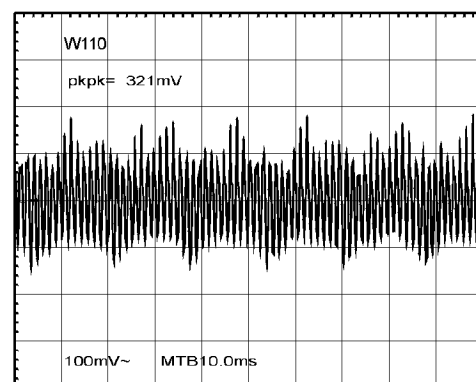
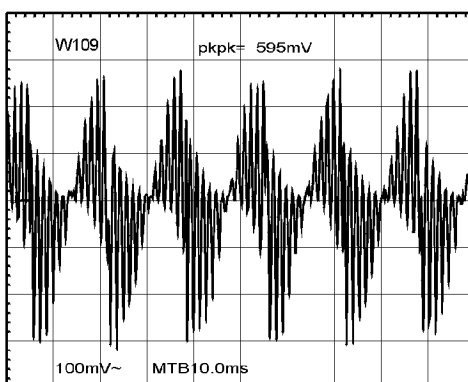
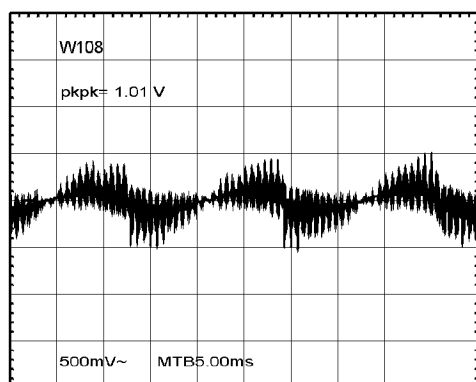
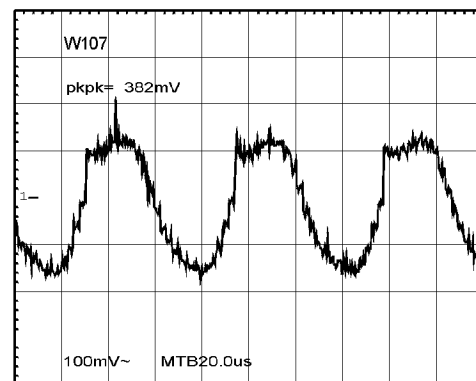
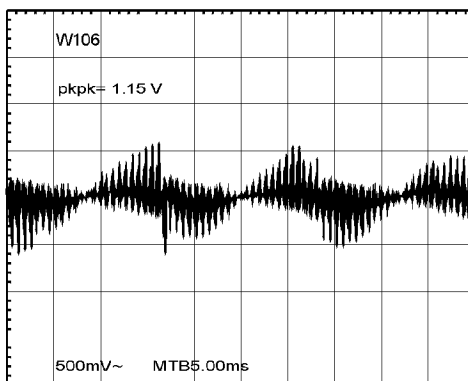
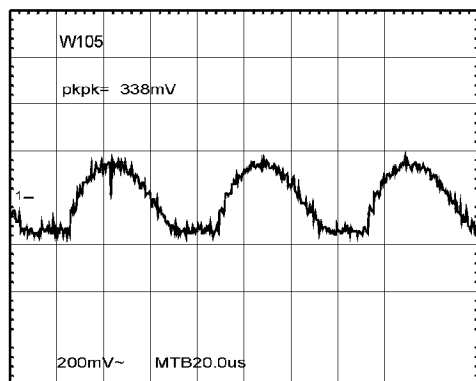
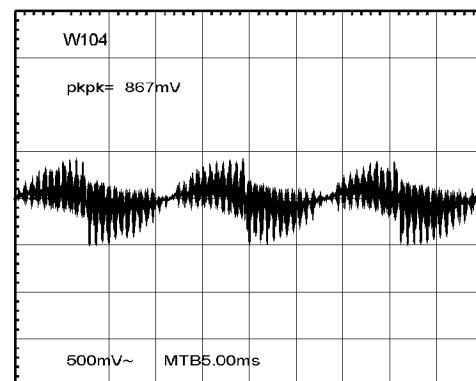
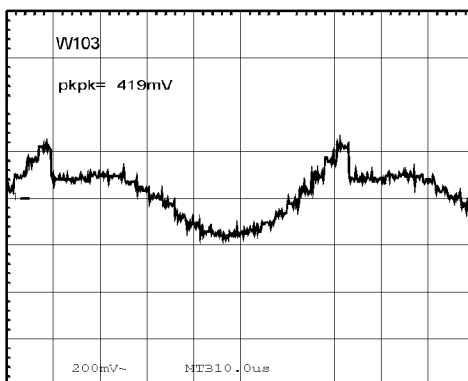
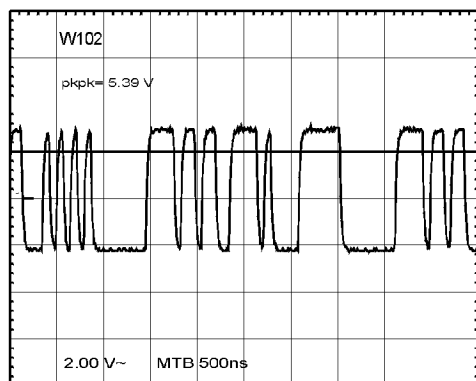
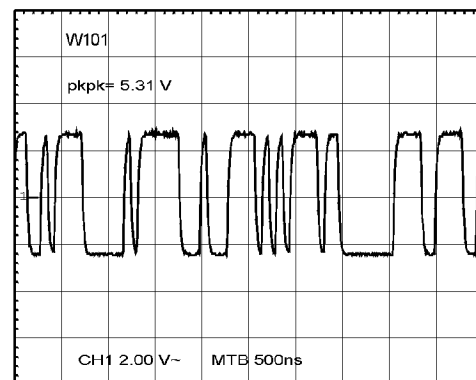
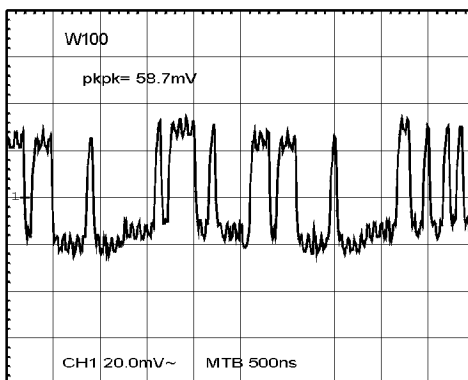
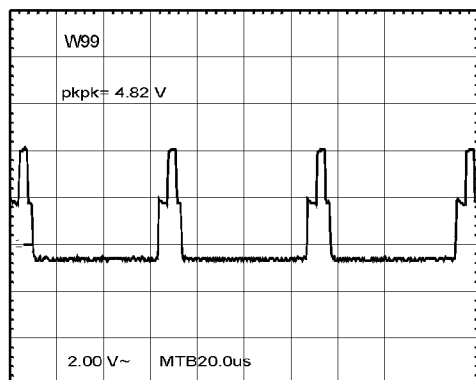


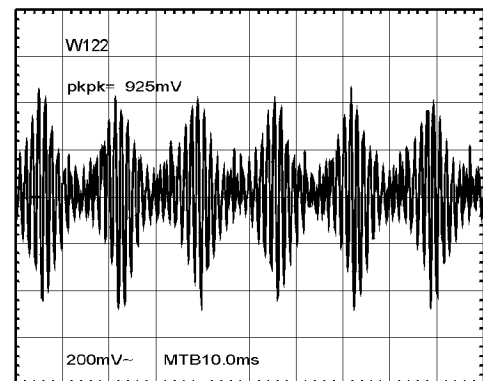
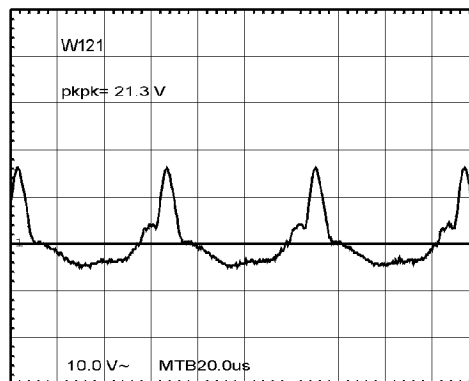
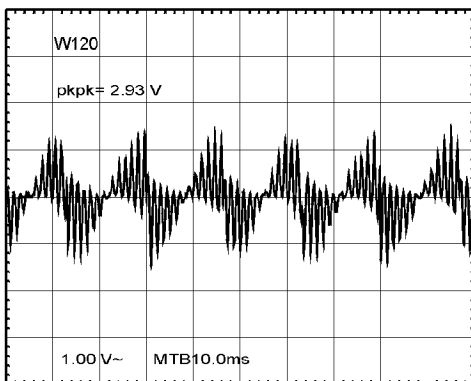
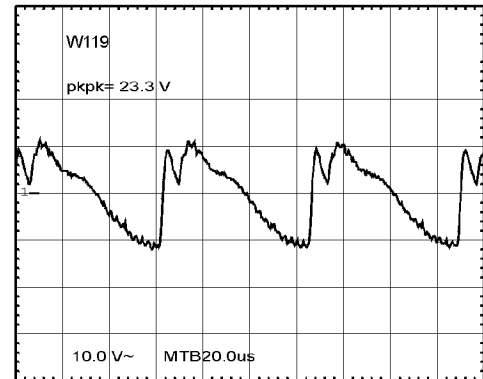
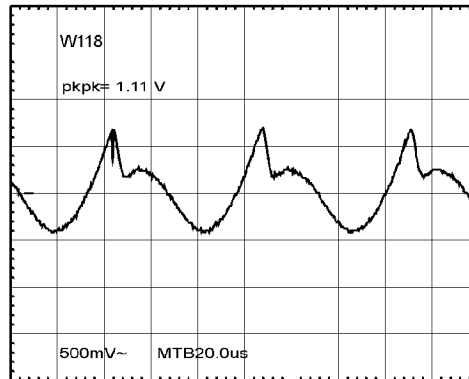
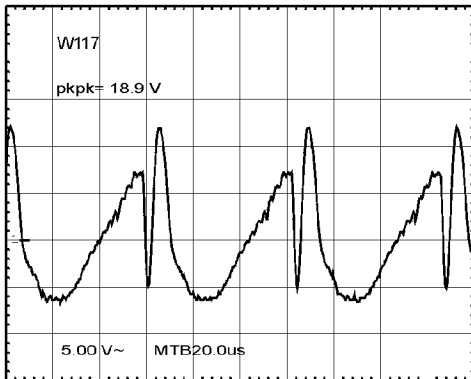
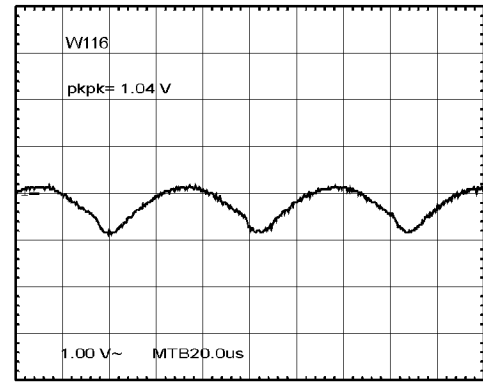
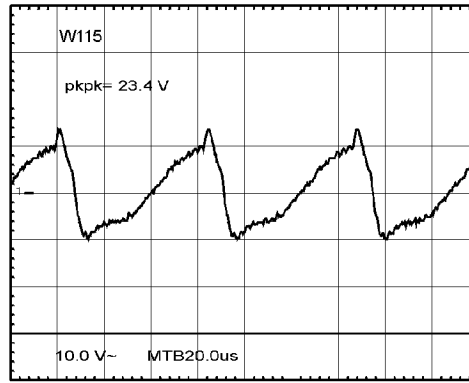
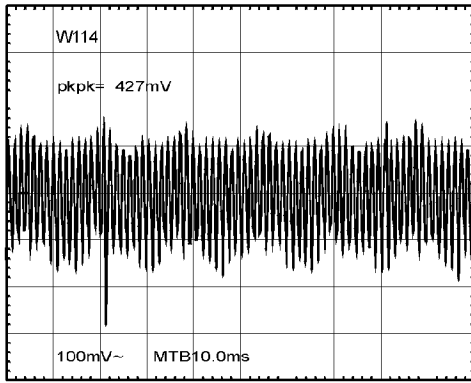
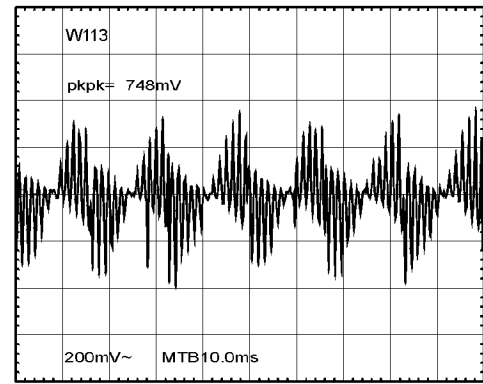
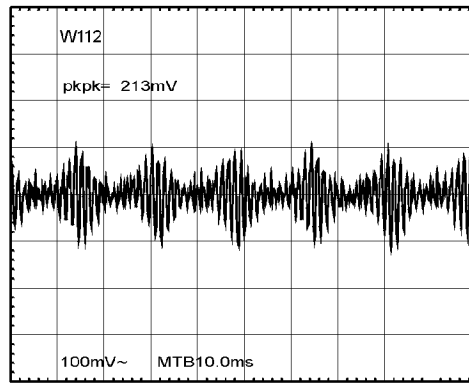
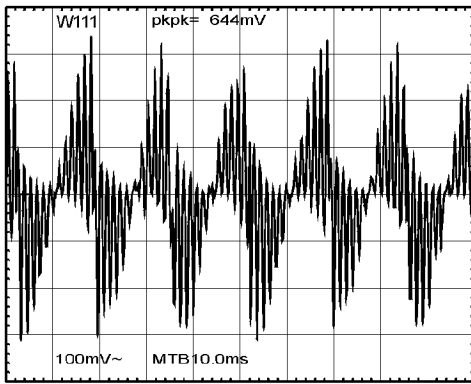


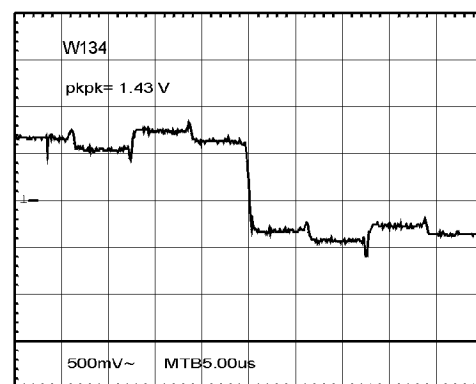
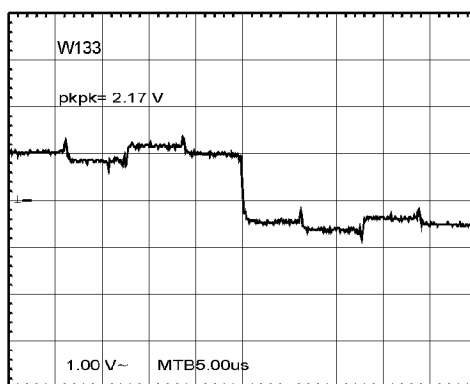
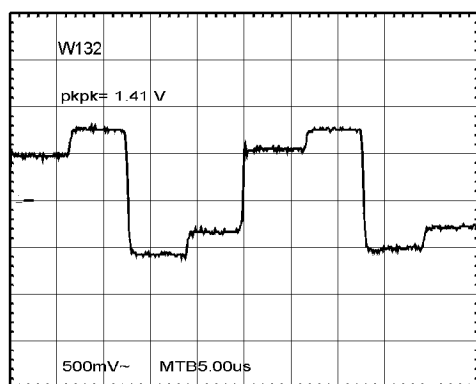
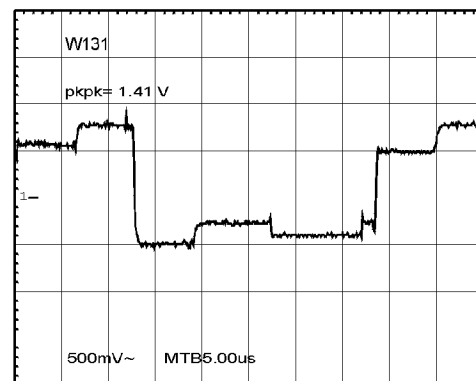
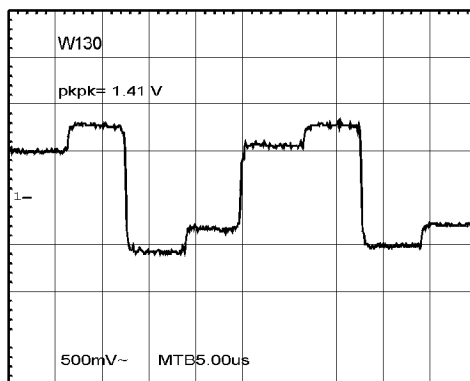
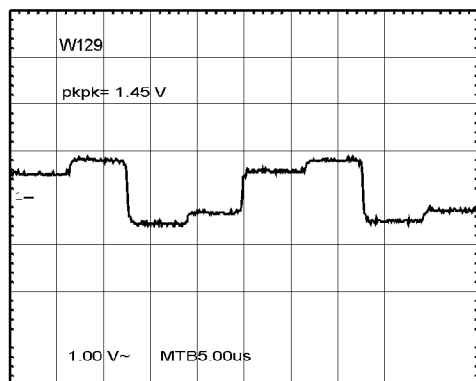
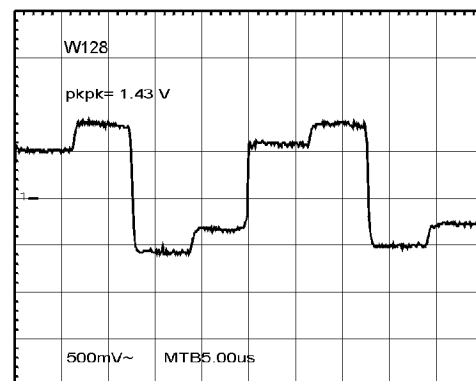
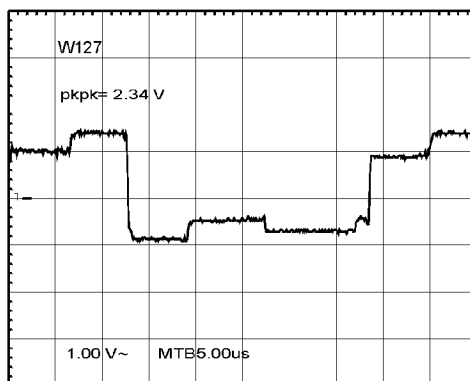
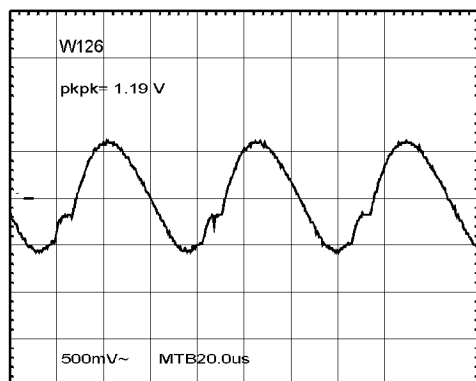
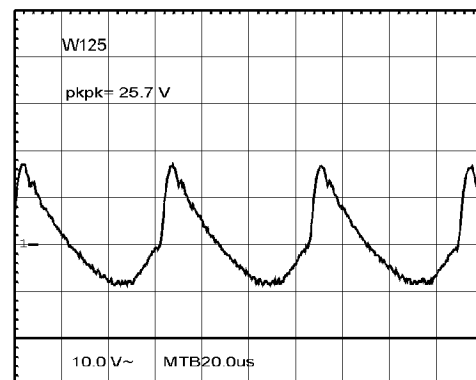
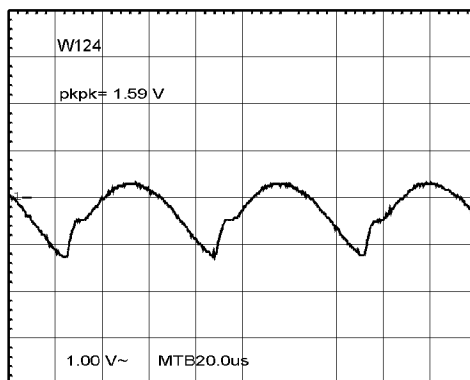
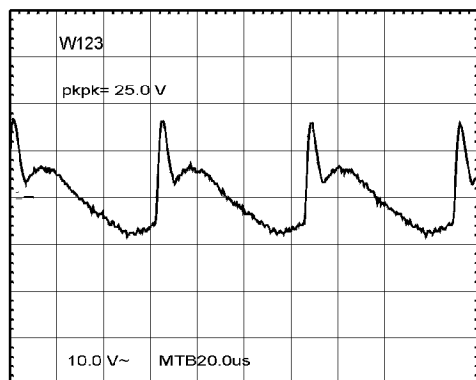


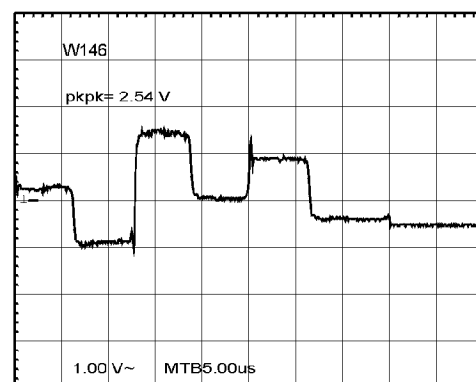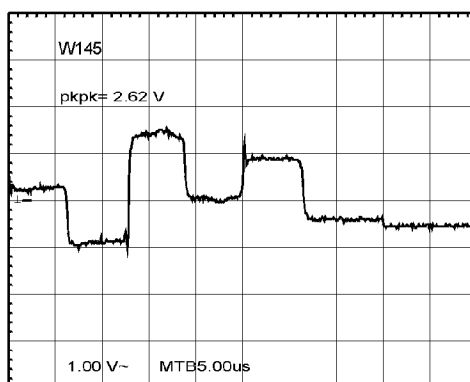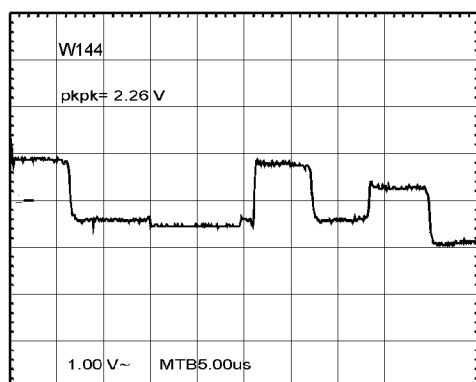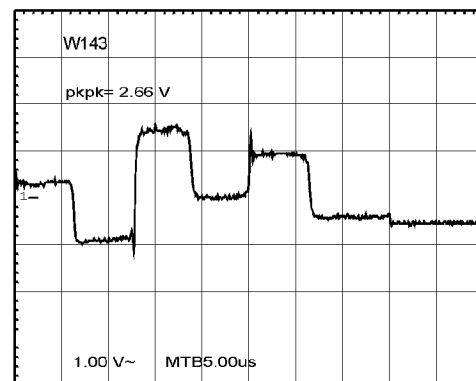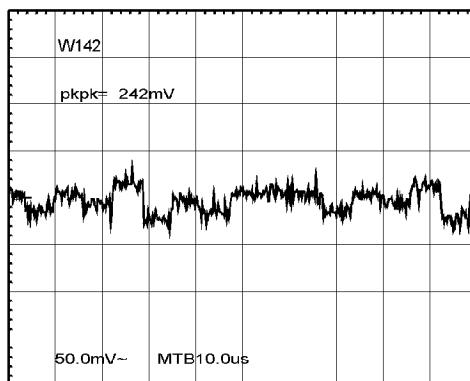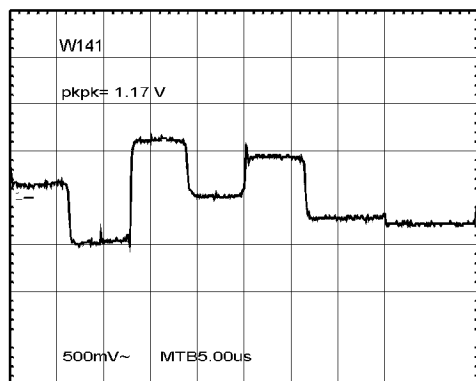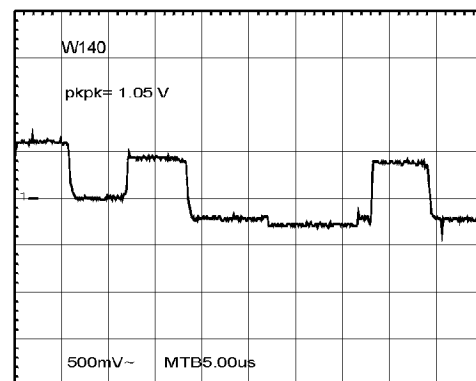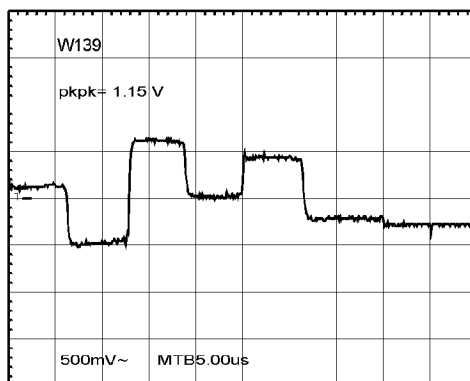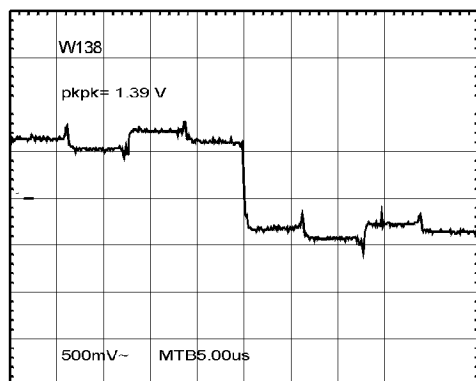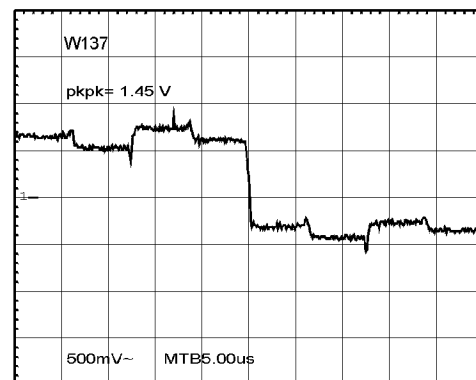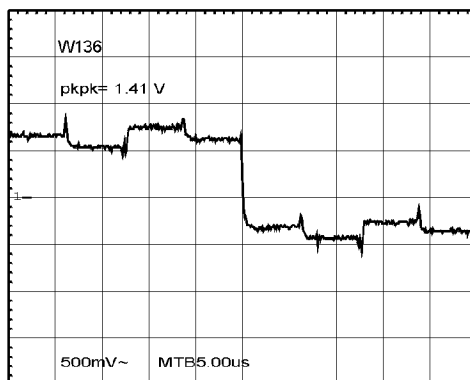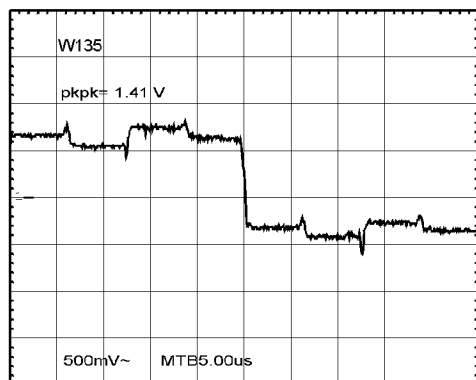


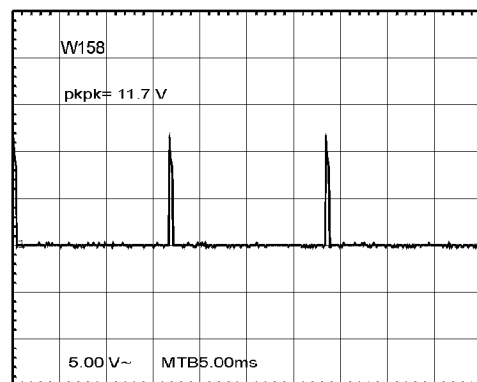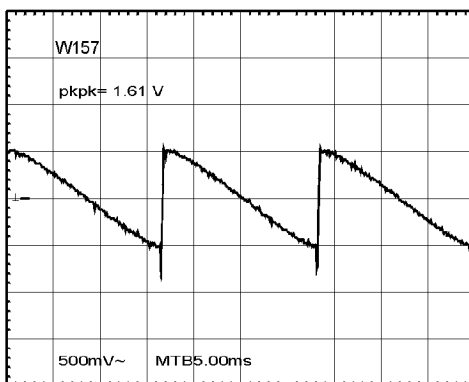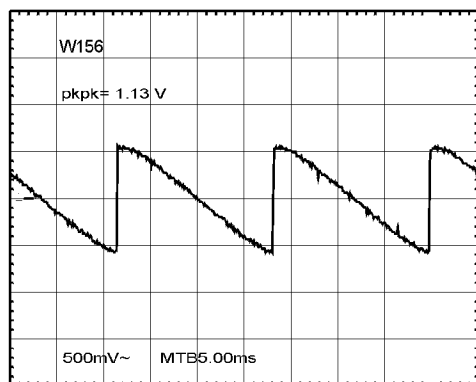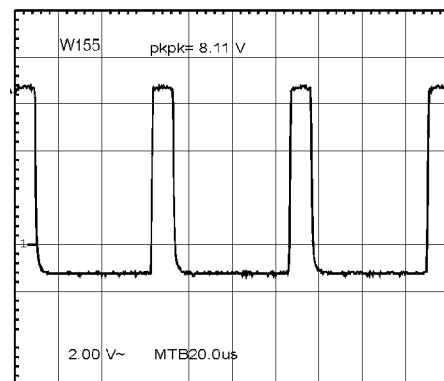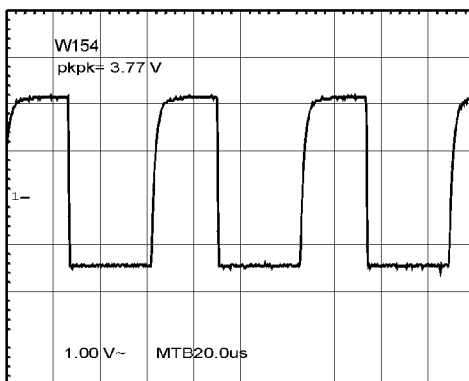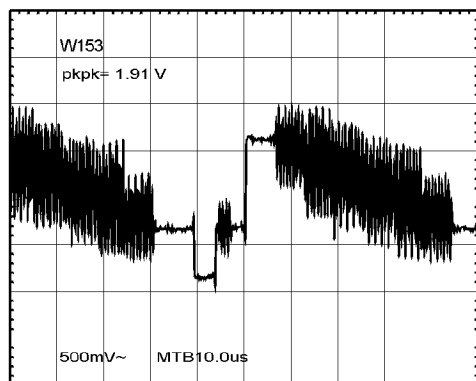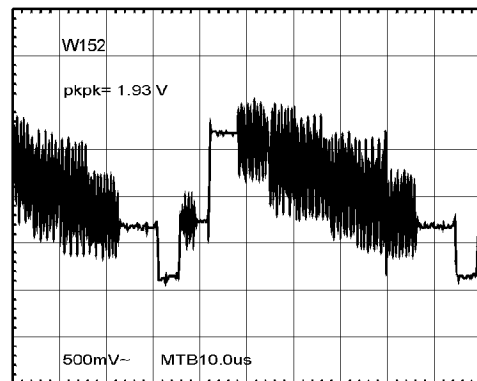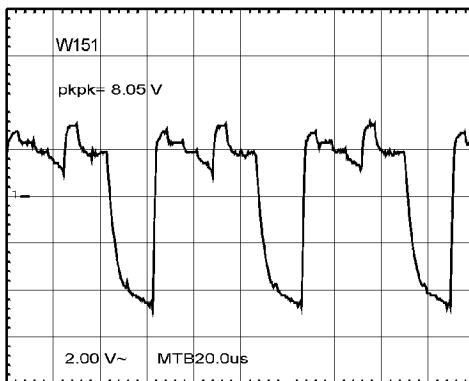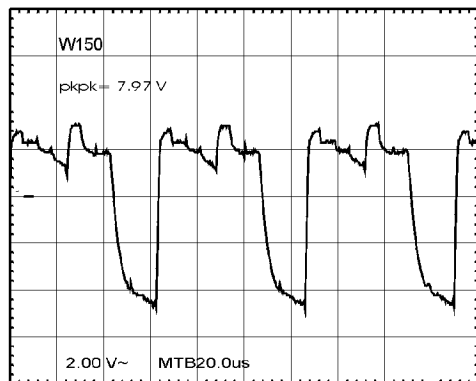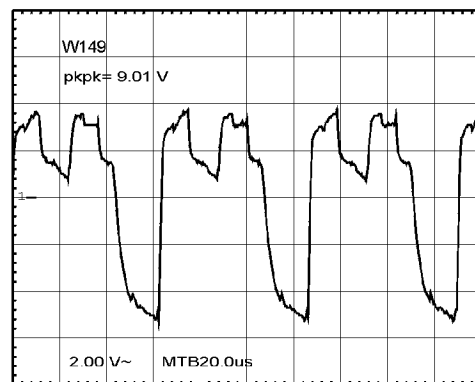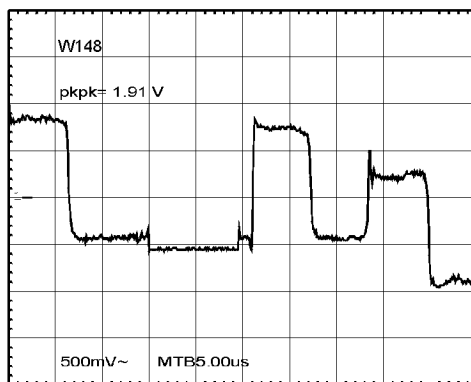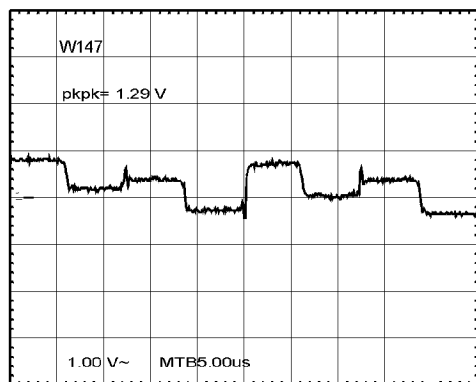

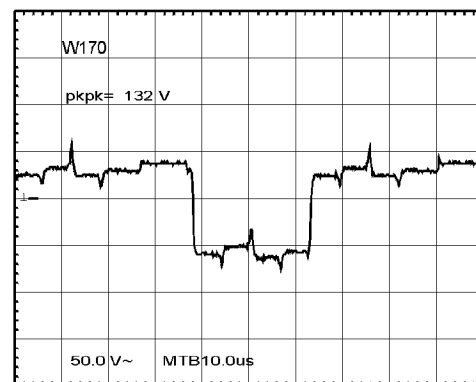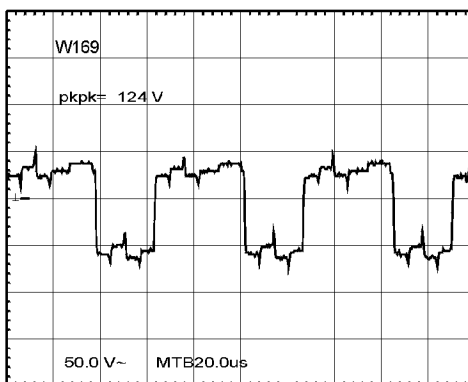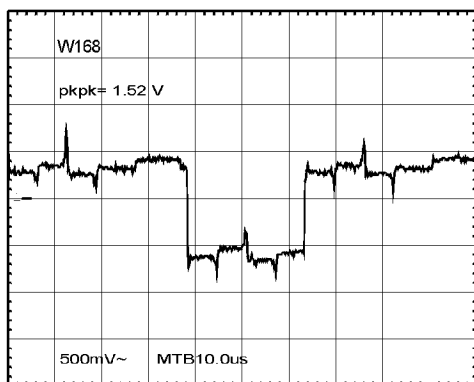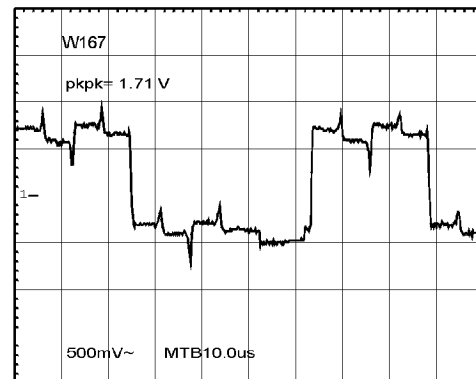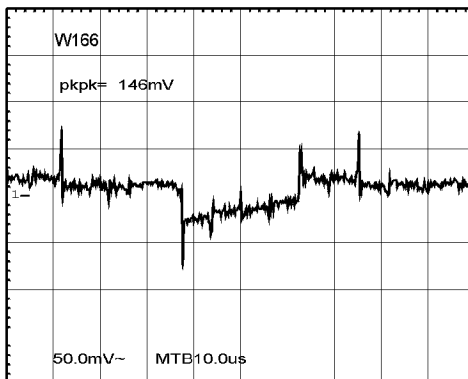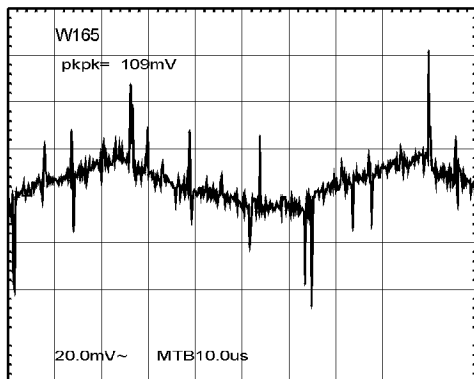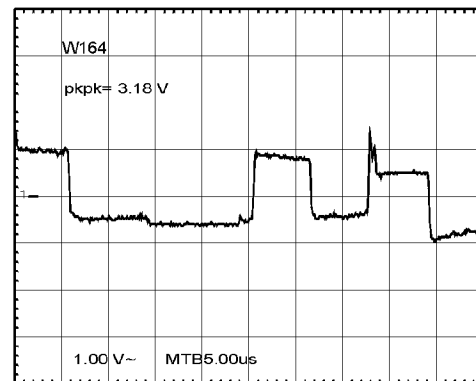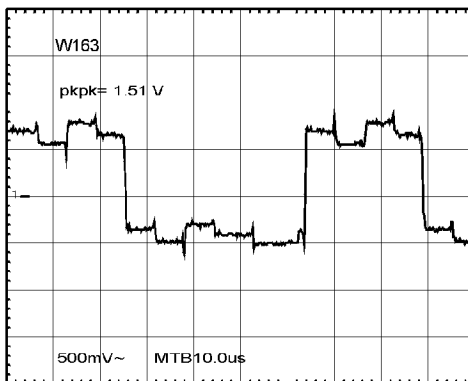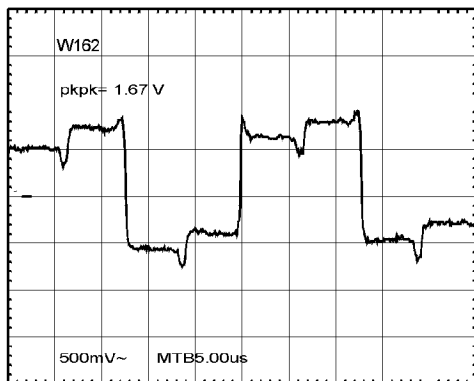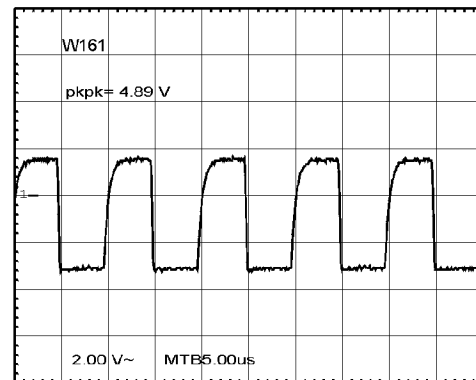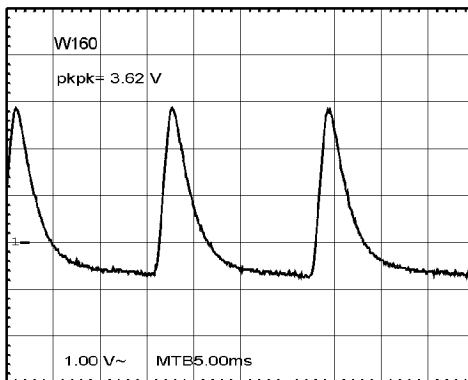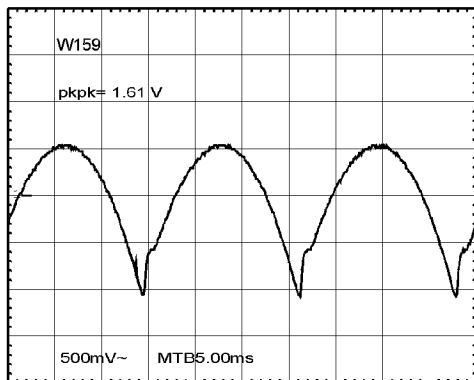

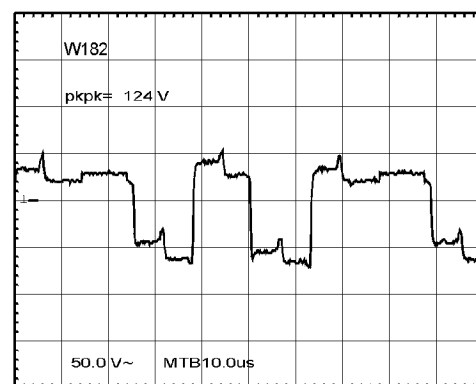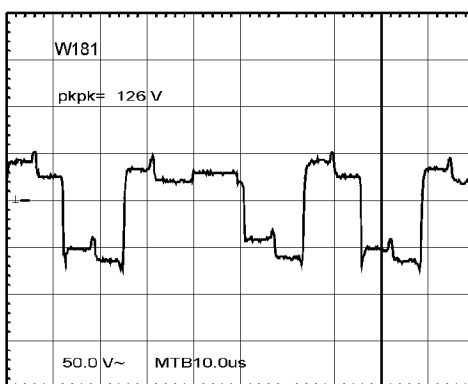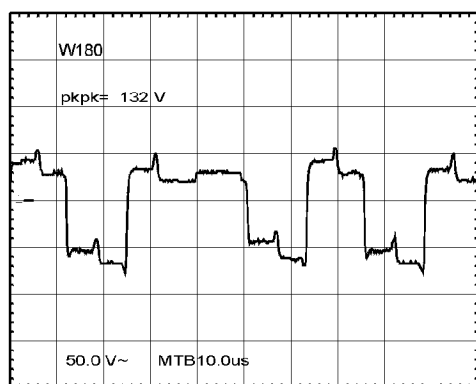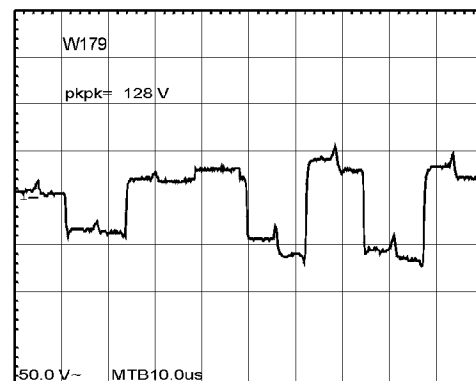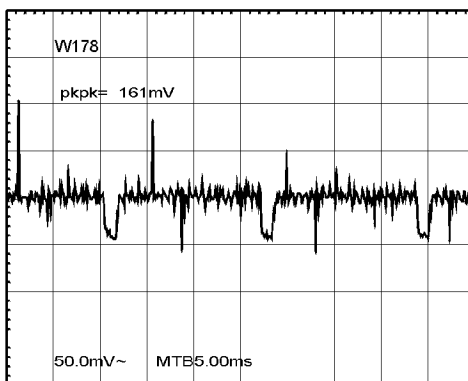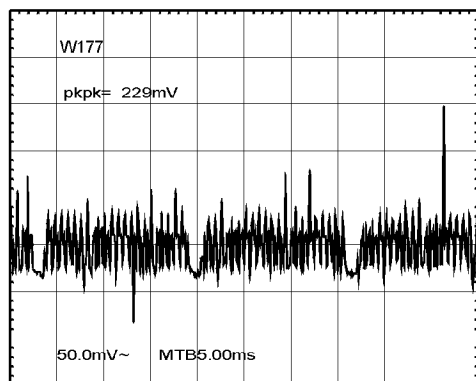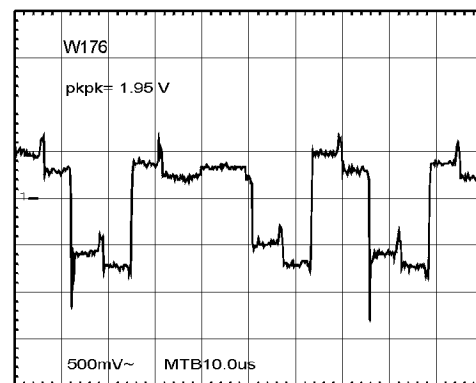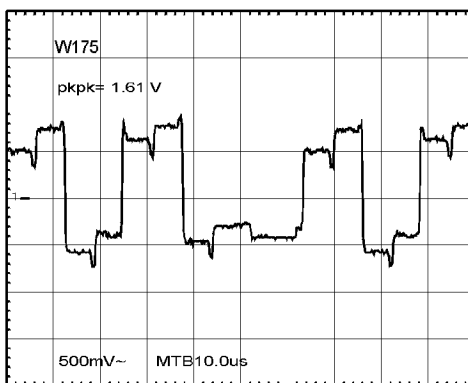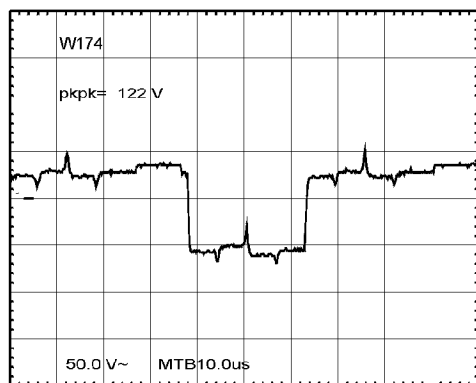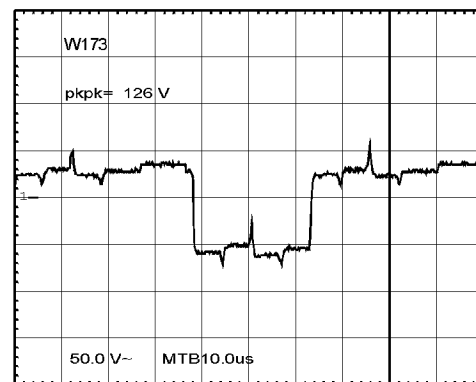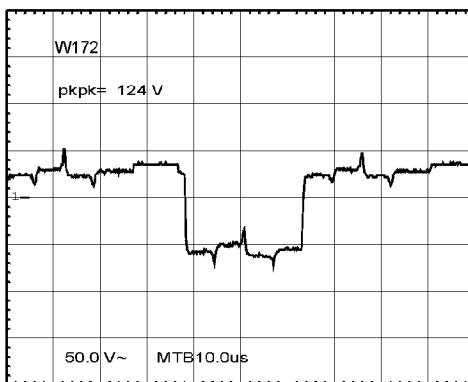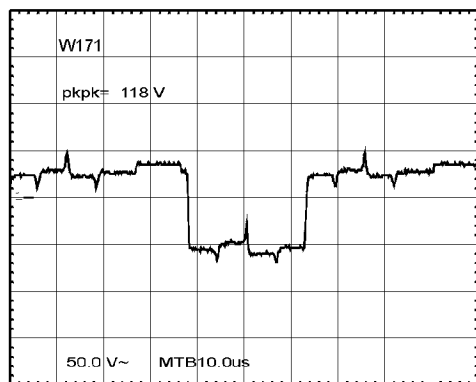

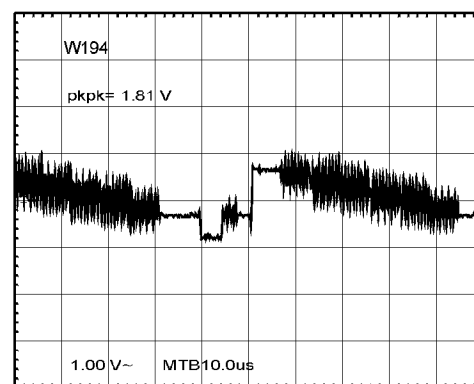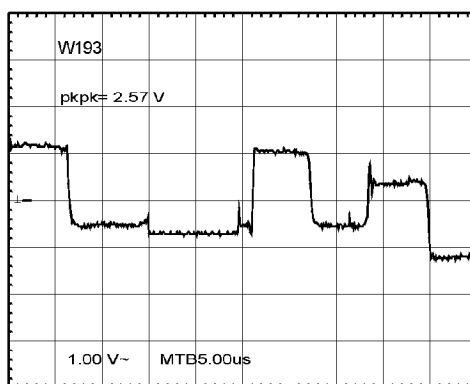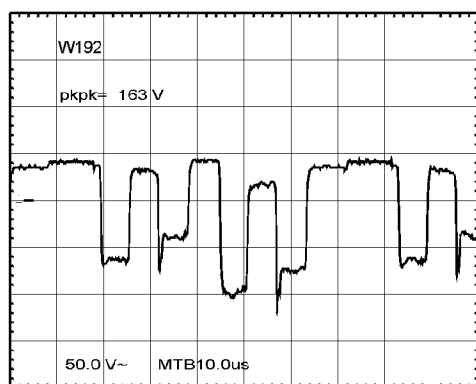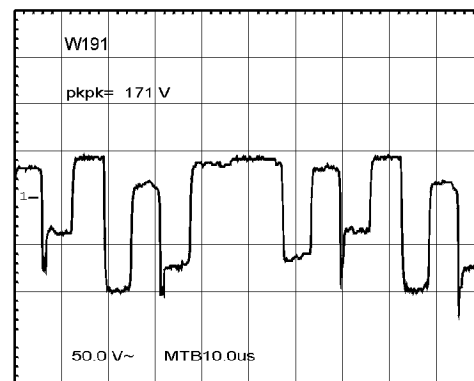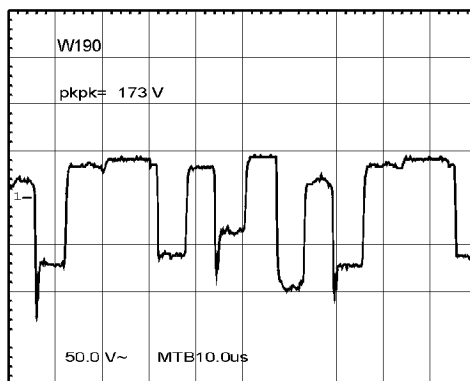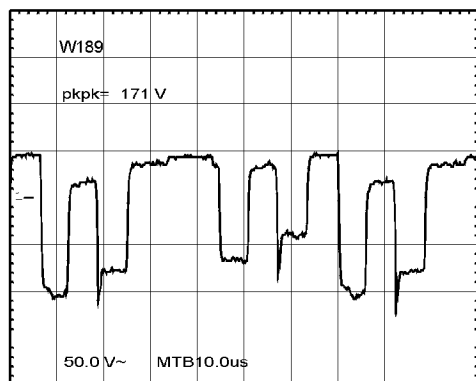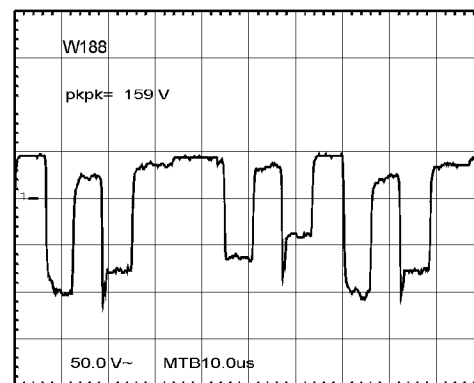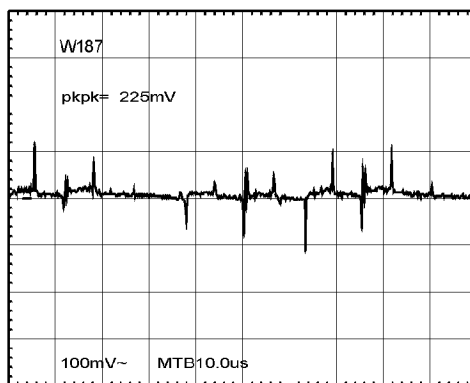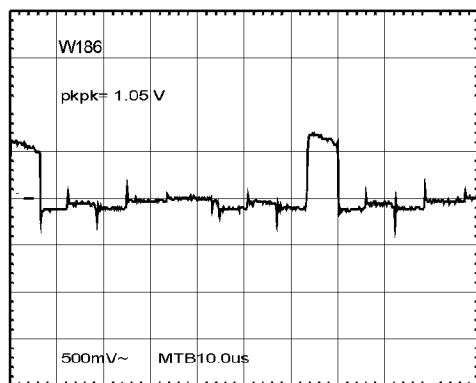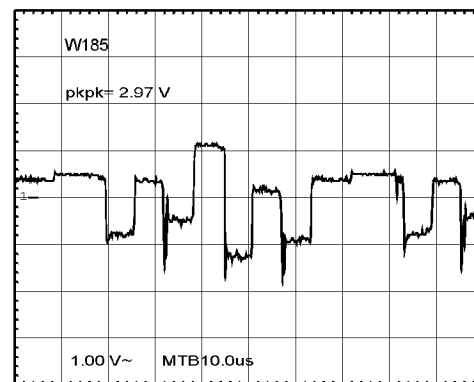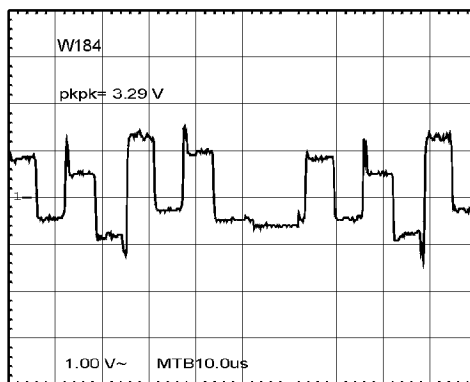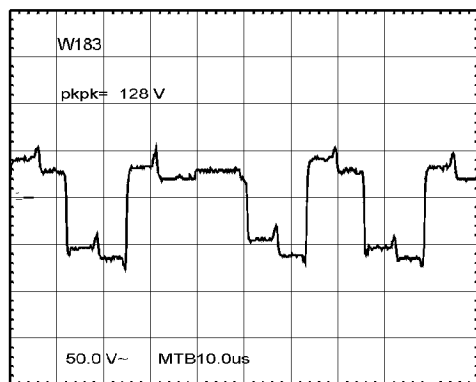

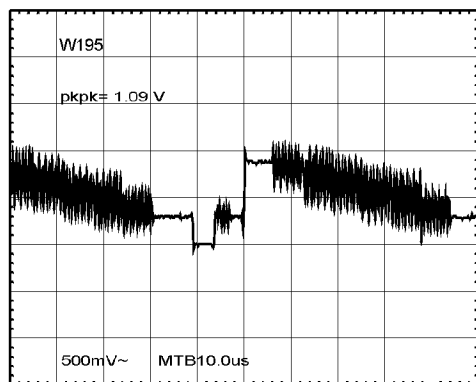

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 43P8341

First Published: 09-23-02

Rev. Date: 10-25-02

Print Date: 2004-10-06


Mechanical Diagrams

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.


CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

43" CABINET EXPLODED VIEW

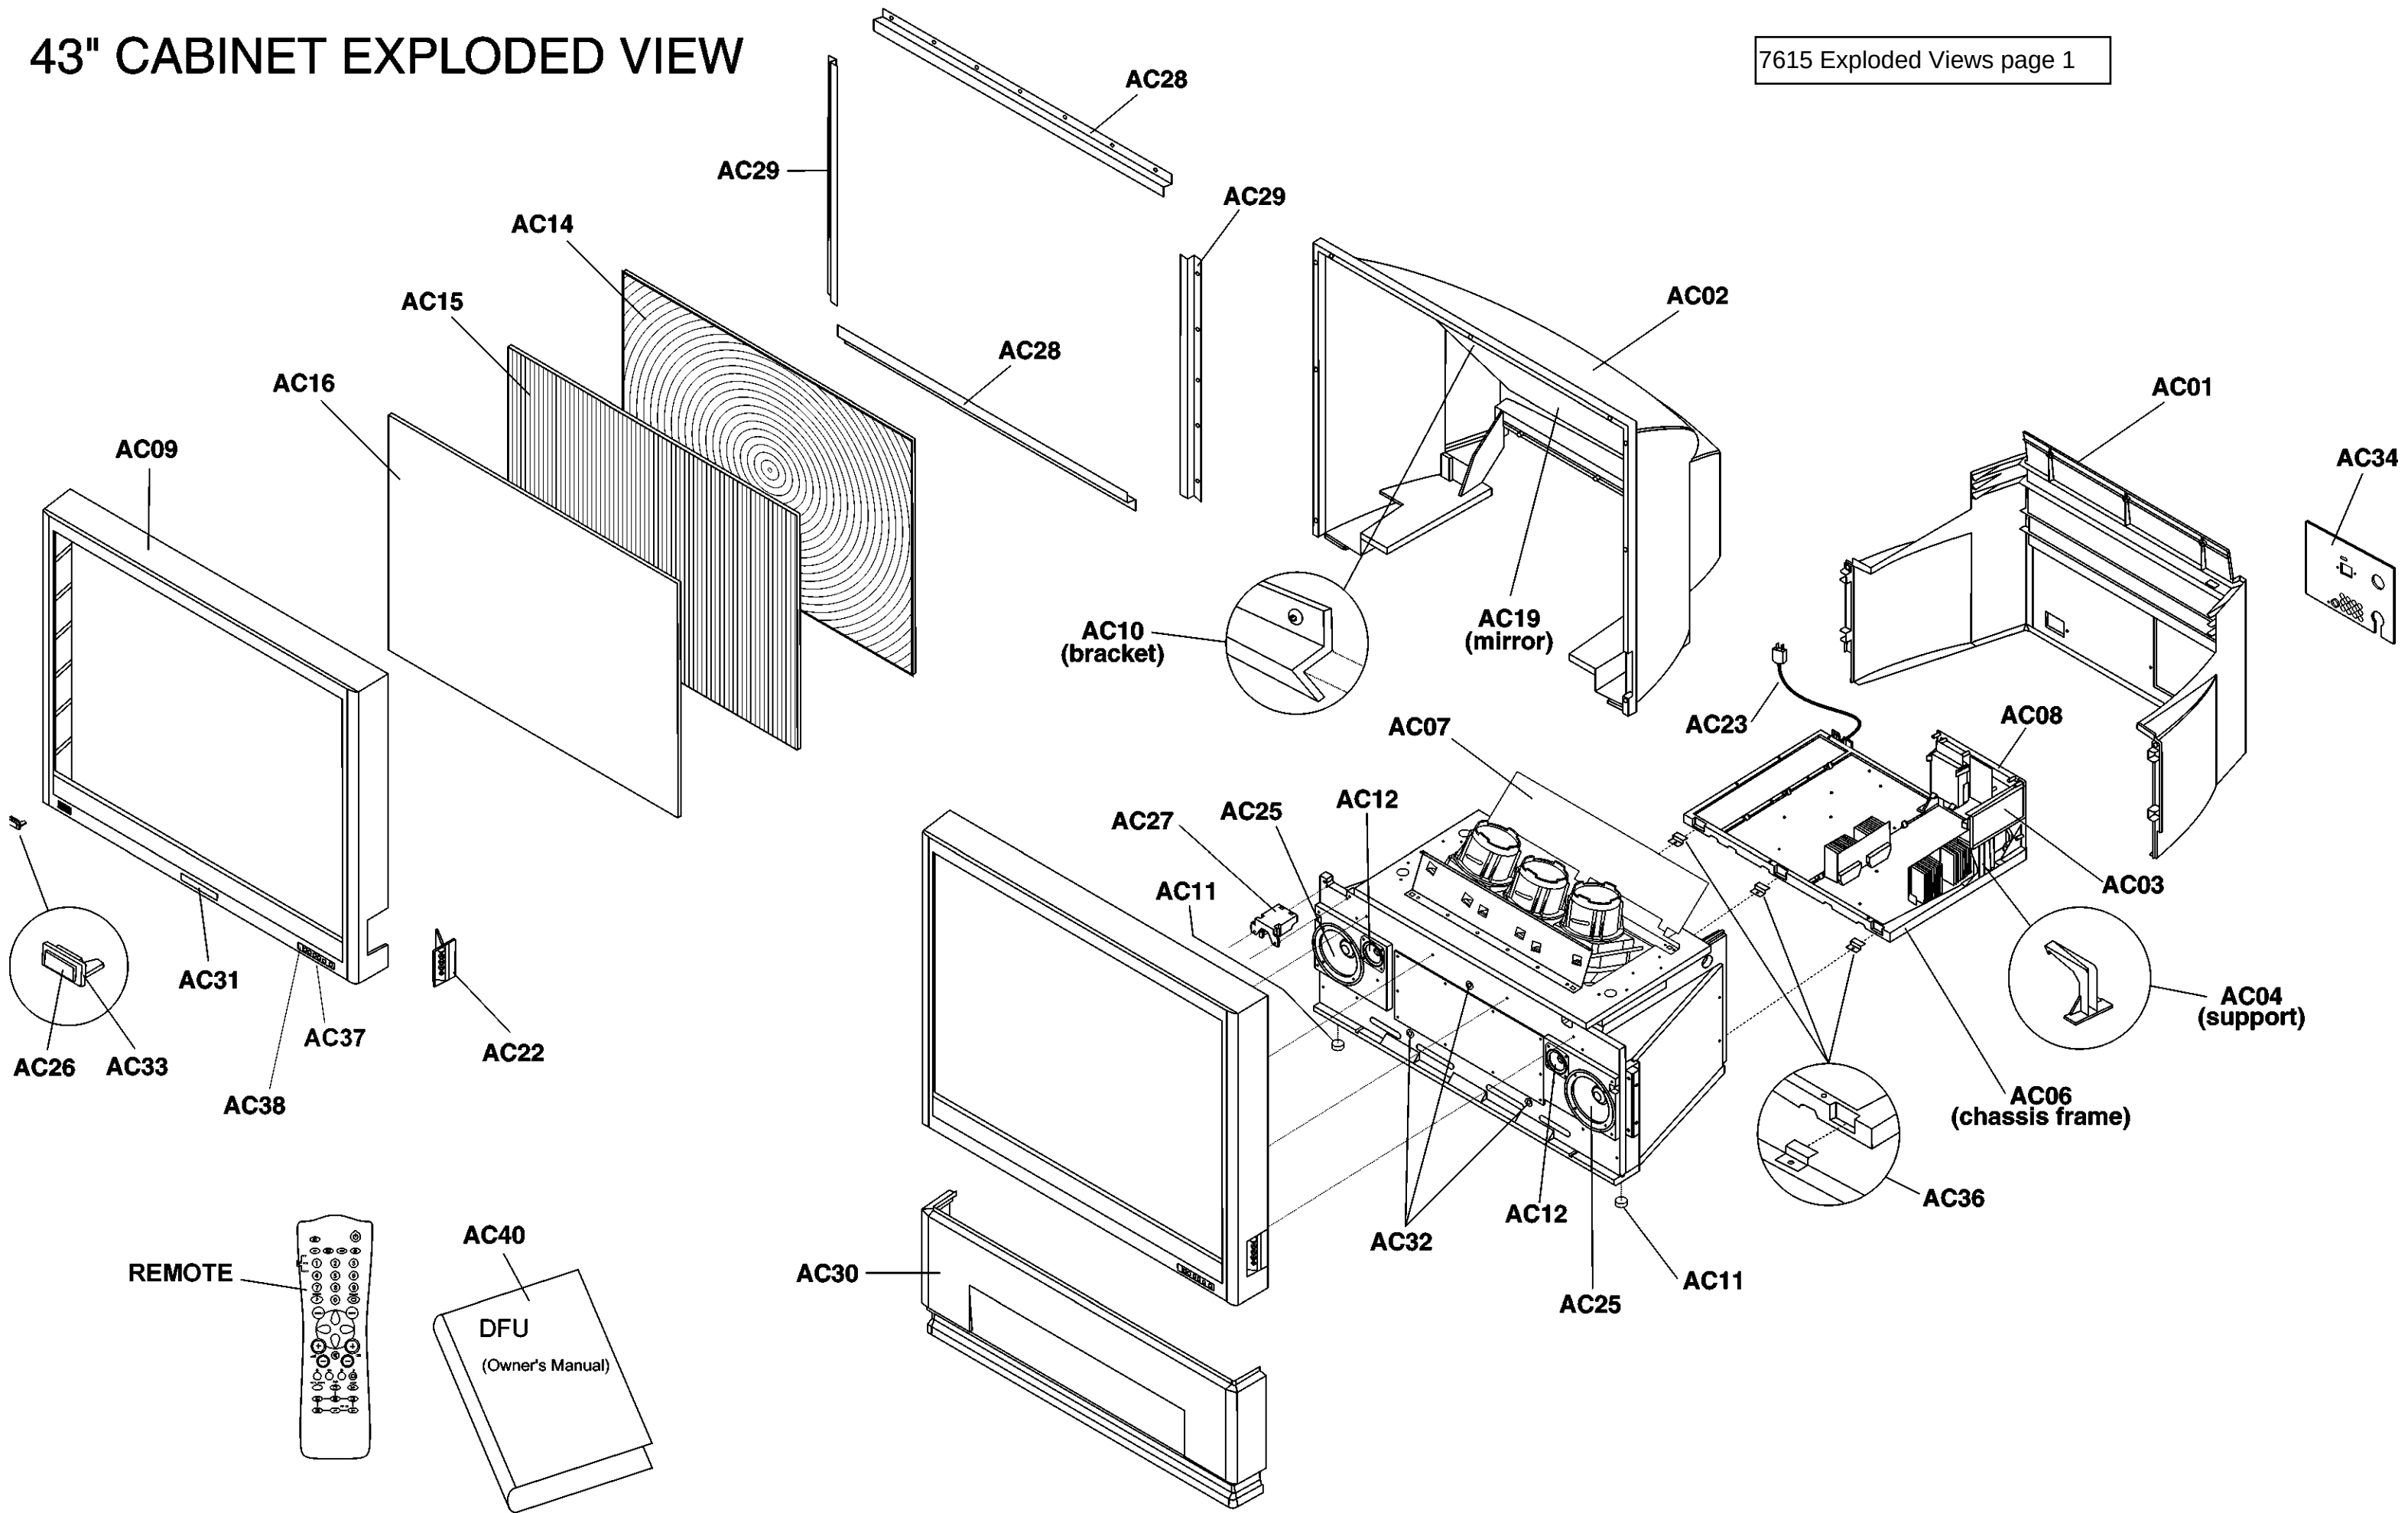


50"/55"/60" CABINET EXPLODED VIEW

NOTE: NOT ALL ITEMS SHOWN ARE AVAILABLE FOR ALL MODELS.

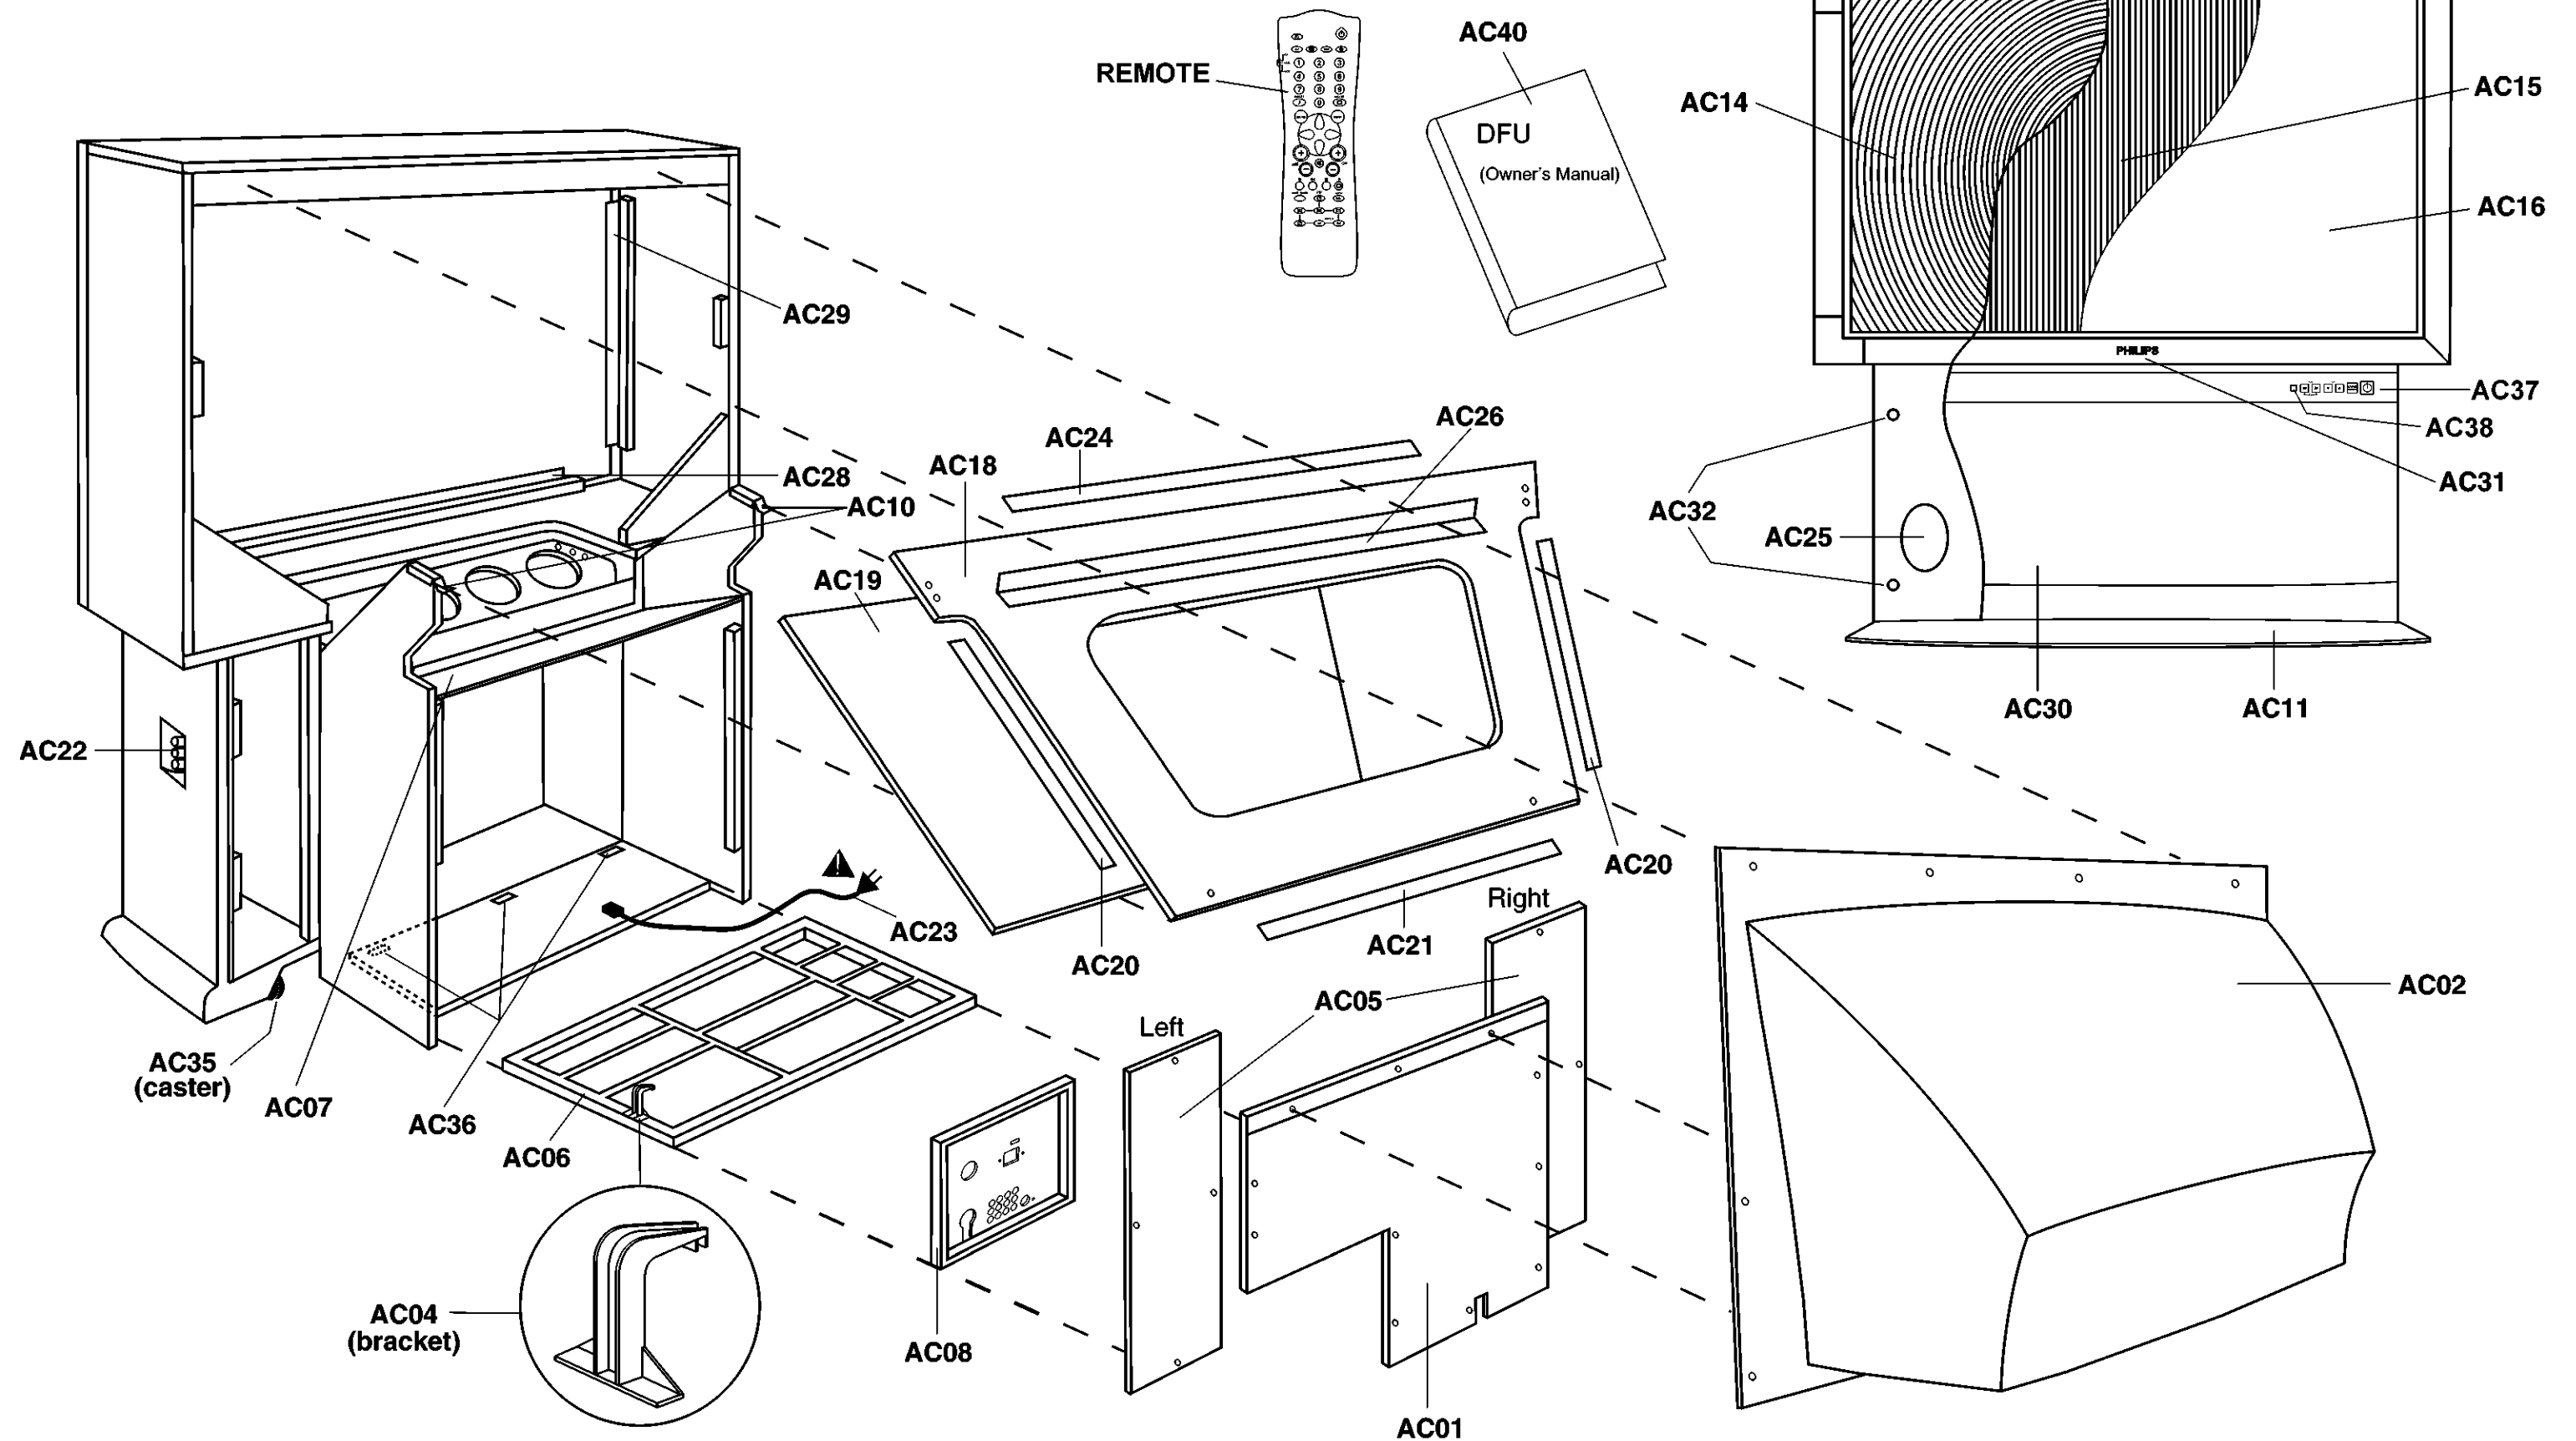

CRT ASSEMBLY EXPLODED VIEW

NOTE: NOT ALL PARTS SHOWN ARE AVAILABLE.

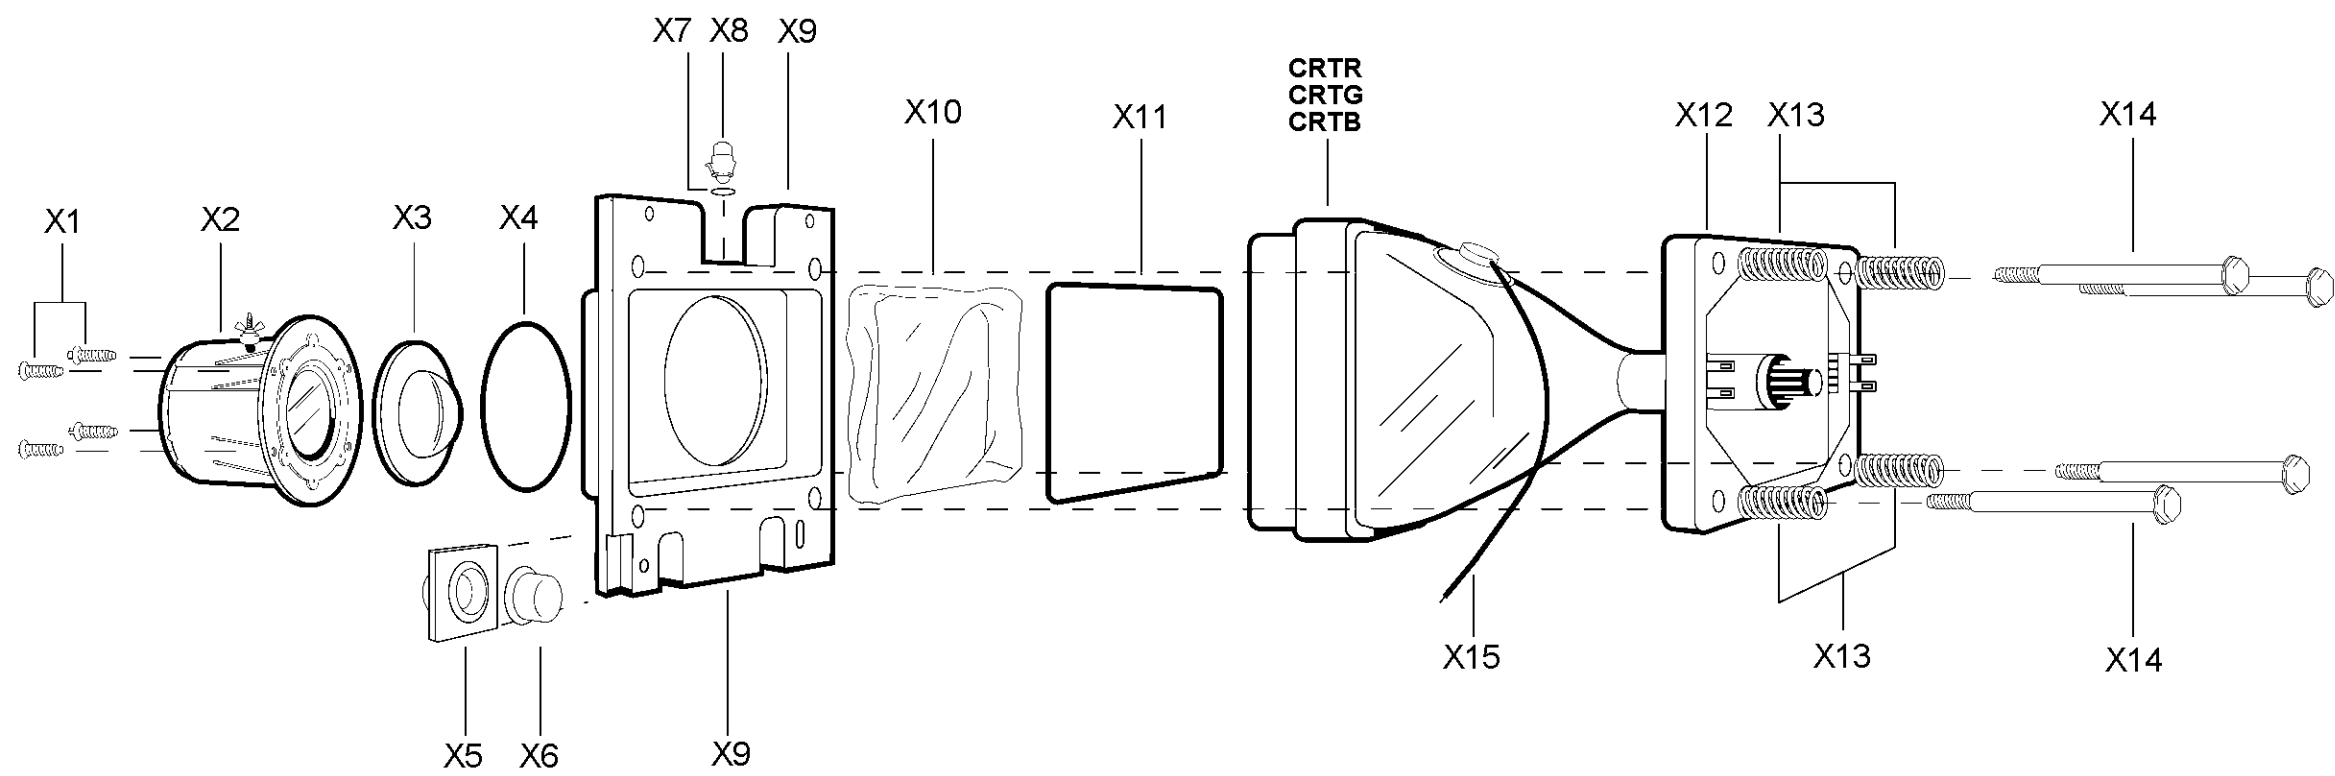

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 43P8341
First Published: 09-23-02
Rev. Date: 10-25-02
Print Date: 2004-09-08

Parts List

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

CABINET & ACCESSORY PARTS

CABINET & ACCESSORY PARTS			
AC01	BACKCOVER f/43P8341/37, 43P8341A/37 (USA Model)	3135 014 10823	
AC02	CABINET BACK, UPPER.	3135 037 50021	
AC03	PIP FRAME.	3135 014 10062	
AC04	SUPPORT FRAME F/SSB.	3135 014 10321	
AC06	CHASSIS FRAME.	3135 014 09962	
AC07	LIGHT BARRIER.	3135 013 03731	
AC08	REAR JACK FRAME.	3135 014 09982	
AC09	FRONT ASM.	3135 017 06843	
AC10	BRACKET MIRROR MTG 43", (2 used)	3135 011 04611	
AC14	FRESNEL SCREEN, 43".	3135 014 10311	
AC15	LENTICULAR SCREEN, 43".	3135 014 10301	
AC16	PROTECTIVE FILTER SCREEN, 43".	3135 014 10022	
AC19	MIRROR ASM., 43".	3135 034 90011	
S AC23	Mains Cord (Special - Noise Filtered)	2422 070 98164	
AC25	Speakers, 4" x 6" Alt. (2 used).	2422 264 00425	
AC28	BRACKET SCREEN TOP, (2 used)	3135 011 04481	
AC29	BRACKET SCREEN SIDE, (2 used).	3135 011 04491	
AC30	BAFFLE SPEAKER GRILL	3135 017 06853	
AC31	NAMEPLATE.	3135 015 02511	
AC37	BUTTON ASSY.	3135 017 06982	
S CRTB	CRT, 180DLB22(B) (U) (HITJ) B, BLU	9322 121 33682	
S CRTG	CRT, 180DLB22(G) (MU) (HITJ) Y, GRN.	9322 155 29682	
S CRTR	CRT, 180DLB22(R) (HU) (HITJ) B, RED.	9322 121 31682	
S DEFL	DEFLECTION YOKE, DAV4284M (TSAJ) B, (3 used).	2422 549 44589	
S FG2	FOCUS/G2 CONTROL, 100M 15KV FMP-PTV Y	2322 460 90519	
LSVM	INDUCTOR, FIXED, SCAVEM DBV4305C (TSAJ).	2422 549 44797	
REMOTE	RC2015/01 Remote Control (Fighter +)	3128 147 12082	

CRT ASSEMBLY

CRT ASSEMBLY			
X1	SCREW, 8-32X0.5 TORX, (12 used), LENS TO COUPLER	3135 010 02971	
X10	COOLANT KIT.	4835 310 67032	
X11	SEAL, CRT, (3 used).	3135 013 02321	
X12	MOUNTING BRACKET, CRT, (3 used).	3135 011 02371	
X13	SPRING COMPRESSION, (12 used), CRT MT	3135 011 00611	
X14	SCREW, SHOULDER, (12 used), CRT TO COUPLER.	3135 010 08101	
X2	LENS DELTA 78, (2 used), GREEN & RED	3135 013 00822	
X2	LENS DELTA 77, FOR BLUE.	3135 013 01052	
X3	LENS C-ELEMENT DELTA-77, FOR GREEN	3135 013 01071	
X3	LENS C-ELEMENT DELTA-77, (2 used), RED & BLUE	3135 013 01081	
X4	SEAL, LENS, (3 used), LENS TO COUPLER	3135 013 02632	
X5	CAP, COUPLER, (3 used), DIAPHRAGM COVER.	3135 014 02681	
X6	DIAPHRAM COUPLER, (3 used)	3135 013 01061	
X7	SEAL, VENT PLUG, (3 used).	3135 013 01231	
X8	PLUG, VENT, (3 used)	3135 014 02641	
X9	COUPLER CRT-LENS, Green.	3135 011 04281	
X9	COUPLER, CRT-LENS 43", (2 used), RED & BLU.	3135 011 04473	
X15	CRT Anode Lead	4835 321 27397	

FCC FILTER PANEL ASSEMBLY

FCC FILTER PANEL ASSEMBLY			
0006	LINE HEATSINK A8, IS HS 0600	3139 121 61663	
0060	SILICON INSULATOR SP600, SIL PAD FOR 6000	3135 010 02351	
0061	IC-SPRING, CLIP FOR 6000	3135 011 02331	
S 1000	FUSE, 5A, 250V	2422 093 00035	
S 1004	FUSE, 1A, 250V	2422 093 00027	
1100	CONNECTOR, 8 PIN	2422 025 10648	
1108	CONNECTOR, 4 PIN	2422 025 15503	
1110	CONNECTOR, 1 PIN	2422 015 18552	
S 2000	CAPACITOR, MATELIZED POLYPROPYLENE, 2 75V, 680NF., 20%	2222 336 29149	
S 2002	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554 90173	
S 2003	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554 90173	
2004	SURGE PROTECTOR, DSP-501N-A21F	2422 549 42349	
S 2005	CAPACITOR, MATELIZED POLYPROPYLENE, 2 75V, 220NF., 20%	2222 336 29146	
2006	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2007	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2008	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2009	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2102	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554 90169	
2103	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554 90169	
2107	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	3198 019 61020	
S = Safety Part Be sure to use exact replacement part.			

2108	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	3198 019 61020	
2110	ELECTROLYTIC CAPACITOR, 200V, 470UF., 20%.	2020 021 91321	
2214	ELECTROLYTIC CAPACITOR, 250V, 10UF., 20%.	2020 012 93495	
S 3000	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242 13475	
S 3001	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242 13475	
S 3002	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242 13475	
3003	RESISTOR, CARBON COMP., 470R, 20%.	2120 103 90019	
3009	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322 253 41228	
3010	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322 253 41228	
S 3011	VARISTOR, DC 1MA/495V S MAX 850V	2322 595 90021	
S 3012	RESISTOR, METAL FILM, 1MEG, 5%	2322 242 13105	
3300	RESISTOR, METAL OXIDE, 5W, 22K, 5%	2322 257 41223	
S 5000	FILTER, MAINS, 8MH., 7A.	2422 549 44591	
S 5005	FILTER, MAINS, 80UH., 1.8A	2422 549 44041	
5103	FIXED INDUCTOR, 4.7UH., 5%	2422 535 94213	
S 5106	FILTER, MAINS, 80UH., 1.8A	2422 549 44041	
6000	DIODE BRIDGE RECTIFIER, GBU4JL-7002.	9322 132 55667	
6001	DIODE BRIDGE RECTIFIER, DF06M.	9338 118 70682	
9000	WIRE JUMPER, 0.58MM.	3198 036 90010	
9001	WIRE JUMPER, 0.58MM.	3198 036 90010	
9002	WIRE JUMPER, 0.58MM.	3198 036 90010	
9003	WIRE JUMPER, 0.58MM.	3198 036 90010	
9030	WIRE JUMPER, 0.58MM.	3198 036 90010	
9031	WIRE JUMPER, 0.58MM.	3198 036 90010	
9032	WIRE JUMPER, 0.58MM.	3198 036 90010	
9101	WIRE JUMPER, 0.58MM.	3198 036 90010	
9102	WIRE JUMPER, 0.58MM.	3198 036 90010	
CBA	FCC FILTER PANEL ASSEMBLY.	3135 017 05441	

CISPR FILTER PANEL ASSEMBLY

CISPR FILTER PANEL ASSEMBLY

LSB PANEL ASSEMBLY

LSB PANEL ASSEMBLY			
CBA	LSB PANEL ASSEMBLY	3135 037 10471	
0031	Heatsink, Vertical	3135 011 04591	
0033	Heatsink, T0220.	2422 487 89872	
0036	Heatsink, T0-220	3135 011 03291	
0038	Heatsink, T0-220	3135 011 03291	
0040	Heatsink, T0220.	2422 487 89872	
0043	Heatsink, T0220.	2422 487 89872	
0046	Heatsink, T0-220	3135 011 03291	
0056	IC-Spring.	3135 011 01511	
0057	Insulator, Mica.	3135 010 02911	
0058	Solder Terminal.	3135 010 02801	
0065	Heatsink, T0-92, Black Anodized.	3135 011 01871	
0066	Solder Terminal.	3135 010 02801	
0067	IC, Spring	3135 011 02331	
0068	Insulator.	3135 010 02351	
0069	Spring, Clip	3135 011 02621	
0070	Insulator.	3135 010 02341	
0080	Heatsink, T0-247	3135 011 00553	
0081	Solder Terminal.	3135 010 02801	
0082	IC-Spring.	3135 011 01512	
0083	Insulator.	3135 010 02321	
1201	Surge Protector.	2422 549 43675	
S 1300	Fuse/Clip, 5A, 250 V	2422 093 00035	
S 1302	Fuse, Radial, LT 4A, 250V.	2422 086 10786	
S 1305	Relay, 1 Pin, 5V, 5A, LKS1AF.	2422 132 07314	
1500	Connector, 8 Pin	2422 025 10648	
1504	Connector, 4 Pin	2422 025 16153	
1505	Connector, 4 Pin	2422 025 16153	
1506	Connector, 4 Pin	2422 025 16153	
1508	Connector, 3 Pin	2422 025 14409	
1510	Connector, 4 Pin	2422 025 12479	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1520	Connector, 12 Pin.	2422 025 08333	
1574	Connector, 1 Pin	2422 015 18552	
S 1800	Fuse, LT 1A, 250V.	2422 086 10779	
S 1801	Fuse, LT 1A, 250V.	2422 086 10779	
1901	Connector, 2 Pin	2412 020 00724	
S 2203	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169	
2206	Cap, 220u, 20%, 25v, Electrolytic.	2020 012 92641	
2208	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2210	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	
2211	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
2212	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2213	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2215	Cap, 220p, 10%, 1000v, Ceramic	2020 558 90424	
2216	Cap, 220p, 10%, 1000v, Ceramic	2020 558 90424	
2218	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	
2226	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019 22230	
2228	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2269	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2270	Cap, 100u, 20%, 25v, Electrolytic.	2020 012 92639	
2282	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	
2283	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	

2285	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	2825	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90555
2301	Cap, 1n5, 10%, 1000v, Ceramic . . .	2020 558 90443	2826	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2302	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471	2827	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2303	Cap, 100u, 20%, 25v, Electrolytic . . .	2020 012 92639	2828	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010
2304	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558 90554	2829	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010
2305	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019 14710	2836	Cap, 1n, 10%, 1000v, Ceramic . . .	2020 558 90557
2306	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025 51080	2837	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2307	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019 14720	2838	Cap, 1n, 10%, 1000v, Ceramic . . .	2020 558 90557
2308	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019 14720	2839	Cap, 18n, 5%, 630v, Polypropylene . .	2222 375 90218
2309	Cap, 82p, 5%, 50v, Ceramic . . .	3198 019 08290	2850	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90555
2310	Cap, 680p, 10%, 50v, Ceramic . . .	3198 019 16810	2851	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010
2311	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019 11020	2852	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2313	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	2853	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2314	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	2907	Cap, 100n, +80/-20%, 25v, Ceramic . .	3198 023 21040
2315	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	2908	Cap, 100n, +80/-20%, 25v, Ceramic . .	3198 023 21040
2316	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2909	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 017 04720
2317	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2910	Cap, 10n, 10%, 50v, Ceramic . . .	3198 017 01030
2318	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2911	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2319	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	2912	Cap, 220u, 20%, 35v, Electrolytic . . .	2020 012 93462
2320	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2913	Cap, 220u, 20%, 35v, Electrolytic . . .	2020 012 93462
2321	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2914	Cap, 100n, 10%, 16v, Ceramic . . .	3198 017 01040
2322	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2915	Cap, 100n, +80/-20%, 25v, Ceramic . .	3198 023 21040
2323	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	2916	Cap, 10n, 10%, 50v, Polyester . . .	2020 300 90573
2324	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374	2917	Cap, 100n, 10%, 250v, Metalized Polye	ster 2222 368 90177
2325	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2918	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
2326	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2919	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 017 04720
2327	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374	2922	Cap, 330u, 20%, 200v, Electrolytic . .	2020 024 90586
2328	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025 51080	3216	Res, 10 ohm, 5%, 1/3W, Metal Film . .	2322 205 33109
2329	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	3223	Res, 47 ohm, 5%, 1/10W, Metalized Gla	ss. 3198 021 54790
2330	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	3230	Res, 1K5, 5%, 1/6W, Carbon Film . . .	3198 011 01520
2331	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3231	Res, 220 ohm, 5%, 2 1/2W, Metal Film	3198 012 32210
2332	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	3232	Res, 22 ohm, 5%, 2 1/2W, Metal Film .	3198 012 32290
2333	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 019 12220	3239	Res, 2K4, 1%, 3/5W, Metal Film . . .	2322 156 22402
2334	Cap, 33n, 10%, 50v, Polyester . . .	3198 014 03330	3240	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2335	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	3244	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
2338	Cap, 1000u, 20%, 25v, Electrolytic . .	2020 012 93458	3245	Res, 1K, 5%, 1/10W, Metalized Glass .	3198 021 51020
2339	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3246	Res, 820 ohm, 5%, 1/6W, Carbon Film .	3198 011 08210
2340	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	3287	Res, 470 ohm, 5%, 1/6W, Carbon Film .	3198 011 04710
2341	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3301	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322 251 41339
2342	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019 14710	3302	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322 251 41339
2343	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019 11020	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2344	Cap, 1000u, 20%, 25v, Electrolytic . .	2020 012 93458	3304	Res, 1K, 5%, 1/10W, Metalized Glass .	3198 021 51020
2345	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	3305	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198 011 01030
2346	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla	ss. 3198 021 51590
2349	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	3307	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198 011 04780
2351	Cap, 22n, +80/-20%, 50v, Ceramic . . .	3198 019 22230	3308	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198 012 21070
2352	Cap, 1000u, 20%, 25v, Electrolytic . .	2020 012 93458	3309	Res, 0R33, 5%, 1 1/3W, Metal Film . .	3198 012 23370
2353	Cap, 220p, 10%, 50v, Ceramic . . .	3198 019 12210	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film .	3198 011 03910
2354	Cap, 220u, 20%, 25v, Electrolytic . .	3198 025 32210	3311	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198 011 04780
2355	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019 14710	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film . .	3198 011 07590
2356	Cap, 470u, 20%, 35v, Electrolytic . . .	2020 021 91376	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2452	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 012 92648	3314	Res, 82K, 5%, 1/6W, Carbon Film . . .	3198 011 08230
2501	Cap, 470n, 10%, 50v, Polyester . . .	3198 014 04740	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2503	Cap, 680p, 10%, 500v, Ceramic . . .	2020 557 90441	3316	Res, 1K, 5%, 1/10W, Metalized Glass .	3198 021 51020
2511	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3317	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2513	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2514	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2516	Cap, 150p, 10%, 500v, Ceramic . . .	3198 019 41510	3322	Res, Trimer, 470R	2120 368 90118
2556	Cap, 10n, 10%, 50v, Ceramic . . .	3198 017 01030	3323	Res, 2K7, 5%, 1W, Metal Film	2120 105 93474
2557	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010	3324	Res, 100K, 5%, 1W, Metal Film	3198 012 11040
2558	Cap, 68n, 10%, 100v, Polyester . . .	2222 347 90235	3325	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198 011 01030
2559	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2564	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016 01020	3327	Res, 100 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 51010
2565	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3328	Res, 100 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 51010
2567	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 53310
2570	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3333	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198 012 21070
2571	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016 01020	3334	Res, 1K, 5%, 1/10W, Metalized Glass .	3198 021 51020
2572	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 017 02220	3335	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2573	Cap, 470p, 10%, 50v, Ceramic . . .	2020 552 91152	3336	Res, 100 ohm, 5%, 1/6W, Carbon Film .	3198 011 01010
2574	Cap, 680n, 10%, 50v, Polyester . . .	3198 014 06840	3337	Res, 390 ohm, 5%, 1/6W, Carbon Film .	3198 011 03910
2586	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3339	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2608	Cap, 680p, 10%, 500v, Ceramic . . .	3198 019 46810	3340	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
2805	Cap, 100n, 10%, 250v, Metalized Polye	ster 2222 368 90177	3343	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2806	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557 90438	3344	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2807	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040	3347	Res, 4K7, 5%, 1/6W, Carbon Film . . .	3198 011 04720
2809	Cap, 100n, 10%, 250v, Metalized Polye	ster 2222 368 90177	3350	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
2810	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	3351	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
2811	Cap, 330p, 10%, 2000v, Ceramic . . .	2020 558 90481	3352	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
2814	Cap, 68u, 20%, 400v, Electrolytic . . .	2020 024 90587	3353	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
2815	Cap, 1n, 10%, 500v, Ceramic . . .	3198 019 41020	3452	Res, 1R5, 5%, 1 1/3W, Metal Film . . .	3198 012 21580
2816	Cap, 18n, 5%, 630v, Polypropylene . .	2222 375 90218	3456	Res, 270 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 52710
2817	Cap, 11n, 5%, 1600v, Polypropylene . .	2222 375 90155	3457	Res, 2K2, 5%, 1/6W, Carbon Film . . .	3198 011 02220
2818	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557 90438	3458	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2819	Cap, 18n, 5%, 630v, Polypropylene . .	2222 375 90218	3500	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2820	Cap, 4u7, 10%, 100v, Metalized Polyes	ter 2222 368 90178	3501	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2822	Cap, 430n, 5%, 250v, Metalized Polypyr	opylene 2222 479 90022			
2823	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040			
2824	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90555			

3503	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3968	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3504	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3969	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3505	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	3975	Res, 100 ohm, 5%, 1/3W, Metal Film.	2322 205 33101
3506	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3983	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3507	Res, 47K, 5%, 1/6W, Carbon Film.	3198 011 04730	3990	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3508	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3991	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3509	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3992	Res, 470K, 5%, 1/6W, Carbon Film.	3198 011 04740
3510	Res, 470K, 5%, 1/6W, Carbon Film.	3198 011 04740	5201	Filter, Mains, 100UH, 2A2.	2422 549 44101
3511	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5202	Transformer, Layer, S229B3-01 Y.	2422 531 98038
3550	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002	5234	Coil, 10u.	2422 535 95363
3551	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002	5235	Coil, 10u.	2422 535 95363
3562	Res, 4R7, 5%, 1W, Metal Film.	3198 012 14780	5238	Coil, 10u.	2422 535 95363
3563	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	5239	Coil, 10u.	2422 535 95363
3565	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	5300	Transformer, Layer, S549C1-04 B.	2422 531 02439
3571	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5301	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3572	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5302	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3573	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5303	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3581	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5304	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3584	Res, 1 ohm, 5%, 3W, Wire Wound.	2122 251 01385	5305	Coil, 10u.	2422 535 95363
3585	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	5306	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3590	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	5307	Coil, 10u.	2422 535 95363
3591	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5308	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3592	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5309	Coil, 10u.	2422 535 95363
3593	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	5310	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3595	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	5311	Coil, 10u.	2422 535 95363
3596	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5312	Coil, 10u.	2422 535 95363
3597	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5313	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3598	Res, 100 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51010	5314	Coil, 10u.	2422 535 95363
3800	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5315	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3801	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	5316	Coil, 10u.	2422 535 95363
3802	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	5317	Coil, 10u.	2422 535 95363
3803	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5318	Coil, 680u.	2422 536 00103
3805	Res, 100 ohm, 5%, 1W, Metal Film.	2120 105 93394	5319	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3806	Res, 10K, 5%, 1W, Metal Film.	2120 105 93407	5320	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3807	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5321	Coil, 3u3.	2422 535 94373
3808	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	5322	Coil, 10u.	2422 535 95363
3809	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5800	Transformer, Signal Driver, C925-01 Y.	2422 535 91022
3810	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5801	Transformer, Layer, S409C3-02 B.	2422 531 02438
3811	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5802	Transformer, Signal, W8073-001 Y.	2422 531 02434
3812	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	5803	Coil, 485u.	2422 536 00079
3813	Res, 1 ohm, 5%, 2W, Metal Film.	2120 106 90572	5804	Coil, 40u.	2422 536 00078
3814	Res, 33 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53390	5805	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3815	Res, 0R27, 5%, 1/2W, Metal Film.	2322 207 90048	5806	Coil, 47u.	2422 535 95282
3816	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	5807	Coil, 22u.	3198 018 72290
3817	Res, 0R27, 5%, 1/2W, Metal Film.	2322 207 90048	5810	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3820	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	5811	Coil, 10u.	2422 535 95363
3821	Res, 470 ohm, 5%, 1W, Metal Film.	2120 105 93398	5812	Coil, 10u.	2422 535 95363
3822	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	5900	High Voltage Generator	3122 268 32865
3823	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	5904	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3824	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	6200	Diode, P4KE550.	9322 141 04673
3825	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	6201	Zener Diode, 8.2 volt.	3198 010 28280
3826	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	6204	Diode, Rect, BYV10-40.	9337 432 70133
3828	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	6205	IC, TL431BCLP.	9322 115 98676
3829	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6207	Diode, Rect, BYD33D.	9337 234 00133
3830	Res, 470 ohm, 5%, 1W, Metal Film.	2120 105 93398	6231	Diode, Rect, BYV10-40.	9337 432 70133
3834	Res, 1 ohm, 5%, 1/3W, Metal Film.	2322 205 33108	6235	Diode, Rect, BYD33D.	9337 234 00133
3835	Res, 2K7, 5%, 1/6W, Carbon Film.	3198 011 02720	6301	Diode, Rect, BYD33J.	9337 234 20133
3837	Res, 12K, 5%, 1/6W, Carbon Film.	3198 011 01230	6302	Diode, Rect, 1N5062.	3198 010 10120
3838	Res, 1K5, 5%, 1/6W, Carbon Film.	3198 011 01520	6303	Diode, Rect, 1N5062.	3198 010 10120
3839	Res, 300K, 5%, 2 1/2W, Metal Film.	2322 195 63304	6306	Diode, Rect, BY229X-600.	9340 380 20127
3840	Res, 1M, 5%, 1/2W, Metalized Glass.	2322 242 13105	6307	Diode, Rect, BY229X-600.	9340 380 20127
3841	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	6308	Diode, Rect, BY229X-600.	9340 380 20127
3865	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	6312	Diode, Rect, SB360L-7003.	9322 128 68682
3866	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	6313	Diode, Signal, 1N4148.	9330 839 90133
3867	Res, 1 ohm, 5%, 1/3W, Metal Film.	2322 205 33108	6500	Zener Diode, 10 volt.	9340 386 80115
3890	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6501	Diode, Signal, BAS316.	3198 010 10630
3891	Res, 6K8, 5%, 1W, Metal Film.	3198 012 16820	6502	Diode, Signal, BAS316.	3198 010 10630
3900	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	6503	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6504	Diode, Rect, BYD33D.	9337 234 00133
3902	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	6505	Zener Diode, 4.7 volt.	3198 010 24780
3903	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	6550	Diode, Rect, BYV27-200.	9335 526 80133
3904	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6551	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 4R7, 5%, 5W, Wire Wound.	2322 251 41478	6552	Zener Diode, 4.7 volt.	3198 010 24780
3907	Res, 2K, 1%, 1/8W, Metalized Glass.	2322 734 62002	6801	Diode, Rect, BYD33J.	9337 234 20133
3909	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	6802	Diode, Rect, BYV27-200.	9335 526 80133
3911	Res, 100 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51010	6803	Diode, Rect, BYV27-200.	9335 526 80133
3912	Res, 100 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51010	6806	Diode, Rect, BY228/24.	9340 559 50112
3913	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	6807	Diode, Rect, BYD33M.	9337 410 30133
3914	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090	6808	Diode, Rect, BYW95C.	9335 001 50133
3917	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	6809	Diode, Signal, BAS316.	3198 010 10630
3918	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6810	Diode, Signal, BAS316.	3198 010 10630
3940	Res, 3K3, 1%, 3/5W, Metal Film.	2322 156 23302	6830	Diode, Rect, BYD33M.	9337 410 30133
3941	Res, 10K, 1%, 3/5W, Metal Film.	2322 156 21003	6850	Diode, Rect, BYD33J.	9337 234 20133
3942	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	6900	Diode, Signal, BAS316.	3198 010 10630
3959	Res, 1K, 5%, 1/4W, Carbon Film.	2120 101 74102	6905	Diode, Signal, BAS316.	3198 010 10630
3960	Res, 100 ohm, 5%, 1/3W, Metal Film.	2322 205 33101	6907	Diode, Signal, BAS316.	3198 010 10630
3967	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710	6910	Diode, Signal, BAS316.	3198 010 10630
			6911	Diode, Signal, BAS316.	3198 010 10630
			6912	Diode, Signal, BAS316.	3198 010 10630
			6919	Zener Diode, 27 volt.	3198 010 52790

S = Safety Part Be sure to use exact replacement part.

6920	Diode, Signal, BAS316.	3198 010 10630	0123	Heatsink, Folded	3135 011 04555
6921	Diode, Signal, BAS316.	3198 010 10630	0139	IC, Spring	3135 011 02331
6922	Diode, Signal, BAS316.	3198 010 10630	0200	Heatsink, T0-220	3135 011 02511
6950	Zener Diode, 4.7 volt.	3198 010 24780	0201	Heatsink, T0-220	3135 011 02511
6951	Diode, Signal, BAS316.	3198 010 10630	1000	Connector, 5 Pin	2422 025 12481
7208	Transistor, NPN, BC547B.	3198 020 40030	1001	Connector, 10 Pin	2422 025 12484
7209	IC, MC34064P-5	9322 066 44676	1002	Connector, 3 Pin	2412 020 00725
7211	IC, TOP221P	9322 125 16682	1003	Connector, 3 Pin	2422 025 09191
7213	Optic Coupler, CQY80NG	9338 941 50682	1005	Connector, 2 Pin	2412 020 00724
7300	Transistor, NPN, BC547B.	3198 020 40030	1009	Connector, 2 Pin	2412 020 00724
7301	F.E.T., Power, STW20NB50	9322 131 15687	1014	Connector, 7 Pin	2422 025 11244
7302	IC, MC44603AP.	9322 108 36682	1015	Connector, 1 Pin	2422 015 18552
7303	Optic Coupler, CQY80NG	9338 941 50682	1017	Connector, 12 Pin	2422 025 08333
7304	IC, TL431BCLP.	9322 115 98676	1018	Connector, 12 Pin	2422 025 08333
7307	IC, MC34063AP1	9322 036 71682	1020	Connector, 12 Pin	2422 025 08333
7308	F.E.T., Power, IRF9224N.	9322 134 76687	1023	Connector, 1 Pin	2422 015 18552
7309	Transistor, NPN, BC547B.	3198 020 40030	1026	Connector, SIMM, 80 Pin	2422 025 16599
7500	Transistor, PNP, BC807-25.	3198 010 43130	1036	Connector, 3 Pin	2412 020 00725
7501	Transistor, PNP, BC807-25.	3198 010 43130	1037	Connector, 1 Pin	2422 015 18552
7550	IC, TDA4861/V3	9352 018 80112	1044	Connector, 3 Pin	2412 020 00725
7551	Transistor, NPN, BC847B.	3198 010 42030	1049	Connector, 5 Pin	2422 025 15832
7552	Transistor, PNP, TIP42C.	9336 594 40687	1072	Connector, 3 Pin	2412 020 00725
7553	Transistor, NPN, BC847B.	3198 010 42030	1073	Connector, 4 Pin	2422 025 12479
7590	Transistor, NPN, BC847B.	3198 010 42030	1074	Connector, 4 Pin	2422 025 12479
7800	Transistor, NPN, BC847B.	3198 010 42030	1083	Connector, 10 Pin	2422 025 12484
7801	Transistor, NPN, 2SC2482	9322 103 07678	1084	Connector, 10 Pin	2422 025 12484
7802	Transistor, NPN, BU4515AF.	9340 550 93127	1262	Socket, Cinch, 12 Pin	2422 026 05064
7803	Transistor, PNP, BC557B.	3198 020 40110	1264	Socket, MDIN, 10 Pin	2422 026 04926
7830	Transistor, NPN, 2SC3675	9322 122 57687	1301	Tuner, V+U, PLL	2422 542 90108
7905	Transistor, NPN, BC547B.	3198 020 40030	S 1910	Fuse, 2 A, 250V IEC.	2422 086 10783
7906	Transistor, NPN, BC817-25.	3198 010 43230	S 1911	Fuse, LT 4A, 250V IEC.	2422 086 10786
7907	Transistor, PNP, BC807-25.	3198 010 43130	S 1912	Fuse, LT 4A, 250V IEC.	2422 086 10786
7908	Transistor, NPN, BC817-25.	3198 010 43230	1913	Connector, 4 Pin	2422 025 12479
7909	Transistor, PNP, BC807-25.	3198 010 43130	2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
7910	Transistor, PNP, BC557B.	3198 020 40110	2001	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9101	Wire Jumper, 0.58MM.	3198 036 90010	2002	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
9102	Wire Jumper, 0.58MM.	3198 036 90010	2003	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
9104	Wire Jumper, 0.58MM.	3198 036 90010	2004	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
9105	Wire Jumper, 0.58MM.	3198 036 90010	2005	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9106	Wire Jumper, 0.58MM.	3198 036 90010	2006	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9107	Wire Jumper, 0.58MM.	3198 036 90010	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9108	Wire Jumper, 0.58MM.	3198 036 90010	2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9109	Wire Jumper, 0.58MM.	3198 036 90010	2009	Cap, 330p, 10%, 50v, Ceramic.	3198 019 13310
9110	Wire Jumper, 0.58MM.	3198 036 90010	2010	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
9111	Wire Jumper, 0.58MM.	3198 036 90010	2011	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9112	Wire Jumper, 0.58MM.	3198 036 90010	2012	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
9113	Wire Jumper, 0.58MM.	3198 036 90010	2013	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
9114	Wire Jumper, 0.58MM.	3198 036 90010	2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9115	Wire Jumper, 0.58MM.	3198 036 90010	2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9116	Wire Jumper, 0.58MM.	3198 036 90010	2016	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9117	Wire Jumper, 0.58MM.	3198 036 90010	2017	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9119	Wire Jumper, 0.58MM.	3198 036 90010	2018	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
9120	Wire Jumper, 0.58MM.	3198 036 90010	2019	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9123	Wire Jumper, 0.58MM.	3198 036 90010	2020	Cap, 27p, 5%, 50v, Ceramic.	3198 016 02790
9124	Wire Jumper, 0.58MM.	3198 036 90010	2021	Cap, 27p, 5%, 50v, Ceramic.	3198 016 02790
9127	Wire Jumper, 0.58MM.	3198 036 90010	2022	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9128	Wire Jumper, 0.58MM.	3198 036 90010	2023	Cap, 27p, 5%, 50v, Ceramic.	3198 016 02790
9129	Wire Jumper, 0.58MM.	3198 036 90010	2024	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9130	Wire Jumper, 0.58MM.	3198 036 90010	2025	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9131	Wire Jumper, 0.58MM.	3198 036 90010	2026	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9132	Wire Jumper, 0.58MM.	3198 036 90010	2027	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9133	Wire Jumper, 0.58MM.	3198 036 90010	2028	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9134	Wire Jumper, 0.58MM.	3198 036 90010	2029	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9136	Wire Jumper, 0.58MM.	3198 036 90010	2030	Cap, 10u, 20%, 16v, Electrolytic.	3198 028 21090
9137	Wire Jumper, 0.58MM.	3198 036 90010	2031	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9139	Wire Jumper, 0.58MM.	3198 036 90010	2032	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
9140	Wire Jumper, 0.58MM.	3198 036 90010	2034	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
9142	Wire Jumper, 0.58MM.	3198 036 90010	2035	Cap, 10u, 20%, 16v, Electrolytic.	3198 028 21090
9143	Wire Jumper, 0.58MM.	3198 036 90010	2036	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9144	Wire Jumper, 0.58MM.	3198 036 90010	2037	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
9145	Wire Jumper, 0.58MM.	3198 036 90010	2040	Cap, 10u, 20%, 16v, Electrolytic.	3198 028 21090
9146	Wire Jumper, 0.58MM.	3198 036 90010	2041	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9147	Wire Jumper, 0.58MM.	3198 036 90010	2042	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
9148	Wire Jumper, 0.58MM.	3198 036 90010	2043	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
9149	Wire Jumper, 0.58MM.	3198 036 90010	2044	Cap, 1000u, 20%, 50v, Electrolytic.	3198 026 51020
9150	Wire Jumper, 0.58MM.	3198 036 90010	2046	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9152	Wire Jumper, 0.58MM.	3198 036 90010	2049	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9153	Wire Jumper, 0.58MM.	3198 036 90010	2050	Cap, 1000u, 20%, 50v, Electrolytic.	3198 026 51020
9154	Wire Jumper, 0.58MM.	3198 036 90010	2052	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
9901	Wire Jumper, 0.58MM.	3198 036 90010	2053	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010
9902	Wire Jumper, 0.58MM.	3198 036 90010	2054	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010
			2055	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040
			2056	Cap, 1000u, 20%, 50v, Electrolytic.	3198 026 51020
			2058	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
			2061	Cap, 4u7, 20%, 50v, Electrolytic.	3198 025 54780
			2062	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
			2063	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
			2064	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
			2065	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
			2066	Cap, 47u, 20%, 25v, Electrolytic.	3198 025 34790
			2067	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
			2068	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040

SSM PANEL ASSEMBLY

CBA	SSM PANEL ASSEMBLY , NAFTA, FIGHTER +	3135 037 10441
0001	Shield, Top	3135 011 02252
0002	Shield, Bottom	3135 011 01892
0009	Heatsink, T0-220	3135 011 03291
0010	Heatsink, T0-220	3135 011 03291
0012	Heatsink, Folded	3135 011 04555
0072	Spring, Clip, Horiz.	3135 011 04572
0082	Spring, Clip, Horiz.	3135 011 04572

S = Safety Part Be sure to use exact replacement part.

2069	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010	2510	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
2070	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010	2511	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
2071	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	2512	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020
2072	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2513	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2073	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2514	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020
2074	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2516	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2075	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2600	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2076	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2601	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2077	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2078	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2604	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2079	Cap, 330n, +80/-20%, 25v, Ceramic . . .	2222 910 19856	2605	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2080	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	2606	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2082	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2607	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2608	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2203	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2609	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2206	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2610	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2208	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2611	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2211	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2612	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2217	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2613	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2219	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2616	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2224	Cap, 100n, +80/-20%, 50v, Ceramic . . .	2020 552 95499	2617	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2227	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2618	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2228	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2229	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2620	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2230	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2621	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2231	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2622	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2233	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2623	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2239	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2624	Cap, 56p, 5%, 50v, Ceramic	3198 016 05690
2242	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2625	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2244	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2626	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2249	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2627	Cap, 56p, 5%, 50v, Ceramic	3198 016 05690
2250	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	2629	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2251	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2630	Cap, 56p, 5%, 50v, Ceramic	3198 016 05690
2252	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2631	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2255	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	2632	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
2260	Cap, 100n, +80/-20%, 50v, Ceramic . . .	2020 552 95499	2633	Cap, 220p, 5%, 50v, Ceramic	3198 016 02210
2300	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2634	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
2301	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2704	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2302	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	2705	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2303	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2717	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2304	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590	2718	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2305	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730	2719	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2306	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	2720	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2307	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730	2721	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2308	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2723	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2310	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	2724	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2311	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	2725	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2312	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710	2726	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2313	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050	2727	Cap, 47n, +80/-20%, 50v, Ceramic	3198 017 24730
2317	Cap, 560p, 5%, 50v, Ceramic	2020 552 93609	2764	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2318	Cap, 560p, 5%, 50v, Ceramic	2020 552 93609	3000	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2319	Cap, 560p, 5%, 50v, Ceramic	2020 552 93609	3001	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2320	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720	3002	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2366	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	3003	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2401	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3004	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2402	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3005	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
2403	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3006	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2405	Cap, 470u, 20%, 35v, Electrolytic	3198 026 44710	3007	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
2406	Cap, 100n, +80/-20%, 50v, Ceramic . . .	2020 552 95499		ass.	3198 021 51010
2407	Cap, 2u2, 20%, 50v, Electrolytic	3198 026 52220	3008	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2410	Cap, 470u, 20%, 35v, Electrolytic	3198 026 44710	3009	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2411	Cap, 470n, +80/-20%, 16v, Ceramic . . .	2020 552 95343	3010	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
2412	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3011	Res, 33K, 5%, 1/10W, Metalized Glass . .	3198 021 53330
2413	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3012	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2414	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020	3013	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
2415	Cap, 6n8, 10%, 50v, Ceramic	3198 017 06820	3014	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
2416	Cap, 6n8, 10%, 50v, Ceramic	3198 017 06820	3015	Res, 220 ohm, 5%, 1/10W, Metalized Gl	
2417	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020		ass.	3198 021 52210
2418	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3016	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2419	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3017	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2322 205 33101
2420	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3018	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2421	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3019	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
2422	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3020	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2423	Cap, 470n, +80/-20%, 16v, Ceramic . . .	2020 552 95343	3021	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2430	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3022	Res, 1K3, 5%, 1/8W, Metalized Glass . . .	2322 730 81132
2431	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3023	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
2432	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3024	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2322 205 33101
2433	Cap, 100n, 10%, 63v, Metalized Polyes		3025	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198 021 52220
2434	ter.	2222 365 75104	3026	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198 021 51020
	Cap, 100n, 10%, 63v, Metalized Polyes		3027	Res, 6K8, 5%, 1/10W, Metalized Glass . .	3198 021 56820
	ter.	2222 365 75104	3028	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198 021 51020
2435	Cap, 10u, 20%, 100v, Electrolytic	3198 025 71090	3030	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2443	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	3031	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198 021 52220
2467	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3032	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2500	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	3033	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2503	Cap, 33p, 5%, 50v, Ceramic	3198 016 03390	3034	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720
2504	Cap, 150p, 5%, 50v, Ceramic	3198 016 01510	3035	Res, 1K6, 1%, 1/8W, Metalized Glass . . .	2322 734 61602
2505	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	3036	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320
2506	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040	3037	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320
2507	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	3038	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2508	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040	3039	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
2509	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790		ass.	3198 021 51010

S = Safety Part Be sure to use exact replacement part.

3040	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322 730 81132	3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3041	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010	3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3042	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3125	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3043	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322 734 61602	3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3044	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3201	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3046	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3202	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3047	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3203	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3048	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3204	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3049	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3206	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3050	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3207	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3051	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3208	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3052	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3209	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3053	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3210	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3054	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3211	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3055	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3212	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3056	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3216	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3057	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3217	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3058	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3218	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3059	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3219	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3060	Res, 15 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31590	3220	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3061	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3221	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3062	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3222	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3063	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3223	Res, 68 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 56890
3064	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3065	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3066	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3226	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3067	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3227	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3068	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3233	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3069	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3234	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3070	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3235	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3071	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3236	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3072	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3237	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3073	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3238	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3074	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3239	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3075	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3240	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3076	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3241	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3077	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3242	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3078	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3243	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3079	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3244	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3080	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3247	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3081	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	3248	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3082	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210	3249	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3083	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710	3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3084	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3252	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3085	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3260	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3086	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3300	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3087	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3301	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3088	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3302	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3089	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3303	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3304	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3097	Res, 1K, 5%, 2 1/2W, Metal Film. . .	3198 012 31020	3307	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3098	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3308	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3099	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3309	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3310	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3101	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3103	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3318	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3104	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3332	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3105	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3333	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3106	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3107	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3335	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3108	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3336	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3337	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	3338	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3111	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3112	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3340	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3113	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3341	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3114	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3342	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3115	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3343	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3344	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3117	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3119	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			

3403	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3608	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3404	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530		ass.	3198 021 51020
3405	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3609	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 54720
3406	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3610	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 55620
3407	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	3611	Res, 5K6, 5%, 1/10W, Metalized Glass	
3408	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3612	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3409	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530		ass.	3198 021 51020
3410	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3613	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 51820
3412	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	3614	Res, 1K8, 5%, 1/10W, Metalized Glass	
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3615	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3416	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220		ass.	3198 021 51010
3418	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	3616	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		ass.	3198 021 52710
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	3617	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3422	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720		ass.	3198 021 51010
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3618	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3424	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		ass.	3198 021 53910
3425	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	3619	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 56890
3427	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090		ass.	3198 021 58210
3428	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3620	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56820
	ss.	3198 021 51020	3621	Res, 820 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3430	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 52220
3431	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3622	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 51010
3432	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3623	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 51020
3433	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930		ass.	3198 021 55610
3434	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3624	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 51010
3435	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3625	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51020
3445	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530		ass.	3198 021 55610
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3626	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3450	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3627	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3451	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504		ass.	3198 021 55610
3452	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3628	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3453	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930		ass.	3198 021 51090
3500	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3629	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51020
3501	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		ss.	3198 021 53310
3502	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710	3630	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51010
	ass.	3198 021 57590	3631	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3503	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590		ass.	3198 021 51010
	ss.	3198 021 57590	3632	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3504	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590		ass.	3198 021 51010
	ss.	3198 021 52290	3633	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 53910
	ss.	3198 021 52290	3634	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 51090
	ss.	3198 021 53320	3635	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3507	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910		ass.	3198 021 53320
	ass.	3198 021 51010	3636	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3508	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 54720		ass.	3198 021 52220
3509	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 54720	3637	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53310
	ass.	3198 021 52290	3638	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 51090
3511	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010		ass.	3198 021 51090
	ass.	3198 021 52290	3639	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 51090
3512	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 52290	3640	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 51090
3513	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 51090
	ss.	3198 021 52290	3641	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51050
3514	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ss.	3198 021 51020
	ss.	3198 021 56890	3642	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51020
3515	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3643	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 52220
3516	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3645	Res, 1K, 5%, 1/10W, Metalized Glass.	
	ss.	3198 021 52290	3647	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52710
3517	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3648	Res, 270 ohm, 5%, 1/10W, Metalized Gl	2322 205 33108
	ss.	3198 021 51220		ass.	2322 205 33108
3518	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3650	Res, 1 ohm, 5%, 1/3W, Metal Film . .	
3519	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3651	Res, 1 ohm, 5%, 1/3W, Metal Film . .	3198 021 51090
3520	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3652	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3521	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230		ss.	3198 021 51090
3522	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3653	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3523	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620		ss.	3198 021 51090
3524	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3654	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3525	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090		ss.	3198 021 53920
	ss.	2322 205 33109	3655	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 51220
3527	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109	3656	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 56830
3528	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3657	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 52230
	ass.	3198 021 56810	3658	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 51040
3529	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810	3659	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 58230
	ass.	3198 021 55610	3660	Res, 82K, 5%, 1/10W, Metalized Glass	3198 011 01020
3600	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3661	Res, 1K, 5%, 1/6W, Carbon Film . . .	
	ass.	3198 021 53320	3663	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3601	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 51030
3602	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3664	Res, 10K, 5%, 1/10W, Metalized Glass	
3603	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3665	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810
	ass.	3198 021 52710		ass.	3198 021 51030
3604	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3666	Res, 10K, 5%, 1/10W, Metalized Glass	
	ass.	3198 021 51010	3667	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3605	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010		ass.	3198 021 52210
	ass.	3198 021 53910	3669	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 011 01020
3606	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910		ass.	
	ass.	3198 021 56890	3670	Res, 1K, 5%, 1/6W, Carbon Film . . .	
3607	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3698	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
	ss.			ss.	2322 205 33109
			3712	Res, 10 ohm, 5%, 1/3W, Metal Film. .	

S = Safety Part Be sure to use exact replacement part.

S = Safety Part Be sure to use exact replacement part.

9509	Wire Jumper, 0.58MM.	3198 036 90010	1057	CRYSTAL RESONATOR, 12MHZ 20P DSX840.	2422 543 01095
9510	Wire Jumper, 0.58MM.	3198 036 90010	1327	CRYSTAL RESONATOR, 12MHZ 20P DSX840.	2422 543 01095
9511	Wire Jumper, 0.58MM.	3198 036 90010	1333	CERAMIC FILTER, 4.5MHZ, TPSCC*MB BS.	2422 549 44043
9512	Wire Jumper, 0.58MM.	3198 036 90010	1451	SAW FILTER, 45.75MHZ., 0FWM1967L	2422 549 44377
9513	Wire Jumper, 0.58MM.	3198 036 90010	1630	CRYSTAL RESONATOR, 18M432 12P DSX840	2422 543 01059
9514	Wire Jumper, 0.58MM.	3198 036 90010	2010	CAPACITOR, NP0, 25V, 820PF.	3198 016 38210
9515	Wire Jumper, 0.58MM.	3198 036 90010	2014	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9516	Wire Jumper, 0.58MM.	3198 036 90010	2015	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9517	Wire Jumper, 0.58MM.	3198 036 90010	2016	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9519	Wire Jumper, 0.58MM.	3198 036 90010	2017	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9520	Wire Jumper, 0.58MM.	3198 036 90010	2018	CAPACITOR, X7R, 50V, 2.2NF.	3198 017 32220
9521	Wire Jumper, 0.58MM.	3198 036 90010	2041	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290
9522	Wire Jumper, 0.58MM.	3198 036 90010	2042	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290
9523	Wire Jumper, 0.58MM.	3198 036 90010	2043	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780
9524	Wire Jumper, 0.58MM.	3198 036 90010	2044	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9525	Wire Jumper, 0.58MM.	3198 036 90010	2045	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890
9530	Wire Jumper, 0.58MM.	3198 036 90010	2046	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890
9531	Wire Jumper, 0.58MM.	3198 036 90010	2049	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9533	Wire Jumper, 0.58MM.	3198 036 90010	2050	CAPACITOR, NP0, 50V, 100PF.	3198 016 31010
9534	Wire Jumper, 0.58MM.	3198 036 90010	2051	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9536	Wire Jumper, 0.58MM.	3198 036 90010	2053	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9538	Wire Jumper, 0.58MM.	3198 036 90010	2301	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9539	Wire Jumper, 0.58MM.	3198 036 90010	2302	CAPACITOR, NP0, 50V, 330PF.	3198 016 33310
9545	Wire Jumper, 0.58MM.	3198 036 90010	2303	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720
9548	Wire Jumper, 0.58MM.	3198 036 90010	2306	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9549	Wire Jumper, 0.58MM.	3198 036 90010	2309	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9550	Wire Jumper, 0.58MM.	3198 036 90010	2311	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9551	Wire Jumper, 0.58MM.	3198 036 90010	2312	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9552	Wire Jumper, 0.58MM.	3198 036 90010	2313	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9553	Wire Jumper, 0.58MM.	3198 036 90010	2314	CAPACITOR, PPS, 16V, 100NF., 5%.	2020 319 90005
9555	Wire Jumper, 0.58MM.	3198 036 90010	2316	CAPACITOR, X7R, 25V 22NF.	3198 017 32230
9556	Wire Jumper, 0.58MM.	3198 036 90010	2317	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9557	Wire Jumper, 0.58MM.	3198 036 90010	2319	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9558	Wire Jumper, 0.58MM.	3198 036 90010	2321	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720
9559	Wire Jumper, 0.58MM.	3198 036 90010	2322	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9560	Wire Jumper, 0.58MM.	3198 036 90010	2323	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9561	Wire Jumper, 0.58MM.	3198 036 90010	2324	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9563	Wire Jumper, 0.58MM.	3198 036 90010	2325	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9564	Wire Jumper, 0.58MM.	3198 036 90010	2326	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9565	Wire Jumper, 0.58MM.	3198 036 90010	2327	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9566	Wire Jumper, 0.58MM.	3198 036 90010	2328	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9567	Wire Jumper, 0.58MM.	3198 036 90010	2332	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9568	Wire Jumper, 0.58MM.	3198 036 90010	2333	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9569	Wire Jumper, 0.58MM.	3198 036 90010	2334	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9570	Wire Jumper, 0.58MM.	3198 036 90010	2335	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9571	Wire Jumper, 0.58MM.	3198 036 90010	2338	CAPACITOR, X7R, 50V, 2.2NF.	3198 017 32220
9572	Wire Jumper, 0.58MM.	3198 036 90010	2342	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9573	Wire Jumper, 0.58MM.	3198 036 90010	2345	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9574	Wire Jumper, 0.58MM.	3198 036 90010	2348	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9575	Wire Jumper, 0.58MM.	3198 036 90010	2350	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780
9576	Wire Jumper, 0.58MM.	3198 036 90010	2354	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9577	Wire Jumper, 0.58MM.	3198 036 90010	2355	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9578	Wire Jumper, 0.58MM.	3198 036 90010	2356	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9579	Wire Jumper, 0.58MM.	3198 036 90010	2357	CAPACITOR, NP0, 50V, 10PF.	3198 016 31090
9580	Wire Jumper, 0.58MM.	3198 036 90010	2372	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720
9581	Wire Jumper, 0.58MM.	3198 036 90010	2373	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20	3198 030 81080
9582	Wire Jumper, 0.58MM.	3198 036 90010	2374	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9583	Wire Jumper, 0.58MM.	3198 036 90010	2375	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9584	Wire Jumper, 0.58MM.	3198 036 90010	2376	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9585	Wire Jumper, 0.58MM.	3198 036 90010	2377	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9587	Wire Jumper, 0.58MM.	3198 036 90010	2380	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9588	Wire Jumper, 0.58MM.	3198 036 90010	2381	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9589	Wire Jumper, 0.58MM.	3198 036 90010	2382	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9590	Wire Jumper, 0.58MM.	3198 036 90010	2401	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9591	Wire Jumper, 0.58MM.	3198 036 90010	2402	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9592	Wire Jumper, 0.58MM.	3198 036 90010	2403	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9593	Wire Jumper, 0.58MM.	3198 036 90010	2404	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9594	Wire Jumper, 0.58MM.	3198 036 90010	2405	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9595	Wire Jumper, 0.58MM.	3198 036 90010	2407	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9600	Wire Jumper, 0.58MM.	3198 036 90010	2408	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9601	Wire Jumper, 0.58MM.	3198 036 90010	2412	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9602	Wire Jumper, 0.58MM.	3198 036 90010	2413	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9603	Wire Jumper, 0.58MM.	3198 036 90010	2415	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9604	Wire Jumper, 0.58MM.	3198 036 90010	2417	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9605	Wire Jumper, 0.58MM.	3198 036 90010	2421	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9700	Wire Jumper, 0.58MM.	3198 036 90010	2422	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9701	Wire Jumper, 0.58MM.	3198 036 90010	2423	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9702	Wire Jumper, 0.58MM.	3198 036 90010	2424	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9703	Wire Jumper, 0.58MM.	3198 036 90010	2425	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9704	Wire Jumper, 0.58MM.	3198 036 90010	2427	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9705	Wire Jumper, 0.58MM.	3198 036 90010	2428	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9706	Wire Jumper, 0.58MM.	3198 036 90010	2429	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9707	Wire Jumper, 0.58MM.	3198 036 90010	2430	CAPACITOR, NP0, 50V, 68PF.	3198 016 36890
9708	Wire Jumper, 0.58MM.	3198 036 90010	2431	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790
9709	Wire Jumper, 0.58MM.	3198 036 90010			

SSB MODULE ASSEMBLY

SSB MODULE ASSEMBLY

0205 CONNECTOR, 10 PIN. 2422 025 16677

0320 FACTORY PLATE. 3122 120 01701

S = Safety Part Be sure to use exact replacement part.

2432	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3058	RESISTOR, 470R, 5%	3198 021 34710
2435	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3059	RESISTOR, 150R, 5%	3198 021 31510
2437	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030	3061	RESISTOR, 470R, 5%	3198 021 34710
2438	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810	3062	RESISTOR, 4K7, 5%	3198 021 34720
2439	CAPACITOR, NP0, 50V, 150PF.	3198 016 31510	3064	RESISTOR, 4K7, 5%	3198 021 34720
2440	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690	3065	RESISTOR, 4K7, 5%	3198 021 34720
2453	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030	3066	RESISTOR, 8K2, 5%	3198 021 38220
2457	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3081	RESISTOR, 4K7, 5%	3198 021 34720
2458	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20 0%.	3198 030 81080	3082	RESISTOR, 10K, 5%	3198 021 31030
2461	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3083	RESISTOR, 470R, 5%	3198 021 34710
2462	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030	3084	RESISTOR, 100R, 5%	3198 021 31010
2463	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030	3085	RESISTOR, 100R, 5%	3198 021 31010
2601	CAPACITOR, NP0, 50V, 470PF.	3198 016 34710	3086	RESISTOR, 100R, 5%	3198 021 31010
2602	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3088	RESISTOR, 100R, 5%	3198 021 31010
2606	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3092	RESISTOR, 100R, 5%	3198 021 31010
2607	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240	3301	RESISTOR, 1K, 5%	3198 021 31020
2612	CAPACITOR, X7R, 50V, 1NF.	3198 017 31020	3302	RESISTOR, 560R, 5%	3198 021 35610
2613	CAPACITOR, X7R, 50V, 1NF.	3198 017 31020	3305	RESISTOR, 3K9, 5%	3198 021 33920
2619	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720	3307	RESISTOR, 390R, 5%	3198 021 33910
2620	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3311	RESISTOR, 27K, 5%	3198 021 32730
2621	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3312	RESISTOR, 10K, 5%	3198 021 31030
2623	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3315	RESISTOR, 39K, 5%	3198 021 33930
2624	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3316	RESISTOR, 220R, 5%	3198 021 32210
2625	ELECTROLYTIC CAPACITOR, 16V, 22UF., 2 0%.	3198 030 42290	3324	RESISTOR, 390R, 5%	3198 021 33910
2628	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3329	RESISTOR, 100R, 5%	3198 021 31010
2629	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3330	RESISTOR, 100R, 5%	3198 021 31010
2635	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3331	RESISTOR, FUSEABLE, 2R2, 5%	2322 750 62208
2636	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3332	RESISTOR, FUSEABLE, 2R2, 5%	2322 750 62208
2637	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3333	RESISTOR, 1K, 5%	3198 021 31020
2638	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3334	RESISTOR, JUMPER, 0R05	3198 021 90030
2639	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3335	RESISTOR, 120R, 5%	3198 021 31210
2640	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3339	RESISTOR, 10K, 5%	3198 021 31030
2641	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3340	RESISTOR, 560R, 5%	3198 021 55610
2642	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3341	RESISTOR, 150R, 5%	3198 021 31510
2655	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720	3342	RESISTOR, JUMPER, 0R05	3198 021 90030
2657	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3344	RESISTOR, 150R, 5%	3198 021 31510
2661	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3345	RESISTOR, JUMPER, 0R05	3198 021 90030
2662	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3348	RESISTOR, 150R, 5%	3198 021 31510
2663	CAPACITOR, NP0, 50V, 47PF.	3198 016 34790	3349	RESISTOR, JUMPER, 0R05	3198 021 90030
2664	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690	3358	RESISTOR, 100R, 5%	3198 021 31010
2665	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790	3361	RESISTOR, 100R, 5%	3198 021 31010
2666	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810	3362	RESISTOR, 100R, 5%	3198 021 31010
2667	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590	3363	RESISTOR, 100R, 5%	3198 021 31010
2675	CAPACITOR, NP0, 50V, 3P3	3198 016 33380	3364	RESISTOR, 1K, 5%	3198 021 31020
2676	CAPACITOR, NP0, 50V, 3P3	3198 016 33380	3365	RESISTOR, 560R, 5%	3198 021 55610
2679	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3371	RESISTOR, 15K, 5%	3198 021 31530
2682	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3373	RESISTOR, 100R, 5%	3198 021 31010
2683	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3374	RESISTOR, 3K3, 5%	3198 021 33320
2684	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3375	RESISTOR, 1K, 5%	3198 021 31020
2685	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3376	RESISTOR, 1K, 5%	3198 021 31020
2686	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3377	RESISTOR, 100R, 5%	3198 021 31010
2687	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3378	RESISTOR, 1K, 5%	3198 021 31020
3002	RESISTOR, 8K2, 5%	3198 021 38220	3381	RESISTOR, 100R, 5%	3198 021 31010
3003	RESISTOR, 10K, 5%	3198 021 31030	3382	RESISTOR, 100R, 5%	3198 021 31010
3004	RESISTOR, 8K2, 5%	3198 021 38220	3383	RESISTOR, 100R, 5%	3198 021 31010
3007	RESISTOR, 8K2, 5%	3198 021 38220	3384	RESISTOR, 8K2, 5%	3198 021 38220
3008	RESISTOR, 8K2, 5%	3198 021 38220	3385	RESISTOR, 10K, 5%	3198 021 31030
3009	RESISTOR, 8K2, 5%	3198 021 38220	3387	RESISTOR, 100R, 5%	3198 021 31010
3013	RESISTOR, 8K2, 5%	3198 021 38220	3388	RESISTOR, 47R, 5%	3198 021 34790
3014	RESISTOR, 8K2, 5%	3198 021 38220	3393	RESISTOR, 27K, 5%	3198 021 52730
3015	RESISTOR, 10K, 5%	3198 021 31030	3394	RESISTOR, 18K, 5%	3198 021 31830
3017	RESISTOR, 100R, 5%	3198 021 31010	3397	RESISTOR, 10R, 5%	3198 021 31090
3018	RESISTOR, 100R, 5%	3198 021 31010	3401	RESISTOR, 100R, 5%	3198 021 31010
3019	RESISTOR, 100R, 5%	3198 021 31010	3402	RESISTOR, 100R, 5%	3198 021 31010
3021	RESISTOR, 100R, 5%	3198 021 31010	3403	RESISTOR, 100R, 5%	3198 021 31010
3022	RESISTOR, 2K2, 5%	3198 021 32220	3404	RESISTOR, 100R, 5%	3198 021 31010
3023	RESISTOR, 8K2, 5%	3198 021 38220	3405	RESISTOR, 100R, 5%	3198 021 31010
3024	RESISTOR, 1K, 5%	3198 021 31020	3411	RESISTOR, 1K5, 5%	3198 021 31520
3030	RESISTOR, 1K, 5%	3198 021 31020	3412	RESISTOR, 1K5, 5%	3198 021 31520
3031	RESISTOR, 470R, 5%	3198 021 34710	3413	RESISTOR, 560R, 5%	3198 021 55610
3034	RESISTOR, 47K, 5%	3198 021 34730	3414	RESISTOR, 1K5, 5%	3198 021 31520
3035	RESISTOR, 470R, 5%	3198 021 34710	3415	RESISTOR, 1K5, 5%	3198 021 31520
3042	RESISTOR, 150R, 5%	3198 021 31510	3416	RESISTOR, 560R, 5%	3198 021 55610
3043	RESISTOR, 150R, 5%	3198 021 31510	3417	RESISTOR, 1K, 5%	3198 021 31020
3044	RESISTOR, 10K, 5%	3198 021 31030	3418	RESISTOR, 560R, 5%	3198 021 55610
3045	RESISTOR, 2K7, 5%	3198 021 32720	3419	RESISTOR, 470R, 5%	3198 021 34710
3046	RESISTOR, 4K7, 5%	3198 021 34720	3422	RESISTOR, 470R, 5%	3198 021 34710
3051	RESISTOR, 24K, 1%	2322 704 62403	3423	RESISTOR, 100R, 5%	3198 021 31010
3054	RESISTOR, 10K, 5%	3198 021 31030	3424	RESISTOR, 4K7, 5%	3198 021 34720
3055	RESISTOR, 10K, 5%	3198 021 31030	3425	RESISTOR, 100R, 5%	3198 021 31010
3056	RESISTOR, 47K, 5%	3198 021 34730	3426	RESISTOR, 820R, 5%	3198 021 38210
3057	RESISTOR, 10K, 5%	3198 021 31030	3427	RESISTOR, 100R, 5%	3198 021 31010
			3428	RESISTOR, 47K, 5%	3198 021 34730
			3429	RESISTOR, 1K, 5%	3198 021 31020
			3430	RESISTOR, 1K, 5%	3198 021 31020
			3434	RESISTOR, 47K, 5%	3198 021 34730
			3437	RESISTOR, 47K, 5%	3198 021 34730
			3438	RESISTOR, 47K, 5%	3198 021 34730
			3466	RESISTOR, 10K, 5%	3198 021 31030
			3467	RESISTOR, 10K, 5%	3198 021 31030
			3468	RESISTOR, 10K, 5%	3198 021 31030
			3471	RESISTOR, JUMPER, 0R05	3198 021 90030

3472	RESISTOR, JUMPER, 0R05	3198 021 90030	1006	TACTILE SWITCH, SKQNAB	2422 128 02742
3473	RESISTOR, JUMPER, 0R05	3198 021 90030	1007	TACTILE SWITCH, SKQNAB	2422 128 02742
3474	RESISTOR, JUMPER, 0R05	3198 021 90030	1214	CONNECTOR, 7 PIN, M 2.50 EH.	2422 025 12491
3477	RESISTOR, 4K7, 5%	3198 021 34720	1215	CONNECTOR, 1 PIN, M 4.8x0.5 STAB	2422 015 18551
3478	RESISTOR, 10R, 5%	3198 021 31090	2003	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040
3483	RESISTOR, 560R, 5%	3198 021 55610	2004	ELECTROLYTIC CAPACITOR, 16V, 100UF., 20%.	3198 028 21010
3484	RESISTOR, 1K, 5%	3198 021 31020		RESISTOR, 1K5, 5%	3198 021 51520
3488	RESISTOR, 220R, 5%	3198 021 32210	3008	RESISTOR, RC12H, 1K5, 1%	2322 734 61502
3489	RESISTOR, 390R, 5%	3198 021 33910	3010	RESISTOR, RC12H, 750R, 1%	2322 734 87501
3490	RESISTOR, 390R, 5%	3198 021 33910	3011	RESISTOR, RC12H, 2K, 1%	2322 734 62002
3491	RESISTOR, 820R, 5%	3198 021 38210	3012	RESISTOR, RC12H, 270R, 1%	2322 734 62701
3492	RESISTOR, 560R, 5%	3198 021 35610	3013	RESISTOR, RC12H, 2K7, 1%	2322 734 62702
3493	RESISTOR, 390R, 5%	3198 021 33910	3015	RESISTOR, RC12H, 3K9, 1%	2322 734 63902
3601	RESISTOR, 100R, 5%	3198 021 31010	3017	RESISTOR, 470R, 5%	3198 021 54710
3602	RESISTOR, 100R, 5%	3198 021 31010	3020	RESISTOR, 10K, 5%	3198 021 51030
3606	RESISTOR, 27K, 5%	3198 021 32730	3022	RESISTOR, 330R, 5%	3198 021 53310
3619	RESISTOR, 100R, 5%	3198 021 31010	3025	LED, VS TLDR5400 (TEG0).	9322 110 34682
3621	RESISTOR, 100R, 5%	3198 021 31010	6002	IR RECEIVER, TSOP1736 (VISH).	9322 152 44687
3665	RESISTOR, 2K2, 5%	3198 021 32220	6005	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4008	RESISTOR, JUMPER, 0R05	3198 021 90030	6009	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4306	RESISTOR, 100R, 5%	3198 021 31010	6011	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4307	RESISTOR, JUMPER, 0R05	3198 021 90030	6013	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4309	RESISTOR, JUMPER, 0R05	3198 021 90030	6014	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4312	RESISTOR, JUMPER, 0R05	3198 021 90030	6015	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4313	RESISTOR, JUMPER, 0R05	3198 021 90030	6016	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4316	RESISTOR, JUMPER, 0R05	3198 021 90030	CBA	KEYBOARD PANEL ASSEMBLY, 43" MODEL	3135 017 07601
4317	RESISTOR, JUMPER, 0R05	3198 021 90020			
4318	RESISTOR, JUMPER, 0R05	3198 021 90020			
4319	RESISTOR, JUMPER, 0R05	3198 021 90020			
4320	RESISTOR, JUMPER, 0R05	3198 021 90020			
4401	RESISTOR, JUMPER, 0R05	3198 021 90020			
4402	RESISTOR, JUMPER, 0R05	3198 021 90020			
4403	RESISTOR, JUMPER, 0R05	3198 021 90020			
4410	RESISTOR, JUMPER, 0R05	3198 021 90020			
4411	RESISTOR, JUMPER, 0R05	3198 021 90020			
4434	RESISTOR, JUMPER, 0R05	3198 021 90030			
4435	RESISTOR, JUMPER, 0R05	3198 021 90030			
4436	RESISTOR, JUMPER, 0R05	3198 021 90030			
4451	RESISTOR, JUMPER, 0R05	3198 021 90030			
4455	RESISTOR, JUMPER, 0R05	3198 021 90030			
4465	RESISTOR, JUMPER, 0R05	3198 021 90030			
5040	FIXED INDUCTOR, 4U7, 5%	3198 018 64780			
5041	FIXED INDUCTOR, 4U7, 5%	3198 018 64780			
5042	FIXED INDUCTOR, 4U7, 5%	3198 018 64780			
5309	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5332	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5333	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5334	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5401	FIXED INDUCTOR, 0U82, 10%.	3198 018 38270			
5421	FIXED INDUCTOR, 22UH., 20%.	3198 018 32290			
5422	FIXED INDUCTOR, 15UH., 20%.	3198 018 31590			
5425	FIXED INDUCTOR, 22UH., 20%.	3198 018 32290			
5426	FIXED INDUCTOR, 15UH., 20%.	3198 018 31590			
5601	FIXED INDUCTOR, 1UH., 5%	3198 018 61080			
5602	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780			
5625	FIXED INDUCTOR, 1UH., 5%	3198 018 61080			
5665	FIXED INDUCTOR, 15UH., 5%	3198 018 61590			
6031	DIODE REGULATOR, UDZ2.4B (RHMO).	9322 131 13685			
6302	DIODE REGULATOR, BZX384-C8V2	3198 020 58280			
6303	DIODE REGULATOR, BZX384-C6V8	3198 020 56880			
6412	DIODE, SIGNAL, BAS316.	3198 010 10630			
6415	DIODE, SIGNAL, BAS316.	3198 010 10630			
6605	DIODE, SIGNAL, BAS316.	3198 010 10630			
7053	TRANSISTOR, SIGNAL, BC847BS (PHSE).	9340 425 20115			
7063	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7064	IC, SAA5667HL/M1/ (PHSE)	4835 310 57615			
7066	IC, M24C32-WMN6 (ST00)	9322 124 74668			
7301	IC, TDA8887H/N1 (PHSE)	9352 638 72557			
7307	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7331	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42320			
7368	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7401	IC, 74HC4053PW (PHSE).	9351 869 40118			
7405	IC, TC90A45F (TOSJ).	9322 144 38668			
7407	IC, 74HC4066PW (PHSE).	9351 750 00118			
7412	TRANSISTOR, SIGNAL, BC847BS (PHSE).	9340 425 20115			
7415	TRANSISTOR, SIGNAL, BC847BS (PHSE).	9340 425 20115			
7421	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7425	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7442	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7446	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7630	IC, 74HC4052PW (PHSE).	9351 874 90118			
7651	IC, MSP3435G-FH-B5 (MTAS).	9322 143 55671			
CBA	SSB MODULE ASSEMBLY, FIGHTER PLUS.	3139 127 25871			

KEYBOARD PANEL ASSEMBLY

0005	KEYBOARD PANEL ASSEMBLY	
0007	LENS, F/IR RECEIVE	3135 014 10231
1001	CONTROL HOUSING, SILVER.	3135 017 06982
1002	TACTILE SWITCH, SKQNAB	2422 128 02742
1003	TACTILE SWITCH, SKQNAB	2422 128 02742
1004	TACTILE SWITCH, SKQNAB	2422 128 02742

SIDE JACK PANEL ASSEMBLY

1001	SIDE JACK PANEL ASSEMBLY	
1002	SOCKET, CINCH, 3 PIN, YEWHRD	2422 026 04756
1007	SOCKET, MINIDIN, 4 PIN, TCS7959.	2422 026 05157
1335	SOCKET, PHONE, 1 PIN	2422 026 04747
1337	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484
1344	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552
2000	CONNECTOR, 3 PIN, M 2.50 EH.	2412 020 00725
2001	CAPACITOR, CERAMIC, Y5V, 25V, 220NF., +80-20%.	2238 910 19854
2002	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
2005	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
2006	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
3000	RESISTOR, 75R, 5%	3198 021 57590
3001	RESISTOR, 75R, 5%	3198 021 57590
3002	RESISTOR, 75R, 5%	3198 021 57590
3005	RESISTOR, 1K, 5%	3198 021 51020
3006	RESISTOR, 22K, 5%	3198 021 52230
3007	RESISTOR, 1K, 5%	3198 021 51020
3009	RESISTOR, 22K, 5%	3198 021 52230
3019	RESISTOR, 10R, 5%	3198 021 51090
3020	RESISTOR, 10R, 5%	3198 021 51090
3023	RESISTOR, 10R, 5%	3198 021 51090
3028	RESISTOR, 10R, 5%	3198 021 51090
3029	RESISTOR, 3K9, 5%	3198 021 53920
3030	RESISTOR, 1K8, 5%	3198 021 51820
6000	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6001	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6002	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6003	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6004	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6005	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6006	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6007	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6008	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6009	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6010	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6011	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6012	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
6013	DIODE, REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
9000	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9000	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9001	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9001	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9002	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
CBA	SIDE JACK PANEL ASSEMBLY	3135 017 05461

RED & BLUE CRT PANEL ASSEMBLIES

0079	RED & BLUE CRT PANEL ASSEMBLIES	
1000	HEATSINK, T0-220, USE SI COMP THERMAL	3135 011 01231
1001	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021
1701	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021
S 1702	CRT SOCKET, 10PIN, F HPS0521	2422 500 80051
1871	SURGE PROTECTOR, DSP-501N-A21F	2422 549 42349
1872	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484
1873	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646
1875	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646
2701	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552
S 2702	CAPACITOR, METALIZED POLYESTER, 400V, 10NF., 10%.	2222 365 55103
S 2705	CAPACITOR, METALIZED POLYESTER, 400V, 10NF., 10%.	2222 365 55103
2717	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020 558 90487
	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%.	2020 012 93487

2720	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2721	CAPACITOR, METALIZED POLYESTER, 63V, 100NF., 10%.	2222	365	75104
2722	CAPACITOR, CERAMIC, B 500V S 560P, 10	2020	557	90147
2750	CAPACITOR, CERAMIC, NP0 50V S 220PF.	3198	019	02210
2751	CAPACITOR, PLOYPROPHYLENE, 50V, 1NF., 2%	2020	310	90049
2752	CAPACITOR, CERAMIC, Y5P, 1KV, 1NF.	3198	019	51020
3703	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198	011	01010
3710	RESISTOR, CARBON FILM, 1K5, 10%.	2120	101	28152
S 3716	RESISTOR, CARBON FILM, 100R, 20%.	2120	103	90057
S 3718	RESISTOR, CARBON FILM, 1/2W, 22K, 5%	2120	103	90075
3719	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
S 3720	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
S 3730	RESISTOR, METAL OXIDE, 5W, 3K3, 5%.	2322	257	41332
S 3731	RESISTOR, METAL OXIDE, 5W, 3K3, 5%.	2322	257	41332
3733	RESISTOR, METAL OXIDE, 10M, 5%.	2322	241	53106
3735	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198	011	01010
3737	RESISTOR, CARBON FILM, 1/2W, 3K3, 20%	3198	013	03320
3738	RESISTOR, CARBON FILM, 1/6W, 100K, 5%	3198	011	01040
3740	RESISTOR, CARBON FILM, 1/6W, 1K, 5%.	3198	011	01020
3742	RESISTOR, METAL FILM, 1K, 1%.	2322	156	21002
3743	RESISTOR, METAL FILM, 220R, 1%.	2322	156	22201
3745	RESISTOR, METAL FILM, 75R, 1%.	2138	116	17509
3750	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198	011	01010
3751	RESISTOR, METAL FILM, 15R, 1%.	2138	116	11509
3752	RESISTOR, 22K, 5%.	2120	103	90075
3753	RESISTOR, CARBON FILM, 27R, 5%.	2120	101	74279
3755	RESISTOR, POWER, 1W, 47R, 5%.	3198	012	14790
3756	RESISTOR, POWER, 1W, 68R, 5%.	3198	012	16890
5701	FIXED INDUCTOR, 100UH., 5%.	3198	018	11010
5702	FIXED INDUCTOR, 15UH., 10%.	2422	535	97331
5703	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5704	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5705	FIXED INDUCTOR, 22UH., 10%.	2422	535	97333
6701	DIODE RECTIFIER, BYD33J (PHSE).	9337	234	20133
6702	DIODE REGULATOR, BZX79-B6V2 (PHSE).	9331	668	30133
6705	DIODE RECTIFIER, BYD33J (PHSE).	9337	234	20133
6706	DIODE RECTIFIER, BYD33J (PHSE).	9337	234	20133
7701	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322	122	58682
7702	TRANSISTOR, SIGNAL, BC337-25).	3198	020	43530
7703	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ).	9322	103	08678
7705	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334	196	60126
9701	WIRE JUMPER 0.6MM.	0322	179	00003
9702	WIRE JUMPER 0.6MM.	0322	179	00003
CBA	RED & BLUE CRT PANEL ASSEMBLIES.	3135	017	04961

GREEN CRT PANEL ASSEMBLY

	GREEN CRT PANEL ASSEMBLY			
0089	HEATSINK TO-220, USE SI COMP THERMAL	3135	011	01231
1000	CONNECTOR, 1 PIN, M RT-01T-1.0	2422	034	20021
1001	CONNECTOR, 1 PIN, M 4.8 X 0.5	2422	015	18552
1002	CONNECTOR, 1 PIN, M RT-01T-1.0	2422	034	20021
S 1801	CRT SOCKET, 10 PIN, HPS0521.	2422	500	80051
S 1802	SURGE PROTECTOR, DSP-501N-A21.	2422	549	42349
1881	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
1882	CONNECTOR, 4 PIN, M 2.50 EH.	2422	025	12479
1883	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
1884	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
1885	CONNECTOR, 2 PIN, M 3.96 VH.	2422	025	10646
1886	CONNECTOR, 4 PIN, M 3.96 VH.	2422	025	10647
2801	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103
S 2805	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020	558	90487
2807	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103
2817	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%.	2020	012	93487
2820	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2821	CAPACITOR, POLYESTER, 63V, 100NF., 10	2222	365	75104
2822	CAPACITOR, CERAMIC DISK, 500V, 560P, 10%.	2020	557	90147
2850	CAPACITOR, CERAMIC DISK, NP0, 50V, 220PF.	3198	019	02210
2851	CAPACITOR, POLYPROPYLENE, 50V, 1NF., 2%.	2020	310	90049
2852	CAPACITOR, CERAMIC DISK, Y5P, 1KV, 1NF.	3198	019	51020
3803	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010
3810	RESISTOR, CARBON, 1/2W, 1K5, 10%.	2120	101	28152
S 3816	RESISTOR, CARBON, 1/2W, 100R, 20%.	2120	103	90057
S 3818	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075
S 3819	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
S 3820	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
3825	RESISTOR, METAL FILM, 220K, 1%.	2322	156	22204
3826	RESISTOR, METAL FILM, 100K, 1%.	2322	156	21004
S 3830	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332
S 3831	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332
3833	RESISTOR, METAL FILM, 1/2W, 10M, 5%.	2322	241	53106
3835	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010
3837	RESISTOR, CARBON, 1/2W, 3K3, 20%.	3198	013	03320
3838	RESISTOR, CARBON, 1/6W, 100K, 5%.	3198	011	01040

3840	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020
3842	RESISTOR, METAL FILM, 1K, 1%.	2322	156	21002
3843	RESISTOR, METAL FILM, 220R, 1%.	2322	156	22201
3845	RESISTOR, METAL FILM, 75R, 1%.	2138	116	17509
3850	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010
3851	RESISTOR, METAL FILM, 15R, 1%.	2138	116	11509
3852	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075
3853	RESISTOR, CARBON, 27R, 5%.	2120	101	74279
3855	RESISTOR, POWER, 1W, 47R, 5%.	3198	012	14790
3856	RESISTOR, POWER, 1W, 68R, 5%.	3198	012	16890
3857	RESISTOR, METAL FILM, 10K, 5%.	2322	193	14103
5801	FIXED INDUCTOR, 100UH., 5%.	3198	018	11010
5802	FIXED INDUCTOR, 15UH., 10%.	2422	535	97331
5803	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5804	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5805	FIXED INDUCTOR, 22UH., 10%.	2422	535	97333
6801	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133
6802	DIODE, REGULATOR, BZX79-B6V2 (PHSE).	9331	668	30133
6805	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133
6806	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133
7801	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322	122	58682
7802	TRANSISTOR, SIGNAL, BC337-25 (COL).	3198	020	43530
7803	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ).	9322	103	08678
7805	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334	196	60126
9801	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9802	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9803	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9804	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9805	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9806	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9807	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9808	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
CBA	GREEN CRT PANEL ASSEMBLY.	3135	017	04981

SINGLE TUNER PIP PANEL ASSEMBLY

SINGLE TUNER PIP PANEL ASSEMBLY

2 TUNER PIP PANEL ASSEMBLY

	2 TUNER PIP PANEL ASSEMBLY			
0025	SHIELD, F/IC 7803.	3139	121	26532
0200	CONNECTOR, 5 PIN, M 2.50 EH.	2422	025	12481
0201	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
0205	CONNECTOR, 10 PIN, F 1.00 FFC 0.3.	2422	025	16587
0236	CONNECTOR, 3 PIN, M 2.50 EH.	2412	020	00725
0272	CONNECTOR, 3 PIN, M 2.50 EH, BLACK.	2422	025	16382
1802	CRYSTAL RESONATOR, 14.31818MHZ., 20P HC49/U.	2422	543	00904
1900	TUNER, V+U, PLL.	2422	542	90057
1901	SAW FILTER, 45.75MHZ., OFWM1962M.	2422	549	43074
1902	CERAMIC FILTER, 4.5MHZ., TPS*MB BS.	2422	549	40807
2801	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2803	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
2804	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2805	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2806	ELECTROLYTIC CAPACITOR, 10V, 220UF., 20%.	3198	025	12210
2807	CAPACITOR, NP0, 50V, 47PF.	3198	016	04790
2808	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2809	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2810	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2811	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2812	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
2813	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2814	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2815	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2816	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2817	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2818	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2819	CAPACITOR, NP0, 50V, 12PF.	3198	016	01290
2820	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2821	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2822	CAPACITOR, X7R, 50V, 33NF.	3198	017	03330
2823	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2824	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
2825	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2826	CAPACITOR, NP0, 50V, 560PF.	3198	016	05610
2827	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2828	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2829	CAPACITOR, Y5V, 16V, 1UF.	3198	017	21050
2830	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2831	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2832	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2833	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2834	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2836	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2837	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030

2840	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	3920	RESISTOR, 100R, 5%	3198 021 51010
2841	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	3921	RESISTOR, 100R, 5%	3198 021 51010
2890	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198 025 32210	3922	RESISTOR, 4K7, 5%.	3198 021 54720
2891	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	3923	RESISTOR, 4K7, 5%.	3198 021 54720
2892	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198 025 34790	3924	RESISTOR, 4K7, 5%.	3198 021 54720
2893	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198 025 32210	3925	RESISTOR, 4K7, 5%.	3198 021 54720
2894	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	3926	RESISTOR, 4K7, 5%.	3198 021 54720
2895	CAPACITOR, NP0, 50V, 47PF.	3198 019 04790	3927	RESISTOR, 470R, 5%.	3198 021 54710
2911	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3933	RESISTOR, 2K2, 5%.	3198 021 52220
2915	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198 025 31010	3934	RESISTOR, 10K, 5%.	3198 021 51030
2916	CAPACITOR, X7R, 50V, 1NF.	3198 017 01020	3936	RESISTOR, 47R, 5%.	3198 021 54790
2917	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198 025 31010	3937	RESISTOR, 47R, 5%.	3198 021 54790
2920	CAPACITOR, X7R, 25V, 47NF.	3198 023 04730	3938	RESISTOR, CARBON, 1/6W, 2R2, 5%.	3198 011 02280
2921	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3939	RESISTOR, JUMPER, 0R05	3198 021 90020
2923	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3942	TRIM ADJUST, 47K, H EVN-DJA.	2120 363 90166
2924	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3943	RESISTOR, 5K6, 5%.	3198 021 55620
2925	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198 025 51090	3944	TRIM ADJUST, 47K, H EVN-DJA.	2120 363 90166
2926	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3945	RESISTOR, 680R, 5%.	3198 021 56810
2927	ELECTROLYTIC CAPACITOR, 50V, 4.7UF., 20%.	3198 025 54780	3946	RESISTOR, 15K, 5%.	3198 021 51530
2928	CAPACITOR, X7R, 50V, 22NF.	3198 017 02230	3947	RESISTOR, 1K, 5%.	3198 021 51020
2929	CAPACITOR, X7R, 25V, 47NF.	3198 023 04730	3948	RESISTOR, 330R, 5%.	3198 021 53310
2930	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3949	RESISTOR, 330R, 5%.	3198 021 53310
2931	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3950	RESISTOR, 22K, 5%.	3198 021 52230
2932	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3951	RESISTOR, 22K, 5%.	3198 021 52230
2933	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3952	RESISTOR, 1K, 5%.	3198 021 51020
2934	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3953	RESISTOR, 330R, 5%.	3198 021 53310
2935	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198 025 31010	3955	RESISTOR, 390R, 5%.	3198 021 53910
2936	RESISTOR, JUMPER, 0R05	3198 021 90020	3956	RESISTOR, JUMPER, 0R05	3198 021 90020
2937	CAPACITOR, Y5V, 16V, 1UF.	3198 017 21050	3957	RESISTOR, 330R, 5%.	3198 021 53310
3801	RESISTOR, 100R, 5%	3198 021 51010	3958	RESISTOR, 120R, 5%.	3198 021 51210
3802	RESISTOR, 100R, 5%	3198 021 51010	3960	RESISTOR, JUMPER, 0R05	3198 021 90020
3805	RESISTOR, 1K, 5%.	3198 021 51020	3961	RESISTOR, 1K, 5%.	3198 021 51020
3806	RESISTOR, 1K5, 5%.	3198 021 51520	3962	RESISTOR, 4K7, 5%.	3198 021 54720
3807	RESISTOR, 1K5, 5%.	3198 021 51520	3964	RESISTOR, 1K, 5%.	3198 021 51020
3812	RESISTOR, 10K, 5%.	3198 021 51030	3965	RESISTOR, 560R, 5%.	3198 021 55610
3813	RESISTOR, 15K, 5%.	3198 021 51530	3968	RESISTOR, 4K7, 5%.	3198 021 54720
3814	RESISTOR, 1K, 5%.	3198 021 51020	3969	RESISTOR, 330R, 5%.	3198 021 53310
3815	RESISTOR, 1K, 5%.	3198 021 51020	3970	RESISTOR, 390R, 5%.	3198 021 53910
3816	RESISTOR, 820R, 5%.	3198 021 58210	3971	RESISTOR, 2K2, 5%.	3198 021 52220
3817	RESISTOR, 1K, 5%.	3198 021 51020	3972	RESISTOR, 4K7, 5%.	3198 021 54720
3818	RESISTOR, 15K, 5%.	3198 021 51530	4803	RESISTOR, JUMPER, 0R05	3198 021 90020
3819	RESISTOR, 10K, 5%.	3198 021 51030	4804	RESISTOR, JUMPER, 0R05	3198 021 90020
3820	RESISTOR, 1K, 5%.	3198 021 51020	4805	RESISTOR, JUMPER, 0R05	3198 021 90020
3821	RESISTOR, 390R, 5%.	3198 021 53910	4807	RESISTOR, JUMPER, 0R05	3198 021 90020
3822	RESISTOR, 390R, 5%.	3198 021 53910	4808	RESISTOR, JUMPER, 0R05	3198 021 90020
3823	RESISTOR, 390R, 5%.	3198 021 53910	4809	RESISTOR, JUMPER, 0R05	3198 021 90020
3824	RESISTOR, 15K, 5%.	3198 021 51530	4810	RESISTOR, JUMPER, 0R05	3198 021 90020
3825	RESISTOR, 150R, 5%.	3198 021 51510	4812	RESISTOR, JUMPER, 0R05	3198 021 90020
3826	RESISTOR, 150R, 5%.	3198 021 51510	4813	RESISTOR, JUMPER, 0R05	3198 021 90020
3827	RESISTOR, 330R, 5%.	3198 021 53310	4814	RESISTOR, JUMPER, 0R05	3198 021 90020
3828	RESISTOR, 4M7, 5%.	3198 021 54750	4815	RESISTOR, JUMPER, 0R05	3198 021 90020
3829	RESISTOR, 15K, 5%.	3198 021 51530	4816	RESISTOR, JUMPER, 0R05	3198 021 90020
3830	RESISTOR, 2K2, 5%.	3198 021 52220	4817	RESISTOR, JUMPER, 0R05	3198 021 90020
3831	RESISTOR, 1M, 5%.	3198 021 51050	4818	RESISTOR, JUMPER, 0R05	3198 021 90020
3832	RESISTOR, 1K, 5%.	3198 021 51020	4819	RESISTOR, JUMPER, 0R05	3198 021 90020
3833	RESISTOR, 100R, 5%.	3198 021 51010	4821	RESISTOR, JUMPER, 0R05	3198 021 90020
3834	RESISTOR, 100R, 5%.	3198 021 51010	4901	RESISTOR, JUMPER, 0R05	3198 021 90020
3836	RESISTOR, 1K, 5%.	3198 021 51020	5890	FIXED INDUCTOR, 10MUH., 10% (UAW).	3198 018 21090
3839	RESISTOR, 1K, 5%.	3198 021 51020	5891	FIXED INDUCTOR, 10MUH., 10% (UAW).	3198 018 21090
3840	RESISTOR, JUMPER, 0R05	3198 021 90020	5892	FIXED INDUCTOR, 10MUH., 10% (UAW).	3198 018 21090
3844	RESISTOR, 1K, 5%.	3198 021 51020	5901	IFT COIL, 91.5MHZ., 292EES-M593BS.	3139 128 23341
3845	RESISTOR, JUMPER, 0R05	3198 021 90020	5902	FIXED INDUCTOR, 4MUH7, 10% (UAW)	3198 018 24780
3849	RESISTOR, 1K, 5%.	3198 021 51020	5903	FIXED INDUCTOR, 0.82UH., 10%	3198 018 38270
3850	RESISTOR, JUMPER, 0R05	3198 021 90020	5905	FIXED INDUCTOR, 4.7UH., 5%.	3198 018 14780
3853	RESISTOR, 3K3, 5%.	3198 021 53320	5906	FIXED INDUCTOR, 5.6UH., 5%.	3198 018 15680
3854	RESISTOR, 15K, 5%.	3198 021 51530	6801	DIODE, SIGNAL, BAT85 (PHSE).	9336 247 60133
3855	RESISTOR, 1K, 5%.	3198 021 51020	6890	DIODE, REGULATOR, BZX384-C3V9.	3198 020 53980
3856	RESISTOR, 1K, 5%.	3198 021 51020	7801	IC, HEF4053BT (PHSE)	9333 729 60653
3857	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198 011 01020	7803	IC, M65669SP (MITJ).	9322 146 60682
3858	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198 011 01020	7804	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3859	RESISTOR, 47K, 5%.	3198 021 54730	7805	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3860	RESISTOR, 47K, 5%.	3198 021 54730	7806	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3864	RESISTOR, 1K, 5%.	3198 021 51020	7807	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3866	RESISTOR, 330R, 5%.	3198 021 53310	7810	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3870	RESISTOR, 220R, 5%.	3198 021 52210	7813	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3871	RESISTOR, 220R, 5%.	3198 021 52210	7816	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3872	RESISTOR, 220R, 5%.	3198 021 52210	7817	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3890	RESISTOR, CARBON, 1/6W, 68R, 5%.	3198 011 06890	7891	TRANSISTOR, SIGNAL, BC337-25	3198 020 43530
3914	RESISTOR, JUMPER, 0R05	3198 021 90020	7910	IC, M62320FP (MITJ).	9322 127 15668
3915	RESISTOR, JUMPER, 0R05	3198 021 90020	7914	IC, TDA9801/V1 (PHSE).	9352 606 44112
3916	RESISTOR, JUMPER, 0R05	3198 021 90020	7915	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3917	RESISTOR, JUMPER, 0R05	3198 021 90020	7916	IC, HEF4053BT (PHSE)	9333 729 60653
3918	RESISTOR, JUMPER, 0R05	3198 021 90020	7917	TRANSISTOR, SIGNAL, BC857B	3198 010 42150
3919	RESISTOR, JUMPER, 0R05	3198 021 90020	7918	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
			7919	IC, TDA8601T/C1 (PHSE).	9351 538 90518
			7920	TRANSISTOR, SIGNAL, BC857B	3198 010 42150
			9800	WIRE JUMPER, 0.6MM	0322 179 00003
			9801	WIRE JUMPER, 0.6MM	0322 179 00003
			9802	WIRE JUMPER, 0.6MM	0322 179 00003
			9803	WIRE JUMPER, 0.6MM	0322 179 00003
			9804	WIRE JUMPER, 0.6MM	0322 179 00003
			9805	WIRE JUMPER, 0.6MM	0322 179 00003

9807	WIRE JUMPER, 0.6MM	0322 179 00003
9808	WIRE JUMPER, 0.6MM	0322 179 00003
9810	WIRE JUMPER, 0.6MM	0322 179 00003
9811	WIRE JUMPER, 0.6MM	0322 179 00003
9812	WIRE JUMPER, 0.6MM	0322 179 00003
9813	WIRE JUMPER, 0.6MM	0322 179 00003
9814	WIRE JUMPER, 0.6MM	0322 179 00003
9815	WIRE JUMPER, 0.6MM	0322 179 00003
9816	WIRE JUMPER, 0.6MM	0322 179 00003
9817	WIRE JUMPER, 0.6MM	0322 179 00003
9818	WIRE JUMPER, 0.6MM	0322 179 00003
9820	WIRE JUMPER, 0.6MM	0322 179 00003
9821	WIRE JUMPER, 0.6MM	0322 179 00003
9822	WIRE JUMPER, 0.6MM	0322 179 00003
9823	WIRE JUMPER, 0.6MM	0322 179 00003
9824	WIRE JUMPER, 0.6MM	0322 179 00003
9902	WIRE JUMPER, 0.6MM	0322 179 00003
9903	WIRE JUMPER, 0.6MM	0322 179 00003
9905	WIRE JUMPER, 0.6MM	0322 179 00003
9907	WIRE JUMPER, 0.6MM	0322 179 00003
9908	WIRE JUMPER, 0.6MM	0322 179 00003
9912	WIRE JUMPER, 0.6MM	0322 179 00003
9915	WIRE JUMPER, 0.6MM	0322 179 00003
9921	WIRE JUMPER, 0.6MM	0322 179 00003
9922	WIRE JUMPER, 0.6MM	0322 179 00003
9923	WIRE JUMPER, 0.6MM	0322 179 00003
CBA	2 TUNER PIP PANEL ASSEMBLY	3139 137 22981

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 43P8341A/37
First Published: 09-23-02
Rev. Date: 10-25-02
Print Date: 2004-09-08

Parts List

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

CABINET & ACCESSORY PARTS

CABINET & ACCESSORY PARTS			
AC01	BACKCOVER f/43P8341/37, 43P8341A/37 (USA Model)	3135 014 10823	
AC02	CABINET BACK, UPPER.	3135 037 50021	
AC03	PIP FRAME.	3135 014 10062	
AC04	SUPPORT FRAME F/SSB.	3135 014 10321	
AC06	CHASSIS FRAME.	3135 014 09962	
AC07	LIGHT BARRIER.	3135 013 03731	
AC08	REAR JACK FRAME.	3135 014 09982	
AC09	FRONT ASM.	3135 017 06843	
AC10	BRACKET MIRROR MTG 43", (2 used)	3135 011 04611	
AC14	FRESNEL SCREEN, 43".	3135 014 10311	
AC15	LENTICULAR SCREEN, 43".	3135 014 10301	
AC16	PROTECTIVE FILTER SCREEN, 43".	3135 014 10022	
AC19	MIRROR ASM., 43".	3135 034 90011	
S AC23	Mains Cord (Special - Noise Filtered)	2422 070 98164	
AC25	Speakers, 4" x 6" Alt. (2 used).	2422 264 00425	
AC28	BRACKET SCREEN TOP, (2 used)	3135 011 04481	
AC29	BRACKET SCREEN SIDE, (2 used).	3135 011 04491	
AC30	BAFFLE SPEAKER GRILL	3135 017 06853	
AC31	NAMEPLATE.	3135 015 02511	
AC37	BUTTON ASSY.	3135 017 06982	
S CRTB	CRT P16LTG00BMB(U)	9322 173 23682	
S CRTG	CRT P16LTG00HHA(U)	9322 173 21682	
S CRTR	CRT P16LTG00RFA(U)	9322 173 22682	
S DEFL	DEFLECTION YOKE, DAV4284M (TSAJ) B, (3 used).	2422 549 44589	
S FG2	FOCUS/G2 CONTROL, 100M 15KV.	2422 549 45201	
LSVM	INDUCTOR, FIXED, SCAVEM DBV4305C (TSAJ).	2422 549 44797	
REMOTE	RC2015/01 Remote Control (Fighter +)	3128 147 12082	

CRT ASSEMBLY

CRT ASSEMBLY			
X1	SCREW, 8-32X0.5 TORX, (12 used), LENS TO COUPLER	3135 010 02971	
X10	COOLANT KIT.	4835 310 67032	
X11	SEAL, CRT, (3 used).	3135 013 02321	
X12	MOUNTING BRACKET, CRT, (3 used).	3135 011 02371	
X13	SPRING COMPRESSION, (12 used), CRT MT	3135 011 00611	
X14	SCREW, SHOULDER, (12 used), CRT TO COUPLER.	3135 010 08101	
X2	LENS DELTA 78, (2 used), GREEN & RED	3135 013 00822	
X2	LENS DELTA 77, FOR BLUE.	3135 013 01052	
X3	LENS C-ELEMENT DELTA-77, FOR GREEN	3135 013 01071	
X3	LENS C-ELEMENT DELTA-77, (2 used), RED & BLUE	3135 013 01081	
X4	SEAL, LENS, (3 used), LENS TO COUPLER	3135 013 02632	
X5	CAP, COUPLER, (3 used), DIAPHRAGM COVER.	3135 014 02681	
X6	DIAPHRAM COUPLER, (3 used)	3135 013 01061	
X7	SEAL, VENT PLUG, (3 used).	3135 013 01231	
X8	PLUG, VENT, (3 used)	3135 014 02641	
X9	COUPLER CRT-LENS, Green.	3135 011 04281	
X9	COUPLER, CRT-LENS 43", (2 used), RED & BLU.	3135 011 04473	

FCC FILTER PANEL ASSEMBLY

FCC FILTER PANEL ASSEMBLY			
0006	LINE HEATSINK A8, IS HS 0600	3139 121 61663	
0060	SILICON INSULATOR SP600, SIL PAD FOR 6000	3135 010 02351	
0061	IC-SPRING, CLIP FOR 6000	3135 011 02331	
S 1000	FUSE, 5A, 250V	2422 093 00035	
S 1004	FUSE, 1A, 250V	2422 093 00027	
1100	CONNECTOR, 8 PIN	2422 025 10648	
1108	CONNECTOR, 4 PIN	2422 025 15503	
1110	CONNECTOR, 1 PIN	2422 015 18552	
S 2000	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 680NF., 20%	2222 336 29149	
S 2002	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554 90173	
S 2003	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554 90173	
2004	SURGE PROTECTOR, DSP-501N-A21F	2422 549 42349	
S 2005	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 220NF., 20%	2222 336 29146	
2006	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2007	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2008	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2009	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020 558 90557	
2102	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554 90169	
2103	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554 90169	
2107	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	3198 019 61020	

2108	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	3198 019 61020	
2110	ELECTROLYTIC CAPACITOR, 200V, 470UF., 20%.	2020 021 91321	
2214	ELECTROLYTIC CAPACITOR, 250V, 10UF., 20%.	2020 012 93495	
S 3000	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242 13475	
S 3001	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242 13475	
S 3002	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242 13475	
3003	RESISTOR, CARBON COMP., 470R, 20%.	2120 103 90019	
3009	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322 253 41228	
3010	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322 253 41228	
S 3011	VARIATOR, DC 1MA/495V S MAX 850V	2322 595 90021	
S 3012	RESISTOR, METAL FILM, 1MEG, 5%	2322 242 13105	
3300	RESISTOR, METAL OXIDE, 5W, 22K, 5%	2322 257 41223	
S 5000	FILTER, MAINS, 8MH., 7A.	2422 549 44591	
S 5005	FILTER, MAINS, 80UH., 1.8A	2422 549 44041	
5103	FIXED INDUCTOR, 4.7UH., 5%	2422 535 94213	
S 5106	FILTER, MAINS, 80UH., 1.8A	2422 549 44041	
6000	DIODE BRIDGE RECTIFIER, GBU4JL-7002.	9322 132 55667	
6001	DIODE BRIDGE RECTIFIER, DF06M.	9338 118 70682	
9000	WIRE JUMPER, 0.58MM.	3198 036 90010	
9001	WIRE JUMPER, 0.58MM.	3198 036 90010	
9002	WIRE JUMPER, 0.58MM.	3198 036 90010	
9003	WIRE JUMPER, 0.58MM.	3198 036 90010	
9030	WIRE JUMPER, 0.58MM.	3198 036 90010	
9031	WIRE JUMPER, 0.58MM.	3198 036 90010	
9032	WIRE JUMPER, 0.58MM.	3198 036 90010	
9101	WIRE JUMPER, 0.58MM.	3198 036 90010	
9102	WIRE JUMPER, 0.58MM.	3198 036 90010	
CBA	FCC FILTER PANEL ASSEMBLY.	3135 017 05441	

CISPR FILTER PANEL ASSEMBLY

CISPR FILTER PANEL ASSEMBLY

LSB PANEL ASSEMBLY

LSB PANEL ASSEMBLY			
CBA	LSB PANEL ASSEMBLY	3135 037 10471	
0031	Heatsink, Vertical	3135 011 04591	
0033	Heatsink, T0220.	2422 487 89872	
0036	Heatsink, T0-220	3135 011 03291	
0038	Heatsink, T0-220	3135 011 03291	
0040	Heatsink, T0220.	2422 487 89872	
0043	Heatsink, T0220.	2422 487 89872	
0046	Heatsink, T0-220	3135 011 03291	
0056	IC-Spring.	3135 011 01511	
0057	Insulator, Mica.	3135 010 02911	
0058	Solder Terminal.	3135 010 02801	
0065	Heatsink, T0-92, Black Anodized.	3135 011 01871	
0066	Solder Terminal.	3135 010 02801	
0067	IC, Spring	3135 011 02331	
0068	Insulator.	3135 010 02351	
0069	Spring, Clip	3135 011 02621	
0070	Insulator.	3135 010 02341	
0080	Heatsink, T0-247	3135 011 00553	
0081	Solder Terminal.	3135 010 02801	
0082	IC-Spring.	3135 011 01512	
0083	Insulator.	3135 010 02321	
1201	Surge Protector.	2422 549 43675	
S 1300	Fuse/Clip, 5A, 250 V	2422 093 00035	
S 1302	Fuse, Radial, LT 4A, 250V.	2422 086 10786	
S 1305	Relay, 1 Pin, 5V, 5A, LKS1AF.	2422 132 07314	
1500	Connector, 8 Pin	2422 025 10648	
1504	Connector, 4 Pin	2422 025 16153	
1505	Connector, 4 Pin	2422 025 16153	
1506	Connector, 4 Pin	2422 025 16153	
1508	Connector, 3 Pin	2422 025 14409	
1510	Connector, 4 Pin	2422 025 12479	
1516	Connector, 12 Pin.	2422 025 08333	
1518	Connector, 12 Pin.	2422 025 08333	
1520	Connector, 12 Pin.	2422 025 08333	
1574	Connector, 1 Pin	2422 015 18552	
S 1800	Fuse, LT 1A, 250V.	2422 086 10779	
S 1801	Fuse, LT 1A, 250V.	2422 086 10779	
1901	Connector, 2 Pin	2412 020 00724	
S 2203	Cap, 2n2, 20%, v, Ceramic.	2020 554 90173	
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554 90169	
2206	Cap, 220u, 20%, 25v, Electrolytic.	2020 012 92641	
2208	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2210	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290	
2211	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
2212	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2213	Cap, 1000u, 20%, 16v, Electrolytic	3198 026 21020	
2215	Cap, 220p, 10%, 1000v, Ceramic	2020 558 90424	
2216	Cap, 220p, 10%, 1000v, Ceramic	2020 558 90424	
2218	Cap, 10u, 20%, 250v, Electrolytic.	2020 012 93495	
2226	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019 22230	
2228	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2269	Cap, 100p, 10%, 500v, Ceramic.	3198 019 41010	
2270	Cap, 100u, 20%, 25v, Electrolytic.	2020 012 92639	
2282	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	
2283	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	

S = Safety Part Be sure to use exact replacement part.

2285	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	2825	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90555
2301	Cap, 1n5, 10%, 1000v, Ceramic . . .	2020 558 90443	2826	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2302	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90471	2827	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026 21020
2303	Cap, 100u, 20%, 25v, Electrolytic . . .	2020 012 92639	2828	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010
2304	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558 90554	2829	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010
2305	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019 14710	2836	Cap, 1n, 10%, 1000v, Ceramic . . .	2020 558 90557
2306	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025 51080	2837	Cap, 10u, 20%, 50v, Electrolytic . . .	3198 025 51090
2307	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019 14720	2838	Cap, 1n, 10%, 1000v, Ceramic . . .	2020 558 90557
2308	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019 14720	2839	Cap, 18n, 5%, 630v, Polypropylene . .	2222 375 90218
2309	Cap, 82p, 5%, 50v, Ceramic . . .	3198 019 08290	2850	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90555
2310	Cap, 680p, 10%, 50v, Ceramic . . .	3198 019 16810	2851	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010
2311	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019 11020	2852	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2313	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	2853	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2314	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	2907	Cap, 100n, +80/-20%, 25v, Ceramic . .	3198 023 21040
2315	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	2908	Cap, 100n, +80/-20%, 25v, Ceramic . .	3198 023 21040
2316	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2909	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 017 04720
2317	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2910	Cap, 10n, 10%, 50v, Ceramic . . .	3198 017 01030
2318	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2911	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2319	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	2912	Cap, 220u, 20%, 35v, Electrolytic . . .	2020 012 93462
2320	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2913	Cap, 220u, 20%, 35v, Electrolytic . . .	2020 012 93462
2321	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	2914	Cap, 100n, 10%, 16v, Ceramic . . .	3198 017 01040
2322	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2915	Cap, 100n, +80/-20%, 25v, Ceramic . .	3198 023 21040
2323	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	2916	Cap, 10n, 10%, 50v, Polyester . . .	2020 300 90573
2324	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374	2917	Cap, 100n, 10%, 250v, Metalized Polye	ster 2222 368 90177
2325	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2918	Cap, 47u, 20%, 50v, Electrolytic . . .	3198 025 54790
2326	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2919	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 017 04720
2327	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021 91374	2922	Cap, 330u, 20%, 200v, Electrolytic . .	2020 024 90586
2328	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025 51080	3216	Res, 10 ohm, 5%, 1/3W, Metal Film . .	2322 205 33109
2329	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558 90424	3223	Res, 47 ohm, 5%, 1/10W, Metalized Gla	ss. 3198 021 54790
2330	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	3230	Res, 1K5, 5%, 1/6W, Carbon Film . . .	3198 011 01520
2331	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3231	Res, 220 ohm, 5%, 2 1/2W, Metal Film	3198 012 32210
2332	Cap, 1000u, 20%, 50v, Electrolytic . .	2020 021 91415	3232	Res, 22 ohm, 5%, 2 1/2W, Metal Film . .	3198 012 32290
2333	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 019 12220	3239	Res, 2K4, 1%, 3/5W, Metal Film . . .	2322 156 22402
2334	Cap, 33n, 10%, 50v, Polyester . . .	3198 014 03330	3240	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2335	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	3244	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
2338	Cap, 1000u, 20%, 25v, Electrolytic . .	2020 012 93458	3245	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
2339	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3246	Res, 820 ohm, 5%, 1/6W, Carbon Film . .	3198 011 08210
2340	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	3287	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2341	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3301	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322 251 41339
2342	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019 14710	3302	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322 251 41339
2343	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019 11020	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2344	Cap, 1000u, 20%, 25v, Electrolytic . .	2020 012 93458	3304	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
2345	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	3305	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198 011 01030
2346	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla	ss. 3198 021 51590
2349	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019 21030	3307	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198 011 04780
2351	Cap, 22n, +80/-20%, 50v, Ceramic . . .	3198 019 22230	3308	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198 012 21070
2352	Cap, 1000u, 20%, 25v, Electrolytic . .	2020 012 93458	3309	Res, 0R33, 5%, 1 1/3W, Metal Film . . .	3198 012 23370
2353	Cap, 220p, 10%, 50v, Ceramic . . .	3198 019 12210	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03910
2354	Cap, 220u, 20%, 25v, Electrolytic . . .	3198 025 32210	3311	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198 011 04780
2355	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019 14710	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198 011 07590
2356	Cap, 470u, 20%, 35v, Electrolytic . . .	2020 021 91376	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2452	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 012 92648	3314	Res, 82K, 5%, 1/6W, Carbon Film . . .	3198 011 08230
2501	Cap, 470n, 10%, 50v, Polyester . . .	3198 014 04740	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2503	Cap, 680p, 10%, 500v, Ceramic . . .	2020 557 90441	3316	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
2511	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3317	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2513	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2514	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2516	Cap, 150p, 10%, 500v, Ceramic . . .	3198 019 41510	3322	Res, Trimer, 470R	2120 368 90118
2556	Cap, 10n, 10%, 50v, Ceramic . . .	3198 017 01030	3323	Res, 2K7, 5%, 1W, Metal Film	2120 105 93474
2557	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010	3324	Res, 100K, 5%, 1W, Metal Film	3198 012 11040
2558	Cap, 68n, 10%, 100v, Polyester . . .	2222 347 90235	3325	Res, 10K, 5%, 1/6W, Carbon Film	3198 011 01030
2559	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2564	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016 01020	3327	Res, 100 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 51010
2565	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3328	Res, 100 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 51010
2567	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 53310
2570	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016 04710	3333	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198 012 21070
2571	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016 01020	3334	Res, 1K, 5%, 1/10W, Metalized Glass . .	3198 021 51020
2572	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 017 02220	3335	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2573	Cap, 470p, 10%, 50v, Ceramic . . .	2020 552 91152	3336	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2574	Cap, 680n, 10%, 50v, Polyester . . .	3198 014 06840	3337	Res, 390 ohm, 5%, 1/6W, Carbon Film . .	3198 011 03910
2586	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	3339	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2608	Cap, 680p, 10%, 500v, Ceramic . . .	3198 019 46810	3340	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
2805	Cap, 100n, 10%, 250v, Metalized Polye	ster 2222 368 90177	3343	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2806	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557 90438	3344	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2807	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040	3347	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720
2809	Cap, 100n, 10%, 250v, Metalized Polye	ster 2222 368 90177	3350	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
2810	Cap, 470u, 20%, 200v, Electrolytic . .	2020 021 91321	3351	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
2811	Cap, 330p, 10%, 2000v, Ceramic . . .	2020 558 90481	3352	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
2814	Cap, 68u, 20%, 400v, Electrolytic . . .	2020 024 90587	3353	Res, 4K7, 5%, 1W, Metal Film	3198 012 14720
2815	Cap, 1n, 10%, 500v, Ceramic . . .	3198 019 41020	3452	Res, 1R5, 5%, 1 1/3W, Metal Film . . .	3198 012 21580
2816	Cap, 18n, 5%, 630v, Polypropylene . .	2222 375 90218	3456	Res, 270 ohm, 5%, 1/10W, Metalized Gl	ass. 3198 021 52710
2817	Cap, 11n, 5%, 1600v, Polypropylene . .	2222 375 90155	3457	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
2818	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557 90438	3458	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2819	Cap, 18n, 5%, 630v, Polypropylene . .	2222 375 90218	3500	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2820	Cap, 4u7, 10%, 100v, Metalized Polyes	ter 2222 368 90178	3501	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2822	Cap, 430n, 5%, 250v, Metalized Polypyr	opylene 2222 479 90022			
2823	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040			
2824	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558 90555			

3503	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3968	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3504	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3969	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3505	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	3975	Res, 100 ohm, 5%, 1/3W, Metal Film.	2322 205 33101
3506	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3983	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3507	Res, 47K, 5%, 1/6W, Carbon Film.	3198 011 04730	3990	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002
3508	Res, 3K9, 5%, 1/6W, Carbon Film.	3198 011 03920	3991	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3509	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	3992	Res, 470K, 5%, 1/6W, Carbon Film.	3198 011 04740
3510	Res, 470K, 5%, 1/6W, Carbon Film.	3198 011 04740	5201	Filter, Mains, 100UH, 2A2.	2422 549 44101
3511	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5202	Transformer, Layer, S229B3-01 Y.	2422 531 98038
3550	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002	5234	Coil, 10u.	2422 535 95363
3551	Res, 2K, 1%, 1/8W, Metalized Glass	2322 734 62002	5235	Coil, 10u.	2422 535 95363
3562	Res, 4R7, 5%, 1W, Metal Film.	3198 012 14780	5238	Coil, 10u.	2422 535 95363
3563	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	5239	Coil, 10u.	2422 535 95363
3565	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	5300	Transformer, Layer, S549C1-04 B.	2422 531 02439
3571	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5301	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3572	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5302	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3573	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5303	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3581	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5304	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3584	Res, 1 ohm, 5%, 3W, Wire Wound.	2122 251 01385	5305	Coil, 10u.	2422 535 95363
3585	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	5306	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3590	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	5307	Coil, 10u.	2422 535 95363
3591	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5308	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3592	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5309	Coil, 10u.	2422 535 95363
3593	Res, 2K2, 5%, 1/6W, Carbon Film.	3198 011 02220	5310	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3595	Res, 33K, 5%, 1/6W, Carbon Film.	3198 011 03330	5311	Coil, 10u.	2422 535 95363
3596	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5312	Coil, 10u.	2422 535 95363
3597	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5313	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3598	Res, 100 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51010	5314	Coil, 10u.	2422 535 95363
3800	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5315	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3801	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	5316	Coil, 10u.	2422 535 95363
3802	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	5317	Coil, 10u.	2422 535 95363
3803	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5318	Coil, 680u.	2422 536 00103
3805	Res, 100 ohm, 5%, 1W, Metal Film.	2120 105 93394	5319	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3806	Res, 10K, 5%, 1W, Metal Film.	2120 105 93407	5320	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3807	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5321	Coil, 3u3.	2422 535 94373
3808	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	5322	Coil, 10u.	2422 535 95363
3809	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5800	Transformer, Signal Driver, C925-01 Y.	2422 535 91022
3810	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5801	Transformer, Layer, S409C3-02 B.	2422 531 02438
3811	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5802	Transformer, Signal, W8073-001 Y.	2422 531 02434
3812	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	5803	Coil, 485u.	2422 536 00079
3813	Res, 1 ohm, 5%, 2W, Metal Film.	2120 106 90572	5804	Coil, 40u.	2422 536 00078
3814	Res, 33 ohm, 5%, 1/10W, Metalized Glass.	3198 021 53390	5805	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
3815	Res, 0R27, 5%, 1/2W, Metal Film.	2322 207 90048	5806	Coil, 47u.	2422 535 95282
3816	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	5807	Coil, 22u.	3198 018 72290
3817	Res, 0R27, 5%, 1/2W, Metal Film.	2322 207 90048	5810	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3820	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	5811	Coil, 10u.	2422 535 95363
3821	Res, 470 ohm, 5%, 1W, Metal Film.	2120 105 93398	5812	Coil, 10u.	2422 535 95363
3822	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	5900	High Voltage Generator	3122 268 32865
3823	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	5904	Fixed, Inductor, 100MHZ, 80 ohm.	3198 018 90020
3824	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	6200	Diode, P4KE550.	9322 141 04673
3825	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	6201	Zener Diode, 8.2 volt.	3198 010 28280
3826	Res, 220 ohm, 5%, 1W, Metal Film.	2120 105 93396	6204	Diode, Rect, BYV10-40.	9337 432 70133
3828	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	6205	IC, TL431BCLP.	9322 115 98676
3829	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6207	Diode, Rect, BYD33D.	9337 234 00133
3830	Res, 470 ohm, 5%, 1W, Metal Film.	2120 105 93398	6231	Diode, Rect, BYV10-40.	9337 432 70133
3834	Res, 1 ohm, 5%, 1/3W, Metal Film.	2322 205 33108	6235	Diode, Rect, BYD33D.	9337 234 00133
3835	Res, 2K7, 5%, 1/6W, Carbon Film.	3198 011 02720	6301	Diode, Rect, BYD33J.	9337 234 20133
3837	Res, 12K, 5%, 1/6W, Carbon Film.	3198 011 01230	6302	Diode, Rect, 1N5062.	3198 010 10120
3838	Res, 1K5, 5%, 1/6W, Carbon Film.	3198 011 01520	6303	Diode, Rect, 1N5062.	3198 010 10120
3839	Res, 300K, 5%, 2 1/2W, Metal Film.	2322 195 63304	6306	Diode, Rect, BY229X-600.	9340 380 20127
3840	Res, 1M, 5%, 1/2W, Metalized Glass.	2322 242 13105	6307	Diode, Rect, BY229X-600.	9340 380 20127
3841	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	6308	Diode, Rect, BY229X-600.	9340 380 20127
3865	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	6312	Diode, Rect, SB360L-7003.	9322 128 68682
3866	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	6313	Diode, Signal, 1N4148.	9330 839 90133
3867	Res, 1 ohm, 5%, 1/3W, Metal Film.	2322 205 33108	6500	Zener Diode, 10 volt.	9340 386 80115
3890	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6501	Diode, Signal, BAS316.	3198 010 10630
3891	Res, 6K8, 5%, 1W, Metal Film.	3198 012 16820	6502	Diode, Signal, BAS316.	3198 010 10630
3900	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030	6503	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6504	Diode, Rect, BYD33D.	9337 234 00133
3902	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	6505	Zener Diode, 4.7 volt.	3198 010 24780
3903	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	6550	Diode, Rect, BYV27-200.	9335 526 80133
3904	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6551	Diode, Signal, BAS316.	3198 010 10630
3906	Res, 4R7, 5%, 5W, Wire Wound.	2322 251 41478	6552	Zener Diode, 4.7 volt.	3198 010 24780
3907	Res, 2K, 1%, 1/8W, Metalized Glass.	2322 734 62002	6801	Diode, Rect, BYD33J.	9337 234 20133
3909	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	6802	Diode, Rect, BYV27-200.	9335 526 80133
3911	Res, 100 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51010	6803	Diode, Rect, BYV27-200.	9335 526 80133
3912	Res, 100 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51010	6806	Diode, Rect, BY228/24.	9340 559 50112
3913	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	6807	Diode, Rect, BYD33M.	9337 410 30133
3914	Res, 10 ohm, 5%, 1/10W, Metalized Glass.	3198 021 51090	6808	Diode, Rect, BYW95C.	9335 001 50133
3917	Res, 68K, 5%, 1/6W, Carbon Film.	3198 011 06830	6809	Diode, Signal, BAS316.	3198 010 10630
3918	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6810	Diode, Signal, BAS316.	3198 010 10630
3940	Res, 3K3, 1%, 3/5W, Metal Film.	2322 156 23302	6830	Diode, Rect, BYD33M.	9337 410 30133
3941	Res, 10K, 1%, 3/5W, Metal Film.	2322 156 21003	6850	Diode, Rect, BYD33J.	9337 234 20133
3942	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	6900	Diode, Signal, BAS316.	3198 010 10630
3959	Res, 1K, 5%, 1/4W, Carbon Film.	2120 101 74102	6905	Diode, Signal, BAS316.	3198 010 10630
3960	Res, 100 ohm, 5%, 1/3W, Metal Film.	2322 205 33101	6907	Diode, Signal, BAS316.	3198 010 10630
3967	Res, 270 ohm, 5%, 1/10W, Metalized Glass.	3198 021 52710	6910	Diode, Signal, BAS316.	3198 010 10630
			6911	Diode, Signal, BAS316.	3198 010 10630
			6912	Diode, Signal, BAS316.	3198 010 10630
			6919	Zener Diode, 27 volt.	3198 010 52790

S = Safety Part Be sure to use exact replacement part.

6920	Diode, Signal, BAS316.	3198 010 10630	0123	Heatsink, Folded	3135 011 04555
6921	Diode, Signal, BAS316.	3198 010 10630	0139	IC, Spring	3135 011 02331
6922	Diode, Signal, BAS316.	3198 010 10630	0200	Heatsink, T0-220	3135 011 02511
6950	Zener Diode, 4.7 volt.	3198 010 24780	0201	Heatsink, T0-220	3135 011 02511
6951	Diode, Signal, BAS316.	3198 010 10630	1000	Connector, 5 Pin	2422 025 12481
7208	Transistor, NPN, BC547B.	3198 020 40030	1001	Connector, 10 Pin.	2422 025 12484
7209	IC, MC34064P-5	9322 066 44676	1002	Connector, 3 Pin	2412 020 00725
7211	IC, TOP221P.	9322 125 16682	1003	Connector, 3 Pin	2422 025 09191
7213	Optic Coupler, CQY80NG	9338 941 50682	1005	Connector, 2 Pin	2412 020 00724
7300	Transistor, NPN, BC547B.	3198 020 40030	1009	Connector, 2 Pin	2412 020 00724
7301	F.E.T., Power, STW20NB50	9322 131 15687	1014	Connector, 7 Pin	2422 025 11244
7302	IC, MC44603AP.	9322 108 36682	1015	Connector, 1 Pin	2422 015 18552
7303	Optic Coupler, CQY80NG	9338 941 50682	1017	Connector, 12 Pin.	2422 025 08333
7304	IC, TL431BCLP.	9322 115 98676	1018	Connector, 12 Pin.	2422 025 08333
7307	IC, MC34063AP1	9322 036 71682	1020	Connector, 12 Pin.	2422 025 08333
7308	F.E.T., Power, IRF9224N.	9322 134 76687	1023	Connector, 1 Pin	2422 015 18552
7309	Transistor, NPN, BC547B.	3198 020 40030	1026	Connector, SIMM, 80 Pin.	2422 025 16599
7500	Transistor, PNP, BC807-25.	3198 010 43130	1036	Connector, 3 Pin	2412 020 00725
7501	Transistor, PNP, BC807-25.	3198 010 43130	1037	Connector, 1 Pin	2422 015 18552
7550	IC, TDA4861/V3	9352 018 80112	1044	Connector, 3 Pin	2412 020 00725
7551	Transistor, NPN, BC847B.	3198 010 42030	1049	Connector, 5 Pin	2422 025 15832
7552	Transistor, PNP, TIP42C.	9336 594 40687	1072	Connector, 3 Pin	2412 020 00725
7553	Transistor, NPN, BC847B.	3198 010 42030	1073	Connector, 4 Pin	2422 025 12479
7590	Transistor, NPN, BC847B.	3198 010 42030	1074	Connector, 4 Pin	2422 025 12479
7800	Transistor, NPN, BC847B.	3198 010 42030	1083	Connector, 10 Pin.	2422 025 12484
7801	Transistor, NPN, 2SC2482	9322 103 07678	1084	Connector, 10 Pin.	2422 025 12484
7802	Transistor, NPN, BU4515AF.	9340 550 93127	1262	Socket, Cinch, 12 Pin.	2422 026 05064
7803	Transistor, PNP, BC557B.	3198 020 40110	1264	Socket, MDIN, 10 Pin	2422 026 04926
7830	Transistor, NPN, 2SC3675	9322 122 57687	1301	Tuner, V+U, PLL	2422 542 90108
7905	Transistor, NPN, BC547B.	3198 020 40030	S 1910	Fuse, 2 A, 250V IEC.	2422 086 10783
7906	Transistor, NPN, BC817-25.	3198 010 43230	S 1911	Fuse, LT 4A, 250V IEC.	2422 086 10786
7907	Transistor, PNP, BC807-25.	3198 010 43130	S 1912	Fuse, LT 4A, 250V IEC.	2422 086 10786
7908	Transistor, NPN, BC817-25.	3198 010 43230	1913	Connector, 4 Pin	2422 025 12479
7909	Transistor, PNP, BC807-25.	3198 010 43130	2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
7910	Transistor, PNP, BC557B.	3198 020 40110	2001	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9101	Wire Jumper, 0.58MM.	3198 036 90010	2002	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
9102	Wire Jumper, 0.58MM.	3198 036 90010	2003	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
9104	Wire Jumper, 0.58MM.	3198 036 90010	2004	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
9105	Wire Jumper, 0.58MM.	3198 036 90010	2005	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9106	Wire Jumper, 0.58MM.	3198 036 90010	2006	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9107	Wire Jumper, 0.58MM.	3198 036 90010	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9108	Wire Jumper, 0.58MM.	3198 036 90010	2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9109	Wire Jumper, 0.58MM.	3198 036 90010	2009	Cap, 330p, 10%, 50v, Ceramic.	3198 019 13310
9110	Wire Jumper, 0.58MM.	3198 036 90010	2010	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
9111	Wire Jumper, 0.58MM.	3198 036 90010	2011	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9112	Wire Jumper, 0.58MM.	3198 036 90010	2012	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220
9113	Wire Jumper, 0.58MM.	3198 036 90010	2013	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
9114	Wire Jumper, 0.58MM.	3198 036 90010	2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9115	Wire Jumper, 0.58MM.	3198 036 90010	2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9116	Wire Jumper, 0.58MM.	3198 036 90010	2016	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9117	Wire Jumper, 0.58MM.	3198 036 90010	2017	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9119	Wire Jumper, 0.58MM.	3198 036 90010	2018	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
9120	Wire Jumper, 0.58MM.	3198 036 90010	2019	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9123	Wire Jumper, 0.58MM.	3198 036 90010	2020	Cap, 27p, 5%, 50v, Ceramic.	3198 016 02790
9124	Wire Jumper, 0.58MM.	3198 036 90010	2021	Cap, 27p, 5%, 50v, Ceramic.	3198 016 02790
9127	Wire Jumper, 0.58MM.	3198 036 90010	2022	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9128	Wire Jumper, 0.58MM.	3198 036 90010	2023	Cap, 27p, 5%, 50v, Ceramic.	3198 016 02790
9129	Wire Jumper, 0.58MM.	3198 036 90010	2024	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9130	Wire Jumper, 0.58MM.	3198 036 90010	2025	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9131	Wire Jumper, 0.58MM.	3198 036 90010	2026	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9132	Wire Jumper, 0.58MM.	3198 036 90010	2027	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9133	Wire Jumper, 0.58MM.	3198 036 90010	2028	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9134	Wire Jumper, 0.58MM.	3198 036 90010	2029	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9136	Wire Jumper, 0.58MM.	3198 036 90010	2030	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9137	Wire Jumper, 0.58MM.	3198 036 90010	2031	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9139	Wire Jumper, 0.58MM.	3198 036 90010	2032	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
9140	Wire Jumper, 0.58MM.	3198 036 90010	2034	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210
9142	Wire Jumper, 0.58MM.	3198 036 90010	2035	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9143	Wire Jumper, 0.58MM.	3198 036 90010	2036	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9144	Wire Jumper, 0.58MM.	3198 036 90010	2037	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
9145	Wire Jumper, 0.58MM.	3198 036 90010	2040	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090
9146	Wire Jumper, 0.58MM.	3198 036 90010	2041	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040
9147	Wire Jumper, 0.58MM.	3198 036 90010	2042	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
9148	Wire Jumper, 0.58MM.	3198 036 90010	2043	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
9149	Wire Jumper, 0.58MM.	3198 036 90010	2044	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020
9150	Wire Jumper, 0.58MM.	3198 036 90010	2046	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9152	Wire Jumper, 0.58MM.	3198 036 90010	2049	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
9153	Wire Jumper, 0.58MM.	3198 036 90010	2050	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020
9154	Wire Jumper, 0.58MM.	3198 036 90010	2052	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
9901	Wire Jumper, 0.58MM.	3198 036 90010	2053	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010
9902	Wire Jumper, 0.58MM.	3198 036 90010	2054	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010
			2055	Cap, 100n, 10%, 50v, Polyester	3198 014 01040
			2056	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020
			2058	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
			2061	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
			2062	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
			2063	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
			2064	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
			2065	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
			2066	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
			2067	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
			2068	Cap, 100n, 10%, 50v, Polyester	3198 014 01040

SSM PANEL ASSEMBLY

CBA	SSM PANEL ASSEMBLY , NAFTA, FIGHTER +	3135 037 10441
0001	Shield, Top	3135 011 02252
0002	Shield, Bottom	3135 011 01892
0009	Heatsink, T0-220	3135 011 03291
0010	Heatsink, T0-220	3135 011 03291
0012	Heatsink, Folded	3135 011 04555
0072	Spring, Clip, Horiz.	3135 011 04572
0082	Spring, Clip, Horiz.	3135 011 04572

S = Safety Part Be sure to use exact replacement part.

2069	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010	2510	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
2070	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025 51010	2511	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710
2071	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	2512	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020
2072	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2513	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2073	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2514	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020
2074	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2516	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2075	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2600	Cap, 1u, 20%, 50v, Electrolytic	3198 025 51080
2076	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2601	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2077	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2602	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2078	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2604	Cap, 82p, 5%, 50v, Ceramic	3198 016 08290
2079	Cap, 330n, +80/-20%, 25v, Ceramic . . .	2222 910 19856	2605	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2080	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	2606	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2082	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2607	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2201	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2608	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2203	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2609	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2206	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2610	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2208	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2611	Cap, 22u, 20%, 50v, Electrolytic	3198 025 52290
2211	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2612	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030
2217	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2613	Cap, 10u, 20%, 50v, Electrolytic	3198 025 51090
2219	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2616	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2224	Cap, 100n, +80/-20%, 50v, Ceramic . . .	2020 552 95499	2617	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2227	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2618	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2228	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2619	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050
2229	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2620	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2230	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2621	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2231	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2622	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290
2233	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2623	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2239	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2624	Cap, 56p, 5%, 50v, Ceramic	3198 016 05690
2242	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	2625	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010
2244	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2626	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2249	Cap, 22p, 5%, 50v, Ceramic	3198 016 02290	2627	Cap, 56p, 5%, 50v, Ceramic	3198 016 05690
2250	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	2629	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090
2251	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2630	Cap, 56p, 5%, 50v, Ceramic	3198 016 05690
2252	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	2631	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010
2255	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	2632	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
2260	Cap, 100n, +80/-20%, 50v, Ceramic . . .	2020 552 95499	2633	Cap, 220p, 5%, 50v, Ceramic	3198 016 02210
2300	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2634	Cap, 180p, 5%, 50v, Ceramic	3198 016 01810
2301	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2704	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2302	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	2705	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2303	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	2717	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2304	Cap, 15p, 5%, 50v, Ceramic	3198 016 01590	2718	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2305	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730	2719	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2306	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	2720	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2307	Cap, 47n, 10%, 25v, Ceramic	3198 023 04730	2721	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2308	Cap, 100p, 5%, 50v, Ceramic	3198 016 01010	2723	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2310	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	2724	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2311	Cap, 10n, 10%, 50v, Ceramic	3198 017 01030	2725	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2312	Cap, 470p, 5%, 50v, Ceramic	3198 016 04710	2726	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040
2313	Cap, 1u, +80/-20%, 16v, Ceramic	3198 017 21050	2727	Cap, 47n, +80/-20%, 50v, Ceramic . . .	3198 017 24730
2317	Cap, 560p, 5%, 50v, Ceramic	2020 552 93609	2764	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790
2318	Cap, 560p, 5%, 50v, Ceramic	2020 552 93609	3000	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2319	Cap, 560p, 5%, 50v, Ceramic	2020 552 93609	3001	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2320	Cap, 4n7, 10%, 50v, Ceramic	3198 017 04720	3002	Res, 470 ohm, 5%, 1/6W, Carbon Film . .	3198 011 04710
2366	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	3003	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2401	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3004	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2402	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3005	Res, 2K2, 5%, 1/6W, Carbon Film	3198 011 02220
2403	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3006	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2405	Cap, 470u, 20%, 35v, Electrolytic	3198 026 44710	3007	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass	3198 021 51010
2406	Cap, 100n, +80/-20%, 50v, Ceramic . . .	2020 552 95499	3008	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2407	Cap, 2u2, 20%, 50v, Electrolytic	3198 026 52220	3009	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2410	Cap, 470u, 20%, 35v, Electrolytic	3198 026 44710	3010	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
2411	Cap, 470n, +80/-20%, 16v, Ceramic . . .	2020 552 95343	3011	Res, 33K, 5%, 1/10W, Metalized Glass . .	3198 021 53330
2412	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3012	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2413	Cap, 100n, 10%, 16v, Ceramic	3198 017 01040	3013	Res, 3K3, 5%, 1/6W, Carbon Film	3198 011 03320
2414	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020	3014	Res, 2K7, 5%, 1/10W, Metalized Glass . .	3198 021 52720
2415	Cap, 6n8, 10%, 50v, Ceramic	3198 017 06820	3015	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass	3198 021 52210
2416	Cap, 6n8, 10%, 50v, Ceramic	3198 017 06820	3016	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2417	Cap, 1n, 5%, 50v, Ceramic	3198 016 01020	3017	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2322 205 33101
2418	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3018	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2419	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3019	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
2420	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3020	Res, 10K, 5%, 1/10W, Metalized Glass . .	3198 021 51030
2421	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3021	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2422	Cap, 1n, 10%, 50v, Ceramic	3198 017 01020	3022	Res, 1K3, 5%, 1/8W, Metalized Glass . . .	2322 730 81132
2423	Cap, 470n, +80/-20%, 16v, Ceramic . . .	2020 552 95343	3023	Res, 4K7, 5%, 1/10W, Metalized Glass . .	3198 021 54720
2430	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3024	Res, 100 ohm, 5%, 1/3W, Metal Film . . .	2322 205 33101
2431	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3025	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198 021 52220
2432	Cap, 2u2, 20%, 50v, Electrolytic	3198 025 52280	3026	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198 021 51020
2433	Cap, 100n, 10%, 63v, Metalized Polyes ter	2222 365 75104	3027	Res, 6K8, 5%, 1/10W, Metalized Glass . .	3198 021 56820
2434	Cap, 100n, 10%, 63v, Metalized Polyes ter	2222 365 75104	3028	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198 021 51020
2435	Cap, 10u, 20%, 100v, Electrolytic	3198 025 71090	3030	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2443	Cap, 47u, 20%, 50v, Electrolytic	3198 025 54790	3031	Res, 2K2, 5%, 1/10W, Metalized Glass . .	3198 021 52220
2467	Cap, 100u, 20%, 50v, Electrolytic	3198 025 51010	3032	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2500	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	3033	Res, 1K5, 5%, 1/10W, Metalized Glass . .	3198 021 51520
2503	Cap, 33p, 5%, 50v, Ceramic	3198 016 03390	3034	Res, 4K7, 5%, 1/6W, Carbon Film	3198 011 04720
2504	Cap, 150p, 5%, 50v, Ceramic	3198 016 01510	3035	Res, 1K6, 1%, 1/8W, Metalized Glass . . .	2322 734 61602
2505	Cap, 330p, 5%, 50v, Ceramic	3198 016 03310	3036	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320
2506	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040	3037	Res, 3K3, 5%, 1/10W, Metalized Glass . .	3198 021 53320
2507	Cap, 100u, 20%, 25v, Electrolytic	3198 025 31010	3038	Res, 100 ohm, 5%, 1/6W, Carbon Film . .	3198 011 01010
2508	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023 21040	3039	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass	3198 021 51010
2509	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790			

S = Safety Part Be sure to use exact replacement part.

3040	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322 730 81132	3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3041	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010	3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3042	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3125	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3043	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322 734 61602	3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3044	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3045	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3201	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3046	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3202	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3047	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3203	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3048	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3204	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3049	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3206	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3050	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3207	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3051	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3208	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3052	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3209	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3053	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3210	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3054	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3211	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3055	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3212	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3056	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3216	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3057	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3217	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3058	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3218	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3059	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3219	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3060	Res, 15 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31590	3220	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3061	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3221	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3062	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3222	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3063	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3223	Res, 68 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 56890
3064	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3065	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3066	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3226	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3067	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3227	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3068	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3233	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3069	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3234	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3070	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3235	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3071	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3236	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3072	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3237	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3073	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3238	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3074	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3239	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3075	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3240	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3076	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3241	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3077	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3242	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3078	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3243	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3079	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3244	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3080	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3247	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210
3081	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	3248	Res, 75 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 57590
3082	Res, 820 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 58210	3249	Res, 150 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51510
3083	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710	3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030
3084	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3252	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3085	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3260	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3086	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3300	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3087	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3301	Res, 47 ohm, 5%, 1/10W, Metalized Gla ss.	3198 021 54790
3088	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3302	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3089	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3303	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3304	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3097	Res, 1K, 5%, 2 1/2W, Metal Film. . .	3198 012 31020	3307	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3098	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3308	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3099	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3309	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3100	Res, 560 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 55610	3310	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3101	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3102	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3103	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3318	Res, 270 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52710
3104	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3332	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3105	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3333	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3106	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310	3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3107	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3335	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3108	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3336	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3337	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3110	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	3338	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3111	Res, 220 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 52210	3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3112	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3340	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3113	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3341	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3114	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3342	Res, 330 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 53310
3115	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3343	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3344	Res, 100 ohm, 5%, 1/10W, Metalized Gl ass.	3198 021 51010
3117	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3119	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020			

3403	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3608	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3404	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530		ass.	3198 021 51020
3405	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3609	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 54720
3406	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3610	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 55620
3407	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	3611	Res, 5K6, 5%, 1/10W, Metalized Glass	
3408	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3612	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3409	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530		ass.	3198 021 51020
3410	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3613	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51820
3412	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220	3614	Res, 1K8, 5%, 1/10W, Metalized Glass	
3415	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3615	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3416	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220		ass.	3198 021 51010
3418	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	3616	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3419	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030		ass.	3198 021 52710
3420	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	3617	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3422	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720		ass.	3198 021 51010
3423	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3618	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3424	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		ass.	3198 021 53910
3425	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	3619	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 56890
3427	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090		ass.	3198 021 58210
3428	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3620	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56820
	ss.	3198 021 51020	3621	Res, 820 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3430	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 52220
3431	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3622	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 51010
3432	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3623	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 51020
3433	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930		ass.	3198 021 55610
3434	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3624	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 51010
3435	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3625	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51020
3445	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530		ass.	3198 021 55610
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3626	Res, 1K, 5%, 1/10W, Metalized Glass.	
3450	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3627	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3451	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504		ass.	3198 021 55610
3452	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3628	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3453	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930		ass.	3198 021 51010
3500	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3629	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3501	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720		ss.	3198 021 51020
3502	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710	3630	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 53310
	ass.	3198 021 57590	3631	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3503	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590		ass.	3198 021 52710
	ss.	3198 021 52290	3632	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3504	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 51010
	ss.	3198 021 52290	3633	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 51010
	ss.	3198 021 52290	3634	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 51010
	ss.	3198 021 53910	3635	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3507	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53320		ass.	3198 021 51010
	ass.	3198 021 55610	3636	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 53320
3508	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 51010		ass.	3198 021 54710
3509	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 54720	3637	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 52220
	ass.	3198 021 52290	3638	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
3511	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 52290		ass.	3198 021 53310
	ss.	3198 021 52290	3639	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 51090
3512	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 52290	3640	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 51090
3513	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ass.	3198 021 51090
	ss.	3198 021 52290	3641	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51050
3514	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290		ss.	3198 021 51020
	ss.	3198 021 56890	3642	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51020
3515	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3643	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 52220
3516	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3644	Res, 1K, 5%, 1/10W, Metalized Glass.	
	ss.	3198 021 52290	3647	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52710
3517	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3648	Res, 270 ohm, 5%, 1/10W, Metalized Gl	2322 205 33108
	ss.	3198 021 51220		ass.	2322 205 33108
3518	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51520	3650	Res, 1 ohm, 5%, 1/3W, Metal Film . .	
3519	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 55620	3651	Res, 1 ohm, 5%, 1/3W, Metal Film . .	3198 021 51090
3520	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 52230	3652	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3521	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 51090
3522	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 55620	3653	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3523	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 51520		ss.	3198 021 51090
3524	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3654	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 53920
3525	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090		ss.	3198 021 51220
	ss.	2322 205 33109	3655	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 56830
3527	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109	3656	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 52230
3528	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3657	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 51040
	ass.	3198 021 56810	3658	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 58230
3529	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810	3659	Res, 100K, 5%, 1/10W, Metalized Glass	3198 011 01020
	ass.	3198 021 55610	3660	Res, 82K, 5%, 1/10W, Metalized Glass	
3600	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 53320	3661	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 021 56890
	ass.	3198 021 51020	3663	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 51030
3601	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 51020		ss.	3198 021 56810
3602	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3664	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3603	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3665	Res, 680 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 52710		ass.	3198 021 54710
3604	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3666	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 52210
	ass.	3198 021 51010	3667	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 011 01020
3605	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910		ass.	
	ass.	3198 021 56890	3669	Res, 220 ohm, 5%, 1/10W, Metalized Gl	
3606	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 56890		ass.	3198 021 52210
	ass.		3670	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 021 56890
3607	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3698	Res, 68 ohm, 5%, 1/10W, Metalized Gla	2322 205 33109
	ss.		3712	Res, 10 ohm, 5%, 1/3W, Metal Film. .	

S = Safety Part Be sure to use exact replacement part.

S = Safety Part Be sure to use exact replacement part.

S = Safety Part Be sure to use exact replacement part.

9509	Wire Jumper, 0.58MM.	3198 036 90010	1057	CRYSTAL RESONATOR, 12MHZ 20P DSX840.	2422 543 01095
9510	Wire Jumper, 0.58MM.	3198 036 90010	1327	CRYSTAL RESONATOR, 12MHZ 20P DSX840.	2422 543 01095
9511	Wire Jumper, 0.58MM.	3198 036 90010	1333	CERAMIC FILTER, 4.5MHZ, TPSCC*MB BS.	2422 549 44043
9512	Wire Jumper, 0.58MM.	3198 036 90010	1451	SAW FILTER, 45.75MHZ., 0FWM1967L	2422 549 44377
9513	Wire Jumper, 0.58MM.	3198 036 90010	1630	CRYSTAL RESONATOR, 18M432 12P DSX840	2422 543 01059
9514	Wire Jumper, 0.58MM.	3198 036 90010	2010	CAPACITOR, NP0, 25V, 820PF.	3198 016 38210
9515	Wire Jumper, 0.58MM.	3198 036 90010	2014	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9516	Wire Jumper, 0.58MM.	3198 036 90010	2015	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9517	Wire Jumper, 0.58MM.	3198 036 90010	2016	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9519	Wire Jumper, 0.58MM.	3198 036 90010	2017	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9520	Wire Jumper, 0.58MM.	3198 036 90010	2018	CAPACITOR, X7R, 50V, 2.2NF.	3198 017 32220
9521	Wire Jumper, 0.58MM.	3198 036 90010	2041	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290
9522	Wire Jumper, 0.58MM.	3198 036 90010	2042	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290
9523	Wire Jumper, 0.58MM.	3198 036 90010	2043	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780
9524	Wire Jumper, 0.58MM.	3198 036 90010	2044	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9525	Wire Jumper, 0.58MM.	3198 036 90010	2045	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890
9530	Wire Jumper, 0.58MM.	3198 036 90010	2046	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890
9531	Wire Jumper, 0.58MM.	3198 036 90010	2049	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9533	Wire Jumper, 0.58MM.	3198 036 90010	2050	CAPACITOR, NP0, 50V, 100PF.	3198 016 31010
9534	Wire Jumper, 0.58MM.	3198 036 90010	2051	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9536	Wire Jumper, 0.58MM.	3198 036 90010	2053	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9538	Wire Jumper, 0.58MM.	3198 036 90010	2301	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9539	Wire Jumper, 0.58MM.	3198 036 90010	2302	CAPACITOR, NP0, 50V, 330PF.	3198 016 33310
9545	Wire Jumper, 0.58MM.	3198 036 90010	2303	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720
9548	Wire Jumper, 0.58MM.	3198 036 90010	2306	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9549	Wire Jumper, 0.58MM.	3198 036 90010	2309	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9550	Wire Jumper, 0.58MM.	3198 036 90010	2311	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9551	Wire Jumper, 0.58MM.	3198 036 90010	2312	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9552	Wire Jumper, 0.58MM.	3198 036 90010	2313	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9553	Wire Jumper, 0.58MM.	3198 036 90010	2314	CAPACITOR, PPS, 16V, 100NF., 5%.	2020 319 90005
9555	Wire Jumper, 0.58MM.	3198 036 90010	2316	CAPACITOR, X7R, 25V 22NF.	3198 017 32230
9556	Wire Jumper, 0.58MM.	3198 036 90010	2317	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9557	Wire Jumper, 0.58MM.	3198 036 90010	2319	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9558	Wire Jumper, 0.58MM.	3198 036 90010	2321	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720
9559	Wire Jumper, 0.58MM.	3198 036 90010	2322	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9560	Wire Jumper, 0.58MM.	3198 036 90010	2323	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9561	Wire Jumper, 0.58MM.	3198 036 90010	2324	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9563	Wire Jumper, 0.58MM.	3198 036 90010	2325	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9564	Wire Jumper, 0.58MM.	3198 036 90010	2326	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9565	Wire Jumper, 0.58MM.	3198 036 90010	2327	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9566	Wire Jumper, 0.58MM.	3198 036 90010	2328	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9567	Wire Jumper, 0.58MM.	3198 036 90010	2332	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9568	Wire Jumper, 0.58MM.	3198 036 90010	2333	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9569	Wire Jumper, 0.58MM.	3198 036 90010	2334	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9570	Wire Jumper, 0.58MM.	3198 036 90010	2335	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9571	Wire Jumper, 0.58MM.	3198 036 90010	2338	CAPACITOR, X7R, 50V, 2.2NF.	3198 017 32220
9572	Wire Jumper, 0.58MM.	3198 036 90010	2342	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9573	Wire Jumper, 0.58MM.	3198 036 90010	2345	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9574	Wire Jumper, 0.58MM.	3198 036 90010	2348	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9575	Wire Jumper, 0.58MM.	3198 036 90010	2350	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780
9576	Wire Jumper, 0.58MM.	3198 036 90010	2354	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9577	Wire Jumper, 0.58MM.	3198 036 90010	2355	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9578	Wire Jumper, 0.58MM.	3198 036 90010	2356	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9579	Wire Jumper, 0.58MM.	3198 036 90010	2357	CAPACITOR, NP0, 50V, 10PF.	3198 016 31090
9580	Wire Jumper, 0.58MM.	3198 036 90010	2372	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720
9581	Wire Jumper, 0.58MM.	3198 036 90010	2373	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20	3198 030 81080
9582	Wire Jumper, 0.58MM.	3198 036 90010	2374	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9583	Wire Jumper, 0.58MM.	3198 036 90010	2375	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9584	Wire Jumper, 0.58MM.	3198 036 90010	2376	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9585	Wire Jumper, 0.58MM.	3198 036 90010	2377	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9586	Wire Jumper, 0.58MM.	3198 036 90010	2380	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9587	Wire Jumper, 0.58MM.	3198 036 90010	2381	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9588	Wire Jumper, 0.58MM.	3198 036 90010	2382	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9589	Wire Jumper, 0.58MM.	3198 036 90010	2401	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9590	Wire Jumper, 0.58MM.	3198 036 90010	2402	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9591	Wire Jumper, 0.58MM.	3198 036 90010	2403	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9592	Wire Jumper, 0.58MM.	3198 036 90010	2404	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9593	Wire Jumper, 0.58MM.	3198 036 90010	2405	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9594	Wire Jumper, 0.58MM.	3198 036 90010	2407	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9595	Wire Jumper, 0.58MM.	3198 036 90010	2408	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9596	Wire Jumper, 0.58MM.	3198 036 90010	2412	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9597	Wire Jumper, 0.58MM.	3198 036 90010	2413	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9598	Wire Jumper, 0.58MM.	3198 036 90010	2415	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9599	Wire Jumper, 0.58MM.	3198 036 90010	2417	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9600	Wire Jumper, 0.58MM.	3198 036 90010	2421	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9601	Wire Jumper, 0.58MM.	3198 036 90010	2422	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9602	Wire Jumper, 0.58MM.	3198 036 90010	2423	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9603	Wire Jumper, 0.58MM.	3198 036 90010	2424	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9604	Wire Jumper, 0.58MM.	3198 036 90010	2425	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9605	Wire Jumper, 0.58MM.	3198 036 90010	2427	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9700	Wire Jumper, 0.58MM.	3198 036 90010	2428	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9701	Wire Jumper, 0.58MM.	3198 036 90010	2429	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9702	Wire Jumper, 0.58MM.	3198 036 90010	2430	CAPACITOR, NP0, 50V, 68PF.	3198 016 36890
9703	Wire Jumper, 0.58MM.	3198 036 90010	2431	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790
9704	Wire Jumper, 0.58MM.	3198 036 90010			
9705	Wire Jumper, 0.58MM.	3198 036 90010			
9706	Wire Jumper, 0.58MM.	3198 036 90010			
9707	Wire Jumper, 0.58MM.	3198 036 90010			
9708	Wire Jumper, 0.58MM.	3198 036 90010			
9709	Wire Jumper, 0.58MM.	3198 036 90010			
SSB MODULE ASSEMBLY					
SSB MODULE ASSEMBLY					
0205	CONNECTOR, 10 PIN.	2422 025 16677			
0320	FACTORY PLATE.	3122 120 01701			

S = Safety Part Be sure to use exact replacement part.

2432	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3058	RESISTOR, 470R, 5%	3198 021 34710
2435	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3059	RESISTOR, 150R, 5%	3198 021 31510
2437	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030	3061	RESISTOR, 470R, 5%	3198 021 34710
2438	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810	3062	RESISTOR, 4K7, 5%	3198 021 34720
2439	CAPACITOR, NP0, 50V, 150PF.	3198 016 31510	3064	RESISTOR, 4K7, 5%	3198 021 34720
2440	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690	3065	RESISTOR, 4K7, 5%	3198 021 34720
2453	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030	3066	RESISTOR, 8K2, 5%	3198 021 38220
2457	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3081	RESISTOR, 4K7, 5%	3198 021 34720
2458	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20 0%.	3198 030 81080	3082	RESISTOR, 10K, 5%	3198 021 31030
2461	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3083	RESISTOR, 470R, 5%	3198 021 34710
2462	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030	3084	RESISTOR, 100R, 5%	3198 021 31010
2463	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030	3085	RESISTOR, 100R, 5%	3198 021 31010
2601	CAPACITOR, NP0, 50V, 470PF.	3198 016 34710	3086	RESISTOR, 100R, 5%	3198 021 31010
2602	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3088	RESISTOR, 100R, 5%	3198 021 31010
2606	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3092	RESISTOR, 100R, 5%	3198 021 31010
2607	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240	3301	RESISTOR, 1K, 5%	3198 021 31020
2612	CAPACITOR, X7R, 50V, 1NF.	3198 017 31020	3302	RESISTOR, 560R, 5%	3198 021 35610
2613	CAPACITOR, X7R, 50V, 1NF.	3198 017 31020	3305	RESISTOR, 3K9, 5%	3198 021 33920
2619	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720	3307	RESISTOR, 390R, 5%	3198 021 33910
2620	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3311	RESISTOR, 27K, 5%	3198 021 32730
2621	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3312	RESISTOR, 10K, 5%	3198 021 31030
2623	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3315	RESISTOR, 39K, 5%	3198 021 33930
2624	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3316	RESISTOR, 220R, 5%	3198 021 32210
2625	ELECTROLYTIC CAPACITOR, 16V, 22UF., 2 0%.	3198 030 42290	3324	RESISTOR, 390R, 5%	3198 021 33910
2628	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3329	RESISTOR, 100R, 5%	3198 021 31010
2629	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3330	RESISTOR, 100R, 5%	3198 021 31010
2635	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3331	RESISTOR, FUSEABLE, 2R2, 5%	2322 750 62208
2636	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3332	RESISTOR, FUSEABLE, 2R2, 5%	2322 750 62208
2637	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3333	RESISTOR, 1K, 5%	3198 021 31020
2638	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3334	RESISTOR, JUMPER, 0R05	3198 021 90030
2639	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3335	RESISTOR, 120R, 5%	3198 021 31210
2640	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3339	RESISTOR, 10K, 5%	3198 021 31030
2641	CAPACITOR, X7R, 50V, 330PF.	3198 017 33310	3340	RESISTOR, 560R, 5%	3198 021 55610
2642	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3341	RESISTOR, 150R, 5%	3198 021 31510
2655	CAPACITOR, X7R, 50V, 4.7NF.	3198 017 34720	3342	RESISTOR, JUMPER, 0R05	3198 021 90030
2657	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3344	RESISTOR, 150R, 5%	3198 021 31510
2661	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3345	RESISTOR, JUMPER, 0R05	3198 021 90030
2662	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3348	RESISTOR, 150R, 5%	3198 021 31510
2663	CAPACITOR, NP0, 50V, 47PF.	3198 016 34790	3349	RESISTOR, JUMPER, 0R05	3198 021 90030
2664	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690	3358	RESISTOR, 100R, 5%	3198 021 31010
2665	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790	3361	RESISTOR, 100R, 5%	3198 021 31010
2666	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810	3362	RESISTOR, 100R, 5%	3198 021 31010
2667	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590	3363	RESISTOR, 100R, 5%	3198 021 31010
2675	CAPACITOR, NP0, 50V, 3P3	3198 016 33380	3364	RESISTOR, 1K, 5%	3198 021 31020
2676	CAPACITOR, NP0, 50V, 3P3	3198 016 33380	3365	RESISTOR, 560R, 5%	3198 021 55610
2679	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	3371	RESISTOR, 15K, 5%	3198 021 31530
2682	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3373	RESISTOR, 100R, 5%	3198 021 31010
2683	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3374	RESISTOR, 3K3, 5%	3198 021 33320
2684	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3375	RESISTOR, 1K, 5%	3198 021 31020
2685	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3376	RESISTOR, 1K, 5%	3198 021 31020
2686	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3377	RESISTOR, 100R, 5%	3198 021 31010
2687	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	3378	RESISTOR, 1K, 5%	3198 021 31020
3002	RESISTOR, 8K2, 5%	3198 021 38220	3381	RESISTOR, 100R, 5%	3198 021 31010
3003	RESISTOR, 10K, 5%	3198 021 31030	3382	RESISTOR, 100R, 5%	3198 021 31010
3004	RESISTOR, 8K2, 5%	3198 021 38220	3383	RESISTOR, 100R, 5%	3198 021 31010
3007	RESISTOR, 8K2, 5%	3198 021 38220	3384	RESISTOR, 8K2, 5%	3198 021 38220
3008	RESISTOR, 8K2, 5%	3198 021 38220	3385	RESISTOR, 10K, 5%	3198 021 31030
3009	RESISTOR, 8K2, 5%	3198 021 38220	3387	RESISTOR, 100R, 5%	3198 021 31010
3013	RESISTOR, 8K2, 5%	3198 021 38220	3388	RESISTOR, 47R, 5%	3198 021 34790
3014	RESISTOR, 8K2, 5%	3198 021 38220	3393	RESISTOR, 27K, 5%	3198 021 52730
3015	RESISTOR, 10K, 5%	3198 021 31030	3394	RESISTOR, 18K, 5%	3198 021 31830
3017	RESISTOR, 100R, 5%	3198 021 31010	3397	RESISTOR, 10R, 5%	3198 021 31090
3018	RESISTOR, 100R, 5%	3198 021 31010	3401	RESISTOR, 100R, 5%	3198 021 31010
3019	RESISTOR, 100R, 5%	3198 021 31010	3402	RESISTOR, 100R, 5%	3198 021 31010
3021	RESISTOR, 100R, 5%	3198 021 31010	3403	RESISTOR, 100R, 5%	3198 021 31010
3022	RESISTOR, 2K2, 5%	3198 021 32220	3404	RESISTOR, 100R, 5%	3198 021 31010
3023	RESISTOR, 8K2, 5%	3198 021 38220	3405	RESISTOR, 100R, 5%	3198 021 31010
3024	RESISTOR, 1K, 5%	3198 021 31020	3411	RESISTOR, 1K5, 5%	3198 021 31520
3030	RESISTOR, 1K, 5%	3198 021 31020	3412	RESISTOR, 1K5, 5%	3198 021 31520
3031	RESISTOR, 470R, 5%	3198 021 34710	3413	RESISTOR, 560R, 5%	3198 021 55610
3034	RESISTOR, 47K, 5%	3198 021 34730	3414	RESISTOR, 1K5, 5%	3198 021 31520
3035	RESISTOR, 470R, 5%	3198 021 34710	3415	RESISTOR, 1K5, 5%	3198 021 31520
3042	RESISTOR, 150R, 5%	3198 021 31510	3416	RESISTOR, 560R, 5%	3198 021 55610
3043	RESISTOR, 150R, 5%	3198 021 31510	3417	RESISTOR, 1K, 5%	3198 021 31020
3044	RESISTOR, 10K, 5%	3198 021 31030	3418	RESISTOR, 560R, 5%	3198 021 55610
3045	RESISTOR, 2K7, 5%	3198 021 32720	3419	RESISTOR, 470R, 5%	3198 021 34710
3046	RESISTOR, 4K7, 5%	3198 021 34720	3422	RESISTOR, 470R, 5%	3198 021 34710
3051	RESISTOR, 24K, 1%	2322 704 62403	3423	RESISTOR, 100R, 5%	3198 021 31010
3054	RESISTOR, 10K, 5%	3198 021 31030	3424	RESISTOR, 4K7, 5%	3198 021 34720
3055	RESISTOR, 10K, 5%	3198 021 31030	3425	RESISTOR, 100R, 5%	3198 021 31010
3056	RESISTOR, 47K, 5%	3198 021 34730	3426	RESISTOR, 820R, 5%	3198 021 38210
3057	RESISTOR, 10K, 5%	3198 021 31030	3427	RESISTOR, 100R, 5%	3198 021 31010
			3428	RESISTOR, 47K, 5%	3198 021 34730
			3429	RESISTOR, 1K, 5%	3198 021 31020
			3430	RESISTOR, 1K, 5%	3198 021 31020
			3434	RESISTOR, 47K, 5%	3198 021 34730
			3437	RESISTOR, 47K, 5%	3198 021 34730
			3438	RESISTOR, 47K, 5%	3198 021 34730
			3466	RESISTOR, 10K, 5%	3198 021 31030
			3467	RESISTOR, 10K, 5%	3198 021 31030
			3468	RESISTOR, 10K, 5%	3198 021 31030
			3471	RESISTOR, JUMPER, 0R05	3198 021 90030

3472	RESISTOR, JUMPER, 0R05	3198 021 90030	1006	TACTILE SWITCH, SKQNAB	2422 128 02742
3473	RESISTOR, JUMPER, 0R05	3198 021 90030	1007	TACTILE SWITCH, SKQNAB	2422 128 02742
3474	RESISTOR, JUMPER, 0R05	3198 021 90030	1214	CONNECTOR, 7 PIN, M 2.50 EH.	2422 025 12491
3477	RESISTOR, 4K7, 5%	3198 021 34720	1215	CONNECTOR, 1 PIN, M 4.8x0.5 STAB	2422 015 18551
3478	RESISTOR, 10R, 5%	3198 021 31090	2003	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040
3483	RESISTOR, 560R, 5%	3198 021 55610	2004	ELECTROLYTIC CAPACITOR, 16V, 100UF., 20%	3198 028 21010
3484	RESISTOR, 1K, 5%	3198 021 31020		RESISTOR, 1K5, 5%	3198 021 51520
3488	RESISTOR, 220R, 5%	3198 021 32210	3008	RESISTOR, RC12H, 1K5, 1%	2322 734 61502
3489	RESISTOR, 390R, 5%	3198 021 33910	3010	RESISTOR, RC12H, 750R, 1%	2322 734 87501
3490	RESISTOR, 390R, 5%	3198 021 33910	3011	RESISTOR, RC12H, 2K, 1%	2322 734 62002
3491	RESISTOR, 820R, 5%	3198 021 38210	3012	RESISTOR, RC12H, 270R, 1%	2322 734 62701
3492	RESISTOR, 560R, 5%	3198 021 35610	3013	RESISTOR, RC12H, 2K7, 1%	2322 734 62702
3493	RESISTOR, 390R, 5%	3198 021 33910	3015	RESISTOR, RC12H, 3K9, 1%	2322 734 63902
3601	RESISTOR, 100R, 5%	3198 021 31010	3017	RESISTOR, 470R, 5%	3198 021 54710
3602	RESISTOR, 100R, 5%	3198 021 31010	3020	RESISTOR, 10K, 5%	3198 021 51030
3606	RESISTOR, 27K, 5%	3198 021 32730	3022	RESISTOR, 330R, 5%	3198 021 53310
3619	RESISTOR, 100R, 5%	3198 021 31010	3025	LED, VS TLDR5400 (TEG0)	9322 110 34682
3621	RESISTOR, 100R, 5%	3198 021 31010	6002	IR RECEIVER, TSOP1736 (VISH)	9322 152 44687
3665	RESISTOR, 2K2, 5%	3198 021 32220	6005	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4008	RESISTOR, JUMPER, 0R05	3198 021 90030	6009	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4306	RESISTOR, 100R, 5%	3198 021 31010	6011	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4307	RESISTOR, JUMPER, 0R05	3198 021 90030	6013	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4309	RESISTOR, JUMPER, 0R05	3198 021 90030	6014	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4312	RESISTOR, JUMPER, 0R05	3198 021 90030	6015	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4313	RESISTOR, JUMPER, 0R05	3198 021 90030	6016	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4316	RESISTOR, JUMPER, 0R05	3198 021 90030	CBA	KEYBOARD PANEL ASSEMBLY, 43" MODEL	3135 017 07601
4317	RESISTOR, JUMPER, 0R05	3198 021 90020			
4318	RESISTOR, JUMPER, 0R05	3198 021 90020			
4319	RESISTOR, JUMPER, 0R05	3198 021 90020			
4320	RESISTOR, JUMPER, 0R05	3198 021 90020			
4401	RESISTOR, JUMPER, 0R05	3198 021 90020			
4402	RESISTOR, JUMPER, 0R05	3198 021 90020			
4403	RESISTOR, JUMPER, 0R05	3198 021 90020			
4410	RESISTOR, JUMPER, 0R05	3198 021 90020			
4411	RESISTOR, JUMPER, 0R05	3198 021 90020			
4434	RESISTOR, JUMPER, 0R05	3198 021 90030			
4435	RESISTOR, JUMPER, 0R05	3198 021 90030			
4436	RESISTOR, JUMPER, 0R05	3198 021 90030			
4451	RESISTOR, JUMPER, 0R05	3198 021 90030			
4455	RESISTOR, JUMPER, 0R05	3198 021 90030			
4465	RESISTOR, JUMPER, 0R05	3198 021 90030			
5040	FIXED INDUCTOR, 4U7, 5%	3198 018 64780			
5041	FIXED INDUCTOR, 4U7, 5%	3198 018 64780			
5042	FIXED INDUCTOR, 4U7, 5%	3198 018 64780			
5309	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5332	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5333	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5334	FIXED INDUCTOR, 6U8, 5%	3198 018 66880			
5401	FIXED INDUCTOR, 0U82, 10%	3198 018 38270			
5421	FIXED INDUCTOR, 22UH., 20%	3198 018 32290			
5422	FIXED INDUCTOR, 15UH., 20%	3198 018 31590			
5425	FIXED INDUCTOR, 22UH., 20%	3198 018 32290			
5426	FIXED INDUCTOR, 15UH., 20%	3198 018 31590			
5601	FIXED INDUCTOR, 1UH., 5%	3198 018 61080			
5602	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780			
5625	FIXED INDUCTOR, 1UH., 5%	3198 018 61080			
5665	FIXED INDUCTOR, 15UH., 5%	3198 018 61590			
6031	DIODE REGULATOR, UDZ2.4B (RHM0)	9322 131 13685			
6302	DIODE REGULATOR, BZX384-C8V2	3198 020 58280			
6303	DIODE REGULATOR, BZX384-C6V8	3198 020 56880			
6412	DIODE, SIGNAL, BAS316	3198 010 10630			
6415	DIODE, SIGNAL, BAS316	3198 010 10630			
6605	DIODE, SIGNAL, BAS316	3198 010 10630			
7053	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7063	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7064	IC, SAA5667HL/M1/ (PHSE)	4835 310 57615			
7066	IC, M24C32-WMN6 (ST00)	9322 124 74668			
7301	IC, TDA8887H/N1 (PHSE)	9352 638 72557			
7307	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7331	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42320			
7368	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7401	IC, 74HC4053PW (PHSE)	9351 869 40118			
7405	IC, TC90A45F (TOSJ)	9322 144 38668			
7407	IC, 74HC4066PW (PHSE)	9351 750 00118			
7412	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7415	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7421	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7425	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7442	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7446	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7630	IC, 74HC4052PW (PHSE)	9351 874 90118			
7651	IC, MSP3435G-FH-B5 (MTAS)	9322 143 55671			
CBA	SSB MODULE ASSEMBLY, FIGHTER PLUS.	3139 127 25871			

KEYBOARD PANEL ASSEMBLY

	KEYBOARD PANEL ASSEMBLY	
0005	LENS, F/IR RECEIVE	3135 014 10231
0007	CONTROL HOUSING, SILVER.	3135 017 06982
1001	TACTILE SWITCH, SKQNAB	2422 128 02742
1002	TACTILE SWITCH, SKQNAB	2422 128 02742
1003	TACTILE SWITCH, SKQNAB	2422 128 02742
1004	TACTILE SWITCH, SKQNAB	2422 128 02742

SIDE JACK PANEL ASSEMBLY

	SIDE JACK PANEL ASSEMBLY	
1001	SOCKET, CINCH, 3 PIN, YEWHRD	2422 026 04756
1002	SOCKET, MINIDIN, 4 PIN, TCS7959.	2422 026 05157
1007	SOCKET, PHONE, 1 PIN	2422 026 04747
1335	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484
1337	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552
1344	CONNECTOR, 3 PIN, M 2.50 EH.	2412 020 00725
2000	CAPACITOR, CERAMIC, Y5V, 25V, 220NF., +80-20%	2238 910 19854
2001	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
2002	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
2005	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
2006	CAPACITOR, CERAMIC, NP0, 50V, 330PF.	3198 016 03310
3000	RESISTOR, 75R, 5%	3198 021 57590
3001	RESISTOR, 75R, 5%	3198 021 57590
3002	RESISTOR, 75R, 5%	3198 021 57590
3005	RESISTOR, 1K, 5%	3198 021 51020
3006	RESISTOR, 22K, 5%	3198 021 52230
3007	RESISTOR, 1K, 5%	3198 021 51020
3009	RESISTOR, 22K, 5%	3198 021 52230
3019	RESISTOR, 10R, 5%	3198 021 51090
3020	RESISTOR, 10R, 5%	3198 021 51090
3023	RESISTOR, 10R, 5%	3198 021 51090
3028	RESISTOR, 10R, 5%	3198 021 51090
3029	RESISTOR, 3K9, 5%	3198 021 53920
3030	RESISTOR, 1K8, 5%	3198 021 51820
6000	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6001	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6002	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6003	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6004	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6005	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6006	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6007	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6008	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6009	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6010	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6011	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6012	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
6013	DIODE, REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
9000	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9000	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9001	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9001	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
9002	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322 179 00003
CBA	SIDE JACK PANEL ASSEMBLY	3135 017 05461

RED & BLUE CRT PANEL ASSEMBLIES

	RED & BLUE CRT PANEL ASSEMBLIES	
0079	HEATSINK, T0-220, USE SI COMP THERMAL	3135 011 01231
1000	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021
1001	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021
1701	CRT SOCKET, 10PIN, F HPS0521	2422 500 80051
S 1702	SURGE PROTECTOR, DSP-501N-A21F	2422 549 42349
1871	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484
1872	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646
1873	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646
1875	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552
2701	CAPACITOR, METALIZED POLYESTER, 400V, 10NF., 10%	2222 365 55103
S 2702	CAPACITOR, METALIZED POLYESTER, 400V, 10NF., 10%	2222 365 55103
S 2705	CAPACITOR, CERAMIC, 2KV, 1NF., 10%	2020 558 90487
2717	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%	2020 012 93487

2720	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2721	CAPACITOR, METALIZED POLYESTER, 63V, 100NF., 10%.	2222	365	75104
2722	CAPACITOR, CERAMIC, B 500V S 560P, 10	2020	557	90147
2750	CAPACITOR, CERAMIC, NP0 50V S 220PF.	3198	019	02210
2751	CAPACITOR, PLOYPROPYLENE, 50V, 1NF., 2%	2020	310	90049
2752	CAPACITOR, CERAMIC, Y5P, 1KV, 1NF.	3198	019	51020
3703	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198	011	01010
3710	RESISTOR, CARBON FILM, 1K5, 10%.	2120	101	28152
S 3716	RESISTOR, CARBON FILM, 100R, 20%.	2120	103	90057
S 3718	RESISTOR, CARBON FILM, 1/2W, 22K, 5%	2120	103	90075
3719	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
S 3720	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
S 3730	RESISTOR, METAL OXIDE, 5W, 3K3, 5%.	2322	257	41332
S 3731	RESISTOR, METAL OXIDE, 5W, 3K3, 5%.	2322	257	41332
3733	RESISTOR, METAL OXIDE, 10M, 5%.	2322	241	53106
3735	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198	011	01010
3737	RESISTOR, CARBON FILM, 1/2W, 3K3, 20%	3198	013	03320
3738	RESISTOR, CARBON FILM, 1/6W, 100K, 5%	3198	011	01040
3740	RESISTOR, CARBON FILM, 1/6W, 1K, 5%.	3198	011	01020
3742	RESISTOR, METAL FILM, 1K, 1%.	2322	156	21002
3743	RESISTOR, METAL FILM, 220R, 1%.	2322	156	22201
3745	RESISTOR, METAL FILM, 75R, 1%.	2138	116	17509
3750	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198	011	01010
3751	RESISTOR, METAL FILM, 15R, 1%.	2138	116	11509
3752	RESISTOR, 22K, 5%.	2120	103	90075
3753	RESISTOR, CARBON FILM, 27R, 5%.	2120	101	74279
3755	RESISTOR, POWER, 1W, 47R, 5%.	3198	012	14790
3756	RESISTOR, POWER, 1W, 68R, 5%.	3198	012	16890
5701	FIXED INDUCTOR, 100UH., 5%.	3198	018	11010
5702	FIXED INDUCTOR, 15UH., 10%.	2422	535	97331
5703	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5704	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5705	FIXED INDUCTOR, 22UH., 10%.	2422	535	97333
6701	DIODE RECTIFIER, BYD33J (PHSE).	9337	234	20133
6702	DIODE REGULATOR, BZX79-B6V2 (PHSE).	9331	668	30133
6705	DIODE RECTIFIER, BYD33J (PHSE).	9337	234	20133
6706	DIODE RECTIFIER, BYD33J (PHSE).	9337	234	20133
7701	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322	122	58682
7702	TRANSISTOR, SIGNAL, BC337-25).	3198	020	43530
7703	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ).	9322	103	08678
7705	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334	196	60126
9701	WIRE JUMPER 0.6MM.	0322	179	00003
9702	WIRE JUMPER 0.6MM.	0322	179	00003
CBA	RED & BLUE CRT PANEL ASSEMBLIES.	3135	017	04961

GREEN CRT PANEL ASSEMBLY

	GREEN CRT PANEL ASSEMBLY			
0089	HEATSINK TO-220, USE SI COMP THERMAL	3135	011	01231
1000	CONNECTOR, 1 PIN, M RT-01T-1.0	2422	034	20021
1001	CONNECTOR, 1 PIN, M 4.8 X 0.5	2422	015	18552
1002	CONNECTOR, 1 PIN, M RT-01T-1.0	2422	034	20021
S 1801	CRT SOCKET, 10 PIN, HPS0521.	2422	500	80051
S 1802	SURGE PROTECTOR, DSP-501N-A21.	2422	549	42349
1881	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
1882	CONNECTOR, 4 PIN, M 2.50 EH.	2422	025	12479
1883	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
1884	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
1885	CONNECTOR, 2 PIN, M 3.96 VH.	2422	025	10646
1886	CONNECTOR, 4 PIN, M 3.96 VH.	2422	025	10647
2801	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103
S 2805	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020	558	90487
2807	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103
2817	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%.	2020	012	93487
2820	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2821	CAPACITOR, POLYESTER, 63V, 100NF., 10	2222	365	75104
2822	CAPACITOR, CERAMIC DISK, 500V, 560P, 10%.	2020	557	90147
2850	CAPACITOR, CERAMIC DISK, NP0, 50V, 220PF.	3198	019	02210
2851	CAPACITOR, POLYPROPYLENE, 50V, 1NF., 2%.	2020	310	90049
2852	CAPACITOR, CERAMIC DISK, Y5P, 1KV, 1NF.	3198	019	51020
3803	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010
3810	RESISTOR, CARBON, 1/2W, 1K5, 10%.	2120	101	28152
S 3816	RESISTOR, CARBON, 1/2W, 100R, 20%.	2120	103	90057
S 3818	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075
S 3819	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
S 3820	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608
3825	RESISTOR, METAL FILM, 220K, 1%.	2322	156	22204
3826	RESISTOR, METAL FILM, 100K, 1%.	2322	156	21004
S 3830	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332
S 3831	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332
3833	RESISTOR, METAL FILM, 1/2W, 10M, 5%.	2322	241	53106
3835	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010
3837	RESISTOR, CARBON, 1/2W, 3K3, 20%.	3198	013	03320
3838	RESISTOR, CARBON, 1/6W, 100K, 5%.	3198	011	01040

3840	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020
3842	RESISTOR, METAL FILM, 1K, 1%.	2322	156	21002
3843	RESISTOR, METAL FILM, 220R, 1%.	2322	156	22201
3845	RESISTOR, METAL FILM, 75R, 1%.	2138	116	17509
3850	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010
3851	RESISTOR, METAL FILM, 15R, 1%.	2138	116	11509
3852	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075
3853	RESISTOR, CARBON, 27R, 5%.	2120	101	74279
3855	RESISTOR, POWER, 1W, 47R, 5%.	3198	012	14790
3856	RESISTOR, POWER, 1W, 68R, 5%.	3198	012	16890
3857	RESISTOR, METAL FILM, 10K, 5%.	2322	193	14103
5801	FIXED INDUCTOR, 100UH., 5%.	3198	018	11010
5802	FIXED INDUCTOR, 15UH., 10%.	2422	535	97331
5803	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5804	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790
5805	FIXED INDUCTOR, 22UH., 10%.	2422	535	97333
6801	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133
6802	DIODE, REGULATOR, BZX79-B6V2 (PHSE).	9331	668	30133
6805	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133
6806	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133
7801	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322	122	58682
7802	TRANSISTOR, SIGNAL, BC337-25 (COL).	3198	020	43530
7803	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ).	9322	103	08678
7805	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334	196	60126
9801	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9802	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9803	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9804	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9805	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9806	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9807	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
9808	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003
CBA	GREEN CRT PANEL ASSEMBLY.	3135	017	04981

SINGLE TUNER PIP PANEL ASSEMBLY

SINGLE TUNER PIP PANEL ASSEMBLY

2 TUNER PIP PANEL ASSEMBLY

	2 TUNER PIP PANEL ASSEMBLY			
0025	SHIELD, F/IC 7803.	3139	121	26532
0200	CONNECTOR, 5 PIN, M 2.50 EH.	2422	025	12481
0201	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484
0205	CONNECTOR, 10 PIN, F 1.00 FFC 0.3.	2422	025	16587
0236	CONNECTOR, 3 PIN, M 2.50 EH.	2412	020	00725
0272	CONNECTOR, 3 PIN, M 2.50 EH, BLACK.	2422	025	16382
1802	CRYSTAL RESONATOR, 14.31818MHZ., 20P HC49/U.	2422	543	00904
1900	TUNER, V+U, PLL.	2422	542	90057
1901	SAW FILTER, 45.75MHZ., OFWM1962M.	2422	549	43074
1902	CERAMIC FILTER, 4.5MHZ., TPS*MB BS.	2422	549	40807
2801	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2803	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
2804	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2805	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2806	ELECTROLYTIC CAPACITOR, 10V, 220UF., 20%.	3198	025	12210
2807	CAPACITOR, NP0, 50V, 47PF.	3198	016	04790
2808	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2809	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2810	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2811	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2812	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
2813	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090
2814	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2815	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2816	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2817	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2818	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2819	CAPACITOR, NP0, 50V, 12PF.	3198	016	01290
2820	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2821	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2822	CAPACITOR, X7R, 50V, 33NF.	3198	017	03330
2823	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2824	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
2825	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2826	CAPACITOR, NP0, 50V, 560PF.	3198	016	05610
2827	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2828	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2829	CAPACITOR, Y5V, 16V, 1UF.	3198	017	21050
2830	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2831	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2832	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2833	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
2834	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2836	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
2837	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030

2840	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	3920	RESISTOR, 100R, 5%	3198 021 51010
2841	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	3921	RESISTOR, 100R, 5%	3198 021 51010
2890	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198 025 32210	3922	RESISTOR, 4K7, 5%.	3198 021 54720
2891	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	3923	RESISTOR, 4K7, 5%.	3198 021 54720
2892	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198 025 34790	3924	RESISTOR, 4K7, 5%.	3198 021 54720
2893	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198 025 32210	3925	RESISTOR, 4K7, 5%.	3198 021 54720
2894	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	3926	RESISTOR, 4K7, 5%.	3198 021 54720
2895	CAPACITOR, NP0, 50V, 47PF.	3198 019 04790	3927	RESISTOR, 470R, 5%.	3198 021 54710
2911	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3933	RESISTOR, 2K2, 5%.	3198 021 52220
2915	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198 025 31010	3934	RESISTOR, 10K, 5%.	3198 021 51030
2916	CAPACITOR, X7R, 50V, 1NF.	3198 017 01020	3936	RESISTOR, 47R, 5%.	3198 021 54790
2917	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198 025 31010	3937	RESISTOR, 47R, 5%.	3198 021 54790
2920	CAPACITOR, X7R, 25V, 47NF.	3198 023 04730	3938	RESISTOR, CARBON, 1/6W, 2R2, 5%.	3198 011 02280
2921	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3939	RESISTOR, JUMPER, 0R05	3198 021 90020
2923	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3942	TRIM ADJUST, 47K, H EVN-DJA.	2120 363 90166
2924	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3943	RESISTOR, 5K6, 5%.	3198 021 55620
2925	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198 025 51090	3944	TRIM ADJUST, 47K, H EVN-DJA.	2120 363 90166
2926	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3945	RESISTOR, 680R, 5%.	3198 021 56810
2927	ELECTROLYTIC CAPACITOR, 50V, 4.7UF., 20%.	3198 025 54780	3946	RESISTOR, 15K, 5%.	3198 021 51530
2928	CAPACITOR, X7R, 50V, 22NF.	3198 017 02230	3947	RESISTOR, 1K, 5%.	3198 021 51020
2929	CAPACITOR, X7R, 25V, 47NF.	3198 023 04730	3948	RESISTOR, 330R, 5%.	3198 021 53310
2930	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3949	RESISTOR, 330R, 5%.	3198 021 53310
2931	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3950	RESISTOR, 22K, 5%.	3198 021 52230
2932	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3951	RESISTOR, 22K, 5%.	3198 021 52230
2933	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3952	RESISTOR, 1K, 5%.	3198 021 51020
2934	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	3953	RESISTOR, 330R, 5%.	3198 021 53310
2935	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198 025 31010	3955	RESISTOR, 390R, 5%.	3198 021 53910
2936	RESISTOR, JUMPER, 0R05	3198 021 90020	3956	RESISTOR, JUMPER, 0R05	3198 021 90020
2937	CAPACITOR, Y5V, 16V, 1UF.	3198 017 21050	3957	RESISTOR, 330R, 5%.	3198 021 53310
3801	RESISTOR, 100R, 5%	3198 021 51010	3958	RESISTOR, 120R, 5%.	3198 021 51210
3802	RESISTOR, 100R, 5%	3198 021 51010	3960	RESISTOR, JUMPER, 0R05	3198 021 90020
3805	RESISTOR, 1K, 5%.	3198 021 51020	3961	RESISTOR, 1K, 5%.	3198 021 51020
3806	RESISTOR, 1K5, 5%.	3198 021 51520	3962	RESISTOR, 4K7, 5%.	3198 021 54720
3807	RESISTOR, 1K5, 5%.	3198 021 51520	3964	RESISTOR, 1K, 5%.	3198 021 51020
3812	RESISTOR, 10K, 5%.	3198 021 51030	3965	RESISTOR, 560R, 5%.	3198 021 55610
3813	RESISTOR, 15K, 5%.	3198 021 51530	3968	RESISTOR, 4K7, 5%.	3198 021 54720
3814	RESISTOR, 1K, 5%.	3198 021 51020	3969	RESISTOR, 330R, 5%.	3198 021 53310
3815	RESISTOR, 1K, 5%.	3198 021 51020	3970	RESISTOR, 390R, 5%.	3198 021 53910
3816	RESISTOR, 820R, 5%.	3198 021 58210	3971	RESISTOR, 2K2, 5%.	3198 021 52220
3817	RESISTOR, 1K, 5%.	3198 021 51020	3972	RESISTOR, 4K7, 5%.	3198 021 54720
3818	RESISTOR, 15K, 5%.	3198 021 51530	4803	RESISTOR, JUMPER, 0R05	3198 021 90020
3819	RESISTOR, 10K, 5%.	3198 021 51030	4804	RESISTOR, JUMPER, 0R05	3198 021 90020
3820	RESISTOR, 1K, 5%.	3198 021 51020	4805	RESISTOR, JUMPER, 0R05	3198 021 90020
3821	RESISTOR, 390R, 5%.	3198 021 53910	4807	RESISTOR, JUMPER, 0R05	3198 021 90020
3822	RESISTOR, 390R, 5%.	3198 021 53910	4808	RESISTOR, JUMPER, 0R05	3198 021 90020
3823	RESISTOR, 390R, 5%.	3198 021 53910	4809	RESISTOR, JUMPER, 0R05	3198 021 90020
3824	RESISTOR, 15K, 5%.	3198 021 51530	4810	RESISTOR, JUMPER, 0R05	3198 021 90020
3825	RESISTOR, 150R, 5%.	3198 021 51510	4812	RESISTOR, JUMPER, 0R05	3198 021 90020
3826	RESISTOR, 150R, 5%.	3198 021 51510	4813	RESISTOR, JUMPER, 0R05	3198 021 90020
3827	RESISTOR, 330R, 5%.	3198 021 53310	4814	RESISTOR, JUMPER, 0R05	3198 021 90020
3828	RESISTOR, 4M7, 5%.	3198 021 54750	4815	RESISTOR, JUMPER, 0R05	3198 021 90020
3829	RESISTOR, 15K, 5%.	3198 021 51530	4816	RESISTOR, JUMPER, 0R05	3198 021 90020
3830	RESISTOR, 2K2, 5%.	3198 021 52220	4817	RESISTOR, JUMPER, 0R05	3198 021 90020
3831	RESISTOR, 1M, 5%.	3198 021 51050	4818	RESISTOR, JUMPER, 0R05	3198 021 90020
3832	RESISTOR, 1K, 5%.	3198 021 51020	4819	RESISTOR, JUMPER, 0R05	3198 021 90020
3833	RESISTOR, 100R, 5%.	3198 021 51010	4821	RESISTOR, JUMPER, 0R05	3198 021 90020
3834	RESISTOR, 100R, 5%.	3198 021 51010	4901	RESISTOR, JUMPER, 0R05	3198 021 90020
3836	RESISTOR, 1K, 5%.	3198 021 51020	5890	FIXED INDUCTOR, 10MUH., 10% (UAW).	3198 018 21090
3839	RESISTOR, 1K, 5%.	3198 021 51020	5891	FIXED INDUCTOR, 10MUH., 10% (UAW).	3198 018 21090
3840	RESISTOR, JUMPER, 0R05	3198 021 90020	5892	FIXED INDUCTOR, 10MUH., 10% (UAW).	3198 018 21090
3844	RESISTOR, 1K, 5%.	3198 021 51020	5901	IFT COIL, 91.5MHZ., 292EES-M593BS.	3139 128 23341
3845	RESISTOR, JUMPER, 0R05	3198 021 90020	5902	FIXED INDUCTOR, 4MUH7, 10% (UAW)	3198 018 24780
3849	RESISTOR, 1K, 5%.	3198 021 51020	5903	FIXED INDUCTOR, 0.82UH., 10%	3198 018 38270
3850	RESISTOR, JUMPER, 0R05	3198 021 90020	5905	FIXED INDUCTOR, 4.7UH., 5%.	3198 018 14780
3853	RESISTOR, 3K3, 5%.	3198 021 53320	5906	FIXED INDUCTOR, 5.6UH., 5%.	3198 018 15680
3854	RESISTOR, 15K, 5%.	3198 021 51530	6801	DIODE, SIGNAL, BAT85 (PHSE).	9336 247 60133
3855	RESISTOR, 1K, 5%.	3198 021 51020	6890	DIODE, REGULATOR, BZX384-C3V9.	3198 020 53980
3856	RESISTOR, 1K, 5%.	3198 021 51020	7801	IC, HEF4053BT (PHSE)	9333 729 60653
3857	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198 011 01020	7803	IC, M65669SP (MITJ).	9322 146 60682
3858	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198 011 01020	7804	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3859	RESISTOR, 47K, 5%.	3198 021 54730	7805	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3860	RESISTOR, 47K, 5%.	3198 021 54730	7806	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3864	RESISTOR, 1K, 5%.	3198 021 51020	7807	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3866	RESISTOR, 330R, 5%.	3198 021 53310	7810	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3870	RESISTOR, 220R, 5%.	3198 021 52210	7813	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3871	RESISTOR, 220R, 5%.	3198 021 52210	7816	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3872	RESISTOR, 220R, 5%.	3198 021 52210	7817	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3890	RESISTOR, CARBON, 1/6W, 68R, 5%.	3198 011 06890	7891	TRANSISTOR, SIGNAL, BC337-25	3198 020 43530
3914	RESISTOR, JUMPER, 0R05	3198 021 90020	7910	IC, M62320FP (MITJ).	9322 127 15668
3915	RESISTOR, JUMPER, 0R05	3198 021 90020	7914	IC, TDA9801/V1 (PHSE).	9352 606 44112
3916	RESISTOR, JUMPER, 0R05	3198 021 90020	7915	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
3917	RESISTOR, JUMPER, 0R05	3198 021 90020	7916	IC, HEF4053BT (PHSE)	9333 729 60653
3918	RESISTOR, JUMPER, 0R05	3198 021 90020	7917	TRANSISTOR, SIGNAL, BC857B	3198 010 42150
3919	RESISTOR, JUMPER, 0R05	3198 021 90020	7918	TRANSISTOR, SIGNAL, BC847B	3198 010 42030
			7919	IC, TDA8601T/C1 (PHSE).	9351 538 90518
			7920	TRANSISTOR, SIGNAL, BC857B	3198 010 42150
			9800	WIRE JUMPER, 0.6MM	0322 179 00003
			9801	WIRE JUMPER, 0.6MM	0322 179 00003
			9802	WIRE JUMPER, 0.6MM	0322 179 00003
			9803	WIRE JUMPER, 0.6MM	0322 179 00003
			9804	WIRE JUMPER, 0.6MM	0322 179 00003
			9805	WIRE JUMPER, 0.6MM	0322 179 00003

9807	WIRE JUMPER, 0.6MM	0322 179 00003
9808	WIRE JUMPER, 0.6MM	0322 179 00003
9810	WIRE JUMPER, 0.6MM	0322 179 00003
9811	WIRE JUMPER, 0.6MM	0322 179 00003
9812	WIRE JUMPER, 0.6MM	0322 179 00003
9813	WIRE JUMPER, 0.6MM	0322 179 00003
9814	WIRE JUMPER, 0.6MM	0322 179 00003
9815	WIRE JUMPER, 0.6MM	0322 179 00003
9816	WIRE JUMPER, 0.6MM	0322 179 00003
9817	WIRE JUMPER, 0.6MM	0322 179 00003
9818	WIRE JUMPER, 0.6MM	0322 179 00003
9820	WIRE JUMPER, 0.6MM	0322 179 00003
9821	WIRE JUMPER, 0.6MM	0322 179 00003
9822	WIRE JUMPER, 0.6MM	0322 179 00003
9823	WIRE JUMPER, 0.6MM	0322 179 00003
9824	WIRE JUMPER, 0.6MM	0322 179 00003
9902	WIRE JUMPER, 0.6MM	0322 179 00003
9903	WIRE JUMPER, 0.6MM	0322 179 00003
9905	WIRE JUMPER, 0.6MM	0322 179 00003
9907	WIRE JUMPER, 0.6MM	0322 179 00003
9908	WIRE JUMPER, 0.6MM	0322 179 00003
9912	WIRE JUMPER, 0.6MM	0322 179 00003
9915	WIRE JUMPER, 0.6MM	0322 179 00003
9921	WIRE JUMPER, 0.6MM	0322 179 00003
9922	WIRE JUMPER, 0.6MM	0322 179 00003
9923	WIRE JUMPER, 0.6MM	0322 179 00003
CBA	2 TUNER PIP PANEL ASSEMBLY	3139 137 22981

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 55P8288

First Published: 09-23-02

Rev. Date: 10-25-02

Print Date: 2004-09-08

Parts List

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

CABINET & ACCESSORY PARTS

CABINET & ACCESSORY PARTS			
S AC23	Mains Cord (Special - Noise Filtered)	2422 070	98164
AC01	CABINET BACKCOVER, CENTER f/55P8288/37, 55P8288A/37 (USA, Best Buy) . . .	3135 013	03691
AC02	CABINET BACK, UPPER, 55"	3135 014	07632
AC03	PIP FRAME.	3135 014	11101
AC04	SUPPORT FRAME F/SSB.	3135 014	11111
AC05	BARRIER LEFT & RIGHT, (2 used) . . .	3135 013	03311
AC06	CHASSIS FRAME.	3135 014	11091
AC07	LIGHT BARRIER.	3135 014	03381
AC08	REAR JACK FRAME.	3135 014	11132
AC09	SCREEN FRAME ASM., 55"	3135 017	07491
AC10	MIRROR MTG. BRKT, (2 used).	3135 011	04751
AC11	BASE	3135 017	03641
AC14	FREZSEL SCREEN, 55"	3135 014	07801
AC15	LENTICULAR SCREEN, 55"	3135 014	07791
AC19	MIRROR ASM., 55"	3135 037	50071
S AC23	MAINCORD, SPECIAL, NOISE FILTERED .	2422 070	98164
AC25	LOUDSPEAKER, 8 OHM, 15W (2 used) . .	2422 264	00289
AC26	TOP PANEL STIFFENER.	3135 011	03003
AC28	RETAINER SCREEN HORIZ, 55V (2 used).	3135 014	10902
AC29	RETAINER SCREEN VERT, 55" (2 used) . .	3135 014	10912
AC30	BAFFLE ASM.	3135 017	07561
AC31	NAMEPLATE.	3135 015	03561
AC32	BAFFLE MTG. CUP, (7 used).	3135 013	02761
AC35	CASTERS, SHEPHERD PRODUCTS (4 used).	0000 001	00153
AC36	CHASSIS MTG. BRACKET, (3 used). . . .	3135 011	02011
AC37	BUTTON ASSEMBLY.	3135 017	07020
AC38	LENS, IR	3135 014	10230
S CRTB	CRT, 180DLB22(B)(U) (HITJ) B, BLU. .	9322 121	33682
S CRTG	CRT, 180DLB22(G)(MU) (HITJ) Y, GRN .	9322 155	29682
S CRTR	CRT, 180DLB22(R)(HU) (HITJ) B, RED .	9322 121	31682
S DEFL	DEFLECTION YOKE, DAV4284M (TSAJ) B, (3 used).	2422 549	44589
S FG2	FOCUS/G2 CONTROL, 100M 15KV FMP-PTV Y	2322 460	90519
REMOTE	RC2520/04 Remote Control (Fighter) . .	3139 228	85371

CRT ASSEMBLY

CRT ASSEMBLY			
X1	SCREW, 8-32X0.5 TORX, (12 used), LENS TO COUPLER	3135 010	02971
X10	COOLANT KIT.	4835 310	67032
X11	SEAL, CRT, (3 used).	3135 013	02321
X12	MOUNTING BRACKET, CRT, (3 used). . .	3135 011	02371
X13	SPRING COMPRESSION, (12 used), CRT MT	3135 011	00611
X14	SCREW, SHOULDER, (12 used), CRT TO COUPLER.	3135 010	08101
X2	LENS DELTA 78, (2 used), GREEN & RED	3135 013	00822
X2	LENS DELTA 77, FOR BLUE.	3135 013	01052
X3	LENS C-ELEMENT DELTA-77, FOR GREEN .	3135 013	01071
X3	LENS C-ELEMENT DELTA-77, (2 used), RE D & BLUE	3135 013	01081
X4	SEAL, LENS, (3 used), LENS TO COUPLER	3135 013	02632
X5	CAP, COUPLER, (3 used), DIAPHRAGM COV ER.	3135 014	02681
X6	DIAPHRAM COUPLER, (3 used)	3135 013	01061
X7	SEAL, VENT PLUG, (3 used).	3135 013	01231
X8	PLUG, VENT, (3 used)	3135 014	02641
X9	COUPLER, CRT-LENS 55", Red & Blue (2 used).	3135 011	01934
X9	COUPLER CRT-LENS, Green.	3135 011	04281

FCC FILTER PANEL ASSEMBLY

FCC FILTER PANEL ASSEMBLY			
0006	LINE HEATSINK A8, IS HS 0600	3139 121	61663
0060	SILICON INSULATOR SP600, SIL PAD FOR 6000	3135 010	02351
0061	IC-SPRING, CLIP FOR 6000	3135 011	02331
S 1000	FUSE, 5A, 250V	2422 093	00035
S 1004	FUSE, 1A, 250V	2422 093	00027
1100	CONNECTOR, 8 PIN	2422 025	10648
1108	CONNECTOR, 4 PIN	2422 025	15503
1110	CONNECTOR, 1 PIN	2422 015	18552
S 2000	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 680NF., 20%	2222 336	29149
S 2002	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554	90173
S 2003	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554	90173
2004	SURGE PROTECTOR, DSP-501N-A21F . . .	2422 549	42349
S 2005	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 220NF., 20%	2222 336	29146
2006	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2007	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2008	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2009	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2102	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554	90169
S = Safety Part Be sure to use exact replacement part.			

2103	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554	90169
2107	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	3198 019	61020
2108	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	3198 019	61020
2110	ELECTROLYTIC CAPACITOR, 200V, 470UF., 20%	2020 021	91321
2214	ELECTROLYTIC CAPACITOR, 250V, 10UF., 20%	2020 012	93495
S 3000	RESISTOR, METAL FILM, 4.7MEG, 5% . .	2322 242	13475
S 3001	RESISTOR, METAL FILM, 4.7MEG, 5% . .	2322 242	13475
S 3002	RESISTOR, METAL FILM, 4.7MEG, 5% . .	2322 242	13475
3003	RESISTOR, CARBON COMP., 470R, 20% . .	2120 103	90019
3009	RESISTOR, WIRE WOUND, 10W, 2R2, 5% .	2322 253	41228
3010	RESISTOR, WIRE WOUND, 10W, 2R2, 5% .	2322 253	41228
S 3011	VARISTOR, DC 1MA/495V S MAX 850V . .	2322 595	90021
S 3012	RESISTOR, METAL FILM, 1MEG, 5% . . .	2322 242	13105
3300	RESISTOR, METAL OXIDE, 5W, 22K, 5% .	2322 257	41223
S 5000	FILTER, MAINS, 8MH., 7A.	2422 549	44591
S 5005	FILTER, MAINS, 80UH., 1.8A	2422 549	44041
5103	FIXED INDUCTOR, 4.7UH., 5%	2422 535	94213
S 5106	FILTER, MAINS, 80UH., 1.8A	2422 549	44041
6000	DIODE BRIDGE RECTIFIER, GBU4JL-7002.	9322 132	55667
6001	DIODE BRIDGE RECTIFIER, DF06M. . . .	9338 118	70682
9000	WIRE JUMPER, 0.58MM.	3198 036	90010
9001	WIRE JUMPER, 0.58MM.	3198 036	90010
9002	WIRE JUMPER, 0.58MM.	3198 036	90010
9003	WIRE JUMPER, 0.58MM.	3198 036	90010
9030	WIRE JUMPER, 0.58MM.	3198 036	90010
9031	WIRE JUMPER, 0.58MM.	3198 036	90010
9032	WIRE JUMPER, 0.58MM.	3198 036	90010
9101	WIRE JUMPER, 0.58MM.	3198 036	90010
9102	WIRE JUMPER, 0.58MM.	3198 036	90010
CBA	FCC FILTER PANEL ASSEMBLY.	3135 017	05441

CISPR FILTER PANEL ASSEMBLY

CISPR FILTER PANEL ASSEMBLY

LSB PANEL ASSEMBLY

LSB PANEL ASSEMBLY			
CBA	LSB PANEL ASSEMBLY	3135 037	10471
0031	Heatsink, Vertical	3135 011	04591
0033	Heatsink, T0220.	2422 487	89872
0036	Heatsink, T0-220	3135 011	03291
0038	Heatsink, T0-220	3135 011	03291
0040	Heatsink, T0220.	2422 487	89872
0043	Heatsink, T0220.	2422 487	89872
0046	Heatsink, T0-220	3135 011	03291
0056	IC-Spring.	3135 011	01511
0057	Insulator, Mica.	3135 010	02911
0058	Solder Terminal.	3135 010	02801
0065	Heatsink, T0-92, Black Anodized. . .	3135 011	01871
0066	Solder Terminal.	3135 010	02801
0067	IC, Spring	3135 011	02331
0068	Insulator.	3135 010	02351
0069	Spring, Clip	3135 011	02621
0070	Insulator.	3135 010	02341
0080	Heatsink, T0-247	3135 011	00553
0081	Solder Terminal.	3135 010	02801
0082	IC-Spring.	3135 011	01512
0083	Insulator.	3135 010	02321
1201	Surge Protector	2422 549	43675
S 1300	Fuse/Clip, 5A, 250 V	2422 093	00035
S 1302	Fuse, Radial, LT 4A, 250V.	2422 086	10786
S 1305	Relay, 1 Pin, 5V, 5A, LKS1AF.	2422 132	07314
1500	Connector, 8 Pin	2422 025	10648
1504	Connector, 4 Pin	2422 025	16153
1505	Connector, 4 Pin	2422 025	16153
1506	Connector, 4 Pin	2422 025	16153
1508	Connector, 3 Pin	2422 025	14409
1510	Connector, 4 Pin	2422 025	12479
1516	Connector, 12 Pin.	2422 025	08333
1518	Connector, 12 Pin.	2422 025	08333
1520	Connector, 12 Pin.	2422 025	08333
1574	Connector, 1 Pin	2422 015	18552
S 1800	Fuse, LT 1A, 250V.	2422 086	10779
S 1801	Fuse, LT 1A, 250V.	2422 086	10779
1901	Connector, 2 Pin	2412 020	00724
S 2203	Cap, 2n2, 20%, v, Ceramic.	2020 554	90173
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554	90169
2206	Cap, 220u, 20%, 25v, Electrolytic. . .	2020 012	92641
2208	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019	41010
2210	Cap, 22u, 20%, 50v, Electrolytic . . .	3198 025	52290
2211	Cap, 100n, 10%, 50v, Polyester	3198 014	01040
2212	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019	41010
2213	Cap, 1000u, 20%, 16v, Electrolytic . .	3198 026	21020
2215	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424
2216	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424
2218	Cap, 10u, 20%, 250v, Electrolytic. . .	2020 012	93495
2226	Cap, 22n, +80/-20%, 50v, Ceramic . .	3198 019	22230
2228	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019	41010

2269	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010	2822	Cap, 430n, 5%, 250v, Metalized Polypr	2222 479 90022
2270	Cap, 100u, 20%, 25v, Electrolytic. . .	2020 012 92639		opylene.	
2282	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	2823	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2283	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790	2824	Cap, 470p, 10%, 1000v, Ceramic. . . .	2020 558 90555
2285	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	2825	Cap, 470p, 10%, 1000v, Ceramic. . . .	2020 558 90555
2301	Cap, 1n5, 10%, 1000v, Ceramic.	2020 558 90443	2826	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020
2302	Cap, 470p, 10%, 1000v, Ceramic. . . .	2020 558 90471	2827	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020
2303	Cap, 100u, 20%, 25v, Electrolytic. . . .	2020 012 92639	2828	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010
2304	Cap, 330p, 10%, 1000v, Ceramic. . . .	2020 558 90554	2829	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010
2305	Cap, 470p, 10%, 50v, Ceramic.	3198 019 14710	2836	Cap, 1n, 10%, 1000v, Ceramic.	2020 558 90557
2306	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	2837	Cap, 10u, 20%, 50v, Electrolytic. . . .	3198 025 51090
2307	Cap, 4n7, 10%, 50v, Ceramic.	3198 019 14720	2838	Cap, 1n, 10%, 1000v, Ceramic.	2020 558 90557
2308	Cap, 4n7, 10%, 50v, Ceramic.	3198 019 14720	2839	Cap, 18n, 5%, 630v, Polypropylene. . .	2222 375 90218
2309	Cap, 82p, 5%, 50v, Ceramic.	3198 019 08290	2850	Cap, 470p, 10%, 1000v, Ceramic. . . .	2020 558 90555
2310	Cap, 680p, 10%, 50v, Ceramic.	3198 019 16810	2851	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010
2311	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020	2852	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2313	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	2853	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2314	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	2907	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2315	Cap, 220p, 10%, 1000v, Ceramic. . . .	2020 558 90424	2908	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2316	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2909	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2317	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2318	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	2911	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2319	Cap, 220p, 10%, 1000v, Ceramic. . . .	2020 558 90424	2912	Cap, 220u, 20%, 35v, Electrolytic. . . .	2020 012 93462
2320	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2913	Cap, 220u, 20%, 35v, Electrolytic. . . .	2020 012 93462
2321	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2914	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2322	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	2915	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2323	Cap, 220p, 10%, 1000v, Ceramic. . . .	2020 558 90424	2916	Cap, 10n, 10%, 50v, Polyester.	2020 300 90573
2324	Cap, 2u2, 20%, 25v, Electrolytic. . . .	2020 021 91374	2917	Cap, 100n, 10%, 250v, Metalized Polye	
2325	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040		ster	2222 368 90177
2326	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	2918	Cap, 47u, 20%, 50v, Electrolytic. . . .	3198 025 54790
2327	Cap, 2u2, 20%, 25v, Electrolytic. . . .	2020 021 91374	2919	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2328	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	2922	Cap, 330u, 20%, 200v, Electrolytic. . .	2020 024 90586
2329	Cap, 220p, 10%, 1000v, Ceramic. . . .	2020 558 90424	3216	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2322 205 33109
2330	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	3223	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
2331	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040		ss.	3198 021 54790
2332	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	3230	Res, 1K5, 5%, 1/6W, Carbon Film. . . .	3198 011 01520
2333	Cap, 2n2, 10%, 50v, Ceramic.	3198 019 12220	3231	Res, 220 ohm, 5%, 2 1/2W, Metal Film	3198 012 32210
2334	Cap, 33n, 10%, 50v, Polyester.	3198 014 03330	3232	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
2335	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	3239	Res, 2K4, 1%, 3/5W, Metal Film.	2322 156 22402
2338	Cap, 1000u, 20%, 25v, Electrolytic. . .	2020 012 93458	3240	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2339	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3244	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
2340	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	3245	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2341	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3246	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
2342	Cap, 470p, 10%, 50v, Ceramic.	3198 019 14710	3287	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2343	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020	3301	Res, 33 ohm, 5%, 5W, Wire Wound. . . .	2322 251 41339
2344	Cap, 1000u, 20%, 25v, Electrolytic. . .	2020 012 93458	3302	Res, 33 ohm, 5%, 5W, Wire Wound. . . .	2322 251 41339
2345	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2346	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2349	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	3305	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2351	Cap, 22n, +80/-20%, 50v, Ceramic. . . .	3198 019 22230	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla	
2352	Cap, 1000u, 20%, 25v, Electrolytic. . .	2020 012 93458		ss.	3198 021 51590
2353	Cap, 220p, 10%, 50v, Ceramic.	3198 019 12210	3307	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2354	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210	3308	Res, 0R1, 5%, 1 1/3W, Metal Film. . . .	3198 012 21070
2355	Cap, 470p, 10%, 50v, Ceramic.	3198 019 14710	3309	Res, 0R33, 5%, 1 1/3W, Metal Film. . . .	3198 012 23700
2356	Cap, 470u, 20%, 35v, Electrolytic. . . .	2020 021 91376	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
2452	Cap, 2u2, 20%, 50v, Electrolytic. . . .	2020 012 92648	3311	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2501	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590
2503	Cap, 680p, 10%, 500v, Ceramic.	2020 557 90441	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2511	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3314	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
2513	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2514	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2516	Cap, 150p, 10%, 500v, Ceramic.	3198 019 41510	3317	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2556	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2557	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010	3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2558	Cap, 68n, 10%, 100v, Polyester.	2222 347 90235	3322	Res, Trimer, 470R.	2120 368 90118
2559	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3323	Res, 2K7, 5%, 1W, Metal Film.	2120 105 93474
2564	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	3324	Res, 100K, 5%, 1W, Metal Film.	3198 012 11040
2565	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3325	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2567	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2570	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3327	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
2571	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020		ass.	3198 021 51010
2572	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	3328	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
2573	Cap, 470p, 10%, 50v, Ceramic.	2020 552 91152		ass.	3198 021 51010
2574	Cap, 680n, 10%, 50v, Polyester.	3198 014 06840	3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
2586	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040		ass.	3198 021 53310
2608	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810	3333	Res, 0R1, 5%, 1 1/3W, Metal Film. . . .	3198 012 21070
2805	Cap, 100n, 10%, 250v, Metalized Polye		3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	ster.	2222 368 90177	3335	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2806	Cap, 470p, 10%, 500v, Ceramic.	2020 557 90438	3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2807	Cap, 100n, +80/-20%, 25v, Ceramic. . . .	3198 023 21040	3337	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
2809	Cap, 100n, 10%, 250v, Metalized Polye		3339	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ster.	2222 368 90177	3340	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
2810	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	3343	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2811	Cap, 330p, 10%, 2000v, Ceramic.	2020 558 90481	3344	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2814	Cap, 68u, 20%, 400v, Electrolytic. . . .	2020 024 90587	3347	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
2815	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020	3350	Res, 47K, 5%, 1W, Metal Film.	3198 012 14730
2816	Cap, 18n, 5%, 630v, Polypropylene. . .	2222 375 90218	3351	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720
2817	Cap, 11n, 5%, 1600v, Polypropylene. . .	2222 375 90155	3352	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720
2818	Cap, 470p, 10%, 500v, Ceramic.	2020 557 90438	3353	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720
2819	Cap, 18n, 5%, 630v, Polypropylene. . .	2222 375 90218	3452	Res, 1R5, 5%, 1 1/3W, Metal Film. . . .	3198 012 21580
2820	Cap, 4u7, 10%, 100v, Metalized Polyes		3456	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
	ter.	2222 368 90178		ass.	3198 021 52710

3457	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	3942	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3458	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3959	Res, 1K, 5%, 1/4W, Carbon Film. . .	2120 101 74102
3500	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3960	Res, 100 ohm, 5%, 1/3W, Metal Film. .	2322 205 33101
3501	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	3967	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3503	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124		ass.	3198 021 52710
3504	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3968	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3505	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	3969	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3506	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3975	Res, 100 ohm, 5%, 1/3W, Metal Film. .	2322 205 33101
3507	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730	3983	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3508	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	3990	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002
3509	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	3991	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3510	Res, 470K, 5%, 1/6W, Carbon Film. . .	3198 011 04740	3992	Res, 470K, 5%, 1/6W, Carbon Film. .	3198 011 04740
3511	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5201	Filter, Mains, 100UH, 2A2.	2422 549 44101
3550	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002	5202	Transformer, Layer, S229B3-01 Y. . .	2422 531 98038
3551	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002	5234	Coil, 10u.	2422 535 95363
3562	Res, 4R7, 5%, 1W, Metal Film.	3198 012 14780	5235	Coil, 10u.	2422 535 95363
3563	Res, 220 ohm, 5%, 1W, Metal Film. . .	2120 105 93396	5238	Coil, 10u.	2422 535 95363
3565	Res, 220 ohm, 5%, 1W, Metal Film. . .	2120 105 93396	5239	Coil, 10u.	2422 535 95363
3571	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5300	Transformer, Layer, S549C1-04 B. . .	2422 531 02439
3572	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5301	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3573	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5302	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3581	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5303	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3584	Res, 1 ohm, 5%, 3W, Wire Wound. . . .	2122 251 01385	5304	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3585	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	5305	Coil, 10u.	2422 535 95363
3590	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	5306	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3591	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5307	Coil, 10u.	2422 535 95363
3592	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5308	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3593	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	5309	Coil, 10u.	2422 535 95363
3595	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198 011 03330	5310	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3596	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5311	Coil, 10u.	2422 535 95363
3597	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5312	Coil, 10u.	2422 535 95363
3598	Res, 100 ohm, 5%, 1/10W, Metalized Gl		5313	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
	ass.	3198 021 51010	5314	Coil, 10u.	2422 535 95363
3800	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5315	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3801	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	5316	Coil, 10u.	2422 535 95363
3802	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	5317	Coil, 10u.	2422 535 95363
3803	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5318	Coil, 680u.	2422 536 00103
3805	Res, 100 ohm, 5%, 1W, Metal Film. . . .	2120 105 93394	5319	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3806	Res, 10K, 5%, 1W, Metal Film.	2120 105 93407	5320	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3807	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5321	Coil, 3u3.	2422 535 94373
3808	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	5322	Coil, 10u.	2422 535 95363
3809	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5800	Transformer, Signal Driver, C925-01 Y	2422 535 91022
3810	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5801	Transformer, Layer, S409C3-02 B. . .	2422 531 02438
3811	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5802	Transformer, Signal, W8073-001 Y. . .	2422 531 02434
3812	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	5803	Coil, 485u.	2422 536 00079
3813	Res, 1 ohm, 5%, 2W, Metal Film.	2120 106 90572	5804	Coil, 40u.	2422 536 00078
3814	Res, 33 ohm, 5%, 1/10W, Metalized Gla		5805	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
	ss.	3198 021 53390	5806	Coil, 47u.	2422 535 95282
3815	Res, 0R27, 5%, 1/2W, Metal Film. . . .	2322 207 90048	5807	Coil, 22u.	3198 018 72290
3816	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	5810	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3817	Res, 0R27, 5%, 1/2W, Metal Film. . . .	2322 207 90048	5811	Coil, 10u.	2422 535 95363
3820	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	5812	Coil, 10u.	2422 535 95363
3821	Res, 470 ohm, 5%, 1W, Metal Film. . . .	2120 105 93398	5900	High Voltage Generator.	3122 268 32865
3822	Res, 220 ohm, 5%, 1W, Metal Film. . . .	2120 105 93396	5904	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3823	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6200	Diode, P4KE550.	9322 141 04673
3824	Res, 220 ohm, 5%, 1W, Metal Film. . . .	2120 105 93396	6201	Zener Diode, 8.2 volt.	3198 010 28280
3825	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6204	Diode, Rect, BYV10-40.	9337 432 70133
3826	Res, 220 ohm, 5%, 1W, Metal Film. . . .	2120 105 93396	6205	IC, TL431BCLP.	9322 115 98676
3828	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6207	Diode, Rect, BYD33D.	9337 234 00133
3829	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6231	Diode, Rect, BYV10-40.	9337 432 70133
3830	Res, 470 ohm, 5%, 1W, Metal Film. . . .	2120 105 93398	6235	Diode, Rect, BYD33D.	9337 234 00133
3834	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2322 205 33108	6301	Diode, Rect, BYD33J.	9337 234 20133
3835	Res, 2K7, 5%, 1/6W, Carbon Film. . . .	3198 011 02720	6302	Diode, Rect, 1N5062.	3198 010 10120
3837	Res, 12K, 5%, 1/6W, Carbon Film. . . .	3198 011 01230	6303	Diode, Rect, 1N5062.	3198 010 10120
3838	Res, 1K5, 5%, 1/6W, Carbon Film. . . .	3198 011 01520	6306	Diode, Rect, BY229X-600.	9340 380 20127
3839	Res, 300K, 5%, 2 1/2W, Metal Film. . .	2322 195 63304	6307	Diode, Rect, BY229X-600.	9340 380 20127
3840	Res, 1M, 5%, 1/2W, Metalized Glass. .	2322 242 13105	6308	Diode, Rect, BY229X-600.	9340 380 20127
3841	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	6309	Diode, Rect, BY229X-600.	9340 380 20127
3865	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	6310	Diode, Rect, BY229X-600.	9340 380 20127
3866	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	6312	Diode, Rect, SB360L-7003.	9322 128 68682
3867	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2322 205 33108	6313	Diode, Signal, 1N4148.	9330 839 90133
3890	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6500	Zener Diode, 10 volt.	9340 386 80115
3891	Res, 6K8, 5%, 1W, Metal Film.	3198 012 16820	6501	Diode, Signal, BAS316.	3198 010 10630
3900	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	6502	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6503	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	6504	Diode, Rect, BYD33D.	9337 234 00133
3903	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	6505	Zener Diode, 4.7 volt.	3198 010 24780
3904	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6550	Diode, Rect, BYV27-200.	9335 526 80133
3906	Res, 4R7, 5%, 5W, Wire Wound.	2322 251 41478	6551	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002	6552	Zener Diode, 4.7 volt.	3198 010 24780
3909	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	6801	Diode, Rect, BYD33J.	9337 234 20133
3911	Res, 100 ohm, 5%, 1/10W, Metalized Gl		6802	Diode, Rect, BYV27-200.	9335 526 80133
	ass.	3198 021 51010	6803	Diode, Rect, BYV27-200.	9335 526 80133
3912	Res, 100 ohm, 5%, 1/10W, Metalized Gl		6806	Diode, Rect, BY228/24.	9340 559 50112
	ass.	3198 021 51010	6807	Diode, Rect, BYD33M.	9337 410 30133
3913	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	6808	Diode, Rect, BYW95C.	9335 001 50133
3914	Res, 10 ohm, 5%, 1/10W, Metalized Gla		6809	Diode, Signal, BAS316.	3198 010 10630
	ss.	3198 021 51090	6810	Diode, Signal, BAS316.	3198 010 10630
3917	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6830	Diode, Rect, BYD33M.	9337 410 30133
3918	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6850	Diode, Rect, BYD33J.	9337 234 20133
3940	Res, 3K3, 1%, 3/5W, Metal Film.	2322 156 23302	6900	Diode, Signal, BAS316.	3198 010 10630
3941	Res, 10K, 1%, 3/5W, Metal Film.	2322 156 21003	6905	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

6907	Diode, Signal, BAS316.	3198 010 10630	0009	Heatsink, TO-220	3135 011 03291	
6910	Diode, Signal, BAS316.	3198 010 10630	0010	Heatsink, TO-220	3135 011 03291	
6911	Diode, Signal, BAS316.	3198 010 10630	0012	Heatsink, Folded	3135 011 04555	
6912	Diode, Signal, BAS316.	3198 010 10630	0072	Spring, Clip, Horiz.	3135 011 04572	
6919	Zener Diode, 27 volt	3198 010 52790	0082	Spring, Clip, Horiz.	3135 011 04572	
6920	Diode, Signal, BAS316.	3198 010 10630	0123	Heatsink, Folded	3135 011 04555	
6921	Diode, Signal, BAS316.	3198 010 10630	0139	IC, Spring	3135 011 02331	
6922	Diode, Signal, BAS316.	3198 010 10630	0200	Heatsink, TO-220	3135 011 02511	
6950	Zener Diode, 4.7 volt.	3198 010 24780	0201	Heatsink, TO-220	3135 011 02511	
6951	Diode, Signal, BAS316.	3198 010 10630	1000	Connector, 5 Pin	2422 025 12481	
7208	Transistor, NPN, BC547B.	3198 020 40030	1001	Connector, 10 Pin.	2422 025 12484	
7209	IC, MC34064P-5	9322 066 44676	1002	Connector, 3 Pin	2412 020 00725	
7211	IC, TOP221P.	9322 125 16682	1003	Connector, 3 Pin	2422 025 09191	
7213	Optic Coupler, CQY80NG	9338 941 50682	1005	Connector, 2 Pin	2412 020 00724	
7300	Transistor, NPN, BC547B.	3198 020 40030	1009	Connector, 2 Pin	2412 020 00724	
7301	F.E.T., Power, STW20NB50	9322 131 15687	1014	Connector, 7 Pin	2422 025 11244	
7302	IC, MC44603AP.	9322 108 36682	1015	Connector, 1 Pin	2422 015 18552	
7303	Optic Coupler, CQY80NG	9338 941 50682	1017	Connector, 12 Pin.	2422 025 08333	
7304	IC, TL431BCLP.	9322 115 98676	1018	Connector, 12 Pin.	2422 025 08333	
7307	IC, MC34063AP1	9322 036 71682	1020	Connector, 12 Pin.	2422 025 08333	
7308	F.E.T., Power, IRF9Z24N.	9322 134 76687	1023	Connector, 1 Pin	2422 015 18552	
7309	Transistor, NPN, BC547B.	3198 020 40030	1026	Connector, SIMM, 80 Pin.	2422 025 16599	
7500	Transistor, PNP, BC807-25.	3198 010 43130	1036	Connector, 3 Pin	2412 020 00725	
7501	Transistor, PNP, BC807-25.	3198 010 43130	1049	Connector, 5 Pin	2422 025 15832	
7550	IC, TDA4861/V3	9352 018 80112	1072	Connector, 3 Pin	2412 020 00725	
7551	Transistor, NPN, BC847B.	3198 010 42030	1073	Connector, 4 Pin	2422 025 12479	
7552	Transistor, PNP, TIP42C.	9336 594 40687	1074	Connector, 4 Pin	2422 025 12479	
7553	Transistor, NPN, BC847B.	3198 010 42030	1083	Connector, 10 Pin.	2422 025 12484	
7590	Transistor, NPN, BC847B.	3198 010 42030	1262	Socket, Cinch, 12 Pin.	2422 026 05064	
7800	Transistor, NPN, BC847B.	3198 010 42030	1264	Socket, MDIN, 10 Pin	2422 026 04926	
7801	Transistor, NPN, 2SC2482	9322 103 07678	1301	Tuner, V+U, PLL	2422 542 90108	
7802	Transistor, NPN, BU4515AF.	9340 550 93127	S 1910	Fuse, 2 A, 250V IEC.	2422 086 10783	
7803	Transistor, PNP, BC557B.	3198 020 40110	S 1911	Fuse, 4 A, 250V IEC.	2422 086 10786	
7830	Transistor, NPN, 2SC3675	9322 122 57687	S 1912	Fuse, 4 A, 250V IEC.	2422 086 10786	
7905	Transistor, NPN, BC547B.	3198 020 40030	1913	Connector, 4 Pin	2422 025 12479	
7906	Transistor, NPN, BC817-25.	3198 010 43230	2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7907	Transistor, PNP, BC807-25.	3198 010 43130	2001	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7908	Transistor, NPN, BC817-25.	3198 010 43230	2002	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
7909	Transistor, PNP, BC807-25.	3198 010 43130	2003	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090	
7910	Transistor, PNP, BC557B.	3198 020 40110	2004	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
9101	Wire Jumper, 0.58MM.	3198 036 90010	2005	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9102	Wire Jumper, 0.58MM.	3198 036 90010	2006	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9104	Wire Jumper, 0.58MM.	3198 036 90010	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9105	Wire Jumper, 0.58MM.	3198 036 90010	2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	2009	Cap, 330p, 10%, 50v, Ceramic	3198 019 13310	
9107	Wire Jumper, 0.58MM.	3198 036 90010	2010	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
9108	Wire Jumper, 0.58MM.	3198 036 90010	2011	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	2012	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
9110	Wire Jumper, 0.58MM.	3198 036 90010	2013	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9111	Wire Jumper, 0.58MM.	3198 036 90010	2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9112	Wire Jumper, 0.58MM.	3198 036 90010	2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9113	Wire Jumper, 0.58MM.	3198 036 90010	2016	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9114	Wire Jumper, 0.58MM.	3198 036 90010	2017	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9115	Wire Jumper, 0.58MM.	3198 036 90010	2018	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9116	Wire Jumper, 0.58MM.	3198 036 90010	2019	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9117	Wire Jumper, 0.58MM.	3198 036 90010	2020	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9119	Wire Jumper, 0.58MM.	3198 036 90010	2021	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9120	Wire Jumper, 0.58MM.	3198 036 90010	2022	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9123	Wire Jumper, 0.58MM.	3198 036 90010	2023	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9124	Wire Jumper, 0.58MM.	3198 036 90010	2024	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9127	Wire Jumper, 0.58MM.	3198 036 90010	2025	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9128	Wire Jumper, 0.58MM.	3198 036 90010	2026	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9129	Wire Jumper, 0.58MM.	3198 036 90010	2027	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9130	Wire Jumper, 0.58MM.	3198 036 90010	2028	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9131	Wire Jumper, 0.58MM.	3198 036 90010	2029	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9132	Wire Jumper, 0.58MM.	3198 036 90010	2030	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9133	Wire Jumper, 0.58MM.	3198 036 90010	2031	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9134	Wire Jumper, 0.58MM.	3198 036 90010	2032	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9136	Wire Jumper, 0.58MM.	3198 036 90010	2034	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210	
9137	Wire Jumper, 0.58MM.	3198 036 90010	2035	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9139	Wire Jumper, 0.58MM.	3198 036 90010	2036	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9140	Wire Jumper, 0.58MM.	3198 036 90010	2037	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9142	Wire Jumper, 0.58MM.	3198 036 90010	2040	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9143	Wire Jumper, 0.58MM.	3198 036 90010	2041	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9144	Wire Jumper, 0.58MM.	3198 036 90010	2042	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9145	Wire Jumper, 0.58MM.	3198 036 90010	2043	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9146	Wire Jumper, 0.58MM.	3198 036 90010	2044	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9147	Wire Jumper, 0.58MM.	3198 036 90010	2046	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9148	Wire Jumper, 0.58MM.	3198 036 90010	2049	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	2050	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9150	Wire Jumper, 0.58MM.	3198 036 90010	2052	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9152	Wire Jumper, 0.58MM.	3198 036 90010	2053	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	2054	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9154	Wire Jumper, 0.58MM.	3198 036 90010	2055	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9901	Wire Jumper, 0.58MM.	3198 036 90010	2056	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9902	Wire Jumper, 0.58MM.	3198 036 90010	2058	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
SSM PANEL ASSEMBLY				2061	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
SSM PANEL ASSEMBLY				2062	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
CBA	SSM Panel Parts.	3135 037 10431	2063	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856	
0001	Shield, Top.	3135 011 02252	2064	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
0002	Shield, Bottom	3135 011 01892	2065	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856	
			2066	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	

S = Safety Part Be sure to use exact replacement part.

2067	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2606	Cap, 22u, 20%, 50v, Electrolytic . .	3198 025 52290
2068	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2607	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2069	Cap, 100u, 20%, 50v, Electrolytic. .	3198 025 51010	2608	Cap, 10u, 20%, 50v, Electrolytic . .	3198 025 51090
2070	Cap, 100u, 20%, 50v, Electrolytic. .	3198 025 51010	2609	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2071	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2610	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2072	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2611	Cap, 22u, 20%, 50v, Electrolytic . .	3198 025 52290
2073	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2612	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2074	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2613	Cap, 10u, 20%, 50v, Electrolytic . .	3198 025 51090
2075	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2616	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2076	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2617	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2077	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2618	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050
2078	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050
2079	Cap, 330n, +80/-20%, 25v, Ceramic. .	2222 910 19856	2620	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2080	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790	2621	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010
2082	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2622	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290
2201	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2623	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
2203	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2624	Cap, 56p, 5%, 50v, Ceramic.	3198 016 05690
2206	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2625	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010
2208	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2626	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
2211	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2627	Cap, 56p, 5%, 50v, Ceramic.	3198 016 05690
2217	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2629	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
2219	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2630	Cap, 56p, 5%, 50v, Ceramic.	3198 016 05690
2224	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020 552 95499	2631	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2227	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2632	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
2228	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2633	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
2229	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2634	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
2230	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2704	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2231	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2705	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2233	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2717	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2239	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2718	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2242	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2719	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2244	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2720	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2249	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2721	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2250	Cap, 10u, 20%, 16v, Electrolytic . .	3198 028 21090	2723	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2255	Cap, 10u, 20%, 16v, Electrolytic . .	3198 028 21090	2724	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2260	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020 552 95499	2725	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2300	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2726	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2301	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2727	Cap, 47n, +80/-20%, 50v, Ceramic. .	3198 017 24730
2302	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	2764	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2303	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3000	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2304	Cap, 15p, 5%, 50v, Ceramic.	3198 016 01590	3001	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2305	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730	3002	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2306	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	3003	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2307	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730	3004	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2308	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	3005	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2310	Cap, 47u, 20%, 50v, Electrolytic . .	3198 025 54790	3006	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2311	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3007	Res, 100 ohm, 5%, 1/10W, Metalized GL	3198 021 51010
2312	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3008	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2313	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050	3009	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2317	Cap, 560p, 5%, 50v, Ceramic.	2020 552 93609	3010	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2318	Cap, 560p, 5%, 50v, Ceramic.	2020 552 93609	3011	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
2319	Cap, 560p, 5%, 50v, Ceramic.	2020 552 93609	3012	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2320	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720	3013	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2366	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	3014	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
2401	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3015	Res, 220 ohm, 5%, 1/10W, Metalized GL	3198 021 52210
2402	Cap, 100u, 20%, 50v, Electrolytic. .	3198 025 51010	3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2403	Cap, 2u2, 20%, 50v, Electrolytic. .	3198 025 52280	3017	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322 205 33101
2405	Cap, 470u, 20%, 35v, Electrolytic. .	3198 026 44710	3018	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2406	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020 552 95499	3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2407	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 026 52220	3020	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2410	Cap, 470u, 20%, 35v, Electrolytic. .	3198 026 44710	3021	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2419	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3022	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322 730 81132
2420	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3023	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2422	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3024	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322 205 33101
2430	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3025	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2431	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3026	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2432	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3027	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
2433	Cap, 100n, 10%, 63v, Metalized Polyes	2222 365 75104	3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2434	Cap, 100n, 10%, 63v, Metalized Polyes	2222 365 75104	3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2435	Cap, 10u, 20%, 100v, Electrolytic. .	3198 025 71090	3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2443	Cap, 47u, 20%, 50v, Electrolytic . .	3198 025 54790	3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2500	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790	3033	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2503	Cap, 33p, 5%, 50v, Ceramic.	3198 016 03390	3034	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2504	Cap, 150p, 5%, 50v, Ceramic.	3198 016 01510	3035	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322 734 61602
2505	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	3036	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2506	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3037	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2507	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	3038	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2508	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3039	Res, 100 ohm, 5%, 1/10W, Metalized GL	3198 021 51010
2509	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790	3040	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322 730 81132
2510	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3041	Res, 100 ohm, 5%, 1/10W, Metalized GL	3198 021 51010
2511	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3042	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2512	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	3043	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322 734 61602
2513	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3044	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
2514	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	3045	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
2516	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050	3046	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2600	Cap, 1u, 20%, 50v, Electrolytic. .	3198 025 51080	3047	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2601	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3048	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	3049	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
2604	Cap, 82p, 5%, 50v, Ceramic.	3198 016 08290			
2605	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040			

S = Safety Part Be sure to use exact replacement part.

3050	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3206	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510
3051	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 52240
3052	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3207	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 51020
3053	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3208	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 54730
3054	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3209	Res, 47K, 5%, 1/10W, Metalized Glass	3198 011 01030
3055	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3210	Res, 10K, 5%, 1/6W, Carbon Film. . .	
3056	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3211	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3057	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ss.	
3058	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3212	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3059	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 54790
3060	Res, 15 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31590	3216	Res, 47 ohm, 5%, 1/10W, Metalized Gla	3198 021 51010
3061	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 57590
3062	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3217	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3063	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	
3064	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3218	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3065	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ss.	
3066	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3219	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3067	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 54720
3068	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3220	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54730
3069	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3221	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3070	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3222	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3071	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3223	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3072	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	3198 021 51020
3073	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3074	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3075	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3226	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3076	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	
3077	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3227	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3078	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ass.	3198 021 51020
3079	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3233	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 54730
3080	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3234	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3081	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	3235	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3082	Res, 820 ohm, 5%, 1/10W, Metalized Gl	3198 021 58210	3236	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.		3237	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 51020
3083	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3238	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 54730
	ass.		3239	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3084	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3240	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.		3241	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3085	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3242	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3086	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3243	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3087	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ss.	
3088	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3244	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510
3089	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ass.	
3090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3247	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210
3097	Res, 1K, 5%, 2 1/2W, Metal Film. . .	3198 012 31020		ass.	3198 021 57590
3098	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3248	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
	ass.			ss.	
3099	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3249	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510
	ass.			ass.	3198 011 01030
3100	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 021 54720
	ass.		3252	Res, 4K7, 5%, 1/10W, Metalized Glass	3232 205 33109
3101	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3260	Res, 10 ohm, 5%, 1/3W, Metal Film. .	
	ass.		3300	Res, 47 ohm, 5%, 1/10W, Metalized Gla	3198 021 54790
3102	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310		ss.	
	ass.		3301	Res, 47 ohm, 5%, 1/10W, Metalized Gla	3198 021 54790
3103	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310		ss.	3198 021 53920
	ass.		3302	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 51030
3104	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3303	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 90020
	ass.		3304	Res, Zero ohm, "Chip" Jumper	3198 021 51030
3105	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3307	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 58230
	ass.		3308	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 51030
3106	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3309	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 54720
	ass.		3310	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 51030
3107	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 54730
3108	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3317	Res, 47K, 5%, 1/10W, Metalized Glass	
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3318	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3110	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210		ass.	3198 021 51820
	ass.		3332	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3111	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210	3333	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51020
	ass.		3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 56840
3112	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3335	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 53320
3113	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3336	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 54720
3114	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3337	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54730
3115	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3338	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 51030
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 54730
3117	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3340	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 51520
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3341	Res, 1K5, 5%, 1/10W, Metalized Glass	
3119	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3342	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 56840
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3343	Res, 680K, 5%, 1/10W, Metalized Glass	
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3344	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 56820
3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3403	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 51530
3125	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3404	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 56820
3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3405	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 52730
3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3406	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 58220
3201	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510	3407	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 56820
	ass.		3408	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 51530
3202	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	3409	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 56820
3203	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3410	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 011 02220
3204	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3424	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3425	Res, 2K2, 5%, 1/6W, Carbon Film. . .	

3427	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3620	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3428	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3621	Res, 820 ohm, 5%, 1/10W, Metalized Gl	3198 021 58210
3430	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3622	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3431	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3623	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3432	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3624	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3433	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3625	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3434	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3626	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3435	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3627	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3445	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	3628	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3629	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3450	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3630	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3451	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3631	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310
3452	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3632	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3453	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3633	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3500	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3634	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3501	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3635	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910
3502	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710	3636	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3503	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590	3637	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3504	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590	3638	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3639	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3640	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310
3507	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3641	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3508	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3642	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3509	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3643	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3511	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3645	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3512	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3647	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3513	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3648	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3514	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3650	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3515	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3651	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3516	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3652	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3517	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3653	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3518	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3654	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3519	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3655	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3656	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	3657	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3522	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3658	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3523	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3659	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3524	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3660	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3525	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3661	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3527	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2322 205 33109	3663	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3528	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3664	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3529	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810	3665	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810
3600	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3666	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3601	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3667	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3602	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3669	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210
3603	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3670	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3604	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3698	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3605	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3712	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2322 205 33109
3606	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3713	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3607	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3714	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3608	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3715	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3609	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3716	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3610	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3717	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3611	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3718	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3612	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3719	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3720	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3614	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	3721	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710	3722	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3616	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3723	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3617	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3724	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3618	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3740	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3619	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3741	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
	S = Safety Part Be sure to use exact replacement part.		3746	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
			3747	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
			3756	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

3759	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	5701	Coil, 6u8.	2422 535 97326
3760	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5702	Coil, 22u.	3198 018 72290
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6000	Diode, Varistor, BB148	9340 332 80135
4007	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6001	Diode, Signal, BAS316.	3198 010 10630
4008	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6003	Diode, Signal, BAS321.	9340 553 52115
4009	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6004	Diode, Signal, BAS316.	3198 010 10630
4010	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6005	Diode, Signal, BAS316.	3198 010 10630
4013	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6006	Diode, Signal, BAS316.	3198 010 10630
4014	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6007	Diode, Signal, BAS316.	3198 010 10630
4019	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6008	Diode, Signal, BAS316.	3198 010 10630
4020	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6009	IC, MC78M05CT.	9334 703 90687
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6010	IC, MC78M05CT.	9334 703 90687
4106	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6011	Diode, Signal, BAS316.	3198 010 10630
4107	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6012	Diode, Signal, BAS316.	3198 010 10630
4109	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6013	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6014	IC, MC79M05CT.	9337 783 20687
4124	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6015	Diode, Signal, BAS316.	3198 010 10630
4125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6016	Diode, Signal, BAS316.	3198 010 10630
4126	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6017	Zener Diode, 15 volt	9340 387 20115
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6018	Diode, Signal, BAS316.	3198 010 10630
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6019	Diode, Signal, BAS316.	3198 010 10630
4129	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6020	Diode, Signal, BAS316.	3198 010 10630
4130	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6021	Diode, Signal, BAS316.	3198 010 10630
4131	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6022	Diode, Signal, BAS316.	3198 010 10630
4134	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6023	Diode, Signal, BAS316.	3198 010 10630
4136	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6024	Diode, Signal, BAS316.	3198 010 10630
4137	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6025	Diode, Signal, BAS316.	3198 010 10630
4138	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6201	Zener Diode, 6.8 volt.	9340 386 40115
4139	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6202	Zener Diode, 6.8 volt.	9340 386 40115
4140	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6203	Zener Diode, 6.8 volt.	9340 386 40115
4143	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6204	Zener Diode, 6.8 volt.	9340 386 40115
4300	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6205	Zener Diode, 6.8 volt.	9340 386 40115
4301	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6206	Zener Diode, 6.8 volt.	9340 386 40115
4302	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6207	Zener Diode, 6.8 volt.	9340 386 40115
4304	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6208	Zener Diode, 6.8 volt.	9340 386 40115
4307	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6209	Zener Diode, 6.8 volt.	9340 386 40115
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6210	Zener Diode, 6.8 volt.	9340 386 40115
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6213	Zener Diode, 6.8 volt.	9340 386 40115
4650	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6214	Zener Diode, 6.8 volt.	9340 386 40115
4700	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6215	Zener Diode, 6.8 volt.	9340 386 40115
4701	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6216	Zener Diode, 6.8 volt.	9340 386 40115
4702	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6221	Zener Diode, 6.8 volt.	9340 386 40115
4703	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6222	Zener Diode, 6.8 volt.	9340 386 40115
4704	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6223	Zener Diode, 6.8 volt.	9340 386 40115
4705	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6224	Zener Diode, 6.8 volt.	9340 386 40115
4708	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6225	Zener Diode, 6.8 volt.	9340 386 40115
4709	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6226	Zener Diode, 6.8 volt.	9340 386 40115
4710	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6227	Zener Diode, 6.8 volt.	9340 386 40115
4711	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6228	Zener Diode, 6.8 volt.	9340 386 40115
4713	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6229	Zener Diode, 6.8 volt.	9340 386 40115
4714	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6230	Zener Diode, 6.8 volt.	9340 386 40115
4715	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6231	Zener Diode, 6.8 volt.	9340 386 40115
4716	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6232	Zener Diode, 6.8 volt.	9340 386 40115
5000	Coil, 5u6.	3198 018 15680	6300	Diode, Signal, BAS316.	3198 010 10630
5001	Coil, 5u6.	3198 018 15680	6301	Diode, Signal, BAS316.	3198 010 10630
5002	Coil, 5u6.	3198 018 15680	6306	Diode, Signal, BAS316.	3198 010 10630
5003	Coil, 5u6.	3198 018 15680	6309	Diode, Signal, BAS316.	3198 010 10630
5004	Coil, 5u6.	3198 018 15680	6402	Zener Diode, 12 volt	3198 010 21290
5005	Coil, 5u6.	3198 018 15680	6500	Diode, Signal, BAS316.	3198 010 10630
5006	Coil, 5u6.	3198 018 15680	6600	Diode, Signal, BAS316.	3198 010 10630
5007	Coil, 5u6.	3198 018 15680	6602	Diode, Signal, BAS316.	3198 010 10630
5008	Coil, 5u6.	3198 018 15680	6603	Diode, Signal, BAS316.	3198 010 10630
5009	Coil, 5u6.	3198 018 15680	6604	Diode, Signal, BAS316.	3198 010 10630
5010	Coil, 5u6.	3198 018 15680	6605	Diode, Signal, BAS316.	3198 010 10630
5011	Coil, 5u6.	3198 018 15680	6606	Diode, Signal, BAS316.	3198 010 10630
5012	Coil, 22u.	3198 018 72290	6607	Diode, Signal, BAS316.	3198 010 10630
5014	Coil, 22u.	3198 018 72290	6608	Diode, Signal, BAS316.	3198 010 10630
5015	Coil, 22u.	3198 018 72290	6609	Diode, Signal, BAS316.	3198 010 10630
5016	Coil, 22u.	3198 018 72290	6610	Diode, Signal, BAS316.	3198 010 10630
5017	Coil, 22u.	3198 018 72290	6611	Diode, Signal, BAS316.	3198 010 10630
5018	Coil, 5u6.	3198 018 15680	6612	Diode, Signal, 1N4148.	3198 010 10010
5019	Coil, 22u.	3198 018 72290	6613	Diode, Signal, BAS316.	3198 010 10630
5020	Coil, 22u.	3198 018 72290	6617	Diode, Signal, 1N4148.	3198 010 10010
5021	Coil, 22u.	3198 018 72290	6700	Zener Diode, 33 volt	9340 388 00115
5022	Coil, 6u8.	3198 018 16880	6708	Zener Diode, 33 volt	9340 388 00115
5302	Coil, 6u8.	2422 535 97326	7000	Transistor, PNP, BF450	9331 677 40126
5304	Coil, 1m	3198 018 21020	7001	IC, LM833N	9322 068 83682
5500	Coil, 2u2.	3198 018 12280	7002	Transistor, NPN, BC847B.	3198 010 42030
5501	Coil, 4u7.	3198 018 14780	7003	IC, UPD65654GF-260	9322 121 87671
5502	Coil, 4u7.	3198 018 14780	7004	Transistor, NPN, BC847B.	3198 010 42030
5503	Coil, 4u7.	3198 018 14780	7005	Transistor, NPN, BC847B.	3198 010 42030
5600	Coil, 3u9.	3198 018 13980	7007	IC, M24C32-WB6.	9322 122 09682
5601	Coil, 8u2.	3198 018 18280	7008	Transistor, NPN, BC547B.	3198 020 40030
5602	Coil, 4u7.	2422 535 96514	7009	IC, SM LC78817M.	9322 154 56682
5603	Coil, 3u9.	3198 018 13980	7010	IC, SM LC78817M.	9322 154 56682
5604	Coil, 8u2.	3198 018 18280	7011	IC, SM LC78817M.	9322 154 56682
5605	Coil, 3u9.	3198 018 13980	7012	IC, STK392-110	9322 130 35682
5606	Coil, 8u2.	3198 018 18280	7013	Transistor, NPN, BC547B.	3198 020 40030
5607	Coil, 1u	3198 018 11080	7014	IC, STK392-110	9322 130 35682
5608	Coil, 1u	3198 018 11080	7015	Transistor, NPN, BC547B.	3198 020 40030
5609	Coil, 1u	3198 018 11080	7016	Transistor, NPN, BC847B.	3198 010 42030
5700	Coil, 6u8.	2422 535 97326	7017	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

9536	Wire Jumper, 0.58MM.	3198 036 90010	2053	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9538	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9539	Wire Jumper, 0.58MM.	3198 036 90010	2301	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9545	Wire Jumper, 0.58MM.	3198 036 90010	2302	CAPACITOR, NP0, 50V, 330PF.	3198 016 33310
9548	Wire Jumper, 0.58MM.	3198 036 90010	2303	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9549	Wire Jumper, 0.58MM.	3198 036 90010	2306	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9550	Wire Jumper, 0.58MM.	3198 036 90010	2309	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9551	Wire Jumper, 0.58MM.	3198 036 90010	2311	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9552	Wire Jumper, 0.58MM.	3198 036 90010	2312	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9553	Wire Jumper, 0.58MM.	3198 036 90010	2313	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9555	Wire Jumper, 0.58MM.	3198 036 90010	2314	CAPACITOR, POLYSTYRENE, 16V, 100NF.,	
9556	Wire Jumper, 0.58MM.	3198 036 90010		5%.	2020 319 90005
9557	Wire Jumper, 0.58MM.	3198 036 90010	2316	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9558	Wire Jumper, 0.58MM.	3198 036 90010	2317	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9559	Wire Jumper, 0.58MM.	3198 036 90010	2319	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9560	Wire Jumper, 0.58MM.	3198 036 90010	2321	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9561	Wire Jumper, 0.58MM.	3198 036 90010	2322	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9563	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9564	Wire Jumper, 0.58MM.	3198 036 90010	2323	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9565	Wire Jumper, 0.58MM.	3198 036 90010	2324	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9566	Wire Jumper, 0.58MM.	3198 036 90010	2325	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9567	Wire Jumper, 0.58MM.	3198 036 90010	2326	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9568	Wire Jumper, 0.58MM.	3198 036 90010	2327	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9569	Wire Jumper, 0.58MM.	3198 036 90010	2328	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9570	Wire Jumper, 0.58MM.	3198 036 90010	2332	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9571	Wire Jumper, 0.58MM.	3198 036 90010	2333	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9572	Wire Jumper, 0.58MM.	3198 036 90010	2334	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9573	Wire Jumper, 0.58MM.	3198 036 90010	2335	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9574	Wire Jumper, 0.58MM.	3198 036 90010	2338	CAPACITOR, X7R, 50V, 2N2	3198 017 32220
9575	Wire Jumper, 0.58MM.	3198 036 90010	2342	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9576	Wire Jumper, 0.58MM.	3198 036 90010	2345	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9577	Wire Jumper, 0.58MM.	3198 036 90010	2348	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9578	Wire Jumper, 0.58MM.	3198 036 90010	2350	ELECTROLYTIC CAPACITOR, 35V, 4.7UF.,	
9579	Wire Jumper, 0.58MM.	3198 036 90010		20%.	3198 030 74780
9580	Wire Jumper, 0.58MM.	3198 036 90010	2354	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9581	Wire Jumper, 0.58MM.	3198 036 90010	2355	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9582	Wire Jumper, 0.58MM.	3198 036 90010	2356	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9583	Wire Jumper, 0.58MM.	3198 036 90010	2357	CAPACITOR, NP0, 50V, 10PF.	3198 016 31090
9584	Wire Jumper, 0.58MM.	3198 036 90010	2372	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9585	Wire Jumper, 0.58MM.	3198 036 90010	2373	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20	3198 030 81080
9587	Wire Jumper, 0.58MM.	3198 036 90010	2374	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9588	Wire Jumper, 0.58MM.	3198 036 90010	2375	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9590	Wire Jumper, 0.58MM.	3198 036 90010	2376	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9591	Wire Jumper, 0.58MM.	3198 036 90010	2377	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9592	Wire Jumper, 0.58MM.	3198 036 90010	2380	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9593	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9594	Wire Jumper, 0.58MM.	3198 036 90010	2381	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9596	Wire Jumper, 0.58MM.	3198 036 90010	2382	ELECTROLYTIC CAPACITOR, 16V, 47UF., 2	
9597	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 44790
9598	Wire Jumper, 0.58MM.	3198 036 90010	2401	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9599	Wire Jumper, 0.58MM.	3198 036 90010	2402	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9600	Wire Jumper, 0.58MM.	3198 036 90010	2403	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9601	Wire Jumper, 0.58MM.	3198 036 90010	2404	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9602	Wire Jumper, 0.58MM.	3198 036 90010	2405	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9603	Wire Jumper, 0.58MM.	3198 036 90010	2407	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9604	Wire Jumper, 0.58MM.	3198 036 90010	2408	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9605	Wire Jumper, 0.58MM.	3198 036 90010	2412	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9700	Wire Jumper, 0.58MM.	3198 036 90010	2413	ELECTROLYTIC CAPACITOR, 16V, 47UF., 2	
9701	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 44790
9702	Wire Jumper, 0.58MM.	3198 036 90010	2415	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9703	Wire Jumper, 0.58MM.	3198 036 90010	2417	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9704	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9705	Wire Jumper, 0.58MM.	3198 036 90010	2421	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9706	Wire Jumper, 0.58MM.	3198 036 90010	2422	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9707	Wire Jumper, 0.58MM.	3198 036 90010	2423	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9708	Wire Jumper, 0.58MM.	3198 036 90010	2424	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9709	Wire Jumper, 0.58MM.	3198 036 90010	2425	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2427	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2428	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2429	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2430	CAPACITOR, NP0, 50V, 68PF.	3198 016 36890
			2431	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790
			2432	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2435	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2437	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2438	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810
			2439	CAPACITOR, NP0, 50V, 150PF.	3198 016 31510
			2440	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690
			2453	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
			2457	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2458	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20	3198 030 81080
			2461	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2462	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2463	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2601	CAPACITOR, NP0, 50V, 470PF.	3198 016 34710
			2602	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
			2606	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090

SSB MODULE ASSEMBLY

SSB MODULE ASSEMBLY			
0205	CONNECTOR, 10PIN, F 1.00 FFC SMT	2422 025 16677	
0320	FACTORY PLATE.	3122 120 01701	
1057	CRYSTAL RESONATOR, 12MHZ., 20P DSX840	2422 543 01095	
1327	CRYSTAL RESONATOR, 12MHZ., 20P DSX840	2422 543 01095	
1451	SAW FILTER, 45.75MHZ., 0FWM1967L	2422 549 44377	
1630	CRYSTAL RESONATOR, 18M432, 12P DSX840	2422 543 01059	
2010	CAPACITOR, NP0, 25V, 820PF.	3198 016 38210	
2014	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	
2015	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050	
2016	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	
2017	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	
2018	CAPACITOR, X7R, 50V, 2N2	3198 017 32220	
2041	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290	
2042	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290	
2043	ELECTROLYTIC CAPACITOR, 35V, 4.7UF.,		
	20%.	3198 030 74780	
2044	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	
2045	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890	
2046	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890	
2049	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240	
2050	CAPACITOR, NP0, 50V, 100PF.	3198 016 31010	
2051	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040	

S = Safety Part Be sure to use exact replacement part.

2607	CAPACITOR, Y5V, 16V, 220NF..	3198 017 42240	3311	RESISTOR, 27K, 5%..	3198 021 32730
2612	CAPACITOR, X7R, 50V, 1NF..	3198 017 31020	3312	RESISTOR, 10K, 5%..	3198 021 31030
2613	CAPACITOR, X7R, 50V, 1NF..	3198 017 31020	3315	RESISTOR, 39K, 5%..	3198 021 33930
2619	CAPACITOR, X7R, 50V, 4N7..	3198 017 34720	3316	RESISTOR, 220R, 5%..	3198 021 32210
2620	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3324	RESISTOR, 390R, 5%..	3198 021 33910
2621	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3326	RESISTOR, 1K, 5%..	3198 021 31020
2623	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%..	3198 030 41090	3327	RESISTOR, 560R, 5%..	3198 021 35610
2624	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3328	RESISTOR, 390R, 5%..	3198 021 33910
2625	ELECTROLYTIC CAPACITOR, 16V, 22UF., 2 0%..	3198 030 42290	3329	RESISTOR, 100R, 5%..	3198 021 31010
2628	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3330	RESISTOR, 100R, 5%..	3198 021 31010
2629	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%..	3198 030 41090	3331	RESISTOR, FUSABLE, 2R2, 5%..	2322 750 62208
2635	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3332	RESISTOR, FUSABLE, 2R2, 5%..	2322 750 62208
2636	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3333	RESISTOR, 1K, 5%..	3198 021 31020
2637	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3334	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2638	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3339	RESISTOR, 10K, 5%..	3198 021 31030
2639	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3340	RESISTOR, 560R, 5%..	3198 021 55610
2640	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3341	RESISTOR, 150R, 5%..	3198 021 31510
2641	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3342	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2642	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3344	RESISTOR, 150R, 5%..	3198 021 31510
2655	CAPACITOR, X7R, 50V, 4N7..	3198 017 34720	3345	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2657	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%..	3198 030 41090	3348	RESISTOR, 150R, 5%..	3198 021 31510
2661	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3349	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2662	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%..	3198 030 41090	3358	RESISTOR, 100R, 5%..	3198 021 31010
2663	CAPACITOR, NP0, 50V, 47PF..	3198 016 34790	3361	RESISTOR, 100R, 5%..	3198 021 31010
2664	CAPACITOR, NP0, 50V, 56PF..	3198 016 35690	3362	RESISTOR, 100R, 5%..	3198 021 31010
2665	CAPACITOR, NP0, 50V, 27PF..	3198 016 32790	3363	RESISTOR, 100R, 5%..	3198 021 31010
2666	CAPACITOR, NP0, 50V, 180PF..	3198 016 31810	3364	RESISTOR, 1K, 5%..	3198 021 31020
2667	CAPACITOR, NP0, 50V, 15PF..	3198 016 31590	3365	RESISTOR, 560R, 5%..	3198 021 55610
2675	CAPACITOR, NP0, 50V, 3.3PF..	3198 016 33380	3371	RESISTOR, 15K, 5%..	3198 021 31530
2676	CAPACITOR, NP0, 50V, 3.3PF..	3198 016 33380	3372	RESISTOR, 10R, 5%..	3198 021 31090
2678	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3373	RESISTOR, 100R, 5%..	3198 021 31010
2679	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3374	RESISTOR, 3K3, 5%..	3198 021 33320
2682	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3375	RESISTOR, 1K, 5%..	3198 021 31020
2683	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3376	RESISTOR, 1K, 5%..	3198 021 31020
2684	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3377	RESISTOR, 100R, 5%..	3198 021 31010
2685	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3378	RESISTOR, 1K, 5%..	3198 021 31020
2686	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3381	RESISTOR, 100R, 5%..	3198 021 31010
2687	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3382	RESISTOR, 100R, 5%..	3198 021 31010
3002	RESISTOR, 8K2, 5%..	3198 021 38220	3383	RESISTOR, 100R, 5%..	3198 021 31010
3003	RESISTOR, 10K, 5%..	3198 021 31030	3384	RESISTOR, 8K2, 5%..	3198 021 38220
3004	RESISTOR, 8K2, 5%..	3198 021 38220	3385	RESISTOR, 10K, 5%..	3198 021 31030
3007	RESISTOR, 8K2, 5%..	3198 021 38220	3387	RESISTOR, 100R, 5%..	3198 021 31010
3008	RESISTOR, 8K2, 5%..	3198 021 38220	3388	RESISTOR, 47R, 5%..	3198 021 34790
3009	RESISTOR, 8K2, 5%..	3198 021 38220	3393	RESISTOR, 27K, 5%..	3198 021 52730
3013	RESISTOR, 8K2, 5%..	3198 021 38220	3394	RESISTOR, 18K, 5%..	3198 021 31830
3014	RESISTOR, 8K2, 5%..	3198 021 38220	3397	RESISTOR, 10R, 5%..	3198 021 31090
3015	RESISTOR, 10K, 5%..	3198 021 31030	3401	RESISTOR, 100R, 5%..	3198 021 31010
3017	RESISTOR, 100R, 5%..	3198 021 31010	3402	RESISTOR, 100R, 5%..	3198 021 31010
3018	RESISTOR, 100R, 5%..	3198 021 31010	3403	RESISTOR, 100R, 5%..	3198 021 31010
3019	RESISTOR, 100R, 5%..	3198 021 31010	3404	RESISTOR, 100R, 5%..	3198 021 31010
3021	RESISTOR, 100R, 5%..	3198 021 31010	3405	RESISTOR, 100R, 5%..	3198 021 31010
3022	RESISTOR, 2K2, 5%..	3198 021 32220	3411	RESISTOR, 1K5, 5%..	3198 021 31520
3023	RESISTOR, 8K2, 5%..	3198 021 38220	3412	RESISTOR, 1K5, 5%..	3198 021 31520
3024	RESISTOR, 1K, 5%..	3198 021 31020	3413	RESISTOR, 560R, 5%..	3198 021 55610
3030	RESISTOR, 1K, 5%..	3198 021 31020	3414	RESISTOR, 1K5, 5%..	3198 021 31520
3031	RESISTOR, 470R, 5%..	3198 021 34710	3415	RESISTOR, 1K5, 5%..	3198 021 31520
3034	RESISTOR, 47K, 5%..	3198 021 34730	3416	RESISTOR, 560R, 5%..	3198 021 55610
3035	RESISTOR, 470R, 5%..	3198 021 34710	3417	RESISTOR, 1K, 5%..	3198 021 31020
3042	RESISTOR, 150R, 5%..	3198 021 31510	3418	RESISTOR, 560R, 5%..	3198 021 55610
3043	RESISTOR, 150R, 5%..	3198 021 31510	3419	RESISTOR, 470R, 5%..	3198 021 34710
3044	RESISTOR, 10K, 5%..	3198 021 31030	3422	RESISTOR, 470R, 5%..	3198 021 34710
3045	RESISTOR, 2K7, 5%..	3198 021 32720	3423	RESISTOR, 100R, 5%..	3198 021 31010
3046	RESISTOR, 4K7, 5%..	3198 021 34720	3424	RESISTOR, 4K7, 5%..	3198 021 34720
3051	RESISTOR, RC22H, 24K, 1%..	2322 704 62403	3425	RESISTOR, 100R, 5%..	3198 021 31010
3054	RESISTOR, 10K, 5%..	3198 021 31030	3426	RESISTOR, 820R, 5%..	3198 021 38210
3055	RESISTOR, 10K, 5%..	3198 021 31030	3427	RESISTOR, 100R, 5%..	3198 021 31010
3056	RESISTOR, 47K, 5%..	3198 021 34730	3428	RESISTOR, 47K, 5%..	3198 021 34730
3057	RESISTOR, 10K, 5%..	3198 021 31030	3429	RESISTOR, 1K, 5%..	3198 021 31020
3058	RESISTOR, 470R, 5%..	3198 021 34710	3430	RESISTOR, 1K, 5%..	3198 021 31020
3059	RESISTOR, 150R, 5%..	3198 021 31510	3434	RESISTOR, 47K, 5%..	3198 021 34730
3061	RESISTOR, 470R, 5%..	3198 021 34710	3437	RESISTOR, 47K, 5%..	3198 021 34730
3062	RESISTOR, 4K7, 5%..	3198 021 34720	3438	RESISTOR, 47K, 5%..	3198 021 34730
3064	RESISTOR, 4K7, 5%..	3198 021 34720	3466	RESISTOR, 10K, 5%..	3198 021 31030
3065	RESISTOR, 4K7, 5%..	3198 021 34720	3467	RESISTOR, 10K, 5%..	3198 021 31030
3066	RESISTOR, 8K2, 5%..	3198 021 38220	3468	RESISTOR, 10K, 5%..	3198 021 31030
3081	RESISTOR, 4K7, 5%..	3198 021 34720	3472	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
3082	RESISTOR, 10K, 5%..	3198 021 31030	3473	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
3083	RESISTOR, 470R, 5%..	3198 021 34710	3474	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
3084	RESISTOR, 100R, 5%..	3198 021 31010	3477	RESISTOR, 4K7, 5%..	3198 021 34720
3085	RESISTOR, 100R, 5%..	3198 021 31010	3478	RESISTOR, 10R, 5%..	3198 021 31090
3086	RESISTOR, 100R, 5%..	3198 021 31010	3483	RESISTOR, 560R, 5%..	3198 021 55610
3088	RESISTOR, 100R, 5%..	3198 021 31010	3484	RESISTOR, 1K, 5%..	3198 021 31020
3092	RESISTOR, 100R, 5%..	3198 021 31010	3488	RESISTOR, 220R, 5%..	3198 021 32210
3301	RESISTOR, 1K, 5%..	3198 021 31020	3489	RESISTOR, 390R, 5%..	3198 021 33910
3302	RESISTOR, 560R, 5%..	3198 021 55610	3490	RESISTOR, 390R, 5%..	3198 021 33910
3305	RESISTOR, 3K9, 5%..	3198 021 33920	3491	RESISTOR, 820R, 5%..	3198 021 38210
3307	RESISTOR, 390R, 5%..	3198 021 33910	3492	RESISTOR, 560R, 5%..	3198 021 55610
			3493	RESISTOR, 390R, 5%..	3198 021 33910
			3601	RESISTOR, 100R, 5%..	3198 021 31010
			3602	RESISTOR, 100R, 5%..	3198 021 31010
			3606	RESISTOR, 27K, 5%..	3198 021 32730

3619	RESISTOR, 100R, 5%	3198 021 31010	6002	LED, VS TLD5400 (TEG0).	9322 110 34682
3621	RESISTOR, 100R, 5%	3198 021 31010	6005	IR RECEIVER, TSOP1736 (VISH).	9322 152 44687
3665	RESISTOR, 2K2, 5%.	3198 021 32220	6009	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4008	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6011	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4304	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6013	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4308	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6014	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4309	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6015	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4312	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6016	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4313	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	CBA	KEYBOARD PANEL ASSEMBLY, 50" TO 64" M	
4316	RESISTOR, 0 OHM, JUMPER.	3198 021 90030		ODELS.	3135 017 07611
4317	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	SIDE JACK PANEL ASSEMBLY		
4318	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	SIDE JACK PANEL ASSEMBLY		
4319	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	RED & BLUE CRT PANEL ASSEMBLIES		
4320	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	RED & BLUE CRT PANEL ASSEMBLIES		
4401	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	0079	HEATSINK, T0-220, USE SI COMP THERMAL	3135 011 01231
4402	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	1000	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021
4403	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	1001	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021
4410	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	1701	CRT SOCKET, 10PIN, F HPS0521.	2422 500 80051
4411	RESISTOR, 0 OHM, JUMPER.	3198 021 90020	S 1702	SURGE PROTECTOR, DSP-501N-A21F.	2422 549 42349
4434	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	1871	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484
4435	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	1872	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646
4436	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	1873	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646
4451	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	1875	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552
4455	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	2701	CAPACITOR, METALIZED POLYESTER, 400V,	
4465	RESISTOR, 0 OHM, JUMPER.	3198 021 90030		10NF., 10%	2222 365 55103
4684	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	S 2702	CAPACITOR, METALIZED POLYESTER, 400V,	
5040	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780		10NF., 10%	2222 365 55103
5041	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780	S 2705	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020 558 90487
5042	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780	2717	ELECTROLYTIC CAPACITOR, 400V, 10UF.,	
5309	FIXED INDUCTOR, 6.8UH., 5%	3198 018 66880		20%	2020 012 93487
5332	FIXED INDUCTOR, 6.8UH., 5%	3198 018 66880	2720	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2	
5333	FIXED INDUCTOR, 6.8UH., 5%	3198 018 66880		0%	3198 025 51090
5401	FIXED INDUCTOR, .82UH., 10%.	3198 018 38270	2721	CAPACITOR, METALIZED POLYESTER, 63V,	
5421	FIXED INDUCTOR, 22UH., 20%	3198 018 32290		100NF., 10%	2222 365 75104
5422	FIXED INDUCTOR, 15UH., 20%	3198 018 31590	2722	CAPACITOR, CERAMIC, B 500V S 560P, 10	
5425	FIXED INDUCTOR, 22UH., 20%	3198 018 32290	2750	CAPACITOR, CERAMIC, NP0 50V S 220PF.	3198 019 02210
5426	FIXED INDUCTOR, 15UH., 20%	3198 018 31590	2751	CAPACITOR, PLOYPROPHYLENE, 50V, 1NF.,	
5601	FIXED INDUCTOR, 1UH., 5%	3198 018 61080		2%	2020 310 90049
5602	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780	2752	CAPACITOR, CERAMIC, Y5P, 1KV, 1NF.	3198 019 51020
5625	FIXED INDUCTOR, 1UH., 5%	3198 018 61080	3703	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010
5665	FIXED INDUCTOR, 15UH., 5%	3198 018 61590	3710	RESISTOR, CARBON FILM, 1K5, 10%.	2120 101 28152
6031	DIODE, REGULATOR, UDZ2.4B (RHM0)	9322 131 13685	S 3716	RESISTOR, CARBON FILM, 100R, 20%	2120 103 90057
6302	DIODE, REGULATOR, BZX384-C8V2.	3198 020 58280	S 3718	RESISTOR, CARBON FILM, 1/2W, 22K, 5%	2120 103 90075
6303	DIODE, REGULATOR, BZX384-C6V8.	3198 020 56880	3719	RESISTOR, METAL FILM, 5R6, 1%.	2322 156 25608
6412	DIODE, SIGNAL, BAS316.	3198 010 10630	S 3720	RESISTOR, METAL FILM, 5R6, 1%.	2322 156 25608
6415	DIODE, SIGNAL, BAS316.	3198 010 10630	S 3730	RESISTOR, METAL OXIDE, 5W, 3K3, 5%	2322 257 41332
6605	DIODE, SIGNAL, BAS316.	3198 010 10630	S 3731	RESISTOR, METAL OXIDE, 5W, 3K3, 5%	2322 257 41332
7053	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115	3733	RESISTOR, METAL OXIDE, 10M, 5%	2322 241 53106
7063	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	3735	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010
7064	IC, SAA5667HL/M1/ (PHSE)	4835 310 57615	3737	RESISTOR, CARBON FILM, 1/2W, 3K3, 20%	3198 013 03320
7066	IC, M24C32-WMN6 (ST00)	9322 124 74668	3738	RESISTOR, CARBON FILM, 1/6W, 100K, 5%	3198 011 01040
7301	IC, TDA8887H/N1 (PHSE)	9352 638 72557	3740	RESISTOR, CARBON FILM, 1/6W, 1K, 5%.	3198 011 01020
7305	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	3742	RESISTOR, METAL FILM, 1K, 1%	2322 156 21002
7307	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	3743	RESISTOR, METAL FILM, 220R, 1%	2322 156 22201
7331	TRANSISTOR, SIGNAL, BC857BW.	3198 010 42320	3745	RESISTOR, METAL FILM, 75R, 1%.	2138 116 17509
7368	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	3750	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010
7401	IC, 74HC4053PW (PHSE).	9351 869 40118	3751	RESISTOR, METAL FILM, 15R, 1%.	2138 116 11509
7405	IC, TC90A45F (TOSJ).	9322 144 38668	3752	RESISTOR, 22K, 5%.	2120 103 90075
7407	IC, 74HC4066PW (PHSE).	9351 750 00118	3753	RESISTOR, CARBON FILM, 27R, 5%	2120 101 74279
7412	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115	3755	RESISTOR, POWER, 1W, 47R, 5%	3198 012 14790
7415	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115	3756	RESISTOR, POWER, 1W, 68R, 5%	3198 012 16890
7421	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	5701	FIXED INDUCTOR, 100UH., 5%	3198 018 11010
7425	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	5702	FIXED INDUCTOR, 15UH., 10%	2422 535 97331
7442	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	5703	FIXED INDUCTOR, 47UH., 5%.	3198 018 14790
7446	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310	5704	FIXED INDUCTOR, 47UH., 5%.	3198 018 14790
7630	IC, 74HC4052PW (PHSE).	9351 874 90118	5705	FIXED INDUCTOR, 22UH., 10%	2422 535 97333
7651	IC, MSP3435G-FH-B5 (MIAS).	9322 143 55671	6701	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133
CBA	SSB MODULE ASSEMBLY, FIGHTER	3139 127 25881	6702	DIODE REGULATOR, BZX79-B6V2 (PHSE)	9331 668 30133
KEYBOARD PANEL ASSEMBLY					
KEYBOARD PANEL ASSEMBLY					
1001	TACTILE SWITCH	2422 128 02742	6705	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133
1002	TACTILE SWITCH	2422 128 02742	6706	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133
1003	TACTILE SWITCH	2422 128 02742	7701	TRANSISTOR, POWER, 2SC3790E (TSAJ)	9322 122 58682
1004	TACTILE SWITCH	2422 128 02742	7702	TRANSISTOR, SIGNAL, BC337-25).	3198 020 43530
1006	TACTILE SWITCH	2422 128 02742	7703	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ)	9322 103 08678
1007	TACTILE SWITCH	2422 128 02742	7705	TRANSISTOR, SIGNAL, BF421 (PHSE)	9334 196 60126
1214	CONNECTOR, 7 PIN	2422 025 12491	9701	WIRE JUMPER 0.6MM.	0322 179 00003
1215	CONNECTOR, 1 PIN	2422 015 18551	9702	WIRE JUMPER 0.6MM.	0322 179 00003
2003	CAPACITOR, CERAMIC, X7R, 16V, 100NF.	3198 017 01040	CBA	RED & BLUE CRT PANEL ASSEMBLIES.	3135 017 04961
2004	ELECTROLYTIC, CAPACITOR, 16V, 100UF.,		GREEN CRT PANEL ASSEMBLY		
	20%.	3198 028 21010	GREEN CRT PANEL ASSEMBLY		
3008	RESISTOR, 1K5, 5%.	3198 021 51520	0089	HEATSINK T0-220, USE SI COMP THERMAL	3135 011 01231
3010	RESISTOR, 1K5, 1%.	2322 734 61502	1000	CONNECTOR, 1 PIN, M RT-01T-1.0	2422 034 20021
3011	RESISTOR, 750R, 1%.	2322 734 87501	1001	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552
3012	RESISTOR, 2K, 1%.	2322 734 62002	1002	CONNECTOR, 1 PIN, M RT-01T-1.0	2422 034 20021
3013	RESISTOR, 270R, 1%.	2322 734 62701	S 1801	CRT SOCKET, 10 PIN, HPS0521.	2422 500 80051
3015	RESISTOR, 2K7, 1%.	2322 734 62702	S 1802	SURGE PROTECTOR, DSP-501N-A21.	2422 549 42349
3017	RESISTOR, 3K9, 1%.	2322 734 63902	1881	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484
3020	RESISTOR, 470R, 5%.	3198 021 54710	1882	CONNECTOR, 4 PIN, M 2.50 EH.	2422 025 12479
3022	RESISTOR, 10K, 5%.	3198 021 51030	1883	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484
3025	RESISTOR, 330R, 5%.	3198 021 53310	1884	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484

S = Safety Part Be sure to use exact replacement part.

1885	CONNECTOR, 2 PIN, M 3.96 VH.	2422	025	10646	2813	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2			
1886	CONNECTOR, 4 PIN, M 3.96 VH.	2422	025	10647		0%.	3198	025	51090
2801	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103	2814	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
S 2805	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020	558	90487	2815	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2807	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103	2816	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2817	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%.	2020	012	93487	2817	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2820	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090	2818	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2821	CAPACITOR, POLYESTER, 63V, 100NF., 10	2222	365	75104	2819	CAPACITOR, NP0, 50V, 12PF.	3198	016	01290
2822	CAPACITOR, CERAMIC DISK, 500V, 560P, 10%.	2020	557	90147	2820	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2850	CAPACITOR, CERAMIC DISK, NP0, 50V, 220PF.	3198	019	02210	2821	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2851	CAPACITOR, POLYPROPYLENE, 50V, 1NF., 2%.	2020	310	90049	2822	CAPACITOR, X7R, 50V, 33NF.	3198	017	03330
2852	CAPACITOR, CERAMIC DISK, Y5P, 1KV, 1N F.	3198	019	51020	2823	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3803	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010	2824	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
3810	RESISTOR, CARBON, 1/2W, 1K5, 10%.	2120	101	28152	2825	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
S 3816	RESISTOR, CARBON, 1/2W, 100R, 20%.	2120	103	90057	2826	CAPACITOR, NP0, 50V, 560PF.	3198	016	05610
S 3818	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075	2827	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
S 3819	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608	2828	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
S 3820	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608	2829	CAPACITOR, Y5V, 16V, 1UF.	3198	017	21050
3825	RESISTOR, METAL FILM, 220K, 1%.	2322	156	22204	2830	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3826	RESISTOR, METAL FILM, 100K, 1%.	2322	156	21004	2831	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
S 3830	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332	2832	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
S 3831	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332	2833	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3833	RESISTOR, METAL FILM, 1/2W, 10M, 5%.	2322	241	53106	2834	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
3835	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010	2836	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
3837	RESISTOR, CARBON, 1/2W, 3K3, 20%.	3198	013	03320	2837	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3838	RESISTOR, CARBON, 1/6W, 100K, 5%.	3198	011	01040	2840	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3840	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020	2841	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
3842	RESISTOR, METAL FILM, 1K, 1%.	2322	156	21002	2890	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198	025	32210
3843	RESISTOR, METAL FILM, 220R, 1%.	2322	156	22201	2891	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3845	RESISTOR, METAL FILM, 75R, 1%.	2138	116	17509	2892	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
3850	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010	2893	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198	025	32210
3851	RESISTOR, METAL FILM, 15R, 1%.	2138	116	11509	2894	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3852	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075	2895	CAPACITOR, NP0, 50V, 47PF.	3198	019	04790
3853	RESISTOR, CARBON, 27R, 5%.	2120	101	74279	2911	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3855	RESISTOR, POWER, 1W, 47R, 5%.	3198	012	14790	2930	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3856	RESISTOR, POWER, 1W, 68R, 5%.	3198	012	16890	2931	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3857	RESISTOR, METAL FILM, 10K, 5%.	2322	193	14103	2932	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
5801	FIXED INDUCTOR, 100UH., 5%.	3198	018	11010	2933	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
5802	FIXED INDUCTOR, 15UH., 10%.	2422	535	97331	2934	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
5803	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790	2935	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198	025	31010
5804	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790	2936	RESISTOR, JUMPER, 0R05	3198	021	90020
5805	FIXED INDUCTOR, 22UH., 10%.	2422	535	97333	2937	CAPACITOR, Y5V, 16V, 1UF.	3198	017	21050
6801	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133	3801	RESISTOR, 100R, 5%.	3198	021	51010
6802	DIODE, REGULATOR, BZX79-B6V2 (PHSE).	9331	668	30133	3802	RESISTOR, 100R, 5%.	3198	021	51010
6805	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133	3805	RESISTOR, 1K, 5%.	3198	021	51020
6806	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133	3806	RESISTOR, 1K5, 5%.	3198	021	51520
7801	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322	122	58682	3807	RESISTOR, 1K5, 5%.	3198	021	51520
7802	TRANSISTOR, SIGNAL, BC337-25 (COL).	3198	020	43530	3812	RESISTOR, 10K, 5%.	3198	021	51030
7803	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ).	9322	103	08678	3813	RESISTOR, 15K, 5%.	3198	021	51530
7805	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334	196	60126	3814	RESISTOR, 1K, 5%.	3198	021	51020
9801	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3815	RESISTOR, 1K, 5%.	3198	021	51020
9802	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3816	RESISTOR, 820R, 5%.	3198	021	58210
9803	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3817	RESISTOR, 1K, 5%.	3198	021	51020
9804	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3818	RESISTOR, 15K, 5%.	3198	021	51530
9805	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3819	RESISTOR, 10K, 5%.	3198	021	51030
9806	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3820	RESISTOR, 1K, 5%.	3198	021	51020
9807	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3821	RESISTOR, 390R, 5%.	3198	021	53910
9808	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3822	RESISTOR, 390R, 5%.	3198	021	53910
CBA	GREEN CRT PANEL ASSEMBLY	3135	017	04981	3823	RESISTOR, 390R, 5%.	3198	021	53910
SINGLE TUNER PIP PANEL ASSEMBLY									
SINGLE TUNER PIP PANEL ASSEMBLY									
0025	SHIELD, F/IC 7803.	3139	121	26532	3824	RESISTOR, 15K, 5%.	3198	021	51530
0200	CONNECTOR, 5 PIN, M 2.50 EH.	2422	025	12481	3825	RESISTOR, 150R, 5%.	3198	021	51510
0201	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484	3826	RESISTOR, 150R, 5%.	3198	021	51510
0205	CONNECTOR, 10 PIN, F 1.00 FFC 0.3.	2422	025	16587	3827	RESISTOR, 330R, 5%.	3198	021	53310
0236	CONNECTOR, 3 PIN, M 2.50 EH.	2412	020	00725	3828	RESISTOR, 4M7, 5%.	3198	021	54750
0272	CONNECTOR, 3 PIN, M 2.50 EH, BLACK.	2422	025	16382	3829	RESISTOR, 15K, 5%.	3198	021	51530
1802	CRYSTAL RESONATOR, 14.31818MHZ., 20P HC49/U	2422	543	00904	3830	RESISTOR, 2K2, 5%.	3198	021	52220
2801	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040	3831	RESISTOR, 1M, 5%.	3198	021	51050
2803	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790	3832	RESISTOR, 1K, 5%.	3198	021	51020
2804	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090	3833	RESISTOR, 100R, 5%.	3198	021	51010
2805	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040	3834	RESISTOR, 100R, 5%.	3198	021	51010
2806	ELECTROLYTIC CAPACITOR, 10V, 220UF., 20%.	3198	025	12210	3836	RESISTOR, 1K, 5%.	3198	021	51020
2807	CAPACITOR, NP0, 50V, 47PF.	3198	016	04790	3839	RESISTOR, 1K, 5%.	3198	021	51020
2808	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090	3840	RESISTOR, JUMPER, 0R05	3198	021	90020
2809	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030	3844	RESISTOR, 1K, 5%.	3198	021	51020
2810	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030	3845	RESISTOR, JUMPER, 0R05	3198	021	90020
2811	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030	3849	RESISTOR, 1K, 5%.	3198	021	51020
2812	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790	3850	RESISTOR, JUMPER, 0R05	3198	021	90020
					3853	RESISTOR, 3K3, 5%.	3198	021	53320
					3854	RESISTOR, 15K, 5%.	3198	021	51530
					3855	RESISTOR, 1K, 5%.	3198	021	51020
					3856	RESISTOR, 1K, 5%.	3198	021	51020
					3857	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020
					3858	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020
					3859	RESISTOR, 47K, 5%.	3198	021	54730
					3860	RESISTOR, 47K, 5%.	3198	021	54730
					3864	RESISTOR, 1K, 5%.	3198	021	51020
					3866	RESISTOR, 330R, 5%.	3198	021	53310

S = Safety Part Be sure to use exact replacement part.

3870	RESISTOR, 220R, 5%	3198 021 52210	9912	WIRE JUMPER, 0.6MM	0322 179 00003
3871	RESISTOR, 220R, 5%	3198 021 52210	9915	WIRE JUMPER, 0.6MM	0322 179 00003
3872	RESISTOR, 220R, 5%	3198 021 52210	9921	WIRE JUMPER, 0.6MM	0322 179 00003
3890	RESISTOR, CARBON, 1/6W, 68R, 5%	3198 011 06890	9922	WIRE JUMPER, 0.6MM	0322 179 00003
3914	RESISTOR, JUMPER, 0R05	3198 021 90020	9923	WIRE JUMPER, 0.6MM	0322 179 00003
3915	RESISTOR, JUMPER, 0R05	3198 021 90020	CBA	SINGLE TUNER PIP PANEL ASSEMBLY	3139 137 22971
3916	RESISTOR, JUMPER, 0R05	3198 021 90020			
3917	RESISTOR, JUMPER, 0R05	3198 021 90020			
3918	RESISTOR, JUMPER, 0R05	3198 021 90020			
3919	RESISTOR, JUMPER, 0R05	3198 021 90020			
3920	RESISTOR, 100R, 5%	3198 021 51010			
3921	RESISTOR, 100R, 5%	3198 021 51010			
3922	RESISTOR, 4K7, 5%	3198 021 54720			
3923	RESISTOR, 4K7, 5%	3198 021 54720			
3924	RESISTOR, 4K7, 5%	3198 021 54720			
3925	RESISTOR, 4K7, 5%	3198 021 54720			
3926	RESISTOR, 4K7, 5%	3198 021 54720			
3927	RESISTOR, 470R, 5%	3198 021 54710			
3956	RESISTOR, JUMPER, 0R05	3198 021 90020			
3958	RESISTOR, 120R, 5%	3198 021 51210			
3960	RESISTOR, JUMPER, 0R05	3198 021 90020			
3961	RESISTOR, 1K, 5%	3198 021 51020			
3962	RESISTOR, 4K7, 5%	3198 021 54720			
3968	RESISTOR, 4K7, 5%	3198 021 54720			
3969	RESISTOR, 330R, 5%	3198 021 53310			
3970	RESISTOR, 390R, 5%	3198 021 53910			
4803	RESISTOR, JUMPER, 0R05	3198 021 90020			
4804	RESISTOR, JUMPER, 0R05	3198 021 90020			
4805	RESISTOR, JUMPER, 0R05	3198 021 90020			
4807	RESISTOR, JUMPER, 0R05	3198 021 90020			
4808	RESISTOR, JUMPER, 0R05	3198 021 90020			
4809	RESISTOR, JUMPER, 0R05	3198 021 90020			
4810	RESISTOR, JUMPER, 0R05	3198 021 90020			
4812	RESISTOR, JUMPER, 0R05	3198 021 90020			
4813	RESISTOR, JUMPER, 0R05	3198 021 90020			
4814	RESISTOR, JUMPER, 0R05	3198 021 90020			
4815	RESISTOR, JUMPER, 0R05	3198 021 90020			
4816	RESISTOR, JUMPER, 0R05	3198 021 90020			
4817	RESISTOR, JUMPER, 0R05	3198 021 90020			
4818	RESISTOR, JUMPER, 0R05	3198 021 90020			
4819	RESISTOR, JUMPER, 0R05	3198 021 90020			
4821	RESISTOR, JUMPER, 0R05	3198 021 90020			
4901	RESISTOR, JUMPER, 0R05	3198 021 90020			
5890	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5891	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5892	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5902	FIXED INDUCTOR, 4MUH7, 10% (UAW)	3198 018 24780			
6801	DIODE, SIGNAL, BAT85 (PHSE)	9336 247 60133			
6890	DIODE, REGULATOR, BZX384-C3V9	3198 020 53980			
7801	IC, HEF4053BT (PHSE)	9333 729 60653			
7803	IC, M65669SP (MITJ)	9322 146 60682			
7804	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7805	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7806	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7807	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7810	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7813	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7816	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7817	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7891	TRANSISTOR, SIGNAL, BC337-25	3198 020 43530			
7910	IC, M62320FP (MITJ)	9322 127 15668			
7919	IC, TDA8601T/C1 (PHSE)	9351 538 90518			
7920	TRANSISTOR, SIGNAL, BC857B	3198 010 42150			
9800	WIRE JUMPER, 0.6MM	0322 179 00003			
9801	WIRE JUMPER, 0.6MM	0322 179 00003			
9802	WIRE JUMPER, 0.6MM	0322 179 00003			
9803	WIRE JUMPER, 0.6MM	0322 179 00003			
9804	WIRE JUMPER, 0.6MM	0322 179 00003			
9805	WIRE JUMPER, 0.6MM	0322 179 00003			
9807	WIRE JUMPER, 0.6MM	0322 179 00003			
9808	WIRE JUMPER, 0.6MM	0322 179 00003			
9810	WIRE JUMPER, 0.6MM	0322 179 00003			
9811	WIRE JUMPER, 0.6MM	0322 179 00003			
9812	WIRE JUMPER, 0.6MM	0322 179 00003			
9813	WIRE JUMPER, 0.6MM	0322 179 00003			
9814	WIRE JUMPER, 0.6MM	0322 179 00003			
9815	WIRE JUMPER, 0.6MM	0322 179 00003			
9816	WIRE JUMPER, 0.6MM	0322 179 00003			
9817	WIRE JUMPER, 0.6MM	0322 179 00003			
9818	WIRE JUMPER, 0.6MM	0322 179 00003			
9820	WIRE JUMPER, 0.6MM	0322 179 00003			
9821	WIRE JUMPER, 0.6MM	0322 179 00003			
9822	WIRE JUMPER, 0.6MM	0322 179 00003			
9823	WIRE JUMPER, 0.6MM	0322 179 00003			
9824	WIRE JUMPER, 0.6MM	0322 179 00003			
9901	WIRE JUMPER, 0.6MM	0322 179 00003			
9902	WIRE JUMPER, 0.6MM	0322 179 00003			
9903	WIRE JUMPER, 0.6MM	0322 179 00003			
9905	WIRE JUMPER, 0.6MM	0322 179 00003			
9906	WIRE JUMPER, 0.6MM	0322 179 00003			
9907	WIRE JUMPER, 0.6MM	0322 179 00003			
9908	WIRE JUMPER, 0.6MM	0322 179 00003			

2 TUNER PIP PANEL ASSEMBLY

2 TUNER PIP PANEL ASSEMBLY

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 55P8288A37
First Published: 09-23-02
Rev. Date: 10-25-02
Print Date: 2004-09-08

Parts List

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

CABINET & ACCESSORY PARTS

CABINET & ACCESSORY PARTS			
S AC23	Mains Cord (Special - Noise Filtered)	2422	070 98164
AC01	CABINET BACKCOVER, CENTER f/55P8288/37, 55P8288A/37 (USA, Best Buy)	3135	013 03691
AC02	CABINET BACK, UPPER, 55"	3135	014 07632
AC03	PIP FRAME	3135	014 11101
AC04	SUPPORT FRAME F/SSB	3135	014 11111
AC05	BARRIER LEFT & RIGHT, (2 used)	3135	013 03311
AC06	CHASSIS FRAME	3135	014 11091
AC07	LIGHT BARRIER	3135	014 03381
AC08	REAR JACK FRAME	3135	014 11132
AC09	SCREEN FRAME ASM., 55"	3135	017 07491
AC10	MIRROR MTG. BRKT, (2 used)	3135	011 04751
AC11	BASE	3135	017 03641
AC14	FREZZEL SCREEN, 55"	3135	014 07801
AC15	LENTICULAR SCREEN, 55"	3135	014 07791
AC19	MIRROR ASM., 55"	3135	037 50071
S AC23	MAINS CORD, SPECIAL, NOISE FILTERED	2422	070 98164
AC25	LOUDSPEAKER, 8 OHM, 15W (2 used)	2422	264 00289
AC26	TOP PANEL STIFFENER	3135	011 03003
AC28	RETAINER SCREEN HORIZ, 55V (2 used)	3135	014 10902
AC29	RETAINER SCREEN VERT, 55" (2 used)	3135	014 10912
AC30	BAFFLE ASM.	3135	017 07561
AC31	NAMEPLATE	3135	015 03561
AC32	BAFFLE MTG. CUP, (7 used)	3135	013 02761
AC35	CASTERS, SHEPHERD PRODUCTS (4 used)	0000	001 00153
AC36	CHASSIS MTG. BRACKET, (3 used)	3135	011 02011
AC37	BUTTON ASSEMBLY	3135	017 07020
AC38	LENS, IR	3135	014 10230
S CRTB	CRT P16LTG00BMB(U)	9322	173 23682
S CRTG	CRT P16LTG00HHA(U)	9322	173 21682
S CRTR	CRT P16LTG00RFA(U)	9322	173 22682
S DEFL	DEFLECTION YOKE, DAV4284M (TSAJ) B, (3 used)	2422	549 44589
S FG2	FOCUS/G2 CONTROL, 100M 15KV	2422	549 45201
REMOTE	RC2520/04 Remote Control (Fighter)	3139	228 85371

CRT ASSEMBLY

CRT ASSEMBLY			
X1	SCREW, 8-32X0.5 TORX, (12 used), LENS TO COUPLER	3135	010 02971
X10	COOLANT KIT	4835	310 67032
X11	SEAL, CRT, (3 used)	3135	013 02321
X12	MOUNTING BRACKET, CRT, (3 used)	3135	011 02371
X13	SPRING COMPRESSION, (12 used), CRT MT	3135	011 00611
X14	SCREW, SHOULDER, (12 used), CRT TO COUPLER	3135	010 08101
X2	LENS DELTA 78, (2 used), GREEN & RED	3135	013 00822
X2	LENS DELTA 77, FOR BLUE	3135	013 01052
X3	LENS C-ELEMENT DELTA-77, FOR GREEN	3135	013 01071
X3	LENS C-ELEMENT DELTA-77, (2 used), RED & BLUE	3135	013 01081
X4	SEAL, LENS, (3 used), LENS TO COUPLER	3135	013 02632
X5	CAP, COUPLER, (3 used), DIAPHRAGM COVER	3135	014 02681
X6	DIAPHRAGM COUPLER, (3 used)	3135	013 01061
X7	SEAL, VENT PLUG, (3 used)	3135	013 01231
X8	PLUG, VENT, (3 used)	3135	014 02641
X9	COUPLER, CRT-LENS 55", Red & Blue (2 used)	3135	011 01934
X9	COUPLER CRT-LENS, Green	3135	011 04281
X15	CRT Anode Lead	4835	321 27397

FCC FILTER PANEL ASSEMBLY

FCC FILTER PANEL ASSEMBLY			
0006	LINE HEATSINK A8, IS HS 0600	3139	121 61663
0060	SILICON INSULATOR SP600, SIL PAD FOR 6000	3135	010 02351
0061	IC-SPRING, CLIP FOR 6000	3135	011 02331
S 1000	FUSE, 5A, 250V	2422	093 00035
S 1004	FUSE, 1A, 250V	2422	093 00027
1100	CONNECTOR, 8 PIN	2422	025 10648
1108	CONNECTOR, 4 PIN	2422	025 15503
1110	CONNECTOR, 1 PIN	2422	015 18552
S 2000	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 680NF., 20%	2222	336 29149
S 2002	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020	554 90173
S 2003	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020	554 90173
2004	SURGE PROTECTOR, DSP-501N-A21F	2422	549 42349
S 2005	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 220NF., 20%	2222	336 29146
2006	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020	558 90557
2007	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020	558 90557
2008	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020	558 90557
2009	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020	558 90557

S = Safety Part Be sure to use exact replacement part.

2102	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020	554 90169
2103	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020	554 90169
2107	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	3198	019 61020
2108	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	3198	019 61020
2110	ELECTROLYTIC CAPACITOR, 200V, 470UF., 20%	2020	021 91321
2214	ELECTROLYTIC CAPACITOR, 250V, 10UF., 20%	2020	012 93495
S 3000	RESISTOR, METAL FILM, 4.7MEG, 5%	2322	242 13475
S 3001	RESISTOR, METAL FILM, 4.7MEG, 5%	2322	242 13475
S 3002	RESISTOR, METAL FILM, 4.7MEG, 5%	2322	242 13475
3003	RESISTOR, CARBON COMP., 470R, 20%	2120	103 90019
3009	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322	253 41228
3010	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322	253 41228
S 3011	VARISTOR, DC 1MA/495V S MAX 850V	2322	595 90021
S 3012	RESISTOR, METAL FILM, 1MEG, 5%	2322	242 13105
3300	RESISTOR, METAL OXIDE, 5W, 22K, 5%	2322	257 41223
S 5000	FILTER, MAINS, 8MH., 7A	2422	549 44591
S 5005	FILTER, MAINS, 80UH., 1.8A	2422	549 44041
5103	FIXED INDUCTOR, 4.7UH., 5%	2422	535 94213
S 5106	FILTER, MAINS, 80UH., 1.8A	2422	549 44041
6000	DIODE BRIDGE RECTIFIER, GBU4JL-7002	9322	132 55667
6001	DIODE BRIDGE RECTIFIER, DF06M	9338	118 70682
9000	WIRE JUMPER, 0.58MM.	3198	036 90010
9001	WIRE JUMPER, 0.58MM.	3198	036 90010
9002	WIRE JUMPER, 0.58MM.	3198	036 90010
9003	WIRE JUMPER, 0.58MM.	3198	036 90010
9030	WIRE JUMPER, 0.58MM.	3198	036 90010
9031	WIRE JUMPER, 0.58MM.	3198	036 90010
9032	WIRE JUMPER, 0.58MM.	3198	036 90010
9101	WIRE JUMPER, 0.58MM.	3198	036 90010
9102	WIRE JUMPER, 0.58MM.	3198	036 90010
CBA	FCC FILTER PANEL ASSEMBLY	3135	017 05441

CISPR FILTER PANEL ASSEMBLY

CISPR FILTER PANEL ASSEMBLY

LSB PANEL ASSEMBLY

LSB PANEL ASSEMBLY			
CBA	LSB PANEL ASSEMBLY	3135	037 10471
0031	Heatsink, Vertical	3135	011 04591
0033	Heatsink, T0220	2422	487 89872
0036	Heatsink, T0-220	3135	011 03291
0038	Heatsink, T0-220	3135	011 03291
0040	Heatsink, T0220	2422	487 89872
0043	Heatsink, T0220	2422	487 89872
0046	Heatsink, T0-220	3135	011 03291
0056	IC-Spring	3135	011 01511
0057	Insulator, Mica	3135	010 02911
0058	Solder Terminal	3135	010 02801
0065	Heatsink, T0-92, Black Anodized	3135	011 01871
0066	Solder Terminal	3135	010 02801
0067	IC, Spring	3135	011 02331
0068	Insulator	3135	010 02351
0069	Spring, Clip	3135	011 02621
0070	Insulator	3135	010 02341
0080	Heatsink, T0-247	3135	011 00553
0081	Solder Terminal	3135	010 02801
0082	IC-Spring	3135	011 01512
0083	Insulator	3135	010 02321
1201	Surge Protector	2422	549 43675
S 1300	Fuse/Clip, 5A, 250 V	2422	093 00035
S 1302	Fuse, Radial, LT 4A, 250V	2422	086 10786
S 1305	Relay, 1 Pin, 5V, 5A, LKS1AF	2422	132 07314
1500	Connector, 8 Pin	2422	025 10648
1504	Connector, 4 Pin	2422	025 16153
1505	Connector, 4 Pin	2422	025 16153
1506	Connector, 4 Pin	2422	025 16153
1508	Connector, 3 Pin	2422	025 14409
1510	Connector, 4 Pin	2422	025 12479
1516	Connector, 12 Pin	2422	025 08333
1518	Connector, 12 Pin	2422	025 08333
1520	Connector, 12 Pin	2422	025 08333
1574	Connector, 1 Pin	2422	015 18552
S 1800	Fuse, LT 1A, 250V	2422	086 10779
S 1801	Fuse, LT 1A, 250V	2422	086 10779
1901	Connector, 2 Pin	2412	020 00724
S 2203	Cap, 2n2, 20%, v, Ceramic	2020	554 90173
S 2204	Cap, 470p, 10%, v, Ceramic	2020	554 90169
2206	Cap, 220u, 20%, 25v, Electrolytic	2020	012 92641
2208	Cap, 100p, 10%, 500v, Ceramic	3198	019 41010
2210	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2211	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2212	Cap, 100p, 10%, 500v, Ceramic	3198	019 41010
2213	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2215	Cap, 220p, 10%, 1000v, Ceramic	2020	558 90424
2216	Cap, 220p, 10%, 1000v, Ceramic	2020	558 90424
2218	Cap, 10u, 20%, 250v, Electrolytic	2020	012 93495

2226	Cap, 22n, +80/-20%, 50v, Ceramic . . .	3198 019	22230	2820	Cap, 4u7, 10%, 100v, Metalized Polyes		
2228	Cap, 100p, 10%, 500v, Ceramic . . .	3198 019	41010		ter.	2222	368 90178
2269	Cap, 100p, 10%, 500v, Ceramic . . .	3198 019	41010	2822	Cap, 430n, 5%, 250v, Metalized Polypyr		
2270	Cap, 100u, 20%, 25v, Electrolytic . . .	2020 012	92639		opylene.	2222	479 90022
2282	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025	51080	2823	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2283	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025	34790	2824	Cap, 470p, 10%, 1000v, Ceramic . . .	2020	558 90555
2285	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	2825	Cap, 470p, 10%, 1000v, Ceramic . . .	2020	558 90555
2301	Cap, 1n5, 10%, 1000v, Ceramic . . .	2020 558	90443	2826	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198	026 21020
2302	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558	90471	2827	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198	026 21020
2303	Cap, 100u, 20%, 25v, Electrolytic . . .	2020 012	92639	2828	Cap, 100u, 20%, 50v, Electrolytic . . .	3198	025 51010
2304	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558	90554	2829	Cap, 100u, 20%, 50v, Electrolytic . . .	3198	025 51010
2305	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019	14710	2836	Cap, 1n, 10%, 1000v, Ceramic . . .	2020	558 90557
2306	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025	51080	2837	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090
2307	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019	14720	2838	Cap, 1n, 10%, 1000v, Ceramic . . .	2020	558 90557
2308	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019	14720	2839	Cap, 18n, 5%, 630v, Polypropylene . . .	2222	375 90218
2309	Cap, 82p, 5%, 50v, Ceramic . . .	3198 019	08290	2850	Cap, 470p, 10%, 1000v, Ceramic . . .	2020	558 90555
2310	Cap, 680p, 10%, 50v, Ceramic . . .	3198 019	16810	2851	Cap, 100u, 20%, 50v, Electrolytic . . .	3198	025 51010
2311	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019	11020	2852	Cap, 1u, 10%, 63v, Metalized Polyeste	2222	365 75105
2313	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	2853	Cap, 1u, 10%, 63v, Metalized Polyeste	2222	365 75105
2314	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	2907	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2315	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	2908	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2316	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2909	Cap, 4n7, 10%, 50v, Ceramic . . .	3198	017 04720
2317	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2910	Cap, 10n, 10%, 50v, Ceramic . . .	3198	017 01030
2318	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	2911	Cap, 1u, 10%, 63v, Metalized Polyeste	2222	365 75105
2319	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	2912	Cap, 220u, 20%, 35v, Electrolytic . . .	2020	012 93462
2320	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2913	Cap, 220u, 20%, 35v, Electrolytic . . .	2020	012 93462
2321	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2914	Cap, 100n, 10%, 16v, Ceramic . . .	3198	017 01040
2322	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	2915	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2323	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	2916	Cap, 10n, 10%, 50v, Polyester . . .	2020	300 90573
2324	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021	91374	2917	Cap, 100n, 10%, 250v, Metalized Polye		
2325	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040		ster	2222	368 90177
2326	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	2918	Cap, 47u, 20%, 50v, Electrolytic . . .	3198	025 54790
2327	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021	91374	2919	Cap, 4n7, 10%, 50v, Ceramic . . .	3198	017 04720
2328	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025	51080	2922	Cap, 330u, 20%, 200v, Electrolytic . . .	2020	024 90586
2329	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	3216	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2322	205 33109
2330	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	3223	Res, 47 ohm, 5%, 1/10W, Metalized Gla		
2331	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040		ss.	3198	021 54790
2332	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	3230	Res, 1K5, 5%, 1/6W, Carbon Film . . .	3198	011 01520
2333	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 019	12220	3231	Res, 220 ohm, 5%, 2 1/2W, Metal Film	3198	012 32210
2334	Cap, 33n, 10%, 50v, Polyester . . .	3198 014	03330	3232	Res, 22 ohm, 5%, 2 1/2W, Metal Film . . .	3198	012 32290
2335	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	3239	Res, 2K4, 1%, 3/5W, Metal Film . . .	2322	156 22402
2338	Cap, 1000u, 20%, 25v, Electrolytic . . .	2020 012	93458	3240	Res, 39K, 5%, 1/10W, Metalized Glass	3198	021 53930
2339	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3244	Res, 33K, 5%, 1/10W, Metalized Glass	3198	021 53330
2340	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	3245	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
2341	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3246	Res, 820 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 08210
2342	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019	14710	3287	Res, 470 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 04710
2343	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019	11020	3301	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322	251 41339
2344	Cap, 1000u, 20%, 25v, Electrolytic . . .	2020 012	93458	3302	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322	251 41339
2345	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021 51040
2346	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3304	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
2349	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	3305	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198	011 01030
2351	Cap, 22n, +80/-20%, 50v, Ceramic . . .	3198 019	22230	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla		
2352	Cap, 1000u, 20%, 25v, Electrolytic . . .	2020 012	93458		ss.	3198	021 51590
2353	Cap, 220p, 10%, 50v, Ceramic . . .	3198 019	12210	3307	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198	011 04780
2354	Cap, 220u, 20%, 25v, Electrolytic . . .	3198 025	32210	3308	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198	012 21070
2355	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019	14710	3309	Res, 0R33, 5%, 1 1/3W, Metal Film . . .	3198	012 23370
2356	Cap, 470u, 20%, 35v, Electrolytic . . .	2020 021	91376	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 03910
2452	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 012	92648	3311	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198	011 04780
2501	Cap, 470n, 10%, 50v, Polyester . . .	3198 014	04740	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 07590
2503	Cap, 680p, 10%, 500v, Ceramic . . .	2020 557	90441	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
2511	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3314	Res, 82K, 5%, 1/6W, Carbon Film . . .	3198	011 08230
2513	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021 51530
2514	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3316	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
2516	Cap, 150p, 10%, 500v, Ceramic . . .	3198 019	41510	3317	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021 51530
2556	Cap, 10n, 10%, 50v, Ceramic . . .	3198 017	01030	3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198	021 51540
2557	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025	51010	3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021 51530
2558	Cap, 68n, 10%, 100v, Polyester . . .	2222 347	90235	3322	Res, Trimer, 470R	2120	368 90118
2559	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3323	Res, 2K7, 5%, 1W, Metal Film . . .	2120	105 93474
2564	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016	01020	3324	Res, 100K, 5%, 1W, Metal Film . . .	3198	012 11040
2565	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3325	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198	011 01030
2567	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021 54720
2570	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3327	Res, 100 ohm, 5%, 1/10W, Metalized Gl		
2571	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016	01020		ass.	3198	021 51010
2572	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 017	02220	3328	Res, 100 ohm, 5%, 1/10W, Metalized Gl		
2573	Cap, 470p, 10%, 50v, Ceramic . . .	2020 552	91152		ass.	3198	021 51010
2574	Cap, 680n, 10%, 50v, Polyester . . .	3198 014	06840	3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl		
2586	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040		ass.	3198	021 53310
2608	Cap, 680p, 10%, 500v, Ceramic . . .	3198 019	46810	3333	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198	012 21070
2805	Cap, 100n, 10%, 250v, Metalized Polye			3334	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
	ster	2222 368	90177	3335	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021 51040
2806	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557	90438	3336	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 01010
2807	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023	21040	3337	Res, 390 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 03910
2809	Cap, 100n, 10%, 250v, Metalized Polye			3339	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021 53320
	ster	2222 368	90177	3340	Res, 220K, 5%, 1/10W, Metalized Glass	3198	021 52240
2810	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	3343	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
2811	Cap, 330p, 10%, 2000v, Ceramic . . .	2020 558	90481	3344	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
2814	Cap, 68u, 20%, 400v, Electrolytic . . .	2020 024	90587	3347	Res, 4K7, 5%, 1/6W, Carbon Film . . .	3198	011 04720
2815	Cap, 1n, 10%, 500v, Ceramic . . .	3198 019	41020	3350	Res, 47K, 5%, 1W, Metal Film . . .	3198	012 14730
2816	Cap, 18n, 5%, 630v, Polypropylene . . .	2222 375	90218	3351	Res, 47K, 5%, 1W, Metal Film . . .	3198	012 14720
2817	Cap, 11n, 5%, 1600v, Polypropylene . . .	2222 375	90155	3352	Res, 4K7, 5%, 1W, Metal Film . . .	3198	012 14720
2818	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557	90438	3353	Res, 4K7, 5%, 1W, Metal Film . . .	3198	012 14720
2819	Cap, 18n, 5%, 630v, Polypropylene . . .	2222 375	90218	3452	Res, 1R5, 5%, 1 1/3W, Metal Film . . .	3198	012 21580

3456	Res, 270 ohm, 5%, 1/10W Metalized Gl			3940	Res, 3K3, 1%, 3/5W, Metal Film . . .	2322	156	23302	
	ass.	3198	021	52710	3941	Res, 10K, 1%, 3/5W, Metal Film . . .	2322	156	21003
3457	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198	011	02220	3942	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220
3458	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	3959	Res, 1K, 5%, 1/4W, Carbon Film . . .	2120	101	74102
3500	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	3960	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322	205	33101
3501	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	3967	Res, 270 ohm, 5%, 1/10W, Metalized Gl			
3503	Res, 120K, 5%, 1/8W, Metalized Glass	2322	730	61124		ass.	3198	021	52710
3504	Res, 120K, 5%, 1/8W, Metalized Glass	2322	730	61124	3968	Res, 220K, 5%, 1/10W, Metalized Glass	3198	021	52240
3505	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210	3969	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730
3506	Res, 120K, 5%, 1/8W, Metalized Glass	2322	730	61124	3975	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322	205	33101
3507	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198	011	04730	3983	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
3508	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198	011	03920	3990	Res, 2K, 1%, 1/8W, Metalized Glass .	2322	734	62002
3509	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011	01030	3991	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021	51040
3510	Res, 470K, 5%, 1/6W, Carbon Film . .	3198	011	04740	3992	Res, 470K, 5%, 1/6W, Carbon Film . .	3198	011	04740
3511	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	5201	Filter, Mains, 100UH, 2A2.	2422	549	44101
3550	Res, 2K, 1%, 1/8W, Metalized Glass .	2322	734	62002	5202	Transformer, Layer, S229B3-01 Y . . .	2422	531	98038
3551	Res, 2K, 1%, 1/8W, Metalized Glass .	2322	734	62002	5234	Coil, 10u.	2422	535	95363
3562	Res, 4R7, 5%, 1W, Metal Film	3198	012	14780	5235	Coil, 10u.	2422	535	95363
3563	Res, 220 ohm, 5%, 1W, Metal Film . .	2120	105	93396	5238	Coil, 10u.	2422	535	95363
3565	Res, 220 ohm, 5%, 1W, Metal Film . .	2120	105	93396	5239	Coil, 10u.	2422	535	95363
3571	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	5300	Transformer, Layer, S549C1-04 B. . .	2422	531	02439
3572	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5301	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3573	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5302	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3581	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	5303	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3584	Res, 1 ohm, 5%, 3W, Wire Wound . . .	2122	251	01385	5304	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3585	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011	01030	5305	Coil, 10u.	2422	535	95363
3590	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021	51040	5306	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3591	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	5307	Coil, 10u.	2422	535	95363
3592	Res, Zero ohm, "Chip" Jumper	3198	021	90020	5308	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3593	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198	011	02220	5309	Coil, 10u.	2422	535	95363
3595	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198	011	03330	5310	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3596	Res, Zero ohm, "Chip" Jumper	3198	021	90020	5311	Coil, 10u.	2422	535	95363
3597	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	5312	Coil, 10u.	2422	535	95363
3598	Res, 100 ohm, 5%, 1/10W, Metalized Gl				5313	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
	ass.	3198	021	51010	5314	Coil, 10u.	2422	535	95363
3800	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5315	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3801	Res, 0R47, 5%, 1W, Metal Film. . . .	2120	106	90556	5316	Coil, 10u.	2422	535	95363
3802	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	5317	Coil, 10u.	2422	535	95363
3803	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	5318	Coil, 680u	2422	536	00103
3805	Res, 100 ohm, 5%, 1W, Metal Film . . .	2120	105	93394	5319	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3806	Res, 10K, 5%, 1W, Metal Film	2120	105	93407	5320	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3807	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310	5321	Coil, 3u3.	2422	535	94373
3808	Res, 4K7, 5%, 1W, Metal Film	3198	012	14720	5322	Coil, 10u.	2422	535	95363
3809	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310	5800	Transformer, Signal Driver, C925-01 Y	2422	535	91022
3810	Res, 1K5, 5%, 5W, Metal Film	2322	257	41152	5801	Transformer, Layer, S409C3-02 B. .	2422	531	02438
3811	Res, 1K5, 5%, 5W, Metal Film	2322	257	41152	5802	Transformer, Signal, W8073-001 Y. .	2422	531	02434
3812	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	5803	Coil, 485u	2422	536	00079
3813	Res, 1 ohm, 5%, 2W, Metal Film	2120	106	90572	5804	Coil, 40u.	2422	536	00078
3814	Res, 33 ohm, 5%, 1/10W, Metalized Gla				5805	Fixed, Inductor, 100MHZ, 50R. . . .	3198	018	90010
	ss.	3198	021	53390	5806	Coil, 47u.	2422	535	95282
3815	Res, 0R27, 5%, 1/2W, Metal Film. . .	2322	207	90048	5807	Coil, 22u.	3198	018	72290
3816	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	5810	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3817	Res, 0R27, 5%, 1/2W, Metal Film. . .	2322	207	90048	5811	Coil, 10u.	2422	535	95363
3820	Res, 2K7, 5%, 1/10W, Metalized Glass	3198	021	52720	5812	Coil, 10u.	2422	535	95363
3821	Res, 470 ohm, 5%, 1W, Metal Film . . .	2120	105	93398	5900	High Voltage Generator	3122	268	32865
3822	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	5904	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3823	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	6200	Diode, P4KE550	9322	141	04673
3824	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	6201	Zener Diode, 8.2 volt.	3198	010	28280
3825	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	6204	Diode, Rect, BYV10-40	9337	432	70133
3826	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	6205	IC, TL431BCLP.	9322	115	98676
3828	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	6207	Diode, Rect, BYD33D	9337	234	00133
3829	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	6231	Diode, Rect, BYV10-40	9337	432	70133
3830	Res, 470 ohm, 5%, 1W, Metal Film . . .	2120	105	93398	6235	Diode, Rect, BYD33D	9337	234	00133
3834	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2322	205	33108	6301	Diode, Rect, BYD33J	9337	234	20133
3835	Res, 2K7, 5%, 1/6W, Carbon Film. . .	3198	011	02720	6302	Diode, Rect, 1N5062	3198	010	10120
3837	Res, 12K, 5%, 1/6W, Carbon Film. . .	3198	011	01230	6303	Diode, Rect, 1N5062	3198	010	10120
3838	Res, 1K5, 5%, 1/6W, Carbon Film. . .	3198	011	01520	6306	Diode, Rect, BY229X-600	9340	380	20127
3839	Res, 300K, 5%, 2 1/2W, Metal Film. .	2322	195	63304	6307	Diode, Rect, BY229X-600	9340	380	20127
3840	Res, 1M, 5%, 1/2W, Metalized Glass .	2322	242	13105	6308	Diode, Rect, BY229X-600	9340	380	20127
3841	Res, 4K7, 5%, 1W, Metal Film	3198	012	14720	6309	Diode, Rect, BY229X-600	9340	380	20127
3865	Res, 0R47, 5%, 1W, Metal Film. . . .	2120	106	90556	6310	Diode, Rect, BY229X-600	9340	380	20127
3866	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	6312	Diode, Rect, SB360L-7003.	9322	128	68682
3867	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2322	205	33108	6313	Diode, Signal, 1N4148.	9330	839	90133
3890	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	6500	Zener Diode, 10 volt	9340	386	80115
3891	Res, 6K8, 5%, 1W, Metal Film	3198	012	16820	6501	Diode, Signal, BAS316.	3198	010	10630
3900	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011	01030	6502	Diode, Signal, BAS316.	3198	010	10630
3901	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	6503	Diode, Signal, BAS316.	3198	010	10630
3902	Res, 39K, 5%, 1/10W, Metalized Glass	3198	021	53930	6504	Diode, Rect, BYD33D	9337	234	00133
3903	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	6505	Zener Diode, 4.7 volt.	3198	010	24780
3904	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	6550	Diode, Rect, BYV27-200.	9335	526	80133
3906	Res, 4R7, 5%, 5W, Wire Wound	2322	251	41478	6551	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 2K, 1%, 1/8W, Metalized Glass .	2322	734	62002	6552	Zener Diode, 4.7 volt.	3198	010	24780
3909	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702	6801	Diode, Rect, BYD33J	9337	234	20133
3911	Res, 100 ohm, 5%, 1/10W, Metalized Gl				6802	Diode, Rect, BYV27-200.	9335	526	80133
	ass.	3198	021	51010	6803	Diode, Rect, BYV27-200.	9335	526	80133
3912	Res, 100 ohm, 5%, 1/10W, Metalized Gl				6806	Diode, Rect, BY228/24	9340	559	50112
	ass.	3198	021	51010	6807	Diode, Rect, BYD33M	9337	410	30133
3913	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	6808	Diode, Rect, BYW95C	9335	001	50133
3914	Res, 10 ohm, 5%, 1/10W, Metalized Gla				6809	Diode, Signal, BAS316.	3198	010</	

S = Safety Part Be sure to use exact replacement part.

6900	Diode, Signal, BAS316.	3198 010 10630	0001	Shield, Top.	3135 011 02252	
6905	Diode, Signal, BAS316.	3198 010 10630	0002	Shield, Bottom	3135 011 01892	
6907	Diode, Signal, BAS316.	3198 010 10630	0009	Heatsink, T0-220	3135 011 03291	
6910	Diode, Signal, BAS316.	3198 010 10630	0010	Heatsink, T0-220	3135 011 03291	
6911	Diode, Signal, BAS316.	3198 010 10630	0012	Heatsink, Folded	3135 011 04555	
6912	Diode, Signal, BAS316.	3198 010 10630	0072	Spring, Clip, Horiz.	3135 011 04572	
6919	Zener Diode, 27 volt	3198 010 52790	0082	Spring, Clip, Horiz.	3135 011 04572	
6920	Diode, Signal, BAS316.	3198 010 10630	0123	Heatsink, Folded	3135 011 04555	
6921	Diode, Signal, BAS316.	3198 010 10630	0139	IC, Spring	3135 011 02331	
6922	Diode, Signal, BAS316.	3198 010 10630	0200	Heatsink, T0-220	3135 011 02511	
6950	Zener Diode, 4.7 volt.	3198 010 24780	0201	Heatsink, T0-220	3135 011 02511	
6951	Diode, Signal, BAS316.	3198 010 10630	1000	Connector, 5 Pin	2422 025 12481	
7208	Transistor, NPN, BC547B.	3198 020 40030	1001	Connector, 10 Pin	2422 025 12484	
7209	IC, MC34064P-5	9322 066 44676	1002	Connector, 3 Pin	2412 020 00725	
7211	IC, TOP221P.	9322 125 16682	1003	Connector, 3 Pin	2422 025 09191	
7213	Optic Coupler, CQY80NG	9338 941 50682	1005	Connector, 2 Pin	2412 020 00724	
7300	Transistor, NPN, BC547B.	3198 020 40030	1009	Connector, 2 Pin	2412 020 00724	
7301	F.E.T., Power, STW20NB50	9322 131 15687	1014	Connector, 7 Pin	2422 025 11244	
7302	IC, MC44603AP.	9322 108 36682	1015	Connector, 1 Pin	2422 015 18552	
7303	Optic Coupler, CQY80NG	9338 941 50682	1017	Connector, 12 Pin	2422 025 08333	
7304	IC, TL431BCLP.	9322 115 98676	1018	Connector, 12 Pin	2422 025 08333	
7307	IC, MC34063AP1	9322 036 71682	1020	Connector, 12 Pin	2422 025 08333	
7308	F.E.T., Power, IRF9224N.	9322 134 76687	1023	Connector, 1 Pin	2422 015 18552	
7309	Transistor, NPN, BC547B.	3198 020 40030	1026	Connector, SIMM, 80 Pin	2422 025 16599	
7500	Transistor, PNP, BC807-25.	3198 010 43130	1036	Connector, 3 Pin	2412 020 00725	
7501	Transistor, PNP, BC807-25.	3198 010 43130	1049	Connector, 5 Pin	2422 025 15832	
7550	IC, TDA4861/V3	9352 018 80112	1072	Connector, 3 Pin	2412 020 00725	
7551	Transistor, NPN, BC847B.	3198 010 42030	1073	Connector, 4 Pin	2422 025 12479	
7552	Transistor, PNP, TIP42C.	9336 594 40687	1074	Connector, 4 Pin	2422 025 12479	
7553	Transistor, NPN, BC847B.	3198 010 42030	1083	Connector, 10 Pin	2422 025 12484	
7590	Transistor, NPN, BC847B.	3198 010 42030	1262	Socket, Cinch, 12 Pin.	2422 026 05064	
7800	Transistor, NPN, BC847B.	3198 010 42030	1264	Socket, MDIN, 10 Pin	2422 026 04926	
7801	Transistor, NPN, 2SC2482	9322 103 07678	1301	Tuner, V+U, PLL	2422 542 90108	
7802	Transistor, NPN, BU4515AF.	9340 550 93127	S 1910	Fuse, 2 A, 250V IEC.	2422 086 10783	
7803	Transistor, PNP, BC557B.	3198 020 40110	S 1911	Fuse, 4 A, 250V IEC.	2422 086 10786	
7830	Transistor, NPN, 2SC3675	9322 122 57687	S 1912	Fuse, 4 A, 250V IEC.	2422 086 10786	
7905	Transistor, NPN, BC547B.	3198 020 40030	1913	Connector, 4 Pin	2422 025 12479	
7906	Transistor, NPN, BC817-25.	3198 010 43230	2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7907	Transistor, PNP, BC807-25.	3198 010 43130	2001	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7908	Transistor, NPN, BC817-25.	3198 010 43230	2002	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
7909	Transistor, PNP, BC807-25.	3198 010 43130	2003	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090	
7910	Transistor, PNP, BC557B.	3198 020 40110	2004	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
9101	Wire Jumper, 0.58MM.	3198 036 90010	2005	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9102	Wire Jumper, 0.58MM.	3198 036 90010	2006	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9104	Wire Jumper, 0.58MM.	3198 036 90010	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9105	Wire Jumper, 0.58MM.	3198 036 90010	2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	2009	Cap, 330p, 10%, 50v, Ceramic	3198 019 13310	
9107	Wire Jumper, 0.58MM.	3198 036 90010	2010	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
9108	Wire Jumper, 0.58MM.	3198 036 90010	2011	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	2012	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
9110	Wire Jumper, 0.58MM.	3198 036 90010	2013	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9111	Wire Jumper, 0.58MM.	3198 036 90010	2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9112	Wire Jumper, 0.58MM.	3198 036 90010	2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9113	Wire Jumper, 0.58MM.	3198 036 90010	2016	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9114	Wire Jumper, 0.58MM.	3198 036 90010	2017	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9115	Wire Jumper, 0.58MM.	3198 036 90010	2018	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9116	Wire Jumper, 0.58MM.	3198 036 90010	2019	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9117	Wire Jumper, 0.58MM.	3198 036 90010	2020	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9119	Wire Jumper, 0.58MM.	3198 036 90010	2021	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9120	Wire Jumper, 0.58MM.	3198 036 90010	2022	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9123	Wire Jumper, 0.58MM.	3198 036 90010	2023	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9124	Wire Jumper, 0.58MM.	3198 036 90010	2024	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9127	Wire Jumper, 0.58MM.	3198 036 90010	2025	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9128	Wire Jumper, 0.58MM.	3198 036 90010	2026	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9129	Wire Jumper, 0.58MM.	3198 036 90010	2027	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9130	Wire Jumper, 0.58MM.	3198 036 90010	2028	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9131	Wire Jumper, 0.58MM.	3198 036 90010	2029	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9132	Wire Jumper, 0.58MM.	3198 036 90010	2030	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9133	Wire Jumper, 0.58MM.	3198 036 90010	2031	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9134	Wire Jumper, 0.58MM.	3198 036 90010	2032	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9136	Wire Jumper, 0.58MM.	3198 036 90010	2034	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210	
9137	Wire Jumper, 0.58MM.	3198 036 90010	2035	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9139	Wire Jumper, 0.58MM.	3198 036 90010	2036	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9140	Wire Jumper, 0.58MM.	3198 036 90010	2037	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9142	Wire Jumper, 0.58MM.	3198 036 90010	2040	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9143	Wire Jumper, 0.58MM.	3198 036 90010	2041	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9144	Wire Jumper, 0.58MM.	3198 036 90010	2042	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9145	Wire Jumper, 0.58MM.	3198 036 90010	2043	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9146	Wire Jumper, 0.58MM.	3198 036 90010	2044	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9147	Wire Jumper, 0.58MM.	3198 036 90010	2046	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9148	Wire Jumper, 0.58MM.	3198 036 90010	2049	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	2050	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9150	Wire Jumper, 0.58MM.	3198 036 90010	2052	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9152	Wire Jumper, 0.58MM.	3198 036 90010	2053	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	2054	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9154	Wire Jumper, 0.58MM.	3198 036 90010	2055	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9901	Wire Jumper, 0.58MM.	3198 036 90010	2056	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9902	Wire Jumper, 0.58MM.	3198 036 90010	2058	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
SSM PANEL ASSEMBLY				2061	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
SSM PANEL ASSEMBLY				2062	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
CBA SSM Panel Parts.				2063	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
				2064	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790

S = Safety Part Be sure to use exact replacement part.

2065	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910	19856	2604	Cap, 82p, 5%, 50v, Ceramic.	3198	016	08290
2066	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790	2605	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2067	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2606	Cap, 22u, 20%, 50v, Electrolytic.	3198	025	52290
2068	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040	2607	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2069	Cap, 100u, 20%, 50v, Electrolytic.	3198	025	51010	2608	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2070	Cap, 100u, 20%, 50v, Electrolytic.	3198	025	51010	2609	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2071	Cap, 100n, 10%, 50v, Polyester.	3198	014	01040	2610	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2072	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2611	Cap, 22u, 20%, 50v, Electrolytic.	3198	025	52290
2073	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2612	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2074	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2613	Cap, 10u, 20%, 50v, Electrolytic.	3198	025	51090
2075	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2616	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2076	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2617	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2077	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2618	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017	21050
2078	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2619	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017	21050
2079	Cap, 330n, +80/-20%, 25v, Ceramic.	2222	910	19856	2620	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2080	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790	2621	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010
2082	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2622	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290
2201	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2623	Cap, 10p, 5%, 50v, Ceramic.	3198	016	01090
2203	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2624	Cap, 56p, 5%, 50v, Ceramic.	3198	016	05690
2206	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2625	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010
2208	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2626	Cap, 10p, 5%, 50v, Ceramic.	3198	016	01090
2211	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2627	Cap, 56p, 5%, 50v, Ceramic.	3198	016	05690
2217	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2629	Cap, 10p, 5%, 50v, Ceramic.	3198	016	01090
2219	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2630	Cap, 56p, 5%, 50v, Ceramic.	3198	016	05690
2224	Cap, 100n, +80/-20%, 50v, Ceramic.	2020	552	95499	2631	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2227	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2632	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810
2228	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	2633	Cap, 220p, 5%, 50v, Ceramic.	3198	016	02210
2229	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	2634	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810
2230	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	2704	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2231	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	2705	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2233	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2717	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2239	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2718	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790
2242	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2719	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790
2244	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2720	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790
2249	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2721	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790
2250	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090	2723	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2255	Cap, 10u, 20%, 16v, Electrolytic.	3198	028	21090	2724	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2260	Cap, 100n, +80/-20%, 50v, Ceramic.	2020	552	95499	2725	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2300	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2726	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040
2301	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2727	Cap, 47n, +80/-20%, 50v, Ceramic.	3198	017	24730
2302	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	2764	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790
2303	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	3000	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710
2304	Cap, 15p, 5%, 50v, Ceramic.	3198	016	01590	3001	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710
2305	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730	3002	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710
2306	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	3003	Res, 10K, 5%, 1/10W, Metalized Glass.	3198	021	51030
2307	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730	3004	Res, 1K5, 5%, 1/10W, Metalized Glass.	3198	021	51520
2308	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	3005	Res, 2K2, 5%, 1/6W, Carbon Film.	3198	011	02220
2310	Cap, 47u, 20%, 50v, Electrolytic.	3198	025	54790	3006	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010
2311	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030	3007	Res, 100 ohm, 5%, 1/10W, Metalized Gl			
2312	Cap, 470p, 5%, 50v, Ceramic.	3198	016	04710	ass.		3198	021	51010
2313	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017	21050	Res, 100 ohm, 5%, 1/6W, Carbon Film.		3198	011	01010
2317	Cap, 560p, 5%, 50v, Ceramic.	2020	552	93609	Res, 10K, 5%, 1/10W, Metalized Glass.		3198	021	51030
2318	Cap, 560p, 5%, 50v, Ceramic.	2020	552	93609	Res, 4K7, 5%, 1/10W, Metalized Glass.		3198	021	54720
2319	Cap, 560p, 5%, 50v, Ceramic.	2020	552	93609	Res, 33K, 5%, 1/10W, Metalized Glass.		3198	021	53330
2320	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	04720	Res, 100 ohm, 5%, 1/6W, Carbon Film.		3198	011	01010
2366	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	Res, 3K3, 5%, 1/6W, Carbon Film.		3198	011	03320
2401	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	Res, 2K7, 5%, 1/10W, Metalized Glass.		3198	021	52720
2402	Cap, 100u, 20%, 50v, Electrolytic.	3198	025	51010	Res, 220 ohm, 5%, 1/10W, Metalized Gl				
2403	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	ass.		3198	021	52210
2405	Cap, 470u, 20%, 35v, Electrolytic.	3198	026	44710	Res, 10K, 5%, 1/10W, Metalized Glass.		3198	021	51030
2406	Cap, 100n, +80/-20%, 50v, Ceramic.	2020	552	95499	Res, 100 ohm, 5%, 1/3W, Metal Film.		2322	205	33101
2407	Cap, 2u2, 20%, 50v, Electrolytic.	3198	026	52220	Res, 10K, 5%, 1/10W, Metalized Glass.		3198	021	51030
2410	Cap, 470u, 20%, 35v, Electrolytic.	3198	026	44710	Res, 4K7, 5%, 1/10W, Metalized Glass.		3198	021	54720
2419	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	Res, 10K, 5%, 1/10W, Metalized Glass.		3198	021	51030
2420	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	Res, 100 ohm, 5%, 1/6W, Carbon Film.		3198	011	01010
2422	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	Res, 1K3, 5%, 1/8W, Metalized Glass.		2322	730	81132
2430	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	Res, 4K7, 5%, 1/10W, Metalized Glass.		3198	021	54720
2431	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	Res, 100 ohm, 5%, 1/3W, Metal Film.		2322	205	33101
2432	Cap, 2u2, 20%, 50v, Electrolytic.	3198	025	52280	Res, 2K2, 5%, 1/10W, Metalized Glass.		3198	021	52220
2433	Cap, 100n, 10%, 63v, Metalized Polyes				Res, 1K, 5%, 1/10W, Metalized Glass.		3198	021	51020
2434	ter.	2222	365	75104	Res, 6K8, 5%, 1/10W, Metalized Glass.		3198	021	56820
	Cap, 100n, 10%, 63v, Metalized Polyes				Res, 1K, 5%, 1/10W, Metalized Glass.		3198	021	51020
2435	ter.	2222	365	75104	Res, 1K5, 5%, 1/10W, Metalized Glass.		3198	021	51520
2443	Cap, 10u, 20%, 100v, Electrolytic.	3198	025	71090	Res, 2K2, 5%, 1/10W, Metalized Glass.		3198	021	52220
2500	Cap, 47u, 20%, 50v, Electrolytic.	3198	025	54790	Res, 1K5, 5%, 1/10W, Metalized Glass.		3198	021	51520
2503	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790	Res, 1K5, 5%, 1/10W, Metalized Glass.		3198	021	51520
2504	Cap, 33p, 5%, 50v, Ceramic.	3198	016	03390	Res, 4K7, 5%, 1/6W, Carbon Film.		3198	011	04720
2504	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510	Res, 1K6, 1%, 1/8W, Metalized Glass.		2322	734	61602
2505	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	Res, 3K3, 5%, 1/10W, Metalized Glass.		3198	021	53320
2506	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040	Res, 3K3, 5%, 1/10W, Metalized Glass.		3198	021	53320
2507	Cap, 100u, 20%, 25v, Electrolytic.	3198	025	31010	Res, 100 ohm, 5%, 1/6W, Carbon Film.		3198	011	01010
2508	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040	Res, 100 ohm, 5%, 1/10W, Metalized Gl				
2509	Cap, 47u, 20%, 25v, Electrolytic.	3198	025	34790	ass.		3198	021	51010
2510	Cap, 470p, 5%, 50v, Ceramic.	3198	016	04710	Res, 1K3, 5%, 1/8W, Metalized Glass.		2322	730	81132
2511	Cap, 470p, 5%, 50v, Ceramic.	3198	016	04710	Res, 100 ohm, 5%, 1/10W, Metalized Gl				
2512	Cap, 1n, 5%, 50v, Ceramic.	3198	016	01020	ass.		3198	021	51010
2513	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040	Res, 4K7, 5%, 1/10W, Metalized Glass.		3198	021	54720
2514	Cap, 1n, 5%, 50v, Ceramic.	3198	016	01020	Res, 1K6, 1%, 1/8W, Metalized Glass.		2322	734	61602
2516	Cap, 1u, +80/-20%, 16v, Ceramic.	3198	017	21050	Res, 1K2, 5%, 1/10W, Metalized Glass.		3198	021	51220
2600	Cap, 1u, 20%, 50v, Electrolytic.	3198	025	51080	Res, 1K2, 5%, 1/10W, Metalized Glass.		3198	021	51220
2601	Cap, 100n, +80/-20%, 25v, Ceramic.	3198	023	21040	Res, 27K, 5%, 1/10W, Metalized Glass.		3198	021	52730
2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	Res, 27K, 5%, 1/10W, Metalized Glass.		3198	021	52730

S = Safety Part Be sure to use exact replacement part.

3048	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3204	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3049	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3050	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3206	Res, 150 ohm, 5%, 1/10W, Metalized Gl	
3051	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 51510
3052	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3207	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3053	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3208	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3054	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3209	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3055	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3210	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3056	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3211	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3057	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ss.	3198 021 57590
3058	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3212	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3059	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 51010
3060	Res, 15 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31590	3216	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
3061	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 54790
3062	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3217	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3063	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 51010
3064	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3218	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3065	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ss.	3198 021 57590
3066	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3219	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3067	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 51010
3068	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3220	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3069	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3221	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3070	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3222	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3071	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3223	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
3072	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	3198 021 56890
3073	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3074	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3075	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3226	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3076	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	3198 021 57590
3077	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3227	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3078	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ass.	3198 021 51010
3079	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3233	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3080	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3234	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3081	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	3235	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3082	Res, 820 ohm, 5%, 1/10W, Metalized Gl		3236	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.	3198 021 58210	3237	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3083	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3238	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	ass.	3198 021 52710	3239	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3084	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3240	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.	3198 021 55610	3241	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3085	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3242	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3086	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3243	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3087	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ss.	3198 021 57590
3088	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3244	Res, 150 ohm, 5%, 1/10W, Metalized Gl	
3089	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ass.	3198 021 51510
3090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3247	Res, 220 ohm, 5%, 1/10W, Metalized Gl	
3097	Res, 1K, 5%, 2 1/2W, Metal Film.	3198 012 31020		ass.	3198 021 52210
3098	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3248	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
	ass.	3198 021 55610		ss.	3198 021 57590
3099	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3249	Res, 150 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 55610		ass.	3198 021 51510
3100	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	ass.	3198 021 55610	3252	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3101	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3260	Res, 10 ohm, 5%, 1/3W, Metal Film.	2322 205 33109
	ass.	3198 021 53310	3300	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
3102	Res, 330 ohm, 5%, 1/10W, Metalized Gl			ss.	3198 021 54790
	ass.	3198 021 53310	3301	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
3103	Res, 330 ohm, 5%, 1/10W, Metalized Gl			ss.	3198 021 54790
	ass.	3198 021 53310	3302	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3104	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3303	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53310	3304	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3105	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3307	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53310	3308	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3106	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3309	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53310	3310	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3107	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3108	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3318	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3110	Res, 220 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 52710
	ass.	3198 021 52210	3332	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3111	Res, 220 ohm, 5%, 1/10W, Metalized Gl		3333	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
	ass.	3198 021 52210	3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3112	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3335	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3113	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3336	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3114	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3337	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3115	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3338	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3117	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3340	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3341	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3119	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3342	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 53310
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3343	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3344	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 51010
3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3403	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3125	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3404	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3405	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3406	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3201	Res, 150 ohm, 5%, 1/10W, Metalized Gl		3407	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	ass.	3198 021 51510	3408	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3202	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	3409	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3203	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3410	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820

S = Safety Part Be sure to use exact replacement part.

3424	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	3619	Res, 390 ohm, 5%, 1/10W, Metalized Gl	
3425	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		ass.	3198 021 53910
3427	Res, 10 ohm, 5%, 1/10W, Metalized Gla		3620	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
	ss.	3198 021 51090		ss.	3198 021 56890
3428	Res, 10 ohm, 5%, 1/10W, Metalized Gla		3621	Res, 820 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 51090		ass.	3198 021 58210
3430	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3622	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3431	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3623	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3432	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930		ass.	3198 021 55610
3433	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3624	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3434	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3625	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3435	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478		ass.	3198 021 51010
3445	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	3626	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3627	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3450	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504		ass.	3198 021 55610
3451	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3628	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3452	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930		ass.	3198 021 55610
3453	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3629	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3500	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ss.	3198 021 51090
3501	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3630	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3502	Res, 470 ohm, 5%, 1/10W, Metalized Gl		3631	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 54710		ass.	3198 021 53310
3503	Res, 75 ohm, 5%, 1/10W, Metalized Gla		3632	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 57590		ass.	3198 021 51010
3504	Res, 75 ohm, 5%, 1/10W, Metalized Gla		3633	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 57590		ass.	3198 021 52710
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3634	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 52290		ass.	3198 021 51010
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3635	Res, 390 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 52290	3636	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3507	Res, 390 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 51010
	ass.	3198 021 53910	3637	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3508	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3638	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
3509	Res, 560 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 54710
	ass.	3198 021 55610	3639	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3511	Res, 100 ohm, 5%, 1/10W, Metalized Gl		3640	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 51010		ass.	3198 021 53310
3512	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3641	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3513	Res, 22 ohm, 5%, 1/10W, Metalized Gla			ss.	3198 021 51090
	ss.	3198 021 52290	3642	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3514	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3643	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	ss.	3198 021 52290	3645	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3515	Res, 68 ohm, 5%, 1/10W, Metalized Gla		3647	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	ss.	3198 021 56890	3648	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3516	Res, 22 ohm, 5%, 1/10W, Metalized Gla			ass.	3198 021 52710
	ss.	3198 021 52290	3650	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3517	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3651	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
	ss.	3198 021 52290	3652	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3518	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220		ss.	3198 021 51090
3519	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3653	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3520	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620		ss.	3198 021 51090
3521	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	3654	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3522	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 51090
3523	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3655	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3524	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3656	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3525	Res, 10 ohm, 5%, 1/10W, Metalized Gla		3657	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
	ss.	3198 021 51090	3658	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3527	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109	3659	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3528	Res, 390 ohm, 5%, 1/10W, Metalized Gl		3660	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
	ass.	3198 021 53910	3661	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3529	Res, 680 ohm, 5%, 1/10W, Metalized Gl		3663	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
	ass.	3198 021 56810		ss.	3198 021 56890
3600	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3664	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 55610	3665	Res, 680 ohm, 5%, 1/10W, Metalized Gl	
3601	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ass.	3198 021 56810
3602	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3666	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3603	Res, 100 ohm, 5%, 1/10W, Metalized Gl		3667	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 51010		ass.	3198 021 54710
3604	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3669	Res, 220 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 52710		ass.	3198 021 52210
3605	Res, 100 ohm, 5%, 1/10W, Metalized Gl		3670	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	ass.	3198 021 51010	3698	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
3606	Res, 390 ohm, 5%, 1/10W, Metalized Gl			ss.	3198 021 56890
	ass.	3198 021 53910	3712	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3607	Res, 68 ohm, 5%, 1/10W, Metalized Gla		3713	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
	ss.	3198 021 56890	3714	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3608	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3715	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 52710	3716	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3609	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3717	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3610	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3718	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3611	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3719	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3612	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3720	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 52710	3721	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3722	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3614	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	3723	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3615	Res, 470 ohm, 5%, 1/10W, Metalized Gl		3724	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	ass.	3198 021 54710	3740	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3616	Res, 100 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 51010
	ass.	3198 021 51010	3741	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3617	Res, 270 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 51010
	ass.	3198 021 52710	3746	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3618	Res, 100 ohm, 5%, 1/10W, Metalized Gl				
	ass.	3198 021 51010			

S = Safety Part Be sure to use exact replacement part.

3747	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5609	Coil, 1u	3198 018 11080
3756	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5700	Coil, 6u8.	2422 535 97326
3759	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	5701	Coil, 6u8.	2422 535 97326
3760	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5702	Coil, 22u.	3198 018 72290
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6000	Diode, Varistor, BB148	9340 332 80135
4007	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6001	Diode, Signal, BAS316.	3198 010 10630
4008	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6003	Diode, Signal, BAS321.	9340 553 52115
4009	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6004	Diode, Signal, BAS316.	3198 010 10630
4010	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6005	Diode, Signal, BAS316.	3198 010 10630
4013	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6006	Diode, Signal, BAS316.	3198 010 10630
4014	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6007	Diode, Signal, BAS316.	3198 010 10630
4019	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6008	Diode, Signal, BAS316.	3198 010 10630
4020	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6009	IC, MC78M05CT.	9334 703 90687
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6010	IC, MC78M05CT.	9334 703 90687
4106	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6011	Diode, Signal, BAS316.	3198 010 10630
4107	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6012	Diode, Signal, BAS316.	3198 010 10630
4109	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6013	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6014	IC, MC79M05CT.	9337 783 20687
4124	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6015	Diode, Signal, BAS316.	3198 010 10630
4125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6016	Diode, Signal, BAS316.	3198 010 10630
4126	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6017	Zener Diode, 15 volt	9340 387 20115
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6018	Diode, Signal, BAS316.	3198 010 10630
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6019	Diode, Signal, BAS316.	3198 010 10630
4129	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6020	Diode, Signal, BAS316.	3198 010 10630
4130	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6021	Diode, Signal, BAS316.	3198 010 10630
4131	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6022	Diode, Signal, BAS316.	3198 010 10630
4134	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6023	Diode, Signal, BAS316.	3198 010 10630
4136	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6024	Diode, Signal, BAS316.	3198 010 10630
4137	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6025	Diode, Signal, BAS316.	3198 010 10630
4138	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6201	Zener Diode, 6.8 volt.	9340 386 40115
4139	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6202	Zener Diode, 6.8 volt.	9340 386 40115
4140	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6203	Zener Diode, 6.8 volt.	9340 386 40115
4143	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6204	Zener Diode, 6.8 volt.	9340 386 40115
4300	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6205	Zener Diode, 6.8 volt.	9340 386 40115
4301	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6206	Zener Diode, 6.8 volt.	9340 386 40115
4302	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6207	Zener Diode, 6.8 volt.	9340 386 40115
4304	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6208	Zener Diode, 6.8 volt.	9340 386 40115
4307	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6209	Zener Diode, 6.8 volt.	9340 386 40115
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6210	Zener Diode, 6.8 volt.	9340 386 40115
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6213	Zener Diode, 6.8 volt.	9340 386 40115
4650	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6214	Zener Diode, 6.8 volt.	9340 386 40115
4700	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6215	Zener Diode, 6.8 volt.	9340 386 40115
4701	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6216	Zener Diode, 6.8 volt.	9340 386 40115
4702	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6221	Zener Diode, 6.8 volt.	9340 386 40115
4703	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6222	Zener Diode, 6.8 volt.	9340 386 40115
4704	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6223	Zener Diode, 6.8 volt.	9340 386 40115
4705	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6224	Zener Diode, 6.8 volt.	9340 386 40115
4708	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6225	Zener Diode, 6.8 volt.	9340 386 40115
4709	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6226	Zener Diode, 6.8 volt.	9340 386 40115
4710	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6227	Zener Diode, 6.8 volt.	9340 386 40115
4711	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6228	Zener Diode, 6.8 volt.	9340 386 40115
4713	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6229	Zener Diode, 6.8 volt.	9340 386 40115
4714	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6230	Zener Diode, 6.8 volt.	9340 386 40115
4715	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6231	Zener Diode, 6.8 volt.	9340 386 40115
4716	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6232	Zener Diode, 6.8 volt.	9340 386 40115
5000	Coil, 5u6.	3198 018 15680	6300	Diode, Signal, BAS316.	3198 010 10630
5001	Coil, 5u6.	3198 018 15680	6301	Diode, Signal, BAS316.	3198 010 10630
5002	Coil, 5u6.	3198 018 15680	6306	Diode, Signal, BAS316.	3198 010 10630
5003	Coil, 5u6.	3198 018 15680	6309	Diode, Signal, BAS316.	3198 010 10630
5004	Coil, 5u6.	3198 018 15680	6402	Zener Diode, 12 volt	3198 010 21290
5005	Coil, 5u6.	3198 018 15680	6500	Diode, Signal, BAS316.	3198 010 10630
5006	Coil, 5u6.	3198 018 15680	6600	Diode, Signal, BAS316.	3198 010 10630
5007	Coil, 5u6.	3198 018 15680	6602	Diode, Signal, BAS316.	3198 010 10630
5008	Coil, 5u6.	3198 018 15680	6603	Diode, Signal, BAS316.	3198 010 10630
5009	Coil, 5u6.	3198 018 15680	6604	Diode, Signal, BAS316.	3198 010 10630
5010	Coil, 5u6.	3198 018 15680	6605	Diode, Signal, BAS316.	3198 010 10630
5011	Coil, 5u6.	3198 018 15680	6606	Diode, Signal, BAS316.	3198 010 10630
5012	Coil, 22u.	3198 018 72290	6607	Diode, Signal, BAS316.	3198 010 10630
5014	Coil, 22u.	3198 018 72290	6608	Diode, Signal, BAS316.	3198 010 10630
5015	Coil, 22u.	3198 018 72290	6609	Diode, Signal, BAS316.	3198 010 10630
5016	Coil, 22u.	3198 018 72290	6610	Diode, Signal, BAS316.	3198 010 10630
5017	Coil, 22u.	3198 018 72290	6611	Diode, Signal, BAS316.	3198 010 10630
5018	Coil, 5u6.	3198 018 15680	6612	Diode, Signal, 1N4148.	3198 010 10010
5019	Coil, 22u.	3198 018 72290	6613	Diode, Signal, BAS316.	3198 010 10630
5020	Coil, 22u.	3198 018 72290	6617	Diode, Signal, 1N4148.	3198 010 10010
5021	Coil, 22u.	3198 018 72290	6700	Zener Diode, 33 volt	9340 388 00115
5022	Coil, 6u8.	3198 018 16880	6708	Zener Diode, 33 volt	9340 388 00115
5302	Coil, 6u8.	2422 535 97326	7000	Transistor, PNP, BF450	9331 677 40126
5304	Coil, 1m	3198 018 21020	7001	IC, LM833N	9322 068 83682
5500	Coil, 2u2.	3198 018 12280	7002	Transistor, NPN, BC847B.	3198 010 42030
5501	Coil, 4u7.	3198 018 14780	7003	IC, UPD65654GF-260	9322 121 87671
5502	Coil, 4u7.	3198 018 14780	7004	Transistor, NPN, BC847B.	3198 010 42030
5503	Coil, 4u7.	3198 018 14780	7005	Transistor, NPN, BC847B.	3198 010 42030
5600	Coil, 3u9.	3198 018 13980	7007	IC, M24C32-WBN6.	9322 122 09682
5601	Coil, 8u2.	3198 018 18280	7008	Transistor, NPN, BC547B.	3198 020 40030
5602	Coil, 4u7.	2422 535 96514	7009	IC, SM LC78817M.	9322 154 56682
5603	Coil, 3u9.	3198 018 13980	7010	IC, SM LC78817M.	9322 154 56682
5604	Coil, 8u2.	3198 018 18280	7011	IC, SM LC78817M.	9322 154 56682
5605	Coil, 3u9.	3198 018 13980	7012	IC, STK392-110	9322 130 35682
5606	Coil, 8u2.	3198 018 18280	7013	Transistor, NPN, BC547B.	3198 020 40030
5607	Coil, 1u	3198 018 11080	7014	IC, STK392-110	9322 130 35682
5608	Coil, 1u	3198 018 11080	7015	Transistor, NPN, BC547B.	3198 020 40030

S = Safety Part Be sure to use exact replacement part.

S = Safety Part Be sure to use exact replacement part.

9533	Wire Jumper, 0.58MM.	3198 036 90010	2050	CAPACITOR, NP0, 50V, 100PF.	3198 016 31010
9534	Wire Jumper, 0.58MM.	3198 036 90010	2051	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9536	Wire Jumper, 0.58MM.	3198 036 90010	2053	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9538	Wire Jumper, 0.58MM.	3198 036 90010	2301	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9539	Wire Jumper, 0.58MM.	3198 036 90010	2302	CAPACITOR, NP0, 50V, 330PF.	3198 016 33310
9545	Wire Jumper, 0.58MM.	3198 036 90010	2303	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9548	Wire Jumper, 0.58MM.	3198 036 90010	2306	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9549	Wire Jumper, 0.58MM.	3198 036 90010	2309	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9550	Wire Jumper, 0.58MM.	3198 036 90010	2311	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9551	Wire Jumper, 0.58MM.	3198 036 90010	2312	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9552	Wire Jumper, 0.58MM.	3198 036 90010	2313	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9553	Wire Jumper, 0.58MM.	3198 036 90010	2314	CAPACITOR, POLYSTYRENE, 16V, 100NF., 5%.	2020 319 90005
9555	Wire Jumper, 0.58MM.	3198 036 90010	2316	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9556	Wire Jumper, 0.58MM.	3198 036 90010	2317	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9557	Wire Jumper, 0.58MM.	3198 036 90010	2319	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9558	Wire Jumper, 0.58MM.	3198 036 90010	2321	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9559	Wire Jumper, 0.58MM.	3198 036 90010	2322	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9560	Wire Jumper, 0.58MM.	3198 036 90010	2323	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9561	Wire Jumper, 0.58MM.	3198 036 90010	2324	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9563	Wire Jumper, 0.58MM.	3198 036 90010	2325	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9564	Wire Jumper, 0.58MM.	3198 036 90010	2326	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9565	Wire Jumper, 0.58MM.	3198 036 90010	2327	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9566	Wire Jumper, 0.58MM.	3198 036 90010	2328	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9567	Wire Jumper, 0.58MM.	3198 036 90010	2332	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9568	Wire Jumper, 0.58MM.	3198 036 90010	2333	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9569	Wire Jumper, 0.58MM.	3198 036 90010	2334	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9570	Wire Jumper, 0.58MM.	3198 036 90010	2335	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9571	Wire Jumper, 0.58MM.	3198 036 90010	2338	CAPACITOR, X7R, 50V, 2N2	3198 017 32220
9572	Wire Jumper, 0.58MM.	3198 036 90010	2342	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9573	Wire Jumper, 0.58MM.	3198 036 90010	2345	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9574	Wire Jumper, 0.58MM.	3198 036 90010	2348	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9575	Wire Jumper, 0.58MM.	3198 036 90010	2350	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780
9576	Wire Jumper, 0.58MM.	3198 036 90010	2354	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9577	Wire Jumper, 0.58MM.	3198 036 90010	2355	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9578	Wire Jumper, 0.58MM.	3198 036 90010	2356	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9579	Wire Jumper, 0.58MM.	3198 036 90010	2357	CAPACITOR, NP0, 50V, 10PF.	3198 016 31090
9580	Wire Jumper, 0.58MM.	3198 036 90010	2372	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9581	Wire Jumper, 0.58MM.	3198 036 90010	2373	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20%.	3198 030 81080
9582	Wire Jumper, 0.58MM.	3198 036 90010	2374	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9583	Wire Jumper, 0.58MM.	3198 036 90010	2375	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9584	Wire Jumper, 0.58MM.	3198 036 90010	2376	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9585	Wire Jumper, 0.58MM.	3198 036 90010	2377	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9587	Wire Jumper, 0.58MM.	3198 036 90010	2380	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9588	Wire Jumper, 0.58MM.	3198 036 90010	2381	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9589	Wire Jumper, 0.58MM.	3198 036 90010	2382	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9590	Wire Jumper, 0.58MM.	3198 036 90010	2401	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9591	Wire Jumper, 0.58MM.	3198 036 90010	2402	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9592	Wire Jumper, 0.58MM.	3198 036 90010	2403	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9593	Wire Jumper, 0.58MM.	3198 036 90010	2404	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9594	Wire Jumper, 0.58MM.	3198 036 90010	2405	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9595	Wire Jumper, 0.58MM.	3198 036 90010	2407	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9600	Wire Jumper, 0.58MM.	3198 036 90010	2408	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9601	Wire Jumper, 0.58MM.	3198 036 90010	2412	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9602	Wire Jumper, 0.58MM.	3198 036 90010	2413	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9603	Wire Jumper, 0.58MM.	3198 036 90010	2415	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9604	Wire Jumper, 0.58MM.	3198 036 90010	2417	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9605	Wire Jumper, 0.58MM.	3198 036 90010	2421	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9606	Wire Jumper, 0.58MM.	3198 036 90010	2422	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9607	Wire Jumper, 0.58MM.	3198 036 90010	2423	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9608	Wire Jumper, 0.58MM.	3198 036 90010	2424	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9609	Wire Jumper, 0.58MM.	3198 036 90010	2425	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9610	Wire Jumper, 0.58MM.	3198 036 90010	2427	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9611	Wire Jumper, 0.58MM.	3198 036 90010	2428	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9612	Wire Jumper, 0.58MM.	3198 036 90010	2429	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9613	Wire Jumper, 0.58MM.	3198 036 90010	2430	CAPACITOR, NP0, 50V, 68PF.	3198 016 36890
9614	Wire Jumper, 0.58MM.	3198 036 90010	2431	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790
9615	Wire Jumper, 0.58MM.	3198 036 90010	2432	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9616	Wire Jumper, 0.58MM.	3198 036 90010	2435	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9617	Wire Jumper, 0.58MM.	3198 036 90010	2437	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9618	Wire Jumper, 0.58MM.	3198 036 90010	2438	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810
9619	Wire Jumper, 0.58MM.	3198 036 90010	2439	CAPACITOR, NP0, 50V, 150PF.	3198 016 31510
9620	Wire Jumper, 0.58MM.	3198 036 90010	2440	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690
9621	Wire Jumper, 0.58MM.	3198 036 90010	2453	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9622	Wire Jumper, 0.58MM.	3198 036 90010	2457	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9623	Wire Jumper, 0.58MM.	3198 036 90010	2458	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20%.	3198 030 81080
9624	Wire Jumper, 0.58MM.	3198 036 90010	2461	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9625	Wire Jumper, 0.58MM.	3198 036 90010	2462	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9626	Wire Jumper, 0.58MM.	3198 036 90010	2463	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9627	Wire Jumper, 0.58MM.	3198 036 90010	2601	CAPACITOR, NP0, 50V, 470PF.	3198 016 34710
9628	Wire Jumper, 0.58MM.	3198 036 90010	2602	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040

SSB MODULE ASSEMBLY

0205	SSB MODULE ASSEMBLY				
0320	CONNECTOR, 10PIN, F 1.00 FFC SMT	2422 025 16677			
1057	FACTORY PLATE.	3122 120 01701			
1327	CRYSTAL RESONATOR, 12MHZ., 20P DSX840	2422 543 01095			
1451	CRYSTAL RESONATOR, 12MHZ., 20P DSX840	2422 543 01095			
1630	SAW FILTER, 45.75MHZ., OFWM1967L	2422 549 44377			
2010	CRYSTAL RESONATOR, 18M432, 12P DSX840	2422 543 01059			
2014	CAPACITOR, NP0, 25V, 820PF.	3198 016 38210			
2015	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050			
2016	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050			
2017	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040			
2018	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040			
2041	CAPACITOR, X7R, 50V, 2N2	3198 017 32220			
2042	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290			
2043	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290			
2044	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780			
2045	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040			
2046	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890			
2049	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890			
2049	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240			

S = Safety Part Be sure to use exact replacement part.

2606	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3305	RESISTOR, 3K9, 5%	3198 021 33920
	0%	3198 030 41090		3307	RESISTOR, 390R, 5%	3198 021 33910
2607	CAPACITOR, Y5V, 16V, 220NF	3198 017 42240		3311	RESISTOR, 27K, 5%	3198 021 32730
2612	CAPACITOR, X7R, 50V, 1NF	3198 017 31020		3312	RESISTOR, 10K, 5%	3198 021 31030
2613	CAPACITOR, X7R, 50V, 1NF	3198 017 31020		3315	RESISTOR, 39K, 5%	3198 021 33930
2619	CAPACITOR, X7R, 50V, 4N7	3198 017 34720		3316	RESISTOR, 220R, 5%	3198 021 32210
2620	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3324	RESISTOR, 390R, 5%	3198 021 33910
2621	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3326	RESISTOR, 1K, 5%	3198 021 31020
2623	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3327	RESISTOR, 560R, 5%	3198 021 35610
	0%	3198 030 41090		3328	RESISTOR, 390R, 5%	3198 021 33910
2624	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3329	RESISTOR, 100R, 5%	3198 021 31010
2625	ELECTROLYTIC CAPACITOR, 16V, 22UF., 2			3330	RESISTOR, 100R, 5%	3198 021 31010
	0%	3198 030 42290		3331	RESISTOR, FUSABLE, 2R2, 5%	2322 750 62208
2628	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3332	RESISTOR, FUSABLE, 2R2, 5%	2322 750 62208
2629	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3333	RESISTOR, 1K, 5%	3198 021 31020
	0%	3198 030 41090		3334	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2635	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3339	RESISTOR, 10K, 5%	3198 021 31030
2636	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3340	RESISTOR, 560R, 5%	3198 021 55610
2637	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3341	RESISTOR, 150R, 5%	3198 021 31510
2638	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3342	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2639	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3344	RESISTOR, 150R, 5%	3198 021 31510
2640	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3345	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2641	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3348	RESISTOR, 150R, 5%	3198 021 31510
2642	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3349	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2655	CAPACITOR, X7R, 50V, 4N7	3198 017 34720		3358	RESISTOR, 100R, 5%	3198 021 31010
2657	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3361	RESISTOR, 100R, 5%	3198 021 31010
	0%	3198 030 41090		3362	RESISTOR, 100R, 5%	3198 021 31010
2661	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3363	RESISTOR, 100R, 5%	3198 021 31010
2662	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3364	RESISTOR, 1K, 5%	3198 021 31020
	0%	3198 030 41090		3365	RESISTOR, 560R, 5%	3198 021 55610
2663	CAPACITOR, NP0, 50V, 47PF	3198 016 34790		3371	RESISTOR, 15K, 5%	3198 021 31530
2664	CAPACITOR, NP0, 50V, 56PF	3198 016 35690		3372	RESISTOR, 10R, 5%	3198 021 31090
2665	CAPACITOR, NP0, 50V, 27PF	3198 016 32790		3373	RESISTOR, 100R, 5%	3198 021 31010
2666	CAPACITOR, NP0, 50V, 180PF	3198 016 31810		3374	RESISTOR, 3K3, 5%	3198 021 33320
2667	CAPACITOR, NP0, 50V, 15PF	3198 016 31590		3375	RESISTOR, 1K, 5%	3198 021 31020
2675	CAPACITOR, NP0, 50V, 3.3PF	3198 016 33380		3376	RESISTOR, 1K, 5%	3198 021 31020
2676	CAPACITOR, NP0, 50V, 3.3PF	3198 016 33380		3377	RESISTOR, 100R, 5%	3198 021 31010
2678	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3378	RESISTOR, 1K, 5%	3198 021 31020
2679	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3381	RESISTOR, 100R, 5%	3198 021 31010
2682	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3382	RESISTOR, 100R, 5%	3198 021 31010
2683	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3383	RESISTOR, 100R, 5%	3198 021 31010
2684	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3384	RESISTOR, 8K2, 5%	3198 021 38220
2685	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3385	RESISTOR, 10K, 5%	3198 021 31030
2686	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3387	RESISTOR, 100R, 5%	3198 021 31010
2687	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3388	RESISTOR, 47R, 5%	3198 021 34790
3002	RESISTOR, 8K2, 5%	3198 021 38220		3393	RESISTOR, 27K, 5%	3198 021 52730
3003	RESISTOR, 10K, 5%	3198 021 31030		3394	RESISTOR, 18K, 5%	3198 021 31830
3004	RESISTOR, 8K2, 5%	3198 021 38220		3397	RESISTOR, 10R, 5%	3198 021 31090
3007	RESISTOR, 8K2, 5%	3198 021 38220		3401	RESISTOR, 100R, 5%	3198 021 31010
3008	RESISTOR, 8K2, 5%	3198 021 38220		3402	RESISTOR, 100R, 5%	3198 021 31010
3009	RESISTOR, 8K2, 5%	3198 021 38220		3403	RESISTOR, 100R, 5%	3198 021 31010
3013	RESISTOR, 8K2, 5%	3198 021 38220		3404	RESISTOR, 100R, 5%	3198 021 31010
3014	RESISTOR, 8K2, 5%	3198 021 38220		3405	RESISTOR, 100R, 5%	3198 021 31010
3015	RESISTOR, 10K, 5%	3198 021 31030		3411	RESISTOR, 1K5, 5%	3198 021 31520
3017	RESISTOR, 100R, 5%	3198 021 31010		3412	RESISTOR, 1K5, 5%	3198 021 31520
3018	RESISTOR, 100R, 5%	3198 021 31010		3413	RESISTOR, 560R, 5%	3198 021 55610
3019	RESISTOR, 100R, 5%	3198 021 31010		3414	RESISTOR, 1K5, 5%	3198 021 31520
3021	RESISTOR, 100R, 5%	3198 021 31010		3415	RESISTOR, 1K5, 5%	3198 021 31520
3022	RESISTOR, 2K2, 5%	3198 021 32220		3416	RESISTOR, 560R, 5%	3198 021 55610
3023	RESISTOR, 8K2, 5%	3198 021 38220		3417	RESISTOR, 1K, 5%	3198 021 31020
3024	RESISTOR, 1K, 5%	3198 021 31020		3418	RESISTOR, 560R, 5%	3198 021 55610
3030	RESISTOR, 1K, 5%	3198 021 31020		3419	RESISTOR, 470R, 5%	3198 021 34710
3031	RESISTOR, 470R, 5%	3198 021 34710		3422	RESISTOR, 470R, 5%	3198 021 34710
3034	RESISTOR, 47K, 5%	3198 021 34730		3423	RESISTOR, 100R, 5%	3198 021 31010
3035	RESISTOR, 470R, 5%	3198 021 34710		3424	RESISTOR, 4K7, 5%	3198 021 34720
3042	RESISTOR, 150R, 5%	3198 021 31510		3425	RESISTOR, 100R, 5%	3198 021 31010
3043	RESISTOR, 150R, 5%	3198 021 31510		3426	RESISTOR, 820R, 5%	3198 021 38210
3044	RESISTOR, 10K, 5%	3198 021 31030		3427	RESISTOR, 100R, 5%	3198 021 31010
3045	RESISTOR, 2K7, 5%	3198 021 32720		3428	RESISTOR, 47K, 5%	3198 021 34730
3046	RESISTOR, 4K7, 5%	3198 021 34720		3429	RESISTOR, 1K, 5%	3198 021 31020
3051	RESISTOR, RC22H, 24K, 1%	2322 704 62403		3430	RESISTOR, 1K, 5%	3198 021 31020
3054	RESISTOR, 10K, 5%	3198 021 31030		3434	RESISTOR, 47K, 5%	3198 021 34730
3055	RESISTOR, 10K, 5%	3198 021 31030		3437	RESISTOR, 47K, 5%	3198 021 34730
3056	RESISTOR, 47K, 5%	3198 021 34730		3438	RESISTOR, 47K, 5%	3198 021 34730
3057	RESISTOR, 10K, 5%	3198 021 31030		3466	RESISTOR, 10K, 5%	3198 021 31030
3058	RESISTOR, 470R, 5%	3198 021 34710		3467	RESISTOR, 10K, 5%	3198 021 31030
3059	RESISTOR, 150R, 5%	3198 021 31510		3468	RESISTOR, 10K, 5%	3198 021 31030
3061	RESISTOR, 470R, 5%	3198 021 34710		3471	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3062	RESISTOR, 4K7, 5%	3198 021 34720		3472	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3064	RESISTOR, 4K7, 5%	3198 021 34720		3473	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3065	RESISTOR, 4K7, 5%	3198 021 34720		3474	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3066	RESISTOR, 8K2, 5%	3198 021 38220		3477	RESISTOR, 4K7, 5%	3198 021 34720
3081	RESISTOR, 4K7, 5%	3198 021 34720		3478	RESISTOR, 10R, 5%	3198 021 31090
3082	RESISTOR, 10K, 5%	3198 021 31030		3483	RESISTOR, 560R, 5%	3198 021 55610
3083	RESISTOR, 470R, 5%	3198 021 34710		3484	RESISTOR, 1K, 5%	3198 021 31020
3084	RESISTOR, 100R, 5%	3198 021 31010		3488	RESISTOR, 220R, 5%	3198 021 32210
3085	RESISTOR, 100R, 5%	3198 021 31010		3489	RESISTOR, 390R, 5%	3198 021 33910
3086	RESISTOR, 100R, 5%	3198 021 31010		3490	RESISTOR, 390R, 5%	3198 021 33910
3088	RESISTOR, 100R, 5%	3198 021 31010		3491	RESISTOR, 820R, 5%	3198 021 38210
3092	RESISTOR, 100R, 5%	3198 021 31010		3492	RESISTOR, 560R, 5%	3198 021 35610
3301	RESISTOR, 1K, 5%	3198 021 31020		3493	RESISTOR, 390R, 5%	3198 021 33910
3302	RESISTOR, 560R, 5%	3198 021 35610		3601	RESISTOR, 100R, 5%	3198 021 31010

3602	RESISTOR, 100R, 5%	3198 021 31010	3022	RESISTOR, 10K, 5%	3198 021 51030
3606	RESISTOR, 27K, 5%	3198 021 32730	3025	RESISTOR, 330R, 5%	3198 021 53310
3619	RESISTOR, 100R, 5%	3198 021 31010	6002	LED, VS TLD5400 (TEG0)	9322 110 34682
3621	RESISTOR, 100R, 5%	3198 021 31010	6005	IR RECEIVER, TSOP1736 (VISH)	9322 152 44687
3665	RESISTOR, 2K2, 5%	3198 021 32220	6009	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4008	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6011	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4304	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6013	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4308	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6014	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4309	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6015	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4312	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6016	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4313	RESISTOR, 0 OHM, JUMPER	3198 021 90030	CBA	KEYBOARD PANEL ASSEMBLY, 50" TO 64" M	
4316	RESISTOR, 0 OHM, JUMPER	3198 021 90030		ODELS	3135 017 07611
4317	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4318	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4319	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4320	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4401	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4402	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4403	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4410	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4411	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4434	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4435	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4436	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4451	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4455	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4465	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4684	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
5040	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5041	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5042	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5309	FIXED INDUCTOR, 6.8UH, 5%	3198 018 66880			
5332	FIXED INDUCTOR, 6.8UH, 5%	3198 018 66880			
5333	FIXED INDUCTOR, 6.8UH, 5%	3198 018 66880			
5401	FIXED INDUCTOR, .82UH, 10%	3198 018 38270			
5421	FIXED INDUCTOR, 22UH, 20%	3198 018 32290			
5422	FIXED INDUCTOR, 15UH, 20%	3198 018 31590			
5425	FIXED INDUCTOR, 22UH, 20%	3198 018 32290			
5426	FIXED INDUCTOR, 15UH, 20%	3198 018 31590			
5601	FIXED INDUCTOR, 1UH, 5%	3198 018 61080			
5602	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5625	FIXED INDUCTOR, 1UH, 5%	3198 018 61080			
5665	FIXED INDUCTOR, 15UH, 5%	3198 018 61590			
6031	DIODE, REGULATOR, UD22.4B (RHM0)	9322 131 13685			
6302	DIODE, REGULATOR, BZX384-C8V2	3198 020 58280			
6303	DIODE, REGULATOR, BZX384-C6V8	3198 020 56880			
6412	DIODE, SIGNAL, BAS316	3198 010 10630			
6415	DIODE, SIGNAL, BAS316	3198 010 10630			
6605	DIODE, SIGNAL, BAS316	3198 010 10630			
7053	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7063	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7064	IC, SAA5667HL/M1/ (PHSE)	4835 310 57615			
7066	IC, M24C32-WMN6 (ST00)	9322 124 74668			
7301	IC, TDA8887H/N1 (PHSE)	9352 638 72557			
7305	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7307	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7331	TRANSISTOR, SIGNAL, BC857BW	3198 010 42320			
7368	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7401	IC, 74HC4053PW (PHSE)	9351 869 40118			
7405	IC, TC90A45F (TOSJ)	9322 144 38668			
7407	IC, 74HC4066PW (PHSE)	9351 750 00118			
7412	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7415	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7421	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7425	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7442	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7446	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7630	IC, 74HC4052PW (PHSE)	9351 874 90118			
7651	IC, MSP3435G-FH-B5 (MIAS)	9322 143 55671			
CBA	SSB MODULE ASSEMBLY, FIGHTER	3139 127 25881			
KEYBOARD PANEL ASSEMBLY					
KEYBOARD PANEL ASSEMBLY					
1001	TACTILE SWITCH	2422 128 02742			
1002	TACTILE SWITCH	2422 128 02742			
1003	TACTILE SWITCH	2422 128 02742			
1004	TACTILE SWITCH	2422 128 02742			
1006	TACTILE SWITCH	2422 128 02742			
1007	TACTILE SWITCH	2422 128 02742			
1214	CONNECTOR, 7 PIN	2422 025 12491			
1215	CONNECTOR, 1 PIN	2422 015 18551			
2003	CAPACITOR, CERAMIC, X7R, 16V, 100NF	3198 017 01040			
2004	ELECTROLYTIC, CAPACITOR, 16V, 100UF, 20%	3198 028 21010			
3008	RESISTOR, 1K5, 5%	3198 021 51520			
3010	RESISTOR, 1K5, 1%	2322 734 61502			
3011	RESISTOR, 750R, 1%	2322 734 87501			
3012	RESISTOR, 2K, 1%	2322 734 62002			
3013	RESISTOR, 270R, 1%	2322 734 62701			
3015	RESISTOR, 2K7, 1%	2322 734 62702			
3017	RESISTOR, 3K9, 1%	2322 734 63902			
3020	RESISTOR, 470R, 5%	3198 021 54710			
SIDE JACK PANEL ASSEMBLY					
SIDE JACK PANEL ASSEMBLY					
RED & BLUE CRT PANEL ASSEMBLIES					
RED & BLUE CRT PANEL ASSEMBLIES					
0079	HEATSINK, T0-220, USE SI COMP THERMAL	3135 011 01231			
1000	CONNECTOR, 1 PIN, M RT-01T-1.0B	2422 034 20021			
1001	CONNECTOR, 1 PIN, M RT-01T-1.0B	2422 034 20021			
1701	CRT SOCKET, 10PIN, F HPS0521	2422 500 80051			
S 1702	SURGE PROTECTOR, DSP-501N-A21F	2422 549 42349			
1871	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484			
1872	CONNECTOR, 2 PIN, M 3.96 VH	2422 025 10646			
1873	CONNECTOR, 2 PIN, M 3.96 VH	2422 025 10646			
1875	CONNECTOR, 1 PIN, M 4.8 X 0.5	2422 015 18552			
2701	CAPACITOR, METALIZED POLYESTER, 400V, 10NF, 10%	2222 365 55103			
S 2702	CAPACITOR, METALIZED POLYESTER, 400V, 10NF, 10%	2222 365 55103			
S 2705	CAPACITOR, CERAMIC, 2KV, 1NF, 10%	2020 558 90487			
2717	ELECTROLYTIC CAPACITOR, 400V, 10UF, 20%	2020 012 93487			
2720	ELECTROLYTIC CAPACITOR, 50V, 10UF, 20%	3198 025 51090			
2721	CAPACITOR, METALIZED POLYESTER, 63V, 100NF, 10%	2222 365 75104			
2722	CAPACITOR, CERAMIC, B 500V S 560P, 10	2020 557 90147			
2750	CAPACITOR, CERAMIC, NP0 50V S 220PF	3198 019 02210			
2751	CAPACITOR, PLOYPROPHYLENE, 50V, 1NF, 2%	2020 310 90049			
2752	CAPACITOR, CERAMIC, Y5P, 1KV, 1NF	3198 019 51020			
3703	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010			
3710	RESISTOR, CARBON FILM, 1K5, 10%	2120 101 28152			
S 3716	RESISTOR, CARBON FILM, 100R, 20%	2120 103 90057			
S 3718	RESISTOR, CARBON FILM, 1/2W, 22K, 5%	2120 103 90075			
3719	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608			
S 3720	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608			
S 3730	RESISTOR, METAL OXIDE, 5W, 3K3, 5%	2322 257 41332			
S 3731	RESISTOR, METAL OXIDE, 5W, 3K3, 5%	2322 257 41332			
3733	RESISTOR, METAL OXIDE, 10M, 5%	2322 241 53106			
3735	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010			
3737	RESISTOR, CARBON FILM, 1/2W, 3K3, 20%	3198 013 03320			
3738	RESISTOR, CARBON FILM, 1/6W, 100K, 5%	3198 011 01040			
3740	RESISTOR, CARBON FILM, 1/6W, 1K, 5%	3198 011 01020			
3742	RESISTOR, METAL FILM, 1K, 1%	2322 156 21002			
3743	RESISTOR, METAL FILM, 220R, 1%	2322 156 22201			
3745	RESISTOR, METAL FILM, 75R, 1%	2138 116 17509			
3750	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010			
3751	RESISTOR, METAL FILM, 15R, 1%	2138 116 11509			
3752	RESISTOR, 22K, 5%	2120 103 90075			
3753	RESISTOR, CARBON FILM, 27R, 5%	2120 101 74279			
3755	RESISTOR, POWER, 1W, 47R, 5%	3198 012 14790			
3756	RESISTOR, POWER, 1W, 68R, 5%	3198 012 16890			
5701	FIXED INDUCTOR, 100UH, 5%	3198 018 11010			
5702	FIXED INDUCTOR, 15UH, 10%	2422 535 97331			
5703	FIXED INDUCTOR, 47UH, 5%	3198 018 14790			
5704	FIXED INDUCTOR, 47UH, 5%	3198 018 14790			
5705	FIXED INDUCTOR, 22UH, 10%	2422 535 97333			
6701	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133			
6702	DIODE REGULATOR, BZX79-B6V2 (PHSE)	9331 668 30133			
6705	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133			
6706	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133			
7701	TRANSISTOR, POWER, 2SC3790E (TSAJ)	9322 122 58682			
7702	TRANSISTOR, SIGNAL, BC337-25)	3198 020 43530			
7703	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ)	9322 103 08678			
7705	TRANSISTOR, SIGNAL, BF421 (PHSE)	9334 196 60126			
9701	WIRE JUMPER 0.6MM	0322 179 00003			
9702	WIRE JUMPER 0.6MM	0322 179 00003			
CBA	RED & BLUE CRT PANEL ASSEMBLIES	3135 017 04961			
GREEN CRT PANEL ASSEMBLY					
GREEN CRT PANEL ASSEMBLY					
0089	HEATSINK T0-220, USE SI COMP THERMAL	3135 011 01231			
1000	CONNECTOR, 1 PIN, M RT-01T-1.0	2422 034 20021			
1001	CONNECTOR, 1 PIN, M 4.8 X 0.5	2422 015 18552			
1002	CONNECTOR, 1 PIN, M RT-01T-1.0	2422 034 20021			
S 1801	CRT SOCKET, 10 PIN, HPS0521	2422 500 80051			
S 1802	SURGE PROTECTOR, DSP-501N-A21	2422 549 42349			
1881	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484			
1882	CONNECTOR, 4 PIN, M 2.50 EH	2422 025 12479			

1883	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484	2812	ELECTROLYTIC CAPACITOR, 25V, 47UF., 2		
1884	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484		0%.	3198 025 34790	
1885	CONNECTOR, 2 PIN, M 3.96 VH	2422 025 10646	2813	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2		
1886	CONNECTOR, 4 PIN, M 3.96 VH	2422 025 10647		0%.	3198 025 51090	
2801	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222 365 55103	2814	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
S 2805	CAPACITOR, CERAMIC, 2KV, 1NF., 10% .	2020 558 90487	2815	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
2807	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222 365 55103	2816	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
2817	ELECTROLYTIC CAPACITOR, 400V, 10UF.,		2817	CAPACITOR, NP0, 50V, 10PF.	3198 016 01090	
	20%.	2020 012 93487	2818	CAPACITOR, NP0, 50V, 10PF.	3198 016 01090	
2820	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2		2819	CAPACITOR, NP0, 50V, 12PF.	3198 016 01290	
	0%.	3198 025 51090	2820	CAPACITOR, Y5V, 25V, 220NF.	3198 023 22240	
2821	CAPACITOR, POLYESTER, 63V, 100NF., 10	2222 365 75104	2821	CAPACITOR, Y5V, 25V, 220NF.	3198 023 22240	
2822	CAPACITOR, CERAMIC DISK, 500V, 560P,		2822	CAPACITOR, X7R, 50V, 33NF.	3198 017 03330	
	10%.	2020 557 90147	2823	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
2850	CAPACITOR, CERAMIC DISK, NP0, 50V, 22		2824	ELECTROLYTIC CAPACITOR, 25V, 47UF., 2		
	0PF.	3198 019 02210		0%.	3198 025 34790	
2851	CAPACITOR, POLYPROPYLENE, 50V, 1NF.,		2825	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
	2%.	2020 310 90049	2826	CAPACITOR, NP0, 50V, 560PF.	3198 016 05610	
2852	CAPACITOR, CERAMIC DISK, Y5P, 1KV, 1N		2827	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
	F.	3198 019 51020	2828	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3803	RESISTOR, CARBON, 1/6W, 100R, 5% . .	3198 011 01010	2829	CAPACITOR, Y5V, 16V, 1UF.	3198 017 21050	
3810	RESISTOR, CARBON, 1/2W, 1K5, 10% . .	2120 101 28152	2830	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3816	RESISTOR, CARBON, 1/2W, 100R, 20% . .	2120 103 90057	2831	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3818	RESISTOR, CARBON, 1/2W, 22K, 5% . . .	2120 103 90075	2832	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3819	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608	2833	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3820	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608	2834	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
3825	RESISTOR, METAL FILM, 220K, 1%	2322 156 22204	2836	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
3826	RESISTOR, METAL FILM, 100K, 1%	2322 156 21004	2837	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
S 3830	RESISTOR, METALOXIDE, 5W, 3K3, 5% . .	2322 257 41332	2840	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
S 3831	RESISTOR, METALOXIDE, 5W, 3K3, 5% . .	2322 257 41332	2841	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
3833	RESISTOR, METAL FILM, 1/2W, 10M, 5% .	2322 241 53106	2890	ELECTROLYTIC CAPACITOR, 25V, 220UF.,		
3835	RESISTOR, CARBON, 1/6W, 100R, 5% . .	3198 011 01010		20%.	3198 025 32210	
3837	RESISTOR, CARBON, 1/2W, 3K3, 20% . .	3198 013 03320	2891	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
3838	RESISTOR, CARBON, 1/6W, 100K, 5% . .	3198 011 01040	2892	ELECTROLYTIC CAPACITOR, 25V, 47UF., 2		
3840	RESISTOR, CARBON, 1/6W, 1K, 5%	3198 011 01020		0%.	3198 025 34790	
3842	RESISTOR, METAL FILM, 1K, 1%	2322 156 21002	2893	ELECTROLYTIC CAPACITOR, 25V, 220UF.,		
3843	RESISTOR, METAL FILM, 220R, 1%	2322 156 22201		20%.	3198 025 32210	
3845	RESISTOR, METAL FILM, 75R, 1%	2138 116 17509	2894	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
3850	RESISTOR, CARBON, 1/6W, 100R, 5% . .	3198 011 01010	2895	CAPACITOR, NP0, 50V, 47PF.	3198 019 04790	
3851	RESISTOR, METAL FILM, 15R, 1%	2138 116 11509	2911	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3852	RESISTOR, CARBON, 1/2W, 22K, 5% . . .	2120 103 90075	2930	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3853	RESISTOR, CARBON, 27R, 5%	2120 101 74279	2931	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3855	RESISTOR, POWER, 1W, 47R, 5%	3198 012 14790	2932	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3856	RESISTOR, POWER, 1W, 68R, 5%	3198 012 16890	2933	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3857	RESISTOR, METAL FILM, 10K, 5%	2322 193 14103	2934	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
5801	FIXED INDUCTOR, 100UH., 5%	3198 018 11010	2935	ELECTROLYTIC CAPACITOR, 25V, 100UF.,		
5802	FIXED INDUCTOR, 15UH., 10%	2422 535 97331		20%.	3198 025 31010	
5803	FIXED INDUCTOR, 47UH., 5%	3198 018 14790	2936	RESISTOR, JUMPER, 0R05	3198 021 90020	
5804	FIXED INDUCTOR, 47UH., 5%	3198 018 14790	2937	CAPACITOR, Y5V, 16V, 1UF.	3198 017 21050	
5805	FIXED INDUCTOR, 22UH., 10%	2422 535 97333	3801	RESISTOR, 100R, 5%	3198 021 51010	
6801	DIODE, RECTIFIER, BYD33J (PHSE) . . .	9337 234 20133	3802	RESISTOR, 100R, 5%	3198 021 51010	
6802	DIODE, REGULATOR, BZX79-B6V2 (PHSE).	9331 668 30133	3805	RESISTOR, 1K, 5%	3198 021 51020	
6805	DIODE, RECTIFIER, BYD33J (PHSE) . . .	9337 234 20133	3806	RESISTOR, 1K5, 5%	3198 021 51520	
6806	DIODE, RECTIFIER, BYD33J (PHSE) . . .	9337 234 20133	3807	RESISTOR, 1K5, 5%	3198 021 51520	
7801	TRANSISTOR, POWER, 2SC3790E (TSAJ) .	9322 122 58682	3812	RESISTOR, 10K, 5%	3198 021 51030	
7802	TRANSISTOR, SIGNAL, BC337-25 (COL) . .	3198 020 43530	3813	RESISTOR, 15K, 5%	3198 021 51530	
7803	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ)	9322 103 08678	3814	RESISTOR, 1K, 5%	3198 021 51020	
7805	TRANSISTOR, SIGNAL, BF421 (PHSE) . . .	9334 196 60126	3815	RESISTOR, 1K, 5%	3198 021 51020	
9801	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3816	RESISTOR, 820R, 5%	3198 021 58210	
9802	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3817	RESISTOR, 1K, 5%	3198 021 51020	
9803	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3818	RESISTOR, 15K, 5%	3198 021 51530	
9804	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3819	RESISTOR, 10K, 5%	3198 021 51030	
9805	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3820	RESISTOR, 1K, 5%	3198 021 51020	
9806	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3821	RESISTOR, 390R, 5%	3198 021 53910	
9807	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3822	RESISTOR, 390R, 5%	3198 021 53910	
9808	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3823	RESISTOR, 390R, 5%	3198 021 53910	
CBA	GREEN CRT PANEL ASSEMBLY	3135 017 04981	3824	RESISTOR, 15K, 5%	3198 021 51530	
			3825	RESISTOR, 150R, 5%	3198 021 51510	
			3826	RESISTOR, 150R, 5%	3198 021 51510	
			3827	RESISTOR, 330R, 5%	3198 021 53310	
			3828	RESISTOR, 4M7, 5%	3198 021 54750	
			3829	RESISTOR, 15K, 5%	3198 021 51530	
			3830	RESISTOR, 2K2, 5%	3198 021 52220	
			3831	RESISTOR, 1M, 5%	3198 021 51050	
			3832	RESISTOR, 1K, 5%	3198 021 51020	
			3833	RESISTOR, 100R, 5%	3198 021 51010	
			3834	RESISTOR, 100R, 5%	3198 021 51010	
			3836	RESISTOR, 1K, 5%	3198 021 51020	
			3839	RESISTOR, 1K, 5%	3198 021 51020	
			3840	RESISTOR, JUMPER, 0R05	3198 021 90020	
			3844	RESISTOR, 1K, 5%	3198 021 51020	
			3845	RESISTOR, JUMPER, 0R05	3198 021 90020	
			3849	RESISTOR, 1K, 5%	3198 021 51020	
			3850	RESISTOR, JUMPER, 0R05	3198 021 90020	
			3853	RESISTOR, 3K3, 5%	3198 021 53320	
			3854	RESISTOR, 15K, 5%	3198 021 51530	
			3855	RESISTOR, 1K, 5%	3198 021 51020	
			3856	RESISTOR, 1K, 5%	3198 021 51020	
			3857	RESISTOR, CARBON, 1/6W, 1K, 5% . . .	3198 011 01020	
			3858	RESISTOR, CARBON, 1/6W, 1K, 5% . . .	3198 011 01020	
			3859	RESISTOR, 47K, 5%	3198 021 54730	
			3860	RESISTOR, 47K, 5%	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

3864	RESISTOR, 1K, 5%	3198 021 51020	9907	WIRE JUMPER, 0.6MM	0322 179 00003
3866	RESISTOR, 330R, 5%	3198 021 53310	9908	WIRE JUMPER, 0.6MM	0322 179 00003
3870	RESISTOR, 220R, 5%	3198 021 52210	9912	WIRE JUMPER, 0.6MM	0322 179 00003
3871	RESISTOR, 220R, 5%	3198 021 52210	9915	WIRE JUMPER, 0.6MM	0322 179 00003
3872	RESISTOR, 220R, 5%	3198 021 52210	9921	WIRE JUMPER, 0.6MM	0322 179 00003
3890	RESISTOR, CARBON, 1/6W, 68R, 5%	3198 011 06890	9922	WIRE JUMPER, 0.6MM	0322 179 00003
3914	RESISTOR, JUMPER, 0R05	3198 021 90020	9923	WIRE JUMPER, 0.6MM	0322 179 00003
3915	RESISTOR, JUMPER, 0R05	3198 021 90020	CBA	SINGLE TUNER PIP PANEL ASSEMBLY.	3139 137 22971
3916	RESISTOR, JUMPER, 0R05	3198 021 90020			
3917	RESISTOR, JUMPER, 0R05	3198 021 90020			
3918	RESISTOR, JUMPER, 0R05	3198 021 90020			
3919	RESISTOR, JUMPER, 0R05	3198 021 90020			
3920	RESISTOR, 100R, 5%	3198 021 51010			
3921	RESISTOR, 100R, 5%	3198 021 51010			
3922	RESISTOR, 4K7, 5%	3198 021 54720			
3923	RESISTOR, 4K7, 5%	3198 021 54720			
3924	RESISTOR, 4K7, 5%	3198 021 54720			
3925	RESISTOR, 4K7, 5%	3198 021 54720			
3926	RESISTOR, 4K7, 5%	3198 021 54720			
3927	RESISTOR, 470R, 5%	3198 021 54710			
3956	RESISTOR, JUMPER, 0R05	3198 021 90020			
3958	RESISTOR, 120R, 5%	3198 021 51210			
3960	RESISTOR, JUMPER, 0R05	3198 021 90020			
3961	RESISTOR, 1K, 5%	3198 021 51020			
3962	RESISTOR, 4K7, 5%	3198 021 54720			
3968	RESISTOR, 4K7, 5%	3198 021 54720			
3969	RESISTOR, 330R, 5%	3198 021 53310			
3970	RESISTOR, 390R, 5%	3198 021 53910			
4803	RESISTOR, JUMPER, 0R05	3198 021 90020			
4804	RESISTOR, JUMPER, 0R05	3198 021 90020			
4805	RESISTOR, JUMPER, 0R05	3198 021 90020			
4807	RESISTOR, JUMPER, 0R05	3198 021 90020			
4808	RESISTOR, JUMPER, 0R05	3198 021 90020			
4809	RESISTOR, JUMPER, 0R05	3198 021 90020			
4810	RESISTOR, JUMPER, 0R05	3198 021 90020			
4812	RESISTOR, JUMPER, 0R05	3198 021 90020			
4813	RESISTOR, JUMPER, 0R05	3198 021 90020			
4814	RESISTOR, JUMPER, 0R05	3198 021 90020			
4815	RESISTOR, JUMPER, 0R05	3198 021 90020			
4816	RESISTOR, JUMPER, 0R05	3198 021 90020			
4817	RESISTOR, JUMPER, 0R05	3198 021 90020			
4818	RESISTOR, JUMPER, 0R05	3198 021 90020			
4819	RESISTOR, JUMPER, 0R05	3198 021 90020			
4821	RESISTOR, JUMPER, 0R05	3198 021 90020			
4901	RESISTOR, JUMPER, 0R05	3198 021 90020			
5890	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5891	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5892	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5902	FIXED INDUCTOR, 4MUH7, 10% (UAW)	3198 018 24780			
6801	DIODE, SIGNAL, BAT85 (PHSE)	9336 247 60133			
6890	DIODE, REGULATOR, BZX384-C3V9	3198 020 53980			
7801	IC, HEF4053BT (PHSE)	9333 729 60653			
7803	IC, M65669SP (MITJ)	9322 146 60682			
7804	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7805	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7806	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7807	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7810	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7813	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7816	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7817	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7891	TRANSISTOR, SIGNAL, BC337-25	3198 020 43530			
7910	IC, M62320FP (MITJ)	9322 127 15668			
7919	IC, TDA8601T/C1 (PHSE)	9351 538 90518			
7920	TRANSISTOR, SIGNAL, BC857B	3198 010 42150			
9800	WIRE JUMPER, 0.6MM	0322 179 00003			
9801	WIRE JUMPER, 0.6MM	0322 179 00003			
9802	WIRE JUMPER, 0.6MM	0322 179 00003			
9803	WIRE JUMPER, 0.6MM	0322 179 00003			
9804	WIRE JUMPER, 0.6MM	0322 179 00003			
9805	WIRE JUMPER, 0.6MM	0322 179 00003			
9807	WIRE JUMPER, 0.6MM	0322 179 00003			
9808	WIRE JUMPER, 0.6MM	0322 179 00003			
9810	WIRE JUMPER, 0.6MM	0322 179 00003			
9811	WIRE JUMPER, 0.6MM	0322 179 00003			
9812	WIRE JUMPER, 0.6MM	0322 179 00003			
9813	WIRE JUMPER, 0.6MM	0322 179 00003			
9814	WIRE JUMPER, 0.6MM	0322 179 00003			
9815	WIRE JUMPER, 0.6MM	0322 179 00003			
9816	WIRE JUMPER, 0.6MM	0322 179 00003			
9817	WIRE JUMPER, 0.6MM	0322 179 00003			
9818	WIRE JUMPER, 0.6MM	0322 179 00003			
9820	WIRE JUMPER, 0.6MM	0322 179 00003			
9821	WIRE JUMPER, 0.6MM	0322 179 00003			
9822	WIRE JUMPER, 0.6MM	0322 179 00003			
9823	WIRE JUMPER, 0.6MM	0322 179 00003			
9824	WIRE JUMPER, 0.6MM	0322 179 00003			
9901	WIRE JUMPER, 0.6MM	0322 179 00003			
9902	WIRE JUMPER, 0.6MM	0322 179 00003			
9903	WIRE JUMPER, 0.6MM	0322 179 00003			
9905	WIRE JUMPER, 0.6MM	0322 179 00003			
9906	WIRE JUMPER, 0.6MM	0322 179 00003			

2 TUNER PIP PANEL ASSEMBLY

2 TUNER PIP PANEL ASSEMBLY

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 60P8288

First Published: 09-23-02

Rev. Date: 10-25-02

Print Date: 2004-09-08

Parts List

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

CABINET & ACCESSORY PARTS

CABINET & ACCESSORY PARTS			
S AC23	Mains Cord (Special - Noise Filtered)	2422 070	98164
AC01	CABINET BACKCOVER CENTER f/60P8288/37, 60P8288A/37 (USA, Best Buy).	3135 013	03691
AC02	BACK CABINET, 60".	3135 014	07642
AC03	PIP FRAME.	3135 014	11101
AC04	SUPPORT FRAME F/SSB.	3135 014	11111
AC05	BARRIER LEFT & RIGHT, (2 used)	3135 013	03311
AC06	CHASSIS FRAME.	3135 014	11091
AC07	LIGHT BARRIER.	3135 014	03381
AC08	REAR JACK FRAME.	3135 014	11132
AC09	SCREEN FRAME ASM., 60".	3135 017	07501
AC10	MIRROR BD. MTG. BRKT (2 used).	3135 011	04751
AC11	BASE.	3135 017	03641
AC14	FRESNEL SCREEN 60".	3135 014	07811
AC15	LENTICULAR SCREEN 60".	3135 014	07821
AC19	MIRROR ASM., 60".	3135 037	50081
S AC23	MAINCORD, SPECIAL, NOISE FILTERED	2422 070	98164
AC25	LOUDSPEAKER, 8 OHM, 15W (2 used)	2422 264	00289
AC26	TOP PANEL STIFFENER.	3135 011	03032
AC28	RETAINER SCREEN HORIZ 60", (2 used).	3135 014	10922
AC29	RETAINER SCREEN VERT 60", (2 used)	3135 014	10932
AC30	BAFFLE ASM.	3135 017	07561
AC31	NAMEPLATE.	3135 015	03561
AC32	BAFFLE MTG. CUP (7 used)	3135 013	02761
AC35	CASTERS, SHEPHERD PRODUCTS (4 used).	0000 001	00153
AC36	CHASSIS MTG. BRACKET (3 used).	3135 011	02011
AC37	BUTTON ASSEMBLY.	3135 017	07020
AC38	LENS, IR.	3135 014	10230
S CRTB	CRT, 180DLB22(B)(U) (HITJ) B, BLU.	9322 121	33682
S CRTG	CRT, 180DLB22(G)(MU) (HITJ) Y, GRN.	9322 155	29682
S CRTR	CRT, 180DLB22(R)(HU) (HITJ) B, RED.	9322 121	31682
S DEFL	DEFLECTION YOKE, DAV4284M (TSAJ) B, (3 used).	2422 549	44589
S FG2	FOCUS/G2 CONTROL, 100M 15KV FMP-PTV Y	2322 460	90519
REMOTE	RC2015/01 REMOTE TRANSMITTER	3128 147	12082

CRT ASSEMBLY

CRT ASSEMBLY			
X1	SCREW, 8-32X0.5 TORX, (12 used), LENS TO COUPLER	3135 010	02971
X10	COOLANT KIT.	4835 310	67032
X11	SEAL, CRT, (3 used).	3135 013	02321
X12	MOUNTING BRACKET, CRT, (3 used).	3135 011	02371
X13	SPRING COMPRESSION, (12 used), CRT MT	3135 011	00611
X14	SCREW, SHOULDER, (12 used), CRT TO COUPLER.	3135 010	08101
X2	LENS DELTA 78, (2 used), GREEN & RED	3135 013	00822
X2	LENS DELTA 77, FOR BLUE.	3135 013	01052
X3	LENS C-ELEMENT DELTA-77, FOR GREEN	3135 013	01071
X3	LENS C-ELEMENT DELTA-77, (2 used), RE D & BLUE	3135 013	01081
X4	SEAL, LENS, (3 used), LENS TO COUPLER	3135 013	02632
X5	CAP, COUPLER, (3 used), DIAPHRAGM COVER.	3135 014	02681
X6	DIAPHRAGM COUPLER, (3 used)	3135 013	01061
X7	SEAL, VENT PLUG, (3 used).	3135 013	01231
X8	PLUG, VENT, (3 used)	3135 014	02641
X9	COUPLER, CRT-LENS 60", Red & Blue, (2 used).	3135 011	04271
X9	COUPLER CRT-LENS, Green.	3135 011	04281

FCC FILTER PANEL ASSEMBLY

FCC FILTER PANEL ASSEMBLY			
0006	LINE HEATSINK A8, IS HS 0600	3139 121	61663
0060	SILICON INSULATOR SP600, SIL PAD FOR 6000	3135 010	02351
0061	IC-SPRING, CLIP FOR 6000	3135 011	02331
S 1000	FUSE, 5A, 250V	2422 093	00035
S 1004	FUSE, 1A, 250V	2422 093	00027
1100	CONNECTOR, 8 PIN	2422 025	10648
1108	CONNECTOR, 4 PIN	2422 025	15503
1110	CONNECTOR, 1 PIN	2422 015	18552
S 2000	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 680NF., 20%	2222 336	29149
S 2002	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554	90173
S 2003	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020 554	90173
2004	SURGE PROTECTOR, DSP-501N-A21F	2422 549	42349
S 2005	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 220NF., 20%	2222 336	29146
2006	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2007	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2008	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2009	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	2020 558	90557
2102	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554	90169
S = Safety Part Be sure to use exact replacement part.			

2103	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020 554	90169
2107	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	3198 019	61020
2108	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%	3198 019	61020
2110	ELECTROLYTIC CAPACITOR, 200V, 470UF., 20%	2020 021	91321
2214	ELECTROLYTIC CAPACITOR, 250V, 10UF., 20%	2020 012	93495
S 3000	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242	13475
S 3001	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242	13475
S 3002	RESISTOR, METAL FILM, 4.7MEG, 5%	2322 242	13475
3003	RESISTOR, CARBON COMP., 470R, 20%	2120 103	90019
3009	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322 253	41228
3010	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322 253	41228
S 3011	VARISTOR, DC 1MA/495V S MAX 850V	2322 595	90021
S 3012	RESISTOR, METAL FILM, 1MEG, 5%	2322 242	13105
3300	RESISTOR, METAL OXIDE, 5W, 22K, 5%	2322 257	41223
S 5000	FILTER, MAINS, 8MH., 7A.	2422 549	44591
S 5005	FILTER, MAINS, 80UH., 1.8A	2422 549	44041
5103	FIXED INDUCTOR, 4.7UH., 5%	2422 535	94213
S 5106	FILTER, MAINS, 80UH., 1.8A	2422 549	44041
6000	DIODE BRIDGE RECTIFIER, GBU4JL-7002.	9322 132	55667
6001	DIODE BRIDGE RECTIFIER, DF06M.	9338 118	70682
9000	WIRE JUMPER, 0.58MM.	3198 036	90010
9001	WIRE JUMPER, 0.58MM.	3198 036	90010
9002	WIRE JUMPER, 0.58MM.	3198 036	90010
9003	WIRE JUMPER, 0.58MM.	3198 036	90010
9030	WIRE JUMPER, 0.58MM.	3198 036	90010
9031	WIRE JUMPER, 0.58MM.	3198 036	90010
9032	WIRE JUMPER, 0.58MM.	3198 036	90010
9101	WIRE JUMPER, 0.58MM.	3198 036	90010
9102	WIRE JUMPER, 0.58MM.	3198 036	90010
CBA	FCC FILTER PANEL ASSEMBLY.	3135 017	05441

CISPR FILTER PANEL ASSEMBLY

CISPR FILTER PANEL ASSEMBLY

LSB PANEL ASSEMBLY

LSB PANEL ASSEMBLY			
CBA	LSB PANEL ASSEMBLY	3135 037	10471
0031	Heatsink, Vertical	3135 011	04591
0033	Heatsink, T0220.	2422 487	89872
0036	Heatsink, T0-220	3135 011	03291
0038	Heatsink, T0-220	3135 011	03291
0040	Heatsink, T0220.	2422 487	89872
0043	Heatsink, T0220.	2422 487	89872
0046	Heatsink, T0-220	3135 011	03291
0056	IC-Spring.	3135 011	01511
0057	Insulator, Mica.	3135 010	02911
0058	Solder Terminal.	3135 010	02801
0065	Heatsink, T0-92, Black Anodized.	3135 011	01871
0066	Solder Terminal.	3135 010	02801
0067	IC, Spring	3135 011	02331
0068	Insulator.	3135 010	02351
0069	Spring, Clip	3135 011	02621
0070	Insulator.	3135 010	02341
0080	Heatsink, T0-247	3135 011	00553
0081	Solder Terminal.	3135 010	02801
0082	IC-Spring.	3135 011	01512
0083	Insulator.	3135 010	02321
1201	Surge Protector	2422 549	43675
S 1300	Fuse/Clip, 5A, 250 V	2422 093	00035
S 1302	Fuse, Radial, LT 4A, 250V.	2422 086	10786
S 1305	Relay, 1 Pin, 5V, 5A, LKS1AF.	2422 132	07314
1500	Connector, 8 Pin	2422 025	10648
1504	Connector, 4 Pin	2422 025	16153
1505	Connector, 4 Pin	2422 025	16153
1506	Connector, 4 Pin	2422 025	16153
1508	Connector, 3 Pin	2422 025	14409
1510	Connector, 4 Pin	2422 025	12479
1516	Connector, 12 Pin.	2422 025	08333
1518	Connector, 12 Pin.	2422 025	08333
1520	Connector, 12 Pin.	2422 025	08333
1574	Connector, 1 Pin	2422 015	18552
S 1800	Fuse, LT 1A, 250V.	2422 086	10779
S 1801	Fuse, LT 1A, 250V.	2422 086	10779
1901	Connector, 2 Pin	2412 020	00724
S 2203	Cap, 2n2, 20%, v, Ceramic	2020 554	90173
S 2204	Cap, 470p, 10%, v, Ceramic	2020 554	90169
2206	Cap, 220u, 20%, 25v, Electrolytic.	2020 012	92641
2208	Cap, 100p, 10%, 500v, Ceramic.	3198 019	41010
2210	Cap, 22u, 20%, 50v, Electrolytic	3198 025	52290
2211	Cap, 100n, 10%, 50v, Polyester	3198 014	01040
2212	Cap, 100p, 10%, 500v, Ceramic.	3198 019	41010
2213	Cap, 1000u, 20%, 16v, Electrolytic	3198 026	21020
2215	Cap, 220p, 10%, 1000v, Ceramic	2020 558	90424
2216	Cap, 220p, 10%, 1000v, Ceramic	2020 558	90424
2218	Cap, 10u, 20%, 250v, Electrolytic.	2020 012	93495
2226	Cap, 22n, +80/-20%, 50v, Ceramic	3198 019	22230
2228	Cap, 100p, 10%, 500v, Ceramic.	3198 019	41010

2269	Cap, 100p, 10%, 500v, Ceramic. . . .	3198 019 41010	2822	Cap, 430n, 5%, 250v, Metalized Polypr	2222 479 90022
2270	Cap, 100u, 20%, 25v, Electrolytic. . .	2020 012 92639		opylene.	
2282	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198 025 51080	2823	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2283	Cap, 47u, 20%, 25v, Electrolytic. . . .	3198 025 34790	2824	Cap, 470p, 10%, 1000v, Ceramic. . . .	2020 558 90555
2285	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	2825	Cap, 470p, 10%, 1000v, Ceramic. . . .	2020 558 90555
2301	Cap, 1n5, 10%, 1000v, Ceramic.	2020 558 90443	2826	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020
2302	Cap, 470p, 10%, 1000v, Ceramic.	2020 558 90471	2827	Cap, 1000u, 20%, 16v, Electrolytic. . .	3198 026 21020
2303	Cap, 100u, 20%, 25v, Electrolytic. . . .	2020 012 92639	2828	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010
2304	Cap, 330p, 10%, 1000v, Ceramic.	2020 558 90554	2829	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010
2305	Cap, 470p, 10%, 50v, Ceramic.	3198 019 14710	2836	Cap, 1n, 10%, 1000v, Ceramic.	2020 558 90557
2306	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	2837	Cap, 10u, 20%, 50v, Electrolytic.	3198 025 51090
2307	Cap, 4n7, 10%, 50v, Ceramic.	3198 019 14720	2838	Cap, 1n, 10%, 1000v, Ceramic.	2020 558 90557
2308	Cap, 4n7, 10%, 50v, Ceramic.	3198 019 14720	2839	Cap, 18n, 5%, 630v, Polypropylene. . .	2222 375 90218
2309	Cap, 82p, 5%, 50v, Ceramic.	3198 019 08290	2850	Cap, 470p, 10%, 1000v, Ceramic.	2020 558 90555
2310	Cap, 680p, 10%, 50v, Ceramic.	3198 019 16810	2851	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010
2311	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020	2852	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2313	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	2853	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2314	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	2907	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2315	Cap, 220p, 10%, 1000v, Ceramic.	2020 558 90424	2908	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2316	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2909	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2317	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2910	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2318	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	2911	Cap, 1u, 10%, 63v, Metalized Polyeste	2222 365 75105
2319	Cap, 220p, 10%, 1000v, Ceramic.	2020 558 90424	2912	Cap, 220u, 20%, 35v, Electrolytic. . . .	2020 012 93462
2320	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2913	Cap, 220u, 20%, 35v, Electrolytic. . . .	2020 012 93462
2321	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	2914	Cap, 100n, 10%, 16v, Ceramic.	3198 017 01040
2322	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	2915	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040
2323	Cap, 220p, 10%, 1000v, Ceramic.	2020 558 90424	2916	Cap, 10n, 10%, 50v, Polyester.	2020 300 90573
2324	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91374	2917	Cap, 100n, 10%, 250v, Metalized Polye	
2325	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040		ster	2222 368 90177
2326	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	2918	Cap, 47u, 20%, 50v, Electrolytic. . . .	3198 025 54790
2327	Cap, 2u2, 20%, 25v, Electrolytic.	2020 021 91374	2919	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720
2328	Cap, 1u, 20%, 50v, Electrolytic.	3198 025 51080	2922	Cap, 330u, 20%, 200v, Electrolytic. . .	2020 024 90586
2329	Cap, 220p, 10%, 1000v, Ceramic.	2020 558 90424	3216	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2322 205 33109
2330	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	3223	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
2331	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040		ss.	3198 021 54790
2332	Cap, 1000u, 20%, 50v, Electrolytic. . .	2020 021 91415	3230	Res, 1K5, 5%, 1/6W, Carbon Film. . . .	3198 011 01520
2333	Cap, 2n2, 10%, 50v, Ceramic.	3198 019 12220	3231	Res, 220 ohm, 5%, 2 1/2W, Metal Film	3198 012 32210
2334	Cap, 33n, 10%, 50v, Polyester.	3198 014 03330	3232	Res, 22 ohm, 5%, 2 1/2W, Metal Film.	3198 012 32290
2335	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	3239	Res, 2K4, 1%, 3/5W, Metal Film.	2322 156 22402
2338	Cap, 1000u, 20%, 25v, Electrolytic. . .	2020 012 93458	3240	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930
2339	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3244	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
2340	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	3245	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2341	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3246	Res, 820 ohm, 5%, 1/6W, Carbon Film.	3198 011 08210
2342	Cap, 470p, 10%, 50v, Ceramic.	3198 019 14710	3287	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2343	Cap, 1n, 10%, 50v, Ceramic.	3198 019 11020	3301	Res, 33 ohm, 5%, 5W, Wire Wound. . . .	2322 251 41339
2344	Cap, 1000u, 20%, 25v, Electrolytic. . .	2020 012 93458	3302	Res, 33 ohm, 5%, 5W, Wire Wound. . . .	2322 251 41339
2345	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2346	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3304	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2349	Cap, 10n, +80/-20%, 50v, Ceramic. . . .	3198 019 21030	3305	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2351	Cap, 22n, +80/-20%, 50v, Ceramic. . . .	3198 019 22230	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla	
2352	Cap, 1000u, 20%, 25v, Electrolytic. . .	2020 012 93458		ss.	3198 021 51590
2353	Cap, 220p, 10%, 50v, Ceramic.	3198 019 12210	3307	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2354	Cap, 220u, 20%, 25v, Electrolytic. . . .	3198 025 32210	3308	Res, 0R1, 5%, 1 1/3W, Metal Film. . . .	3198 012 21070
2355	Cap, 470p, 10%, 50v, Ceramic.	3198 019 14710	3309	Res, 0R33, 5%, 1 1/3W, Metal Film. . . .	3198 012 23070
2356	Cap, 470u, 20%, 35v, Electrolytic. . . .	2020 021 91376	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
2452	Cap, 2u2, 20%, 50v, Electrolytic.	2020 012 92648	3311	Res, 4R7, 5%, 1/6W, Carbon Film. . . .	3198 011 04780
2501	Cap, 470n, 10%, 50v, Polyester.	3198 014 04740	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film. . .	3198 011 07590
2503	Cap, 680p, 10%, 500v, Ceramic.	2020 557 90441	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2511	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3314	Res, 82K, 5%, 1/6W, Carbon Film. . . .	3198 011 08230
2513	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2514	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3316	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2516	Cap, 150p, 10%, 500v, Ceramic.	3198 019 41510	3317	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2556	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198 021 51540
2557	Cap, 100u, 20%, 50v, Electrolytic. . . .	3198 025 51010	3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
2558	Cap, 68n, 10%, 100v, Polyester.	2222 347 90235	3322	Res, Trimer, 470R.	2120 368 90118
2559	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3323	Res, 2K7, 5%, 1W, Metal Film.	2120 105 93474
2564	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	3324	Res, 100K, 5%, 1W, Metal Film.	3198 012 11040
2565	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040	3325	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030
2567	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2570	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3327	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
2571	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020		ass.	3198 021 51010
2572	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	3328	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
2573	Cap, 470p, 10%, 50v, Ceramic.	2020 552 91152		ass.	3198 021 51010
2574	Cap, 680n, 10%, 50v, Polyester.	3198 014 06840	3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
2586	Cap, 100n, 10%, 50v, Polyester.	3198 014 01040		ass.	3198 021 53310
2608	Cap, 680p, 10%, 500v, Ceramic.	3198 019 46810	3333	Res, 0R1, 5%, 1 1/3W, Metal Film. . . .	3198 012 21070
2805	Cap, 100n, 10%, 250v, Metalized Polye		3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	ster.	2222 368 90177	3335	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
2806	Cap, 470p, 10%, 500v, Ceramic.	2020 557 90438	3336	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2807	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198 023 21040	3337	Res, 390 ohm, 5%, 1/6W, Carbon Film.	3198 011 03910
2809	Cap, 100n, 10%, 250v, Metalized Polye		3339	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
	ster.	2222 368 90177	3340	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
2810	Cap, 470u, 20%, 200v, Electrolytic. . .	2020 021 91321	3343	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2811	Cap, 330p, 10%, 2000v, Ceramic.	2020 558 90481	3344	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2814	Cap, 68u, 20%, 400v, Electrolytic. . . .	2020 024 90587	3347	Res, 4K7, 5%, 1/6W, Carbon Film. . . .	3198 011 04720
2815	Cap, 1n, 10%, 500v, Ceramic.	3198 019 41020	3350	Res, 47K, 5%, 1W, Metal Film.	3198 012 14730
2816	Cap, 18n, 5%, 630v, Polypropylene. . .	2222 375 90218	3351	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720
2817	Cap, 11n, 5%, 1600v, Polypropylene. . .	2222 375 90155	3352	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720
2818	Cap, 470p, 10%, 500v, Ceramic.	2020 557 90438	3353	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720
2819	Cap, 18n, 5%, 630v, Polypropylene. . .	2222 375 90218	3452	Res, 1R5, 5%, 1 1/3W, Metal Film. . . .	3198 012 21580
2820	Cap, 4u7, 10%, 100v, Metalized Polyes		3456	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
	ter.	2222 368 90178		ass.	3198 021 52710

3457	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	3942	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3458	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3959	Res, 1K, 5%, 1/4W, Carbon Film. . .	2120 101 74102
3500	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3960	Res, 100 ohm, 5%, 1/3W, Metal Film. .	2322 205 33101
3501	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	3967	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3503	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124		ass.	3198 021 52710
3504	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3968	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3505	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210	3969	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3506	Res, 120K, 5%, 1/8W, Metalized Glass	2322 730 61124	3975	Res, 100 ohm, 5%, 1/3W, Metal Film. .	2322 205 33101
3507	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198 011 04730	3983	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198 011 02210
3508	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198 011 03920	3990	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002
3509	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 011 01030	3991	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3510	Res, 470K, 5%, 1/6W, Carbon Film. . .	3198 011 04740	3992	Res, 470K, 5%, 1/6W, Carbon Film. . .	3198 011 04740
3511	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5201	Filter, Mains, 100UH, 2A2.	2422 549 44101
3550	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002	5202	Transformer, Layer, S229B3-01 Y. . .	2422 531 98038
3551	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002	5234	Coil, 10u.	2422 535 95363
3562	Res, 4R7, 5%, 1W, Metal Film.	3198 012 14780	5235	Coil, 10u.	2422 535 95363
3563	Res, 220 ohm, 5%, 1W, Metal Film. . .	2120 105 93396	5238	Coil, 10u.	2422 535 95363
3565	Res, 220 ohm, 5%, 1W, Metal Film. . .	2120 105 93396	5239	Coil, 10u.	2422 535 95363
3571	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5300	Transformer, Layer, S549C1-04 B. . .	2422 531 02439
3572	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5301	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3573	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	5302	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3581	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5303	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3584	Res, 1 ohm, 5%, 3W, Wire Wound. . . .	2122 251 01385	5304	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3585	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	5305	Coil, 10u.	2422 535 95363
3590	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	5306	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3591	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5307	Coil, 10u.	2422 535 95363
3592	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5308	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3593	Res, 2K2, 5%, 1/6W, Carbon Film. . . .	3198 011 02220	5309	Coil, 10u.	2422 535 95363
3595	Res, 33K, 5%, 1/6W, Carbon Film. . . .	3198 011 03330	5310	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3596	Res, Zero ohm, "Chip" Jumper.	3198 021 90020	5311	Coil, 10u.	2422 535 95363
3597	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5312	Coil, 10u.	2422 535 95363
3598	Res, 100 ohm, 5%, 1/10W, Metalized Gl		5313	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
	ass.	3198 021 51010	5314	Coil, 10u.	2422 535 95363
3800	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5315	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3801	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	5316	Coil, 10u.	2422 535 95363
3802	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	5317	Coil, 10u.	2422 535 95363
3803	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	5318	Coil, 680u.	2422 536 00103
3805	Res, 100 ohm, 5%, 1W, Metal Film. . . .	2120 105 93394	5319	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3806	Res, 10K, 5%, 1W, Metal Film.	2120 105 93407	5320	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3807	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5321	Coil, 3u3.	2422 535 94373
3808	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	5322	Coil, 10u.	2422 535 95363
3809	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198 011 03310	5800	Transformer, Signal Driver, C925-01 Y	2422 535 91022
3810	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5801	Transformer, Layer, S409C3-02 B. . .	2422 531 02438
3811	Res, 1K5, 5%, 5W, Metal Film.	2322 257 41152	5802	Transformer, Signal, W8073-001 Y. . .	2422 531 02434
3812	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	5803	Coil, 485u.	2422 536 00079
3813	Res, 1 ohm, 5%, 2W, Metal Film.	2120 106 90572	5804	Coil, 40u.	2422 536 00078
3814	Res, 33 ohm, 5%, 1/10W, Metalized Gla		5805	Fixed, Inductor, 100MHZ, 50R.	3198 018 90010
	ss.	3198 021 53390	5806	Coil, 47u.	2422 535 95282
3815	Res, 0R27, 5%, 1/2W, Metal Film. . . .	2322 207 90048	5807	Coil, 22u.	3198 018 72290
3816	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	5810	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3817	Res, 0R27, 5%, 1/2W, Metal Film. . . .	2322 207 90048	5811	Coil, 10u.	2422 535 95363
3820	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720	5812	Coil, 10u.	2422 535 95363
3821	Res, 470 ohm, 5%, 1W, Metal Film. . . .	2120 105 93398	5900	High Voltage Generator.	3122 268 32865
3822	Res, 220 ohm, 5%, 1W, Metal Film. . . .	2120 105 93396	5904	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198 018 90020
3823	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6200	Diode, P4KE550.	9322 141 04673
3824	Res, 220 ohm, 5%, 1W, Metal Film. . . .	2120 105 93396	6201	Zener Diode, 8.2 volt.	3198 010 28280
3825	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6204	Diode, Rect, BYV10-40.	9337 432 70133
3826	Res, 220 ohm, 5%, 1W, Metal Film. . . .	2120 105 93396	6205	IC, TL431BCLP.	9322 115 98676
3828	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6207	Diode, Rect, BYD33D.	9337 234 00133
3829	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6231	Diode, Rect, BYV10-40.	9337 432 70133
3830	Res, 470 ohm, 5%, 1W, Metal Film. . . .	2120 105 93398	6235	Diode, Rect, BYD33D.	9337 234 00133
3834	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2322 205 33108	6301	Diode, Rect, BYD33J.	9337 234 20133
3835	Res, 2K7, 5%, 1/6W, Carbon Film. . . .	3198 011 02720	6302	Diode, Rect, 1N5062.	3198 010 10120
3837	Res, 12K, 5%, 1/6W, Carbon Film. . . .	3198 011 01230	6303	Diode, Rect, 1N5062.	3198 010 10120
3838	Res, 1K5, 5%, 1/6W, Carbon Film. . . .	3198 011 01520	6306	Diode, Rect, BY229X-600.	9340 380 20127
3839	Res, 300K, 5%, 2 1/2W, Metal Film. . .	2322 195 63304	6307	Diode, Rect, BY229X-600.	9340 380 20127
3840	Res, 1M, 5%, 1/2W, Metalized Glass. .	2322 242 13105	6308	Diode, Rect, BY229X-600.	9340 380 20127
3841	Res, 4K7, 5%, 1W, Metal Film.	3198 012 14720	6309	Diode, Rect, BY229X-600.	9340 380 20127
3865	Res, 0R47, 5%, 1W, Metal Film.	2120 106 90556	6310	Diode, Rect, BY229X-600.	9340 380 20127
3866	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	6312	Diode, Rect, SB360L-7003.	9322 128 68682
3867	Res, 1 ohm, 5%, 1/3W, Metal Film. . . .	2322 205 33108	6313	Diode, Signal, 1N4148.	9330 839 90133
3890	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010	6500	Zener Diode, 10 volt.	9340 386 80115
3891	Res, 6K8, 5%, 1W, Metal Film.	3198 012 16820	6501	Diode, Signal, BAS316.	3198 010 10630
3900	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198 011 01030	6502	Diode, Signal, BAS316.	3198 010 10630
3901	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6503	Diode, Signal, BAS316.	3198 010 10630
3902	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	6504	Diode, Rect, BYD33D.	9337 234 00133
3903	Res, 12K, 5%, 1/10W, Metalized Glass	3198 021 51230	6505	Zener Diode, 4.7 volt.	3198 010 24780
3904	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6550	Diode, Rect, BYV27-200.	9335 526 80133
3906	Res, 4R7, 5%, 5W, Wire Wound.	2322 251 41478	6551	Diode, Signal, BAS316.	3198 010 10630
3907	Res, 2K, 1%, 1/8W, Metalized Glass. .	2322 734 62002	6552	Zener Diode, 4.7 volt.	3198 010 24780
3909	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322 734 62702	6801	Diode, Rect, BYD33J.	9337 234 20133
3911	Res, 100 ohm, 5%, 1/10W, Metalized Gl		6802	Diode, Rect, BYV27-200.	9335 526 80133
	ass.	3198 021 51010	6803	Diode, Rect, BYV27-200.	9335 526 80133
3912	Res, 100 ohm, 5%, 1/10W, Metalized Gl		6806	Diode, Rect, BY228/24.	9340 559 50112
	ass.	3198 021 51010	6807	Diode, Rect, BYD33M.	9337 410 30133
3913	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	6808	Diode, Rect, BYW95C.	9335 001 50133
3914	Res, 10 ohm, 5%, 1/10W, Metalized Gla		6809	Diode, Signal, BAS316.	3198 010 10630
	ss.	3198 021 51090	6810	Diode, Signal, BAS316.	3198 010 10630
3917	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198 011 06830	6830	Diode, Rect, BYD33M.	9337 410 30133
3918	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	6850	Diode, Rect, BYD33J.	9337 234 20133
3940	Res, 3K3, 1%, 3/5W, Metal Film.	2322 156 23302	6900	Diode, Signal, BAS316.	3198 010 10630
3941	Res, 10K, 1%, 3/5W, Metal Film.	2322 156 21003	6905	Diode, Signal, BAS316.	3198 010 10630

S = Safety Part Be sure to use exact replacement part.

6907	Diode, Signal, BAS316.	3198 010 10630	0009	Heatsink, TO-220	3135 011 03291	
6910	Diode, Signal, BAS316.	3198 010 10630	0010	Heatsink, TO-220	3135 011 03291	
6911	Diode, Signal, BAS316.	3198 010 10630	0012	Heatsink, Folded	3135 011 04555	
6912	Diode, Signal, BAS316.	3198 010 10630	0072	Spring, Clip, Horiz.	3135 011 04572	
6919	Zener Diode, 27 volt	3198 010 52790	0082	Spring, Clip, Horiz.	3135 011 04572	
6920	Diode, Signal, BAS316.	3198 010 10630	0123	Heatsink, Folded	3135 011 04555	
6921	Diode, Signal, BAS316.	3198 010 10630	0139	IC, Spring	3135 011 02331	
6922	Diode, Signal, BAS316.	3198 010 10630	0200	Heatsink, TO-220	3135 011 02511	
6950	Zener Diode, 4.7 volt.	3198 010 24780	0201	Heatsink, TO-220	3135 011 02511	
6951	Diode, Signal, BAS316.	3198 010 10630	1000	Connector, 5 Pin	2422 025 12481	
7208	Transistor, NPN, BC547B.	3198 020 40030	1001	Connector, 10 Pin.	2422 025 12484	
7209	IC, MC34064P-5	9322 066 44676	1002	Connector, 3 Pin	2412 020 00725	
7211	IC, TOP221P.	9322 125 16682	1003	Connector, 3 Pin	2422 025 09191	
7213	Optic Coupler, CQY80NG	9338 941 50682	1005	Connector, 2 Pin	2412 020 00724	
7300	Transistor, NPN, BC547B.	3198 020 40030	1009	Connector, 2 Pin	2412 020 00724	
7301	F.E.T., Power, STW20NB50	9322 131 15687	1014	Connector, 7 Pin	2422 025 11244	
7302	IC, MC44603AP.	9322 108 36682	1015	Connector, 1 Pin	2422 015 18552	
7303	Optic Coupler, CQY80NG	9338 941 50682	1017	Connector, 12 Pin.	2422 025 08333	
7304	IC, TL431BCLP.	9322 115 98676	1018	Connector, 12 Pin.	2422 025 08333	
7307	IC, MC34063AP1	9322 036 71682	1020	Connector, 12 Pin.	2422 025 08333	
7308	F.E.T., Power, IRF9Z24N.	9322 134 76687	1023	Connector, 1 Pin	2422 015 18552	
7309	Transistor, NPN, BC547B.	3198 020 40030	1026	Connector, SIMM, 80 Pin.	2422 025 16599	
7500	Transistor, PNP, BC807-25.	3198 010 43130	1036	Connector, 3 Pin	2412 020 00725	
7501	Transistor, PNP, BC807-25.	3198 010 43130	1049	Connector, 5 Pin	2422 025 15832	
7550	IC, TDA4861/V3	9352 018 80112	1072	Connector, 3 Pin	2412 020 00725	
7551	Transistor, NPN, BC847B.	3198 010 42030	1073	Connector, 4 Pin	2422 025 12479	
7552	Transistor, PNP, TIP42C.	9336 594 40687	1074	Connector, 4 Pin	2422 025 12479	
7553	Transistor, NPN, BC847B.	3198 010 42030	1083	Connector, 10 Pin.	2422 025 12484	
7590	Transistor, NPN, BC847B.	3198 010 42030	1262	Socket, Cinch, 12 Pin.	2422 026 05064	
7800	Transistor, NPN, BC847B.	3198 010 42030	1264	Socket, MDIN, 10 Pin	2422 026 04926	
7801	Transistor, NPN, 2SC2482	9322 103 07678	1301	Tuner, V+U, PLL	2422 542 90108	
7802	Transistor, NPN, BU4515AF.	9340 550 93127	S 1910	Fuse, 2 A, 250V IEC.	2422 086 10783	
7803	Transistor, PNP, BC557B.	3198 020 40110	S 1911	Fuse, 4 A, 250V IEC.	2422 086 10786	
7830	Transistor, NPN, 2SC3675	9322 122 57687	S 1912	Fuse, 4 A, 250V IEC.	2422 086 10786	
7905	Transistor, NPN, BC547B.	3198 020 40030	1913	Connector, 4 Pin	2422 025 12479	
7906	Transistor, NPN, BC817-25.	3198 010 43230	2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7907	Transistor, PNP, BC807-25.	3198 010 43130	2001	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7908	Transistor, NPN, BC817-25.	3198 010 43230	2002	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
7909	Transistor, PNP, BC807-25.	3198 010 43130	2003	Cap, 10p, 5%, 50v, Ceramic	3198 016 01090	
7910	Transistor, PNP, BC557B.	3198 020 40110	2004	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
9101	Wire Jumper, 0.58MM.	3198 036 90010	2005	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9102	Wire Jumper, 0.58MM.	3198 036 90010	2006	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9104	Wire Jumper, 0.58MM.	3198 036 90010	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9105	Wire Jumper, 0.58MM.	3198 036 90010	2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	2009	Cap, 330p, 10%, 50v, Ceramic	3198 019 13310	
9107	Wire Jumper, 0.58MM.	3198 036 90010	2010	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
9108	Wire Jumper, 0.58MM.	3198 036 90010	2011	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	2012	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
9110	Wire Jumper, 0.58MM.	3198 036 90010	2013	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9111	Wire Jumper, 0.58MM.	3198 036 90010	2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9112	Wire Jumper, 0.58MM.	3198 036 90010	2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9113	Wire Jumper, 0.58MM.	3198 036 90010	2016	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9114	Wire Jumper, 0.58MM.	3198 036 90010	2017	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9115	Wire Jumper, 0.58MM.	3198 036 90010	2018	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9116	Wire Jumper, 0.58MM.	3198 036 90010	2019	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9117	Wire Jumper, 0.58MM.	3198 036 90010	2020	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9119	Wire Jumper, 0.58MM.	3198 036 90010	2021	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9120	Wire Jumper, 0.58MM.	3198 036 90010	2022	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9123	Wire Jumper, 0.58MM.	3198 036 90010	2023	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9124	Wire Jumper, 0.58MM.	3198 036 90010	2024	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9127	Wire Jumper, 0.58MM.	3198 036 90010	2025	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9128	Wire Jumper, 0.58MM.	3198 036 90010	2026	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9129	Wire Jumper, 0.58MM.	3198 036 90010	2027	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9130	Wire Jumper, 0.58MM.	3198 036 90010	2028	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9131	Wire Jumper, 0.58MM.	3198 036 90010	2029	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9132	Wire Jumper, 0.58MM.	3198 036 90010	2030	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9133	Wire Jumper, 0.58MM.	3198 036 90010	2031	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9134	Wire Jumper, 0.58MM.	3198 036 90010	2032	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9136	Wire Jumper, 0.58MM.	3198 036 90010	2034	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210	
9137	Wire Jumper, 0.58MM.	3198 036 90010	2035	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9139	Wire Jumper, 0.58MM.	3198 036 90010	2036	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9140	Wire Jumper, 0.58MM.	3198 036 90010	2037	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9142	Wire Jumper, 0.58MM.	3198 036 90010	2040	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9143	Wire Jumper, 0.58MM.	3198 036 90010	2041	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9144	Wire Jumper, 0.58MM.	3198 036 90010	2042	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9145	Wire Jumper, 0.58MM.	3198 036 90010	2043	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9146	Wire Jumper, 0.58MM.	3198 036 90010	2044	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9147	Wire Jumper, 0.58MM.	3198 036 90010	2046	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9148	Wire Jumper, 0.58MM.	3198 036 90010	2049	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	2050	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9150	Wire Jumper, 0.58MM.	3198 036 90010	2052	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9152	Wire Jumper, 0.58MM.	3198 036 90010	2053	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	2054	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9154	Wire Jumper, 0.58MM.	3198 036 90010	2055	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9901	Wire Jumper, 0.58MM.	3198 036 90010	2056	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9902	Wire Jumper, 0.58MM.	3198 036 90010	2058	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
SSM PANEL ASSEMBLY				2061	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
SSM PANEL ASSEMBLY				2062	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
CBA	SSM Panel Parts.	3135 037 10431	2063	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856	
0001	Shield, Top.	3135 011 02252	2064	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
0002	Shield, Bottom	3135 011 01892	2065	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856	
			2066	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	

S = Safety Part Be sure to use exact replacement part.

2067	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2606	Cap, 22u, 20%, 50v, Electrolytic . .	3198 025 52290
2068	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2607	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2069	Cap, 100u, 20%, 50v, Electrolytic. .	3198 025 51010	2608	Cap, 10u, 20%, 50v, Electrolytic . .	3198 025 51090
2070	Cap, 100u, 20%, 50v, Electrolytic. .	3198 025 51010	2609	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2071	Cap, 100n, 10%, 50v, Polyester . . .	3198 014 01040	2610	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2072	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2611	Cap, 22u, 20%, 50v, Electrolytic . .	3198 025 52290
2073	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2612	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030
2074	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2613	Cap, 10u, 20%, 50v, Electrolytic . .	3198 025 51090
2075	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2616	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2076	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2617	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2077	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2618	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050
2078	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050
2079	Cap, 330n, +80/-20%, 25v, Ceramic. .	2222 910 19856	2620	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2080	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790	2621	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010
2082	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	2622	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290
2201	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2623	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
2203	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2624	Cap, 56p, 5%, 50v, Ceramic.	3198 016 05690
2206	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2625	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010
2208	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2626	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
2211	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2627	Cap, 56p, 5%, 50v, Ceramic.	3198 016 05690
2217	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2629	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090
2219	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2630	Cap, 56p, 5%, 50v, Ceramic.	3198 016 05690
2224	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020 552 95499	2631	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
2227	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2632	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
2228	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2633	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210
2229	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2634	Cap, 180p, 5%, 50v, Ceramic.	3198 016 01810
2230	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2704	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2231	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	2705	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2233	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2717	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2239	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2718	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2242	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	2719	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2244	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2720	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2249	Cap, 22p, 5%, 50v, Ceramic.	3198 016 02290	2721	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2250	Cap, 10u, 20%, 16v, Electrolytic . .	3198 028 21090	2723	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2255	Cap, 10u, 20%, 16v, Electrolytic . .	3198 028 21090	2724	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2260	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020 552 95499	2725	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2300	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2726	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040
2301	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	2727	Cap, 47n, +80/-20%, 50v, Ceramic. .	3198 017 24730
2302	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	2764	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790
2303	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3000	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2304	Cap, 15p, 5%, 50v, Ceramic.	3198 016 01590	3001	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2305	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730	3002	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198 011 04710
2306	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	3003	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2307	Cap, 47n, 10%, 25v, Ceramic.	3198 023 04730	3004	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2308	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	3005	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
2310	Cap, 47u, 20%, 50v, Electrolytic . .	3198 025 54790	3006	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2311	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	3007	Res, 100 ohm, 5%, 1/10W, Metalized GL	3198 021 51010
2312	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3008	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2313	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050	3009	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2317	Cap, 560p, 5%, 50v, Ceramic.	2020 552 93609	3010	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2318	Cap, 560p, 5%, 50v, Ceramic.	2020 552 93609	3011	Res, 33K, 5%, 1/10W, Metalized Glass	3198 021 53330
2319	Cap, 560p, 5%, 50v, Ceramic.	2020 552 93609	3012	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2320	Cap, 4n7, 10%, 50v, Ceramic.	3198 017 04720	3013	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198 011 03320
2366	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	3014	Res, 2K7, 5%, 1/10W, Metalized Glass	3198 021 52720
2401	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3015	Res, 220 ohm, 5%, 1/10W, Metalized GL	3198 021 52210
2402	Cap, 100u, 20%, 50v, Electrolytic. .	3198 025 51010	3016	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2403	Cap, 2u2, 20%, 50v, Electrolytic. .	3198 025 52280	3017	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322 205 33101
2405	Cap, 470u, 20%, 35v, Electrolytic. .	3198 026 44710	3018	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2406	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020 552 95499	3019	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2407	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 026 52220	3020	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
2410	Cap, 470u, 20%, 35v, Electrolytic. .	3198 026 44710	3021	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2419	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3022	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322 730 81132
2420	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3023	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2422	Cap, 1n, 10%, 50v, Ceramic.	3198 017 01020	3024	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322 205 33101
2430	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3025	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2431	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3026	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2432	Cap, 2u2, 20%, 50v, Electrolytic . .	3198 025 52280	3027	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
2433	Cap, 100n, 10%, 63v, Metalized Polyes	2222 365 75104	3028	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
2434	Cap, 100n, 10%, 63v, Metalized Polyes	2222 365 75104	3030	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2435	Cap, 10u, 20%, 100v, Electrolytic. .	3198 025 71090	3031	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
2443	Cap, 47u, 20%, 50v, Electrolytic . .	3198 025 54790	3032	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2500	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790	3033	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
2503	Cap, 33p, 5%, 50v, Ceramic.	3198 016 03390	3034	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720
2504	Cap, 150p, 5%, 50v, Ceramic.	3198 016 01510	3035	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322 734 61602
2505	Cap, 330p, 5%, 50v, Ceramic.	3198 016 03310	3036	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2506	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3037	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2507	Cap, 100u, 20%, 25v, Electrolytic. .	3198 025 31010	3038	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198 011 01010
2508	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3039	Res, 100 ohm, 5%, 1/10W, Metalized GL	3198 021 51010
2509	Cap, 47u, 20%, 25v, Electrolytic . .	3198 025 34790	3040	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322 730 81132
2510	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3041	Res, 100 ohm, 5%, 1/10W, Metalized GL	3198 021 51010
2511	Cap, 470p, 5%, 50v, Ceramic.	3198 016 04710	3042	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
2512	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	3043	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322 734 61602
2513	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3044	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
2514	Cap, 1n, 5%, 50v, Ceramic.	3198 016 01020	3045	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
2516	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198 017 21050	3046	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2600	Cap, 1u, 20%, 50v, Electrolytic. .	3198 025 51080	3047	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
2601	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040	3048	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
2602	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	3049	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
2604	Cap, 82p, 5%, 50v, Ceramic.	3198 016 08290			
2605	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198 023 21040			

3050	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3206	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510
3051	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 52240
3052	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3207	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 51020
3053	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3208	Res, 1K, 5%, 1/10W, Metalized Glass	3198 021 54730
3054	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3209	Res, 47K, 5%, 1/10W, Metalized Glass	3198 011 01030
3055	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3210	Res, 10K, 5%, 1/6W, Carbon Film. . .	
3056	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3211	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3057	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ss.	
3058	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3212	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3059	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 54790
3060	Res, 15 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31590	3216	Res, 47 ohm, 5%, 1/10W, Metalized Gla	3198 021 51010
3061	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 51010
3062	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3217	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3063	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 57590
3064	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3218	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 51010
3065	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ss.	3198 021 51010
3066	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3219	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3067	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 54720
3068	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3220	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54730
3069	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3221	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3070	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3222	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3071	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3223	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3072	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	3198 021 51020
3073	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3074	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3075	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3226	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3076	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	
3077	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3227	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3078	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ass.	3198 021 51020
3079	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3233	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 54730
3080	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3234	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3081	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198 011 04720	3235	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3082	Res, 820 ohm, 5%, 1/10W, Metalized Gl	3198 021 58210	3236	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.		3237	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 51020
3083	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3238	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 54730
	ass.		3239	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3084	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3240	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.		3241	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3085	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3242	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3086	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3243	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
3087	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ss.	
3088	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3244	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510
3089	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ass.	
3090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3247	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210
3097	Res, 1K, 5%, 2 1/2W, Metal Film. . .	3198 012 31020		ass.	
3098	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3248	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590
	ass.			ss.	
3099	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3249	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510
	ass.			ass.	3198 011 01030
3100	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3251	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198 021 54720
	ass.		3252	Res, 4K7, 5%, 1/10W, Metalized Glass	3232 205 33109
3101	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3260	Res, 10 ohm, 5%, 1/3W, Metal Film. .	
	ass.		3300	Res, 47 ohm, 5%, 1/10W, Metalized Gla	3198 021 54790
3102	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310		ss.	
	ass.		3301	Res, 47 ohm, 5%, 1/10W, Metalized Gla	3198 021 54790
3103	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310		ss.	
	ass.		3302	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3104	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3303	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.		3304	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3105	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3307	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.		3308	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3106	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310	3309	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.		3310	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3107	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3108	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3318	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3110	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210		ass.	
	ass.		3332	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3111	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210	3333	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
	ass.		3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3112	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3335	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3113	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3336	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3114	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3337	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3115	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3338	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3117	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3340	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3341	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3119	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3342	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 56840
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3343	Res, 680K, 5%, 1/10W, Metalized Glass	
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3344	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	
3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3403	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3125	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3404	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3405	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3406	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3201	Res, 150 ohm, 5%, 1/10W, Metalized Gl	3198 021 51510	3407	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	ass.		3408	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3202	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	3409	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3203	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3410	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3204	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3424	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220
3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3425	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220

3427	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3620	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3428	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3621	Res, 820 ohm, 5%, 1/10W, Metalized Gl	3198 021 58210
3430	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3622	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3431	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3623	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3432	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3624	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3433	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3625	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3434	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3626	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3435	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3627	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3445	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	3628	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3629	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3450	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3630	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3451	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3631	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310
3452	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3632	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3453	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3633	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3500	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3634	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3501	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3635	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910
3502	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710	3636	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3503	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590	3637	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3504	Res, 75 ohm, 5%, 1/10W, Metalized Gla	3198 021 57590	3638	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3639	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3640	Res, 330 ohm, 5%, 1/10W, Metalized Gl	3198 021 53310
3507	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3641	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3508	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3642	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3509	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3643	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3511	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3645	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3512	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3647	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3513	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3648	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710
3514	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3650	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3515	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3651	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3516	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3652	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3517	Res, 22 ohm, 5%, 1/10W, Metalized Gla	3198 021 52290	3653	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3518	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220	3654	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090
3519	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3655	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3520	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3656	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3521	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	3657	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
3522	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3658	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3523	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3659	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3524	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3660	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3525	Res, 10 ohm, 5%, 1/10W, Metalized Gla	3198 021 51090	3661	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3527	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2322 205 33109	3663	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3528	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3664	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3529	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810	3665	Res, 680 ohm, 5%, 1/10W, Metalized Gl	3198 021 56810
3600	Res, 560 ohm, 5%, 1/10W, Metalized Gl	3198 021 55610	3666	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3601	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3667	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710
3602	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3669	Res, 220 ohm, 5%, 1/10W, Metalized Gl	3198 021 52210
3603	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3670	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3604	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3698	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890
3605	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3712	Res, 10 ohm, 5%, 1/3W, Metal Film. . .	2322 205 33109
3606	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3713	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3607	Res, 68 ohm, 5%, 1/10W, Metalized Gla	3198 021 56890	3714	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3608	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3715	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3609	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3716	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3610	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3717	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3611	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3718	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3612	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3719	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3720	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3614	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	3721	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3615	Res, 470 ohm, 5%, 1/10W, Metalized Gl	3198 021 54710	3722	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3616	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3723	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3617	Res, 270 ohm, 5%, 1/10W, Metalized Gl	3198 021 52710	3724	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3618	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010	3740	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
3619	Res, 390 ohm, 5%, 1/10W, Metalized Gl	3198 021 53910	3741	Res, 100 ohm, 5%, 1/10W, Metalized Gl	3198 021 51010
	S = Safety Part Be sure to use exact replacement part.		3746	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
			3747	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
			3756	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030

3759	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	5701	Coil, 6u8.	2422 535 97326
3760	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5702	Coil, 22u.	3198 018 72290
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6000	Diode, Varistor, BB148	9340 332 80135
4007	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6001	Diode, Signal, BAS316.	3198 010 10630
4008	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6003	Diode, Signal, BAS321.	9340 553 52115
4009	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6004	Diode, Signal, BAS316.	3198 010 10630
4010	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6005	Diode, Signal, BAS316.	3198 010 10630
4013	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6006	Diode, Signal, BAS316.	3198 010 10630
4014	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6007	Diode, Signal, BAS316.	3198 010 10630
4019	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6008	Diode, Signal, BAS316.	3198 010 10630
4020	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6009	IC, MC78M05CT.	9334 703 90687
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6010	IC, MC78M05CT.	9334 703 90687
4106	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6011	Diode, Signal, BAS316.	3198 010 10630
4107	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6012	Diode, Signal, BAS316.	3198 010 10630
4109	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6013	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6014	IC, MC79M05CT.	9337 783 20687
4124	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6015	Diode, Signal, BAS316.	3198 010 10630
4125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6016	Diode, Signal, BAS316.	3198 010 10630
4126	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6017	Zener Diode, 15 volt	9340 387 20115
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6018	Diode, Signal, BAS316.	3198 010 10630
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6019	Diode, Signal, BAS316.	3198 010 10630
4129	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6020	Diode, Signal, BAS316.	3198 010 10630
4130	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6021	Diode, Signal, BAS316.	3198 010 10630
4131	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6022	Diode, Signal, BAS316.	3198 010 10630
4134	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6023	Diode, Signal, BAS316.	3198 010 10630
4136	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6024	Diode, Signal, BAS316.	3198 010 10630
4137	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6025	Diode, Signal, BAS316.	3198 010 10630
4138	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6201	Zener Diode, 6.8 volt.	9340 386 40115
4139	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6202	Zener Diode, 6.8 volt.	9340 386 40115
4140	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6203	Zener Diode, 6.8 volt.	9340 386 40115
4143	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6204	Zener Diode, 6.8 volt.	9340 386 40115
4300	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6205	Zener Diode, 6.8 volt.	9340 386 40115
4301	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6206	Zener Diode, 6.8 volt.	9340 386 40115
4302	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6207	Zener Diode, 6.8 volt.	9340 386 40115
4304	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6208	Zener Diode, 6.8 volt.	9340 386 40115
4307	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6209	Zener Diode, 6.8 volt.	9340 386 40115
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6210	Zener Diode, 6.8 volt.	9340 386 40115
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6213	Zener Diode, 6.8 volt.	9340 386 40115
4650	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6214	Zener Diode, 6.8 volt.	9340 386 40115
4700	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6215	Zener Diode, 6.8 volt.	9340 386 40115
4701	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6216	Zener Diode, 6.8 volt.	9340 386 40115
4702	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6221	Zener Diode, 6.8 volt.	9340 386 40115
4703	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6222	Zener Diode, 6.8 volt.	9340 386 40115
4704	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6223	Zener Diode, 6.8 volt.	9340 386 40115
4705	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6224	Zener Diode, 6.8 volt.	9340 386 40115
4708	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6225	Zener Diode, 6.8 volt.	9340 386 40115
4709	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6226	Zener Diode, 6.8 volt.	9340 386 40115
4710	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6227	Zener Diode, 6.8 volt.	9340 386 40115
4711	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6228	Zener Diode, 6.8 volt.	9340 386 40115
4713	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6229	Zener Diode, 6.8 volt.	9340 386 40115
4714	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6230	Zener Diode, 6.8 volt.	9340 386 40115
4715	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6231	Zener Diode, 6.8 volt.	9340 386 40115
4716	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6232	Zener Diode, 6.8 volt.	9340 386 40115
5000	Coil, 5u6.	3198 018 15680	6300	Diode, Signal, BAS316.	3198 010 10630
5001	Coil, 5u6.	3198 018 15680	6301	Diode, Signal, BAS316.	3198 010 10630
5002	Coil, 5u6.	3198 018 15680	6306	Diode, Signal, BAS316.	3198 010 10630
5003	Coil, 5u6.	3198 018 15680	6309	Diode, Signal, BAS316.	3198 010 10630
5004	Coil, 5u6.	3198 018 15680	6402	Zener Diode, 12 volt	3198 010 21290
5005	Coil, 5u6.	3198 018 15680	6500	Diode, Signal, BAS316.	3198 010 10630
5006	Coil, 5u6.	3198 018 15680	6600	Diode, Signal, BAS316.	3198 010 10630
5007	Coil, 5u6.	3198 018 15680	6602	Diode, Signal, BAS316.	3198 010 10630
5008	Coil, 5u6.	3198 018 15680	6603	Diode, Signal, BAS316.	3198 010 10630
5009	Coil, 5u6.	3198 018 15680	6604	Diode, Signal, BAS316.	3198 010 10630
5010	Coil, 5u6.	3198 018 15680	6605	Diode, Signal, BAS316.	3198 010 10630
5011	Coil, 5u6.	3198 018 15680	6606	Diode, Signal, BAS316.	3198 010 10630
5012	Coil, 22u.	3198 018 72290	6607	Diode, Signal, BAS316.	3198 010 10630
5014	Coil, 22u.	3198 018 72290	6608	Diode, Signal, BAS316.	3198 010 10630
5015	Coil, 22u.	3198 018 72290	6609	Diode, Signal, BAS316.	3198 010 10630
5016	Coil, 22u.	3198 018 72290	6610	Diode, Signal, BAS316.	3198 010 10630
5017	Coil, 22u.	3198 018 72290	6611	Diode, Signal, BAS316.	3198 010 10630
5018	Coil, 5u6.	3198 018 15680	6612	Diode, Signal, 1N4148.	3198 010 10010
5019	Coil, 22u.	3198 018 72290	6613	Diode, Signal, BAS316.	3198 010 10630
5020	Coil, 22u.	3198 018 72290	6617	Diode, Signal, 1N4148.	3198 010 10010
5021	Coil, 22u.	3198 018 72290	6700	Zener Diode, 33 volt	9340 388 00115
5022	Coil, 6u8.	3198 018 16880	6708	Zener Diode, 33 volt	9340 388 00115
5302	Coil, 6u8.	2422 535 97326	7000	Transistor, PNP, BF450	9331 677 40126
5304	Coil, 1m	3198 018 21020	7001	IC, LM833N	9322 068 83682
5500	Coil, 2u2.	3198 018 12280	7002	Transistor, NPN, BC847B.	3198 010 42030
5501	Coil, 4u7.	3198 018 14780	7003	IC, UPD65654GF-260	9322 121 87671
5502	Coil, 4u7.	3198 018 14780	7004	Transistor, NPN, BC847B.	3198 010 42030
5503	Coil, 4u7.	3198 018 14780	7005	Transistor, NPN, BC847B.	3198 010 42030
5600	Coil, 3u9.	3198 018 13980	7007	IC, M24C32-WB6.	9322 122 09682
5601	Coil, 8u2.	3198 018 18280	7008	Transistor, NPN, BC547B.	3198 020 40030
5602	Coil, 4u7.	2422 535 96514	7009	IC, SM LC78817M.	9322 154 56682
5603	Coil, 3u9.	3198 018 13980	7010	IC, SM LC78817M.	9322 154 56682
5604	Coil, 8u2.	3198 018 18280	7011	IC, SM LC78817M.	9322 154 56682
5605	Coil, 3u9.	3198 018 13980	7012	IC, STK392-110	9322 130 35682
5606	Coil, 8u2.	3198 018 18280	7013	Transistor, NPN, BC547B.	3198 020 40030
5607	Coil, 1u	3198 018 11080	7014	IC, STK392-110	9322 130 35682
5608	Coil, 1u	3198 018 11080	7015	Transistor, NPN, BC547B.	3198 020 40030
5609	Coil, 1u	3198 018 11080	7016	Transistor, NPN, BC847B.	3198 010 42030
5700	Coil, 6u8.	2422 535 97326	7017	Transistor, NPN, BC847B.	3198 010 42030

S = Safety Part Be sure to use exact replacement part.

7218	Transistor, NPN, BC847B.	3198 010 42030	9418	Wire Jumper, 0.58MM.	3198 036 90010
7224	Transistor, NPN, BC847B.	3198 010 42030	9419	Wire Jumper, 0.58MM.	3198 036 90010
7300	Transistor, PNP, BC857B.	3198 010 42150	9420	Wire Jumper, 0.58MM.	3198 036 90010
7301	Transistor, NPN, BC847B.	3198 010 42030	9421	Wire Jumper, 0.58MM.	3198 036 90010
7303	Transistor, NPN, BC847B.	3198 010 42030	9422	Wire Jumper, 0.58MM.	3198 036 90010
7304	Transistor, PNP, BC857B.	3198 010 42150	9424	Wire Jumper, 0.58MM.	3198 036 90010
7305	Transistor, NPN, BC847B.	3198 010 42030	9425	Wire Jumper, 0.58MM.	3198 036 90010
7306	Transistor, PNP, BC857B.	3198 010 42150	9426	Wire Jumper, 0.58MM.	3198 036 90010
7307	Transistor, NPN, BC847B.	3198 010 42030	9427	Wire Jumper, 0.58MM.	3198 036 90010
7401	Transistor, NPN, BC847B.	3198 010 42030	9428	Wire Jumper, 0.58MM.	3198 036 90010
7402	IC, TDA7269A	9322 111 64687	9429	Wire Jumper, 0.58MM.	3198 036 90010
7405	Transistor, PNP, BC857B.	3198 010 42150	9430	Wire Jumper, 0.58MM.	3198 036 90010
7410	Transistor, NPN, BC847B.	3198 010 42030	9433	Wire Jumper, 0.58MM.	3198 036 90010
7500	Transistor, NPN, BC847B.	3198 010 42030	9434	Wire Jumper, 0.58MM.	3198 036 90010
7501	Transistor, NPN, BC847B.	3198 010 42030	9436	Wire Jumper, 0.58MM.	3198 036 90010
7502	IC, MC1496P.	9332 900 10682	9437	Wire Jumper, 0.58MM.	3198 036 90010
7503	Transistor, PNP, BC857B.	3198 010 42150	9438	Wire Jumper, 0.58MM.	3198 036 90010
7504	Transistor, PNP, BC857B.	3198 010 42150	9439	Wire Jumper, 0.58MM.	3198 036 90010
7600	Transistor, PNP, BC857B.	3198 010 42150	9440	Wire Jumper, 0.58MM.	3198 036 90010
7601	Transistor, PNP, BC857B.	3198 010 42150	9441	Wire Jumper, 0.58MM.	3198 036 90010
7602	Transistor, NPN, BC847B.	3198 010 42030	9443	Wire Jumper, 0.58MM.	3198 036 90010
7603	Transistor, PNP, BC857B.	3198 010 42150	9444	Wire Jumper, 0.58MM.	3198 036 90010
7604	Transistor, PNP, BC857B.	3198 010 42150	9450	Wire Jumper, 0.58MM.	3198 036 90010
7605	Transistor, NPN, BC847B.	3198 010 42030	9451	Wire Jumper, 0.58MM.	3198 036 90010
7606	Transistor, PNP, BC857B.	3198 010 42150	9454	Wire Jumper, 0.58MM.	3198 036 90010
7607	Transistor, NPN, BC847B.	3198 010 42030	9456	Wire Jumper, 0.58MM.	3198 036 90010
7608	Transistor, PNP, BC857B.	3198 010 42150	9457	Wire Jumper, 0.58MM.	3198 036 90010
7609	Transistor, PNP, BC857B.	3198 010 42150	9458	Wire Jumper, 0.58MM.	3198 036 90010
7610	Transistor, NPN, BC847B.	3198 010 42030	9459	Wire Jumper, 0.58MM.	3198 036 90010
7611	IC, L7808CV.	9339 208 10682	9460	Wire Jumper, 0.58MM.	3198 036 90010
7612	IC, L4940V12	9322 039 42687	9461	Wire Jumper, 0.58MM.	3198 036 90010
7613	Transistor, PNP, BC857B.	3198 010 42150	9462	Wire Jumper, 0.58MM.	3198 036 90010
7615	Transistor, PNP, BC857B.	3198 010 42150	9464	Wire Jumper, 0.58MM.	3198 036 90010
7616	Transistor, NPN, BC847B.	3198 010 42030	9465	Wire Jumper, 0.58MM.	3198 036 90010
7710	IC, TDA8444P/N4.	9351 774 70112	9466	Wire Jumper, 0.58MM.	3198 036 90010
7711	IC, HEF4053BT.	9333 729 60653	9467	Wire Jumper, 0.58MM.	3198 036 90010
7712	IC, HEF4053BT.	9333 729 60653	9468	Wire Jumper, 0.58MM.	3198 036 90010
9000	Wire Jumper, 0.58MM.	3198 036 90010	9469	Wire Jumper, 0.58MM.	3198 036 90010
9001	Wire Jumper, 0.58MM.	3198 036 90010	9470	Wire Jumper, 0.58MM.	3198 036 90010
9002	Wire Jumper, 0.58MM.	3198 036 90010	9471	Wire Jumper, 0.58MM.	3198 036 90010
9012	Wire Jumper, 0.58MM.	3198 036 90010	9473	Wire Jumper, 0.58MM.	3198 036 90010
9013	Wire Jumper, 0.58MM.	3198 036 90010	9474	Wire Jumper, 0.58MM.	3198 036 90010
9014	Wire Jumper, 0.58MM.	3198 036 90010	9475	Wire Jumper, 0.58MM.	3198 036 90010
9015	Wire Jumper, 0.58MM.	3198 036 90010	9476	Wire Jumper, 0.58MM.	3198 036 90010
9018	Wire Jumper, 0.58MM.	3198 036 90010	9477	Wire Jumper, 0.58MM.	3198 036 90010
9020	Wire Jumper, 0.58MM.	3198 036 90010	9478	Wire Jumper, 0.58MM.	3198 036 90010
9024	Wire Jumper, 0.58MM.	3198 036 90010	9479	Wire Jumper, 0.58MM.	3198 036 90010
9027	Wire Jumper, 0.58MM.	3198 036 90010	9480	Wire Jumper, 0.58MM.	3198 036 90010
9028	Wire Jumper, 0.58MM.	3198 036 90010	9481	Wire Jumper, 0.58MM.	3198 036 90010
9029	Wire Jumper, 0.58MM.	3198 036 90010	9482	Wire Jumper, 0.58MM.	3198 036 90010
9034	Wire Jumper, 0.58MM.	3198 036 90010	9483	Wire Jumper, 0.58MM.	3198 036 90010
9035	Wire Jumper, 0.58MM.	3198 036 90010	9484	Wire Jumper, 0.58MM.	3198 036 90010
9036	Wire Jumper, 0.58MM.	3198 036 90010	9486	Wire Jumper, 0.58MM.	3198 036 90010
9038	Wire Jumper, 0.58MM.	3198 036 90010	9487	Wire Jumper, 0.58MM.	3198 036 90010
9039	Wire Jumper, 0.58MM.	3198 036 90010	9488	Wire Jumper, 0.58MM.	3198 036 90010
9040	Wire Jumper, 0.58MM.	3198 036 90010	9490	Wire Jumper, 0.58MM.	3198 036 90010
9045	Wire Jumper, 0.58MM.	3198 036 90010	9491	Wire Jumper, 0.58MM.	3198 036 90010
9051	Wire Jumper, 0.58MM.	3198 036 90010	9492	Wire Jumper, 0.58MM.	3198 036 90010
9052	Wire Jumper, 0.58MM.	3198 036 90010	9493	Wire Jumper, 0.58MM.	3198 036 90010
9053	Wire Jumper, 0.58MM.	3198 036 90010	9494	Wire Jumper, 0.58MM.	3198 036 90010
9054	Wire Jumper, 0.58MM.	3198 036 90010	9495	Wire Jumper, 0.58MM.	3198 036 90010
9055	Wire Jumper, 0.58MM.	3198 036 90010	9496	Wire Jumper, 0.58MM.	3198 036 90010
9057	Wire Jumper, 0.58MM.	3198 036 90010	9497	Wire Jumper, 0.58MM.	3198 036 90010
9059	Wire Jumper, 0.58MM.	3198 036 90010	9498	Wire Jumper, 0.58MM.	3198 036 90010
9061	Wire Jumper, 0.58MM.	3198 036 90010	9500	Wire Jumper, 0.58MM.	3198 036 90010
9062	Wire Jumper, 0.58MM.	3198 036 90010	9501	Wire Jumper, 0.58MM.	3198 036 90010
9064	Wire Jumper, 0.58MM.	3198 036 90010	9502	Wire Jumper, 0.58MM.	3198 036 90010
9065	Wire Jumper, 0.58MM.	3198 036 90010	9503	Wire Jumper, 0.58MM.	3198 036 90010
9067	Wire Jumper, 0.58MM.	3198 036 90010	9504	Wire Jumper, 0.58MM.	3198 036 90010
9068	Wire Jumper, 0.58MM.	3198 036 90010	9505	Wire Jumper, 0.58MM.	3198 036 90010
9069	Wire Jumper, 0.58MM.	3198 036 90010	9506	Wire Jumper, 0.58MM.	3198 036 90010
9070	Wire Jumper, 0.58MM.	3198 036 90010	9508	Wire Jumper, 0.58MM.	3198 036 90010
9071	Wire Jumper, 0.58MM.	3198 036 90010	9509	Wire Jumper, 0.58MM.	3198 036 90010
9072	Wire Jumper, 0.58MM.	3198 036 90010	9510	Wire Jumper, 0.58MM.	3198 036 90010
9074	Wire Jumper, 0.58MM.	3198 036 90010	9511	Wire Jumper, 0.58MM.	3198 036 90010
9076	Wire Jumper, 0.58MM.	3198 036 90010	9512	Wire Jumper, 0.58MM.	3198 036 90010
9078	Wire Jumper, 0.58MM.	3198 036 90010	9513	Wire Jumper, 0.58MM.	3198 036 90010
9081	Wire Jumper, 0.58MM.	3198 036 90010	9514	Wire Jumper, 0.58MM.	3198 036 90010
9083	Wire Jumper, 0.58MM.	3198 036 90010	9515	Wire Jumper, 0.58MM.	3198 036 90010
9084	Wire Jumper, 0.58MM.	3198 036 90010	9516	Wire Jumper, 0.58MM.	3198 036 90010
9085	Wire Jumper, 0.58MM.	3198 036 90010	9517	Wire Jumper, 0.58MM.	3198 036 90010
9086	Wire Jumper, 0.58MM.	3198 036 90010	9519	Wire Jumper, 0.58MM.	3198 036 90010
9087	Wire Jumper, 0.58MM.	3198 036 90010	9520	Wire Jumper, 0.58MM.	3198 036 90010
9099	Wire Jumper, 0.58MM.	3198 036 90010	9521	Wire Jumper, 0.58MM.	3198 036 90010
9112	Wire Jumper, 0.58MM.	3198 036 90010	9522	Wire Jumper, 0.58MM.	3198 036 90010
9300	Wire Jumper, 0.58MM.	3198 036 90010	9523	Wire Jumper, 0.58MM.	3198 036 90010
9301	Wire Jumper, 0.58MM.	3198 036 90010	9524	Wire Jumper, 0.58MM.	3198 036 90010
9302	Wire Jumper, 0.58MM.	3198 036 90010	9525	Wire Jumper, 0.58MM.	3198 036 90010
9305	Wire Jumper, 0.58MM.	3198 036 90010	9530	Wire Jumper, 0.58MM.	3198 036 90010
9306	Wire Jumper, 0.58MM.	3198 036 90010	9531	Wire Jumper, 0.58MM.	3198 036 90010
9401	Wire Jumper, 0.58MM.	3198 036 90010	9533	Wire Jumper, 0.58MM.	3198 036 90010
9410	Wire Jumper, 0.58MM.	3198 036 90010	9534	Wire Jumper, 0.58MM.	3198 036 90010

S = Safety Part Be sure to use exact replacement part.

9536	Wire Jumper, 0.58MM.	3198 036 90010	2053	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9538	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9539	Wire Jumper, 0.58MM.	3198 036 90010	2301	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9545	Wire Jumper, 0.58MM.	3198 036 90010	2302	CAPACITOR, NP0, 50V, 330PF.	3198 016 33310
9548	Wire Jumper, 0.58MM.	3198 036 90010	2303	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9549	Wire Jumper, 0.58MM.	3198 036 90010	2306	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9550	Wire Jumper, 0.58MM.	3198 036 90010	2309	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9551	Wire Jumper, 0.58MM.	3198 036 90010	2311	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9552	Wire Jumper, 0.58MM.	3198 036 90010	2312	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9553	Wire Jumper, 0.58MM.	3198 036 90010	2313	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9555	Wire Jumper, 0.58MM.	3198 036 90010	2314	CAPACITOR, POLYSTYRENE, 16V, 100NF.,	
9556	Wire Jumper, 0.58MM.	3198 036 90010		5%.	2020 319 90005
9557	Wire Jumper, 0.58MM.	3198 036 90010	2316	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9558	Wire Jumper, 0.58MM.	3198 036 90010	2317	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9559	Wire Jumper, 0.58MM.	3198 036 90010	2319	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9560	Wire Jumper, 0.58MM.	3198 036 90010	2321	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9561	Wire Jumper, 0.58MM.	3198 036 90010	2322	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9563	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9564	Wire Jumper, 0.58MM.	3198 036 90010	2323	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9565	Wire Jumper, 0.58MM.	3198 036 90010	2324	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9566	Wire Jumper, 0.58MM.	3198 036 90010	2325	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9567	Wire Jumper, 0.58MM.	3198 036 90010	2326	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9568	Wire Jumper, 0.58MM.	3198 036 90010	2327	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9569	Wire Jumper, 0.58MM.	3198 036 90010	2328	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9570	Wire Jumper, 0.58MM.	3198 036 90010	2332	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9571	Wire Jumper, 0.58MM.	3198 036 90010	2333	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9572	Wire Jumper, 0.58MM.	3198 036 90010	2334	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9573	Wire Jumper, 0.58MM.	3198 036 90010	2335	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9574	Wire Jumper, 0.58MM.	3198 036 90010	2338	CAPACITOR, X7R, 50V, 2N2	3198 017 32220
9575	Wire Jumper, 0.58MM.	3198 036 90010	2342	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9576	Wire Jumper, 0.58MM.	3198 036 90010	2345	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9577	Wire Jumper, 0.58MM.	3198 036 90010	2348	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9578	Wire Jumper, 0.58MM.	3198 036 90010	2350	ELECTROLYTIC CAPACITOR, 35V, 4.7UF.,	
9579	Wire Jumper, 0.58MM.	3198 036 90010		20%.	3198 030 74780
9580	Wire Jumper, 0.58MM.	3198 036 90010	2354	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9581	Wire Jumper, 0.58MM.	3198 036 90010	2355	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9582	Wire Jumper, 0.58MM.	3198 036 90010	2356	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9583	Wire Jumper, 0.58MM.	3198 036 90010	2357	CAPACITOR, NP0, 50V, 10PF.	3198 016 31090
9584	Wire Jumper, 0.58MM.	3198 036 90010	2372	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9585	Wire Jumper, 0.58MM.	3198 036 90010	2373	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20	3198 030 81080
9587	Wire Jumper, 0.58MM.	3198 036 90010	2374	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9588	Wire Jumper, 0.58MM.	3198 036 90010	2375	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9590	Wire Jumper, 0.58MM.	3198 036 90010	2376	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9591	Wire Jumper, 0.58MM.	3198 036 90010	2377	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9592	Wire Jumper, 0.58MM.	3198 036 90010	2380	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9593	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9594	Wire Jumper, 0.58MM.	3198 036 90010	2381	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9596	Wire Jumper, 0.58MM.	3198 036 90010	2382	ELECTROLYTIC CAPACITOR, 16V, 47UF., 2	
9597	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 44790
9598	Wire Jumper, 0.58MM.	3198 036 90010	2401	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9599	Wire Jumper, 0.58MM.	3198 036 90010	2402	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9600	Wire Jumper, 0.58MM.	3198 036 90010	2403	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9601	Wire Jumper, 0.58MM.	3198 036 90010	2404	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9602	Wire Jumper, 0.58MM.	3198 036 90010	2405	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9603	Wire Jumper, 0.58MM.	3198 036 90010	2407	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9604	Wire Jumper, 0.58MM.	3198 036 90010	2408	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9605	Wire Jumper, 0.58MM.	3198 036 90010	2412	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9700	Wire Jumper, 0.58MM.	3198 036 90010	2413	ELECTROLYTIC CAPACITOR, 16V, 47UF., 2	
9701	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 44790
9702	Wire Jumper, 0.58MM.	3198 036 90010	2415	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9703	Wire Jumper, 0.58MM.	3198 036 90010	2417	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
9704	Wire Jumper, 0.58MM.	3198 036 90010		0%.	3198 030 41090
9705	Wire Jumper, 0.58MM.	3198 036 90010	2421	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9706	Wire Jumper, 0.58MM.	3198 036 90010	2422	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9707	Wire Jumper, 0.58MM.	3198 036 90010	2423	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9708	Wire Jumper, 0.58MM.	3198 036 90010	2424	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9709	Wire Jumper, 0.58MM.	3198 036 90010	2425	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2427	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2428	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2429	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2430	CAPACITOR, NP0, 50V, 68PF.	3198 016 36890
			2431	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790
			2432	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2435	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2437	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2438	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810
			2439	CAPACITOR, NP0, 50V, 150PF.	3198 016 31510
			2440	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690
			2453	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
			2457	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2458	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20	3198 030 81080
			2461	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090
			2462	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2463	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
			2601	CAPACITOR, NP0, 50V, 470PF.	3198 016 34710
			2602	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
			2606	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2	
				0%.	3198 030 41090

S = Safety Part Be sure to use exact replacement part.

2607	CAPACITOR, Y5V, 16V, 220NF..	3198 017 42240	3311	RESISTOR, 27K, 5%..	3198 021 32730
2612	CAPACITOR, X7R, 50V, 1NF..	3198 017 31020	3312	RESISTOR, 10K, 5%..	3198 021 31030
2613	CAPACITOR, X7R, 50V, 1NF..	3198 017 31020	3315	RESISTOR, 39K, 5%..	3198 021 33930
2619	CAPACITOR, X7R, 50V, 4N7..	3198 017 34720	3316	RESISTOR, 220R, 5%..	3198 021 32210
2620	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3324	RESISTOR, 390R, 5%..	3198 021 33910
2621	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3326	RESISTOR, 1K, 5%..	3198 021 31020
2623	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3327	RESISTOR, 560R, 5%..	3198 021 35610
2624	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3328	RESISTOR, 390R, 5%..	3198 021 33910
2625	ELECTROLYTIC CAPACITOR, 16V, 22UF., 2 0%.	3198 030 42290	3329	RESISTOR, 100R, 5%..	3198 021 31010
2628	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3330	RESISTOR, 100R, 5%..	3198 021 31010
2629	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3331	RESISTOR, FUSABLE, 2R2, 5%..	2322 750 62208
2635	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3332	RESISTOR, FUSABLE, 2R2, 5%..	2322 750 62208
2636	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3333	RESISTOR, 1K, 5%..	3198 021 31020
2637	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3334	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2638	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3339	RESISTOR, 10K, 5%..	3198 021 31030
2639	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3340	RESISTOR, 560R, 5%..	3198 021 55610
2640	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3341	RESISTOR, 150R, 5%..	3198 021 31510
2641	CAPACITOR, X7R, 50V, 330PF..	3198 017 33310	3342	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2642	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3344	RESISTOR, 150R, 5%..	3198 021 31510
2655	CAPACITOR, X7R, 50V, 4N7..	3198 017 34720	3345	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2657	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3348	RESISTOR, 150R, 5%..	3198 021 31510
2661	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3349	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
2662	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2 0%.	3198 030 41090	3358	RESISTOR, 100R, 5%..	3198 021 31010
2663	CAPACITOR, NP0, 50V, 47PF..	3198 016 34790	3361	RESISTOR, 100R, 5%..	3198 021 31010
2664	CAPACITOR, NP0, 50V, 56PF..	3198 016 35690	3362	RESISTOR, 100R, 5%..	3198 021 31010
2665	CAPACITOR, NP0, 50V, 27PF..	3198 016 32790	3363	RESISTOR, 100R, 5%..	3198 021 31010
2666	CAPACITOR, NP0, 50V, 180PF..	3198 016 31810	3364	RESISTOR, 1K, 5%..	3198 021 31020
2667	CAPACITOR, NP0, 50V, 15PF..	3198 016 31590	3365	RESISTOR, 560R, 5%..	3198 021 55610
2675	CAPACITOR, NP0, 50V, 3.3PF..	3198 016 33380	3371	RESISTOR, 15K, 5%..	3198 021 31530
2676	CAPACITOR, NP0, 50V, 3.3PF..	3198 016 33380	3372	RESISTOR, 10R, 5%..	3198 021 31090
2678	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3373	RESISTOR, 100R, 5%..	3198 021 31010
2679	CAPACITOR, X7R, 16V, 100NF..	3198 017 31040	3374	RESISTOR, 3K3, 5%..	3198 021 33320
2682	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3375	RESISTOR, 1K, 5%..	3198 021 31020
2683	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3376	RESISTOR, 1K, 5%..	3198 021 31020
2684	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3377	RESISTOR, 100R, 5%..	3198 021 31010
2685	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3378	RESISTOR, 1K, 5%..	3198 021 31020
2686	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3381	RESISTOR, 100R, 5%..	3198 021 31010
2687	CAPACITOR, Y5V, 10V, 1UF..	3198 017 41050	3382	RESISTOR, 100R, 5%..	3198 021 31010
3002	RESISTOR, 8K2, 5%..	3198 021 38220	3383	RESISTOR, 100R, 5%..	3198 021 31010
3003	RESISTOR, 10K, 5%..	3198 021 31030	3384	RESISTOR, 8K2, 5%..	3198 021 38220
3004	RESISTOR, 8K2, 5%..	3198 021 38220	3385	RESISTOR, 10K, 5%..	3198 021 31030
3007	RESISTOR, 8K2, 5%..	3198 021 38220	3387	RESISTOR, 100R, 5%..	3198 021 31010
3008	RESISTOR, 8K2, 5%..	3198 021 38220	3388	RESISTOR, 47R, 5%..	3198 021 34790
3009	RESISTOR, 8K2, 5%..	3198 021 38220	3393	RESISTOR, 27K, 5%..	3198 021 52730
3013	RESISTOR, 8K2, 5%..	3198 021 38220	3394	RESISTOR, 18K, 5%..	3198 021 31830
3014	RESISTOR, 8K2, 5%..	3198 021 38220	3397	RESISTOR, 10R, 5%..	3198 021 31090
3015	RESISTOR, 10K, 5%..	3198 021 31030	3401	RESISTOR, 100R, 5%..	3198 021 31010
3017	RESISTOR, 100R, 5%..	3198 021 31010	3402	RESISTOR, 100R, 5%..	3198 021 31010
3018	RESISTOR, 100R, 5%..	3198 021 31010	3403	RESISTOR, 100R, 5%..	3198 021 31010
3019	RESISTOR, 100R, 5%..	3198 021 31010	3404	RESISTOR, 100R, 5%..	3198 021 31010
3021	RESISTOR, 100R, 5%..	3198 021 31010	3405	RESISTOR, 100R, 5%..	3198 021 31010
3022	RESISTOR, 2K2, 5%..	3198 021 32220	3411	RESISTOR, 1K5, 5%..	3198 021 31520
3023	RESISTOR, 8K2, 5%..	3198 021 38220	3412	RESISTOR, 1K5, 5%..	3198 021 31520
3024	RESISTOR, 1K, 5%..	3198 021 31020	3413	RESISTOR, 560R, 5%..	3198 021 55610
3030	RESISTOR, 1K, 5%..	3198 021 31020	3414	RESISTOR, 1K5, 5%..	3198 021 31520
3031	RESISTOR, 470R, 5%..	3198 021 34710	3415	RESISTOR, 1K5, 5%..	3198 021 31520
3034	RESISTOR, 47K, 5%..	3198 021 34730	3416	RESISTOR, 560R, 5%..	3198 021 55610
3035	RESISTOR, 470R, 5%..	3198 021 34710	3417	RESISTOR, 1K, 5%..	3198 021 31020
3042	RESISTOR, 150R, 5%..	3198 021 31510	3418	RESISTOR, 560R, 5%..	3198 021 55610
3043	RESISTOR, 150R, 5%..	3198 021 31510	3419	RESISTOR, 470R, 5%..	3198 021 34710
3044	RESISTOR, 10K, 5%..	3198 021 31030	3422	RESISTOR, 470R, 5%..	3198 021 34710
3045	RESISTOR, 2K7, 5%..	3198 021 32720	3423	RESISTOR, 100R, 5%..	3198 021 31010
3046	RESISTOR, 4K7, 5%..	3198 021 34720	3424	RESISTOR, 4K7, 5%..	3198 021 34720
3051	RESISTOR, RC22H, 24K, 1%..	2322 704 62403	3425	RESISTOR, 100R, 5%..	3198 021 31010
3054	RESISTOR, 10K, 5%..	3198 021 31030	3426	RESISTOR, 820R, 5%..	3198 021 38210
3055	RESISTOR, 10K, 5%..	3198 021 31030	3427	RESISTOR, 100R, 5%..	3198 021 31010
3056	RESISTOR, 47K, 5%..	3198 021 34730	3428	RESISTOR, 47K, 5%..	3198 021 34730
3057	RESISTOR, 10K, 5%..	3198 021 31030	3429	RESISTOR, 1K, 5%..	3198 021 31020
3058	RESISTOR, 470R, 5%..	3198 021 34710	3430	RESISTOR, 1K, 5%..	3198 021 31020
3059	RESISTOR, 150R, 5%..	3198 021 31510	3434	RESISTOR, 47K, 5%..	3198 021 34730
3061	RESISTOR, 470R, 5%..	3198 021 34710	3437	RESISTOR, 47K, 5%..	3198 021 34730
3062	RESISTOR, 4K7, 5%..	3198 021 34720	3438	RESISTOR, 47K, 5%..	3198 021 34730
3064	RESISTOR, 4K7, 5%..	3198 021 34720	3466	RESISTOR, 10K, 5%..	3198 021 31030
3065	RESISTOR, 4K7, 5%..	3198 021 34720	3467	RESISTOR, 10K, 5%..	3198 021 31030
3066	RESISTOR, 8K2, 5%..	3198 021 38220	3468	RESISTOR, 10K, 5%..	3198 021 31030
3081	RESISTOR, 4K7, 5%..	3198 021 34720	3472	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
3082	RESISTOR, 10K, 5%..	3198 021 31030	3473	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
3083	RESISTOR, 470R, 5%..	3198 021 34710	3474	RESISTOR, 0 OHM, JUMPER..	3198 021 90030
3084	RESISTOR, 100R, 5%..	3198 021 31010	3477	RESISTOR, 4K7, 5%..	3198 021 34720
3085	RESISTOR, 100R, 5%..	3198 021 31010	3478	RESISTOR, 10R, 5%..	3198 021 31090
3086	RESISTOR, 100R, 5%..	3198 021 31010	3483	RESISTOR, 560R, 5%..	3198 021 55610
3088	RESISTOR, 100R, 5%..	3198 021 31010	3484	RESISTOR, 1K, 5%..	3198 021 31020
3092	RESISTOR, 100R, 5%..	3198 021 31010	3488	RESISTOR, 220R, 5%..	3198 021 32210
3301	RESISTOR, 1K, 5%..	3198 021 31020	3489	RESISTOR, 390R, 5%..	3198 021 33910
3302	RESISTOR, 560R, 5%..	3198 021 55610	3490	RESISTOR, 390R, 5%..	3198 021 33910
3305	RESISTOR, 3K9, 5%..	3198 021 33920	3491	RESISTOR, 820R, 5%..	3198 021 38210
3307	RESISTOR, 390R, 5%..	3198 021 33910	3492	RESISTOR, 560R, 5%..	3198 021 55610
			3493	RESISTOR, 390R, 5%..	3198 021 33910
			3601	RESISTOR, 100R, 5%..	3198 021 31010
			3602	RESISTOR, 100R, 5%..	3198 021 31010
			3606	RESISTOR, 27K, 5%..	3198 021 32730

3619	RESISTOR, 100R, 5%	3198 021 31010	6002	LED, VS TLD5400 (TEG0).	9322 110 34682
3621	RESISTOR, 100R, 5%	3198 021 31010	6005	IR RECEIVER, TSOP1736 (VISH).	9322 152 44687
3665	RESISTOR, 2K2, 5%.	3198 021 32220	6009	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4008	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6011	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4304	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6013	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4308	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6014	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4309	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6015	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4312	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	6016	DIODE REGULATOR, BZX284-C6V8 (PHSE).	9340 386 40115
4313	RESISTOR, 0 OHM, JUMPER.	3198 021 90030	CBA	KEYBOARD PANEL ASSEMBLY, 50" TO 64" M	
4316	RESISTOR, 0 OHM, JUMPER.	3198 021 90030		ODELS.	3135 017 07611
4317	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4318	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4319	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4320	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4401	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4402	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4403	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4410	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4411	RESISTOR, 0 OHM, JUMPER.	3198 021 90020			
4434	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
4435	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
4436	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
4451	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
4455	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
4465	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
4684	RESISTOR, 0 OHM, JUMPER.	3198 021 90030			
5040	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780			
5041	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780			
5042	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780			
5309	FIXED INDUCTOR, 6.8UH., 5%	3198 018 66880			
5332	FIXED INDUCTOR, 6.8UH., 5%	3198 018 66880			
5333	FIXED INDUCTOR, 6.8UH., 5%	3198 018 66880			
5401	FIXED INDUCTOR, .82UH., 10%.	3198 018 38270			
5421	FIXED INDUCTOR, 22UH., 20%.	3198 018 32290			
5422	FIXED INDUCTOR, 15UH., 20%.	3198 018 31590			
5425	FIXED INDUCTOR, 22UH., 20%.	3198 018 32290			
5426	FIXED INDUCTOR, 15UH., 20%.	3198 018 31590			
5601	FIXED INDUCTOR, 1UH., 5%	3198 018 61080			
5602	FIXED INDUCTOR, 4.7UH., 5%	3198 018 64780			
5625	FIXED INDUCTOR, 1UH., 5%	3198 018 61080			
5665	FIXED INDUCTOR, 15UH., 5%.	3198 018 61590			
6031	DIODE, REGULATOR, UDZ2.4B (RHM0)	9322 131 13685			
6302	DIODE, REGULATOR, BZX384-C8V2.	3198 020 58280			
6303	DIODE, REGULATOR, BZX384-C6V8.	3198 020 56880			
6412	DIODE, SIGNAL, BAS316.	3198 010 10630			
6415	DIODE, SIGNAL, BAS316.	3198 010 10630			
6605	DIODE, SIGNAL, BAS316.	3198 010 10630			
7053	TRANSISTOR, SIGNAL, BC847BS (PHSE).	9340 425 20115			
7063	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7064	IC, SAA5667HL/M1/ (PHSE).	4835 310 57615			
7066	IC, M24C32-WMN6 (ST00).	9322 124 74668			
7301	IC, TDA8887H/N1 (PHSE).	9352 638 72557			
7305	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7307	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7331	TRANSISTOR, SIGNAL, BC857BW.	3198 010 42320			
7368	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7401	IC, 74HC4053PW (PHSE).	9351 869 40118			
7405	IC, TC90A45F (TOSJ).	9322 144 38668			
7407	IC, 74HC4066PW (PHSE).	9351 750 00118			
7412	TRANSISTOR, SIGNAL, BC847BS (PHSE).	9340 425 20115			
7415	TRANSISTOR, SIGNAL, BC847BS (PHSE).	9340 425 20115			
7421	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7425	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7442	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7446	TRANSISTOR, SIGNAL, BC847BW.	3198 010 42310			
7630	IC, 74HC4052PW (PHSE).	9351 874 90118			
7651	IC, MSP3435G-FH-B5 (MIAS).	9322 143 55671			
CBA	SSB MODULE ASSEMBLY, FIGHTER	3139 127 25881			

KEYBOARD PANEL ASSEMBLY

KEYBOARD PANEL ASSEMBLY				
1001	TACTILE SWITCH	2422 128 02742		
1002	TACTILE SWITCH	2422 128 02742		
1003	TACTILE SWITCH	2422 128 02742		
1004	TACTILE SWITCH	2422 128 02742		
1006	TACTILE SWITCH	2422 128 02742		
1007	TACTILE SWITCH	2422 128 02742		
1214	CONNECTOR, 7 PIN	2422 025 12491		
1215	CONNECTOR, 1 PIN	2422 015 18551		
2003	CAPACITOR, CERAMIC, X7R, 16V, 100NF.	3198 017 01040		
2004	ELECTROLYTIC, CAPACITOR, 16V, 100UF., 20%.	3198 028 21010		
3008	RESISTOR, 1K5, 5%.	3198 021 51520		
3010	RESISTOR, 1K5, 1%.	2322 734 61502		
3011	RESISTOR, 750R, 1%.	2322 734 87501		
3012	RESISTOR, 2K, 1%.	2322 734 62002		
3013	RESISTOR, 270R, 1%.	2322 734 62701		
3015	RESISTOR, 2K7, 1%.	2322 734 62702		
3017	RESISTOR, 3K9, 1%.	2322 734 63902		
3020	RESISTOR, 470R, 5%.	3198 021 54710		
3022	RESISTOR, 10K, 5%.	3198 021 51030		
3025	RESISTOR, 330R, 5%.	3198 021 53310		

SIDE JACK PANEL ASSEMBLY

SIDE JACK PANEL ASSEMBLY

RED & BLUE CRT PANEL ASSEMBLIES

RED & BLUE CRT PANEL ASSEMBLIES				
RED & BLUE CRT PANEL ASSEMBLIES				
0079	HEATSINK, T0-220, USE SI COMP THERMAL	3135 011 01231		
1000	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021		
1001	CONNECTOR, 1 PIN, M RT-01T-1.0B.	2422 034 20021		
1701	CRT SOCKET, 10PIN, F HPS0521.	2422 500 80051		
S 1702	SURGE PROTECTOR, DSP-501N-A21F.	2422 549 42349		
1871	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484		
1872	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646		
1873	CONNECTOR, 2 PIN, M 3.96 VH.	2422 025 10646		
1875	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552		
2701	CAPACITOR, METALIZED POLYESTER, 400V, 10NF., 10%.	2222 365 55103		
S 2702	CAPACITOR, METALIZED POLYESTER, 400V, 10NF., 10%.	2222 365 55103		
S 2705	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020 558 90487		
2717	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%.	2020 012 93487		
2720	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198 025 51090		
2721	CAPACITOR, METALIZED POLYESTER, 63V, 100NF., 10%.	2222 365 75104		
2722	CAPACITOR, CERAMIC, B 500V S 560P, 10	2020 557 90147		
2750	CAPACITOR, CERAMIC, NP0 50V S 220PF.	3198 019 02210		
2751	CAPACITOR, PLOYPROPHYLENE, 50V, 1NF., 2%.	2020 310 90049		
2752	CAPACITOR, CERAMIC, Y5P, 1KV, 1NF.	3198 019 51020		
3703	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010		
3710	RESISTOR, CARBON FILM, 1K5, 10%.	2120 101 28152		
S 3716	RESISTOR, CARBON FILM, 100R, 20%.	2120 103 90057		
S 3718	RESISTOR, CARBON FILM, 1/2W, 22K, 5%	2120 103 90075		
3719	RESISTOR, METAL FILM, 5R6, 1%.	2322 156 25608		
S 3720	RESISTOR, METAL FILM, 5R6, 1%.	2322 156 25608		
S 3730	RESISTOR, METAL OXIDE, 5W, 3K3, 5%.	2322 257 41332		
S 3731	RESISTOR, METAL OXIDE, 5W, 3K3, 5%.	2322 257 41332		
3733	RESISTOR, METAL OXIDE, 10M, 5%.	2322 241 53106		
3735	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010		
3737	RESISTOR, CARBON FILM, 1/2W, 3K3, 20%	3198 013 03320		
3738	RESISTOR, CARBON FILM, 1/6W, 100K, 5%	3198 011 01040		
3740	RESISTOR, CARBON FILM, 1/6W, 1K, 5%.	3198 011 01020		
3742	RESISTOR, METAL FILM, 1K, 1%.	2322 156 21002		
3743	RESISTOR, METAL FILM, 220R, 1%.	2322 156 22201		
3745	RESISTOR, METAL FILM, 75R, 1%.	2138 116 17509		
3750	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010		
3751	RESISTOR, METAL FILM, 15R, 1%.	2138 116 11509		
3752	RESISTOR, 22K, 5%.	2120 103 90075		
3753	RESISTOR, CARBON FILM, 27R, 5%.	2120 101 74279		
3755	RESISTOR, POWER, 1W, 47R, 5%.	3198 012 14790		
3756	RESISTOR, POWER, 1W, 68R, 5%.	3198 012 16890		
5701	FIXED INDUCTOR, 100UH., 5%.	3198 018 11010		
5702	FIXED INDUCTOR, 15UH., 10%.	2422 535 97331		
5703	FIXED INDUCTOR, 47UH., 5%.	3198 018 14790		
5704	FIXED INDUCTOR, 47UH., 5%.	3198 018 14790		
5705	FIXED INDUCTOR, 22UH., 10%.	2422 535 97333		
6701	DIODE RECTIFIER, BYD33J (PHSE).	9337 234 20133		
6702	DIODE REGULATOR, BZX79-B6V2 (PHSE).	9331 668 30133		
6705	DIODE RECTIFIER, BYD33J (PHSE).	9337 234 20133		
6706	DIODE RECTIFIER, BYD33J (PHSE).	9337 234 20133		
7701	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322 122 58682		
7702	TRANSISTOR, SIGNAL, BC337-25).	3198 020 43530		
7703	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ)	9322 103 08678		
7705	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334 196 60126		
9701	WIRE JUMPER 0.6MM.	0322 179 00003		
9702	WIRE JUMPER 0.6MM.	0322 179 00003		
CBA	RED & BLUE CRT PANEL ASSEMBLIES.	3135 017 04961		

GREEN CRT PANEL ASSEMBLY

GREEN CRT PANEL ASSEMBLY				
GREEN CRT PANEL ASSEMBLY				
0089	HEATSINK T0-220, USE SI COMP THERMAL	3135 011 01231		
1000	CONNECTOR, 1 PIN, M RT-01T-1.0.	2422 034 20021		
1001	CONNECTOR, 1 PIN, M 4.8 X 0.5.	2422 015 18552		
1002	CONNECTOR, 1 PIN, M RT-01T-1.0.	2422 034 20021		
S 1801	CRT SOCKET, 10 PIN, HPS0521.	2422 500 80051		
S 1802	SURGE PROTECTOR, DSP-501N-A21.	2422 549 42349		
1881	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484		
1882	CONNECTOR, 4 PIN, M 2.50 EH.	2422 025 12479		
1883	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484		
1884	CONNECTOR, 10 PIN, M 2.50 EH.	2422 025 12484		

1885	CONNECTOR, 2 PIN, M 3.96 VH.	2422	025	10646	2813	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2			
1886	CONNECTOR, 4 PIN, M 3.96 VH.	2422	025	10647		0%.	3198	025	51090
2801	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103	2814	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
S 2805	CAPACITOR, CERAMIC, 2KV, 1NF., 10%.	2020	558	90487	2815	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2807	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222	365	55103	2816	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
2817	ELECTROLYTIC CAPACITOR, 400V, 10UF., 20%.	2020	012	93487	2817	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2820	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090	2818	CAPACITOR, NP0, 50V, 10PF.	3198	016	01090
2821	CAPACITOR, POLYESTER, 63V, 100NF., 10	2222	365	75104	2819	CAPACITOR, NP0, 50V, 12PF.	3198	016	01290
2822	CAPACITOR, CERAMIC DISK, 500V, 560P, 10%.	2020	557	90147	2820	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2850	CAPACITOR, CERAMIC DISK, NP0, 50V, 220PF.	3198	019	02210	2821	CAPACITOR, Y5V, 25V, 220NF.	3198	023	22240
2851	CAPACITOR, POLYPROPYLENE, 50V, 1NF., 2%.	2020	310	90049	2822	CAPACITOR, X7R, 50V, 33NF.	3198	017	03330
2852	CAPACITOR, CERAMIC DISK, Y5P, 1KV, 1N F.	3198	019	51020	2823	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3803	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010	2824	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
3810	RESISTOR, CARBON, 1/2W, 1K5, 10%.	2120	101	28152	2825	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
S 3816	RESISTOR, CARBON, 1/2W, 100R, 20%.	2120	103	90057	2826	CAPACITOR, NP0, 50V, 560PF.	3198	016	05610
S 3818	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075	2827	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
S 3819	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608	2828	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
S 3820	RESISTOR, METAL FILM, 5R6, 1%.	2322	156	25608	2829	CAPACITOR, Y5V, 16V, 1UF.	3198	017	21050
3825	RESISTOR, METAL FILM, 220K, 1%.	2322	156	22204	2830	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3826	RESISTOR, METAL FILM, 100K, 1%.	2322	156	21004	2831	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
S 3830	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332	2832	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
S 3831	RESISTOR, METALOXIDE, 5W, 3K3, 5%.	2322	257	41332	2833	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3833	RESISTOR, METAL FILM, 1/2W, 10M, 5%.	2322	241	53106	2834	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
3835	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010	2836	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
3837	RESISTOR, CARBON, 1/2W, 3K3, 20%.	3198	013	03320	2837	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3838	RESISTOR, CARBON, 1/6W, 100K, 5%.	3198	011	01040	2840	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3840	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020	2841	CAPACITOR, Y5V, 16V, 470NF.	3198	017	24740
3842	RESISTOR, METAL FILM, 1K, 1%.	2322	156	21002	2890	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198	025	32210
3843	RESISTOR, METAL FILM, 220R, 1%.	2322	156	22201	2891	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3845	RESISTOR, METAL FILM, 75R, 1%.	2138	116	17509	2892	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790
3850	RESISTOR, CARBON, 1/6W, 100R, 5%.	3198	011	01010	2893	ELECTROLYTIC CAPACITOR, 25V, 220UF., 20%.	3198	025	32210
3851	RESISTOR, METAL FILM, 15R, 1%.	2138	116	11509	2894	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030
3852	RESISTOR, CARBON, 1/2W, 22K, 5%.	2120	103	90075	2895	CAPACITOR, NP0, 50V, 47PF.	3198	019	04790
3853	RESISTOR, CARBON, 27R, 5%.	2120	101	74279	2911	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3855	RESISTOR, POWER, 1W, 47R, 5%.	3198	012	14790	2930	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3856	RESISTOR, POWER, 1W, 68R, 5%.	3198	012	16890	2931	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
3857	RESISTOR, METAL FILM, 10K, 5%.	2322	193	14103	2932	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
5801	FIXED INDUCTOR, 100UH., 5%.	3198	018	11010	2933	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
5802	FIXED INDUCTOR, 15UH., 10%.	2422	535	97331	2934	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040
5803	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790	2935	ELECTROLYTIC CAPACITOR, 25V, 100UF., 20%.	3198	025	31010
5804	FIXED INDUCTOR, 47UH., 5%.	3198	018	14790	2936	RESISTOR, JUMPER, 0R05	3198	021	90020
5805	FIXED INDUCTOR, 22UH., 10%.	2422	535	97333	2937	CAPACITOR, Y5V, 16V, 1UF.	3198	017	21050
6801	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133	3801	RESISTOR, 100R, 5%.	3198	021	51010
6802	DIODE, REGULATOR, BZX79-B6V2 (PHSE).	9331	668	30133	3802	RESISTOR, 100R, 5%.	3198	021	51010
6805	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133	3805	RESISTOR, 1K, 5%.	3198	021	51020
6806	DIODE, RECTIFIER, BYD33J (PHSE).	9337	234	20133	3806	RESISTOR, 1K5, 5%.	3198	021	51520
7801	TRANSISTOR, POWER, 2SC3790E (TSAJ).	9322	122	58682	3807	RESISTOR, 1K5, 5%.	3198	021	51520
7802	TRANSISTOR, SIGNAL, BC337-25 (COL).	3198	020	43530	3812	RESISTOR, 10K, 5%.	3198	021	51030
7803	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ).	9322	103	08678	3813	RESISTOR, 15K, 5%.	3198	021	51530
7805	TRANSISTOR, SIGNAL, BF421 (PHSE).	9334	196	60126	3814	RESISTOR, 1K, 5%.	3198	021	51020
9801	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3815	RESISTOR, 1K, 5%.	3198	021	51020
9802	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3816	RESISTOR, 820R, 5%.	3198	021	58210
9803	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3817	RESISTOR, 1K, 5%.	3198	021	51020
9804	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3818	RESISTOR, 15K, 5%.	3198	021	51530
9805	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3819	RESISTOR, 10K, 5%.	3198	021	51030
9806	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3820	RESISTOR, 1K, 5%.	3198	021	51020
9807	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3821	RESISTOR, 390R, 5%.	3198	021	53910
9808	WIRE JUMPER, SNPB-PLATED, 0.6MM.	0322	179	00003	3822	RESISTOR, 390R, 5%.	3198	021	53910
CBA	GREEN CRT PANEL ASSEMBLY	3135	017	04981	3823	RESISTOR, 390R, 5%.	3198	021	53910
SINGLE TUNER PIP PANEL ASSEMBLY									
SINGLE TUNER PIP PANEL ASSEMBLY									
0025	SHIELD, F/IC 7803.	3139	121	26532	3824	RESISTOR, 15K, 5%.	3198	021	51530
0200	CONNECTOR, 5 PIN, M 2.50 EH.	2422	025	12481	3825	RESISTOR, 150R, 5%.	3198	021	51510
0201	CONNECTOR, 10 PIN, M 2.50 EH.	2422	025	12484	3826	RESISTOR, 150R, 5%.	3198	021	51510
0205	CONNECTOR, 10 PIN, F 1.00 FFC 0.3.	2422	025	16587	3827	RESISTOR, 330R, 5%.	3198	021	53310
0236	CONNECTOR, 3 PIN, M 2.50 EH.	2412	020	00725	3828	RESISTOR, 4M7, 5%.	3198	021	54750
0272	CONNECTOR, 3 PIN, M 2.50 EH, BLACK.	2422	025	16382	3829	RESISTOR, 15K, 5%.	3198	021	51530
1802	CRYSTAL RESONATOR, 14.31818MHZ., 20P HC49/U	2422	543	00904	3830	RESISTOR, 2K2, 5%.	3198	021	52220
2801	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040	3831	RESISTOR, 1M, 5%.	3198	021	51050
2803	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790	3832	RESISTOR, 1K, 5%.	3198	021	51020
2804	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090	3833	RESISTOR, 100R, 5%.	3198	021	51010
2805	CAPACITOR, X7R, 16V, 100NF.	3198	017	01040	3834	RESISTOR, 100R, 5%.	3198	021	51010
2806	ELECTROLYTIC CAPACITOR, 10V, 220UF., 20%.	3198	025	12210	3836	RESISTOR, 1K, 5%.	3198	021	51020
2807	CAPACITOR, NP0, 50V, 47PF.	3198	016	04790	3839	RESISTOR, 1K, 5%.	3198	021	51020
2808	ELECTROLYTIC CAPACITOR, 50V, 10UF., 20%.	3198	025	51090	3840	RESISTOR, JUMPER, 0R05	3198	021	90020
2809	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030	3844	RESISTOR, 1K, 5%.	3198	021	51020
2810	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030	3845	RESISTOR, JUMPER, 0R05	3198	021	90020
2811	CAPACITOR, X7R, 50V, 10NF.	3198	017	01030	3849	RESISTOR, 1K, 5%.	3198	021	51020
2812	ELECTROLYTIC CAPACITOR, 25V, 47UF., 20%.	3198	025	34790	3850	RESISTOR, JUMPER, 0R05	3198	021	90020
					3853	RESISTOR, 3K3, 5%.	3198	021	53320
					3854	RESISTOR, 15K, 5%.	3198	021	51530
					3855	RESISTOR, 1K, 5%.	3198	021	51020
					3856	RESISTOR, 1K, 5%.	3198	021	51020
					3857	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020
					3858	RESISTOR, CARBON, 1/6W, 1K, 5%.	3198	011	01020
					3859	RESISTOR, 47K, 5%.	3198	021	54730
					3860	RESISTOR, 47K, 5%.	3198	021	54730
					3864	RESISTOR, 1K, 5%.	3198	021	51020
					3866	RESISTOR, 330R, 5%.	3198	021	53310

S = Safety Part Be sure to use exact replacement part.

3870	RESISTOR, 220R, 5%	3198 021 52210	9912	WIRE JUMPER, 0.6MM	0322 179 00003
3871	RESISTOR, 220R, 5%	3198 021 52210	9915	WIRE JUMPER, 0.6MM	0322 179 00003
3872	RESISTOR, 220R, 5%	3198 021 52210	9921	WIRE JUMPER, 0.6MM	0322 179 00003
3890	RESISTOR, CARBON, 1/6W, 68R, 5%	3198 011 06890	9922	WIRE JUMPER, 0.6MM	0322 179 00003
3914	RESISTOR, JUMPER, 0R05	3198 021 90020	9923	WIRE JUMPER, 0.6MM	0322 179 00003
3915	RESISTOR, JUMPER, 0R05	3198 021 90020	CBA	SINGLE TUNER PIP PANEL ASSEMBLY	3139 137 22971
3916	RESISTOR, JUMPER, 0R05	3198 021 90020			
3917	RESISTOR, JUMPER, 0R05	3198 021 90020			
3918	RESISTOR, JUMPER, 0R05	3198 021 90020			
3919	RESISTOR, JUMPER, 0R05	3198 021 90020			
3920	RESISTOR, 100R, 5%	3198 021 51010			
3921	RESISTOR, 100R, 5%	3198 021 51010			
3922	RESISTOR, 4K7, 5%	3198 021 54720			
3923	RESISTOR, 4K7, 5%	3198 021 54720			
3924	RESISTOR, 4K7, 5%	3198 021 54720			
3925	RESISTOR, 4K7, 5%	3198 021 54720			
3926	RESISTOR, 4K7, 5%	3198 021 54720			
3927	RESISTOR, 470R, 5%	3198 021 54710			
3956	RESISTOR, JUMPER, 0R05	3198 021 90020			
3958	RESISTOR, 120R, 5%	3198 021 51210			
3960	RESISTOR, JUMPER, 0R05	3198 021 90020			
3961	RESISTOR, 1K, 5%	3198 021 51020			
3962	RESISTOR, 4K7, 5%	3198 021 54720			
3968	RESISTOR, 4K7, 5%	3198 021 54720			
3969	RESISTOR, 330R, 5%	3198 021 53310			
3970	RESISTOR, 390R, 5%	3198 021 53910			
4803	RESISTOR, JUMPER, 0R05	3198 021 90020			
4804	RESISTOR, JUMPER, 0R05	3198 021 90020			
4805	RESISTOR, JUMPER, 0R05	3198 021 90020			
4807	RESISTOR, JUMPER, 0R05	3198 021 90020			
4808	RESISTOR, JUMPER, 0R05	3198 021 90020			
4809	RESISTOR, JUMPER, 0R05	3198 021 90020			
4810	RESISTOR, JUMPER, 0R05	3198 021 90020			
4812	RESISTOR, JUMPER, 0R05	3198 021 90020			
4813	RESISTOR, JUMPER, 0R05	3198 021 90020			
4814	RESISTOR, JUMPER, 0R05	3198 021 90020			
4815	RESISTOR, JUMPER, 0R05	3198 021 90020			
4816	RESISTOR, JUMPER, 0R05	3198 021 90020			
4817	RESISTOR, JUMPER, 0R05	3198 021 90020			
4818	RESISTOR, JUMPER, 0R05	3198 021 90020			
4819	RESISTOR, JUMPER, 0R05	3198 021 90020			
4821	RESISTOR, JUMPER, 0R05	3198 021 90020			
4901	RESISTOR, JUMPER, 0R05	3198 021 90020			
5890	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5891	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5892	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5902	FIXED INDUCTOR, 4MUH7, 10% (UAW)	3198 018 24780			
6801	DIODE, SIGNAL, BAT85 (PHSE)	9336 247 60133			
6890	DIODE, REGULATOR, BZX384-C3V9	3198 020 53980			
7801	IC, HEF4053BT (PHSE)	9333 729 60653			
7803	IC, M65669SP (MITJ)	9322 146 60682			
7804	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7805	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7806	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7807	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7810	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7813	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7816	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7817	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7891	TRANSISTOR, SIGNAL, BC337-25	3198 020 43530			
7910	IC, M62320FP (MITJ)	9322 127 15668			
7919	IC, TDA8601T/C1 (PHSE)	9351 538 90518			
7920	TRANSISTOR, SIGNAL, BC857B	3198 010 42150			
9800	WIRE JUMPER, 0.6MM	0322 179 00003			
9801	WIRE JUMPER, 0.6MM	0322 179 00003			
9802	WIRE JUMPER, 0.6MM	0322 179 00003			
9803	WIRE JUMPER, 0.6MM	0322 179 00003			
9804	WIRE JUMPER, 0.6MM	0322 179 00003			
9805	WIRE JUMPER, 0.6MM	0322 179 00003			
9807	WIRE JUMPER, 0.6MM	0322 179 00003			
9808	WIRE JUMPER, 0.6MM	0322 179 00003			
9810	WIRE JUMPER, 0.6MM	0322 179 00003			
9811	WIRE JUMPER, 0.6MM	0322 179 00003			
9812	WIRE JUMPER, 0.6MM	0322 179 00003			
9813	WIRE JUMPER, 0.6MM	0322 179 00003			
9814	WIRE JUMPER, 0.6MM	0322 179 00003			
9815	WIRE JUMPER, 0.6MM	0322 179 00003			
9816	WIRE JUMPER, 0.6MM	0322 179 00003			
9817	WIRE JUMPER, 0.6MM	0322 179 00003			
9818	WIRE JUMPER, 0.6MM	0322 179 00003			
9820	WIRE JUMPER, 0.6MM	0322 179 00003			
9821	WIRE JUMPER, 0.6MM	0322 179 00003			
9822	WIRE JUMPER, 0.6MM	0322 179 00003			
9823	WIRE JUMPER, 0.6MM	0322 179 00003			
9824	WIRE JUMPER, 0.6MM	0322 179 00003			
9901	WIRE JUMPER, 0.6MM	0322 179 00003			
9902	WIRE JUMPER, 0.6MM	0322 179 00003			
9903	WIRE JUMPER, 0.6MM	0322 179 00003			
9905	WIRE JUMPER, 0.6MM	0322 179 00003			
9906	WIRE JUMPER, 0.6MM	0322 179 00003			
9907	WIRE JUMPER, 0.6MM	0322 179 00003			
9908	WIRE JUMPER, 0.6MM	0322 179 00003			

S = Safety Part Be sure to use exact replacement part.

Philips Consumer Electronics

Technical Service Data

Service and Quality
Service Publications Dept.
One Philips Drive
P.O. Box 14810
Knoxville, TN 37914

Manual 7615

Model no.: 60P8288A37
First Published: 09-23-02
Rev. Date: 10-25-02
Print Date: 2004-09-08

Parts List

REFER TO SAFETY GUIDELINES

SAFETY NOTICE: ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

CABINET & ACCESSORY PARTS

CABINET & ACCESSORY PARTS			
S AC23	Mains Cord (Special - Noise Filtered)	2422	070 98164
AC01	CABINET BACKCOVER CENTER f/60P8288/37, 60P8288A/37 (USA, Best Buy).	3135	013 03691
AC02	BACK CABINET, 60".	3135	014 07642
AC03	PIP FRAME.	3135	014 11101
AC04	SUPPORT FRAME F/SSB.	3135	014 11111
AC05	BARRIER LEFT & RIGHT, (2 used)	3135	013 03311
AC06	CHASSIS FRAME.	3135	014 11091
AC07	LIGHT BARRIER.	3135	014 03381
AC08	REAR JACK FRAME.	3135	014 11132
AC09	SCREEN FRAME ASM., 60".	3135	017 07501
AC10	MIRROR BD. MTG. BRKT (2 used).	3135	011 04751
AC11	BASE.	3135	017 03641
AC14	FRESNEL SCREEN 60".	3135	014 07811
AC15	LENTICULAR SCREEN 60".	3135	014 07821
AC19	MIRROR ASM., 60".	3135	037 50081
S AC23	MAINS CORD, SPECIAL, NOISE FILTERED	2422	070 98164
AC25	LOUDSPEAKER, 8 OHM, 15W (2 used)	2422	264 00289
AC26	TOP PANEL STIFFENER.	3135	011 03032
AC28	RETAINER SCREEN HORIZ 60", (2 used).	3135	014 10922
AC29	RETAINER SCREEN VERT 60", (2 used)	3135	014 10932
AC30	BAFFLE ASM.	3135	017 07561
AC31	NAMEPLATE.	3135	015 03561
AC32	BAFFLE MTG. CUP (7 used)	3135	013 02761
AC35	CASTERS, SHEPHERD PRODUCTS (4 used).	0000	001 00153
AC36	CHASSIS MTG. BRACKET (3 used).	3135	011 02011
AC37	BUTTON ASSEMBLY.	3135	017 07020
AC38	LENS, IR	3135	014 10230
S CRTB	CRT P16LTG00BMB(U)	9322	173 23682
S CRTG	CRT P16LTG00HHA(U)	9322	173 21682
S CRTR	CRT P16LTG00RFA(U)	9322	173 22682
S DEFL	DEFLECTION YOKE, DAV4284M (TSAJ) B, (3 used).	2422	549 44589
S FG2	FOCUS/G2 CONTROL, 100M 15KV.	2422	549 45201
REMOTE	RC2015/01 REMOTE TRANSMITTER	3128	147 12082

CRT ASSEMBLY

CRT ASSEMBLY			
X1	SCREW, 8-32X0.5 TORX, (12 used), LENS TO COUPLER	3135	010 02971
X10	COOLANT KIT.	4835	310 67032
X11	SEAL, CRT, (3 used).	3135	013 02321
X12	MOUNTING BRACKET, CRT, (3 used).	3135	011 02371
X13	SPRING COMPRESSION, (12 used), CRT MT	3135	011 00611
X14	SCREW, SHOULDER, (12 used), CRT TO COUPLER.	3135	010 08101
X2	LENS DELTA 78, (2 used), GREEN & RED	3135	013 00822
X2	LENS DELTA 77, FOR BLUE.	3135	013 01052
X3	LENS C-ELEMENT DELTA-77, FOR GREEN	3135	013 01071
X3	LENS C-ELEMENT DELTA-77, (2 used), RE D & BLUE	3135	013 01081
X4	SEAL, LENS, (3 used), LENS TO COUPLER	3135	013 02632
X5	CAP, COUPLER, (3 used), DIAPHRAGM COVER.	3135	014 02681
X6	DIAPHRAGM COUPLER, (3 used)	3135	013 01061
X7	SEAL, VENT PLUG, (3 used).	3135	013 01231
X8	PLUG, VENT, (3 used)	3135	014 02641
X9	COUPLER, CRT-LENS 60", Red & Blue, (2 used).	3135	011 04271
X9	COUPLER CRT-LENS, Green.	3135	011 04281
X15	CRT Anode Lead	4835	321 27397

FCC FILTER PANEL ASSEMBLY

FCC FILTER PANEL ASSEMBLY			
0006	LINE HEATSINK A8, IS HS 0600	3139	121 61663
0060	SILICON INSULATOR SP600, SIL PAD FOR 6000	3135	010 02351
0061	IC-SPRING, CLIP FOR 6000	3135	011 02331
S 1000	FUSE, 5A, 250V	2422	093 00035
S 1004	FUSE, 1A, 250V	2422	093 00027
1100	CONNECTOR, 8 PIN	2422	025 10648
1108	CONNECTOR, 4 PIN	2422	025 15503
1110	CONNECTOR, 1 PIN	2422	015 18552
S 2000	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 680NF., 20%	2222	336 29149
S 2002	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020	554 90173
S 2003	CAPACITOR, CERAMIC, SAFETY, 250V, 2.2 NF., 20%	2020	554 90173
2004	SURGE PROTECTOR, DSP-501N-A21F	2422	549 42349
S 2005	CAPACITOR, MATELIZED POLYPROPYLENE, 275V, 220NF., 20%	2222	336 29146
2006	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020	558 90557
2007	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020	558 90557
2008	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020	558 90557
2009	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	2020	558 90557

2102	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020	554 90169
2103	CAPACITOR, CERAMIC, SAFETY, 250V, 470 PF., 10%	2020	554 90169
2107	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	3198	019 61020
2108	CAPACITOR, CERAMIC, HEAVY DUTY, 1KV, 1NF., 10%.	3198	019 61020
2110	ELECTROLYTIC CAPACITOR, 200V, 470UF., 20%.	2020	021 91321
2214	ELECTROLYTIC CAPACITOR, 250V, 10UF., 20%.	2020	012 93495
S 3000	RESISTOR, METAL FILM, 4.7MEG, 5%	2322	242 13475
S 3001	RESISTOR, METAL FILM, 4.7MEG, 5%	2322	242 13475
S 3002	RESISTOR, METAL FILM, 4.7MEG, 5%	2322	242 13475
3003	RESISTOR, CARBON COMP., 470R, 20%.	2120	103 90019
3009	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322	253 41228
3010	RESISTOR, WIRE WOUND, 10W, 2R2, 5%	2322	253 41228
S 3011	VARISTOR, DC 1MA/495V S MAX 850V	2322	595 90021
S 3012	RESISTOR, METAL FILM, 1MEG, 5%	2322	242 13105
3300	RESISTOR, METAL OXIDE, 5W, 22K, 5%	2322	257 41223
S 5000	FILTER, MAINS, 8MH., 7A.	2422	549 44591
S 5005	FILTER, MAINS, 80UH., 1.8A	2422	549 44041
5103	FIXED INDUCTOR, 4.7UH., 5%	2422	535 94213
S 5106	FILTER, MAINS, 80UH., 1.8A	2422	549 44041
6000	DIODE BRIDGE RECTIFIER, GBU4JL-7002.	9322	132 55667
6001	DIODE BRIDGE RECTIFIER, DF06M.	9338	118 70682
9000	WIRE JUMPER, 0.58MM.	3198	036 90010
9001	WIRE JUMPER, 0.58MM.	3198	036 90010
9002	WIRE JUMPER, 0.58MM.	3198	036 90010
9003	WIRE JUMPER, 0.58MM.	3198	036 90010
9030	WIRE JUMPER, 0.58MM.	3198	036 90010
9031	WIRE JUMPER, 0.58MM.	3198	036 90010
9032	WIRE JUMPER, 0.58MM.	3198	036 90010
9101	WIRE JUMPER, 0.58MM.	3198	036 90010
9102	WIRE JUMPER, 0.58MM.	3198	036 90010
CBA	FCC FILTER PANEL ASSEMBLY.	3135	017 05441

CISPR FILTER PANEL ASSEMBLY

CISPR FILTER PANEL ASSEMBLY

LSB PANEL ASSEMBLY

LSB PANEL ASSEMBLY			
CBA	LSB PANEL ASSEMBLY	3135	037 10471
0031	Heatsink, Vertical	3135	011 04591
0033	Heatsink, T0220.	2422	487 89872
0036	Heatsink, T0-220	3135	011 03291
0038	Heatsink, T0-220	3135	011 03291
0040	Heatsink, T0220.	2422	487 89872
0043	Heatsink, T0220.	2422	487 89872
0046	Heatsink, T0-220	3135	011 03291
0056	IC-Spring.	3135	011 01511
0057	Insulator, Mica.	3135	010 02911
0058	Solder Terminal.	3135	010 02801
0065	Heatsink, T0-92, Black Anodized.	3135	011 01871
0066	Solder Terminal.	3135	010 02801
0067	IC, Spring	3135	011 02331
0068	Insulator.	3135	010 02351
0069	Spring, Clip	3135	011 02621
0070	Insulator.	3135	010 02341
0080	Heatsink, T0-247	3135	011 00553
0081	Solder Terminal.	3135	010 02801
0082	IC-Spring.	3135	011 01512
0083	Insulator.	3135	010 02321
1201	Surge Protector.	2422	549 43675
S 1300	Fuse/Clip, 5A, 250 V	2422	093 00035
S 1302	Fuse, Radial, LT 4A, 250V.	2422	086 10786
S 1305	Relay, 1 Pin, 5V, 5A, LKS1AF.	2422	132 07314
1500	Connector, 8 Pin	2422	025 10648
1504	Connector, 4 Pin	2422	025 16153
1505	Connector, 4 Pin	2422	025 16153
1506	Connector, 4 Pin	2422	025 16153
1508	Connector, 3 Pin	2422	025 14409
1510	Connector, 4 Pin	2422	025 12479
1516	Connector, 12 Pin.	2422	025 08333
1518	Connector, 12 Pin.	2422	025 08333
1520	Connector, 12 Pin.	2422	025 08333
1574	Connector, 1 Pin	2422	015 18552
S 1800	Fuse, LT 1A, 250V.	2422	086 10779
S 1801	Fuse, LT 1A, 250V.	2422	086 10779
1901	Connector, 2 Pin	2412	020 00724
S 2203	Cap, 2n2, 20%, v, Ceramic.	2020	554 90173
S 2204	Cap, 470p, 10%, v, Ceramic	2020	554 90169
2206	Cap, 220u, 20%, 25v, Electrolytic.	2020	012 92641
2208	Cap, 100p, 10%, 500v, Ceramic.	3198	019 41010
2210	Cap, 22u, 20%, 50v, Electrolytic	3198	025 52290
2211	Cap, 100n, 10%, 50v, Polyester	3198	014 01040
2212	Cap, 100p, 10%, 500v, Ceramic.	3198	019 41010
2213	Cap, 1000u, 20%, 16v, Electrolytic	3198	026 21020
2215	Cap, 220p, 10%, 1000v, Ceramic	2020	558 90424
2216	Cap, 220p, 10%, 1000v, Ceramic	2020	558 90424
2218	Cap, 10u, 20%, 250v, Electrolytic.	2020	012 93495

S = Safety Part Be sure to use exact replacement part.

2226	Cap, 22n, +80/-20%, 50v, Ceramic . . .	3198 019	22230	2820	Cap, 4u7, 10%, 100v, Metalized Polyes		
2228	Cap, 100p, 10%, 500v, Ceramic . . .	3198 019	41010		ter.	2222	368 90178
2269	Cap, 100p, 10%, 500v, Ceramic . . .	3198 019	41010	2822	Cap, 430n, 5%, 250v, Metalized Polypyr		
2270	Cap, 100u, 20%, 25v, Electrolytic . . .	2020 012	92639		opylene.	2222	479 90022
2282	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025	51080	2823	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2283	Cap, 47u, 20%, 25v, Electrolytic . . .	3198 025	34790	2824	Cap, 470p, 10%, 1000v, Ceramic . . .	2020	558 90555
2285	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	2825	Cap, 470p, 10%, 1000v, Ceramic . . .	2020	558 90555
2301	Cap, 1n5, 10%, 1000v, Ceramic . . .	2020 558	90443	2826	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198	026 21020
2302	Cap, 470p, 10%, 1000v, Ceramic . . .	2020 558	90471	2827	Cap, 1000u, 20%, 16v, Electrolytic . . .	3198	026 21020
2303	Cap, 100u, 20%, 25v, Electrolytic . . .	2020 012	92639	2828	Cap, 100u, 20%, 50v, Electrolytic . . .	3198	025 51010
2304	Cap, 330p, 10%, 1000v, Ceramic . . .	2020 558	90554	2829	Cap, 100u, 20%, 50v, Electrolytic . . .	3198	025 51010
2305	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019	14710	2836	Cap, 1n, 10%, 1000v, Ceramic . . .	2020	558 90557
2306	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025	51080	2837	Cap, 10u, 20%, 50v, Electrolytic . . .	3198	025 51090
2307	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019	14720	2838	Cap, 1n, 10%, 1000v, Ceramic . . .	2020	558 90557
2308	Cap, 4n7, 10%, 50v, Ceramic . . .	3198 019	14720	2839	Cap, 18n, 5%, 630v, Polypropylene . . .	2222	375 90218
2309	Cap, 82p, 5%, 50v, Ceramic . . .	3198 019	08290	2850	Cap, 470p, 10%, 1000v, Ceramic . . .	2020	558 90555
2310	Cap, 680p, 10%, 50v, Ceramic . . .	3198 019	16810	2851	Cap, 100u, 20%, 50v, Electrolytic . . .	3198	025 51010
2311	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019	11020	2852	Cap, 1u, 10%, 63v, Metalized Polyeste	2222	365 75105
2313	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	2853	Cap, 1u, 10%, 63v, Metalized Polyeste	2222	365 75105
2314	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	2907	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2315	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	2908	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2316	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2909	Cap, 4n7, 10%, 50v, Ceramic . . .	3198	017 04720
2317	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2910	Cap, 10n, 10%, 50v, Ceramic . . .	3198	017 01030
2318	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	2911	Cap, 1u, 10%, 63v, Metalized Polyeste	2222	365 75105
2319	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	2912	Cap, 220u, 20%, 35v, Electrolytic . . .	2020	012 93462
2320	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2913	Cap, 220u, 20%, 35v, Electrolytic . . .	2020	012 93462
2321	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	2914	Cap, 100n, 10%, 16v, Ceramic . . .	3198	017 01040
2322	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	2915	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198	023 21040
2323	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	2916	Cap, 10n, 10%, 50v, Polyester . . .	2020	300 90573
2324	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021	91374	2917	Cap, 100n, 10%, 250v, Metalized Polye		
2325	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040		ster	2222	368 90177
2326	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	2918	Cap, 47u, 20%, 50v, Electrolytic . . .	3198	025 54790
2327	Cap, 2u2, 20%, 25v, Electrolytic . . .	2020 021	91374	2919	Cap, 4n7, 10%, 50v, Ceramic . . .	3198	017 04720
2328	Cap, 1u, 20%, 50v, Electrolytic . . .	3198 025	51080	2922	Cap, 330u, 20%, 200v, Electrolytic . . .	2020	024 90586
2329	Cap, 220p, 10%, 1000v, Ceramic . . .	2020 558	90424	3216	Res, 10 ohm, 5%, 1/3W, Metal Film . . .	2322	205 33109
2330	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	3223	Res, 47 ohm, 5%, 1/10W, Metalized Gla		
2331	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040		ss.	3198	021 54790
2332	Cap, 1000u, 20%, 50v, Electrolytic . . .	2020 021	91415	3230	Res, 1K5, 5%, 1/6W, Carbon Film . . .	3198	011 01520
2333	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 019	12220	3231	Res, 220 ohm, 5%, 2 1/2W, Metal Film	3198	012 32210
2334	Cap, 33n, 10%, 50v, Polyester . . .	3198 014	03330	3232	Res, 22 ohm, 5%, 2 1/2W, Metal Film . . .	3198	012 32290
2335	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	3239	Res, 2K4, 1%, 3/5W, Metal Film . . .	2322	156 22402
2338	Cap, 1000u, 20%, 25v, Electrolytic . . .	2020 012	93458	3240	Res, 39K, 5%, 1/10W, Metalized Glass	3198	021 53930
2339	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3244	Res, 33K, 5%, 1/10W, Metalized Glass	3198	021 53330
2340	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	3245	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
2341	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3246	Res, 820 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 08210
2342	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019	14710	3287	Res, 470 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 04710
2343	Cap, 1n, 10%, 50v, Ceramic . . .	3198 019	11020	3301	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322	251 41339
2344	Cap, 1000u, 20%, 25v, Electrolytic . . .	2020 012	93458	3302	Res, 33 ohm, 5%, 5W, Wire Wound . . .	2322	251 41339
2345	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	3303	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021 51040
2346	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3304	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
2349	Cap, 10n, +80/-20%, 50v, Ceramic . . .	3198 019	21030	3305	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198	011 01030
2351	Cap, 22n, +80/-20%, 50v, Ceramic . . .	3198 019	22230	3306	Res, 15 ohm, 5%, 1/10W, Metalized Gla		
2352	Cap, 1000u, 20%, 25v, Electrolytic . . .	2020 012	93458		ss.	3198	021 51590
2353	Cap, 220p, 10%, 50v, Ceramic . . .	3198 019	12210	3307	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198	011 04780
2354	Cap, 220u, 20%, 25v, Electrolytic . . .	3198 025	32210	3308	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198	012 21070
2355	Cap, 470p, 10%, 50v, Ceramic . . .	3198 019	14710	3309	Res, 0R33, 5%, 1 1/3W, Metal Film . . .	3198	012 23370
2356	Cap, 470u, 20%, 35v, Electrolytic . . .	2020 021	91376	3310	Res, 390 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 03910
2452	Cap, 2u2, 20%, 50v, Electrolytic . . .	2020 012	92648	3311	Res, 4R7, 5%, 1/6W, Carbon Film . . .	3198	011 04780
2501	Cap, 470n, 10%, 50v, Polyester . . .	3198 014	04740	3312	Res, 75 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 07590
2503	Cap, 680p, 10%, 500v, Ceramic . . .	2020 557	90441	3313	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
2511	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3314	Res, 82K, 5%, 1/6W, Carbon Film . . .	3198	011 08230
2513	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3315	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021 51530
2514	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3316	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
2516	Cap, 150p, 10%, 500v, Ceramic . . .	3198 019	41510	3317	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021 51530
2556	Cap, 10n, 10%, 50v, Ceramic . . .	3198 017	01030	3318	Res, 150K, 5%, 1/10W, Metalized Glass	3198	021 51540
2557	Cap, 100u, 20%, 50v, Electrolytic . . .	3198 025	51010	3319	Res, 15K, 5%, 1/10W, Metalized Glass	3198	021 51530
2558	Cap, 68n, 10%, 100v, Polyester . . .	2222 347	90235	3322	Res, Trimer, 470R	2120	368 90118
2559	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3323	Res, 2K7, 5%, 1W, Metal Film . . .	2120	105 93474
2564	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016	01020	3324	Res, 100K, 5%, 1W, Metal Film . . .	3198	012 11040
2565	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040	3325	Res, 10K, 5%, 1/6W, Carbon Film . . .	3198	011 01030
2567	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3326	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021 54720
2570	Cap, 470p, 5%, 50v, Ceramic . . .	3198 016	04710	3327	Res, 100 ohm, 5%, 1/10W, Metalized Gl		
2571	Cap, 1n, 5%, 50v, Ceramic . . .	3198 016	01020		ass.	3198	021 51010
2572	Cap, 2n2, 10%, 50v, Ceramic . . .	3198 017	02220	3328	Res, 100 ohm, 5%, 1/10W, Metalized Gl		
2573	Cap, 470p, 10%, 50v, Ceramic . . .	2020 552	91152		ass.	3198	021 51010
2574	Cap, 680n, 10%, 50v, Polyester . . .	3198 014	06840	3329	Res, 330 ohm, 5%, 1/10W, Metalized Gl		
2586	Cap, 100n, 10%, 50v, Polyester . . .	3198 014	01040		ass.	3198	021 53310
2608	Cap, 680p, 10%, 500v, Ceramic . . .	3198 019	46810	3333	Res, 0R1, 5%, 1 1/3W, Metal Film . . .	3198	012 21070
2805	Cap, 100n, 10%, 250v, Metalized Polye			3334	Res, 1K, 5%, 1/10W, Metalized Glass . . .	3198	021 51020
	ster	2222 368	90177	3335	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021 51040
2806	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557	90438	3336	Res, 100 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 01010
2807	Cap, 100n, +80/-20%, 25v, Ceramic . . .	3198 023	21040	3337	Res, 390 ohm, 5%, 1/6W, Carbon Film . . .	3198	011 03910
2809	Cap, 100n, 10%, 250v, Metalized Polye			3339	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021 53320
	ster	2222 368	90177	3340	Res, 220K, 5%, 1/10W, Metalized Glass	3198	021 52240
2810	Cap, 470u, 20%, 200v, Electrolytic . . .	2020 021	91321	3343	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
2811	Cap, 330p, 10%, 2000v, Ceramic . . .	2020 558	90481	3344	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021 51030
2814	Cap, 68u, 20%, 400v, Electrolytic . . .	2020 024	90587	3347	Res, 4K7, 5%, 1/6W, Carbon Film . . .	3198	011 04720
2815	Cap, 1n, 10%, 500v, Ceramic . . .	3198 019	41020	3350	Res, 47K, 5%, 1W, Metal Film . . .	3198	012 14730
2816	Cap, 18n, 5%, 630v, Polypropylene . . .	2222 375	90218	3351	Res, 47K, 5%, 1W, Metal Film . . .	3198	012 14720
2817	Cap, 11n, 5%, 1600v, Polypropylene . . .	2222 375	90155	3352	Res, 4K7, 5%, 1W, Metal Film . . .	3198	012 14720
2818	Cap, 470p, 10%, 500v, Ceramic . . .	2020 557	90438	3353	Res, 4K7, 5%, 1W, Metal Film . . .	3198	012 14720
2819	Cap, 18n, 5%, 630v, Polypropylene . . .	2222 375	90218	3452	Res, 1R5, 5%, 1 1/3W, Metal Film . . .	3198	012 21580

3456	Res, 270 ohm, 5%, 1/10W, Metalized Gl			3940	Res, 3K3, 1%, 3/5W, Metal Film . . .	2322	156	23302	
	ass.	3198	021	52710	3941	Res, 10K, 1%, 3/5W, Metal Film . . .	2322	156	21003
3457	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198	011	02220	3942	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220
3458	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	3959	Res, 1K, 5%, 1/4W, Carbon Film . . .	2120	101	74102
3500	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	3960	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322	205	33101
3501	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	3967	Res, 270 ohm, 5%, 1/10W, Metalized Gl			
3503	Res, 120K, 5%, 1/8W, Metalized Glass	2322	730	61124		ass.	3198	021	52710
3504	Res, 120K, 5%, 1/8W, Metalized Glass	2322	730	61124	3968	Res, 220K, 5%, 1/10W, Metalized Glass	3198	021	52240
3505	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210	3969	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730
3506	Res, 120K, 5%, 1/8W, Metalized Glass	2322	730	61124	3975	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322	205	33101
3507	Res, 47K, 5%, 1/6W, Carbon Film. . .	3198	011	04730	3983	Res, 220 ohm, 5%, 1/6W, Carbon Film.	3198	011	02210
3508	Res, 3K9, 5%, 1/6W, Carbon Film. . .	3198	011	03920	3990	Res, 2K, 1%, 1/8W, Metalized Glass .	2322	734	62002
3509	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011	01030	3991	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021	51040
3510	Res, 470K, 5%, 1/6W, Carbon Film . .	3198	011	04740	3992	Res, 470K, 5%, 1/6W, Carbon Film . .	3198	011	04740
3511	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	5201	Filter, Mains, 100UH, 2A2.	2422	549	44101
3550	Res, 2K, 1%, 1/8W, Metalized Glass . .	2322	734	62002	5202	Transformer, Layer, S229B3-01 Y . . .	2422	531	98038
3551	Res, 2K, 1%, 1/8W, Metalized Glass . .	2322	734	62002	5234	Coil, 10u.	2422	535	95363
3562	Res, 4R7, 5%, 1W, Metal Film	3198	012	14780	5235	Coil, 10u.	2422	535	95363
3563	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	5238	Coil, 10u.	2422	535	95363
3565	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	5239	Coil, 10u.	2422	535	95363
3571	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	5300	Transformer, Layer, S549C1-04 B. . .	2422	531	02439
3572	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5301	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3573	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	5302	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3581	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	5303	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3584	Res, 1 ohm, 5%, 3W, Wire Wound . . .	2122	251	01385	5304	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3585	Res, 10K, 5%, 1/6W, Carbon Film. . .	3198	011	01030	5305	Coil, 10u.	2422	535	95363
3590	Res, 100K, 5%, 1/10W, Metalized Glass	3198	021	51040	5306	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3591	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	5307	Coil, 10u.	2422	535	95363
3592	Res, Zero ohm, "Chip" Jumper	3198	021	90020	5308	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3593	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198	011	02220	5309	Coil, 10u.	2422	535	95363
3595	Res, 33K, 5%, 1/6W, Carbon Film. . .	3198	011	03330	5310	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3596	Res, Zero ohm, "Chip" Jumper	3198	021	90020	5311	Coil, 10u.	2422	535	95363
3597	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	5312	Coil, 10u.	2422	535	95363
3598	Res, 100 ohm, 5%, 1/10W, Metalized Gl				5313	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
	ass.	3198	021	51010	5314	Coil, 10u.	2422	535	95363
3800	Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	5315	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3801	Res, 0R47, 5%, 1W, Metal Film. . . .	2120	106	90556	5316	Coil, 10u.	2422	535	95363
3802	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	5317	Coil, 10u.	2422	535	95363
3803	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	5318	Coil, 680u	2422	536	00103
3805	Res, 100 ohm, 5%, 1W, Metal Film . . .	2120	105	93394	5319	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3806	Res, 10K, 5%, 1W, Metal Film	2120	105	93407	5320	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3807	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310	5321	Coil, 3u3.	2422	535	94373
3808	Res, 4K7, 5%, 1W, Metal Film	3198	012	14720	5322	Coil, 10u.	2422	535	95363
3809	Res, 330 ohm, 5%, 1/6W, Carbon Film.	3198	011	03310	5800	Transformer, Signal Driver, C925-01 Y	2422	535	91022
3810	Res, 1K5, 5%, 5W, Metal Film	2322	257	41152	5801	Transformer, Layer, S409C3-02 B. . .	2422	531	02438
3811	Res, 1K5, 5%, 5W, Metal Film	2322	257	41152	5802	Transformer, Signal, W8073-001 Y. . .	2422	531	02434
3812	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	5803	Coil, 485u	2422	536	00079
3813	Res, 1 ohm, 5%, 2W, Metal Film	2120	106	90572	5804	Coil, 40u.	2422	536	00078
3814	Res, 33 ohm, 5%, 1/10W, Metalized Gla				5805	Fixed, Inductor, 100MHZ, 50R. . . .	3198	018	90010
	ss.	3198	021	53390	5806	Coil, 47u.	2422	535	95282
3815	Res, 0R27, 5%, 1/2W, Metal Film. . . .	2322	207	90048	5807	Coil, 22u.	3198	018	72290
3816	Res, 68K, 5%, 1/6W, Carbon Film. . .	3198	011	06830	5810	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3817	Res, 0R27, 5%, 1/2W, Metal Film. . . .	2322	207	90048	5811	Coil, 10u.	2422	535	95363
3820	Res, 2K7, 5%, 1/10W, Metalized Glass	3198	021	52720	5812	Coil, 10u.	2422	535	95363
3821	Res, 470 ohm, 5%, 1W, Metal Film . . .	2120	105	93398	5900	High Voltage Generator	3122	268	32865
3822	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	5904	Fixed, Inductor, 100MHZ, 80 ohm. . .	3198	018	90020
3823	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198	011	06830	6200	Diode, P4KE550	9322	141	04673
3824	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	6201	Zener Diode, 8.2 volt.	3198	010	28280
3825	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198	011	06830	6204	Diode, Rect, BYV10-40	9337	432	70133
3826	Res, 220 ohm, 5%, 1W, Metal Film . . .	2120	105	93396	6205	IC, TL431BCLP.	9322	115	98676
3828	Res, 68K, 5%, 1/6W, Carbon Film. . . .	3198	011	06830	6207	Diode, Rect, BYD33D	9337	234	00133
3829	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	6231	Diode, Rect, BYV10-40	9337	432	70133
3830	Res, 470 ohm, 5%, 1W, Metal Film . . .	2120	105	93398	6235	Diode, Rect, BYD33D	9337	234	00133
3834	Res, 1 ohm, 5%, 1/3W, Metal Film	2322	205	33108	6301	Diode, Rect, BYD33J	9337	234	20133
3835	Res, 2K7, 5%, 1/6W, Carbon Film. . . .	3198	011	02720	6302	Diode, Rect, 1N5062	3198	010	10120
3837	Res, 12K, 5%, 1/6W, Carbon Film. . . .	3198	011	01230	6303	Diode, Rect, 1N5062	3198	010	10120
3838	Res, 1K5, 5%, 1/6W, Carbon Film. . . .	3198	011	01520	6306	Diode, Rect, BY229X-600	9340	380	20127
3839	Res, 300K, 5%, 2 1/2W, Metal Film. . .	2322	195	63304	6307	Diode, Rect, BY229X-600	9340	380	20127
3840	Res, 1M, 5%, 1/2W, Metalized Glass . .	2322	242	13105	6308	Diode, Rect, BY229X-600	9340	380	20127
3841	Res, 4K7, 5%, 1W, Metal Film	3198	012	14720	6309	Diode, Rect, BY229X-600	9340	380	20127
3865	Res, 0R47, 5%, 1W, Metal Film. . . .	2120	106	90556	6310	Diode, Rect, BY229X-600	9340	380	20127
3866	Res, 47K, 5%, 1/10W, Metalized Glass	3198	021	54730	6312	Diode, Rect, SB360L-7003.	9322	128	68682
3867	Res, 1 ohm, 5%, 1/3W, Metal Film . . .	2322	205	33108	6313	Diode, Signal, 1N4148.	9330	839	90133
3890	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	6500	Zener Diode, 10 volt	9340	386	80115
3891	Res, 6K8, 5%, 1W, Metal Film	3198	012	16820	6501	Diode, Signal, BAS316.	3198	010	10630
3900	Res, 10K, 5%, 1/6W, Carbon Film. . . .	3198	011	01030	6502	Diode, Signal, BAS316.	3198	010	10630
3901	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	6503	Diode, Signal, BAS316.	3198	010	10630
3902	Res, 39K, 5%, 1/10W, Metalized Glass	3198	021	53930	6504	Diode, Rect, BYD33D	9337	234	00133
3903	Res, 12K, 5%, 1/10W, Metalized Glass	3198	021	51230	6505	Zener Diode, 4.7 volt.	3198	010	24780
3904	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	6550	Diode, Rect, BYV27-200.	9335	526	80133
3906	Res, 4R7, 5%, 5W, Wire Wound	2322	251	41478	6551	Diode, Signal, BAS316.	3198	010	10630
3907	Res, 2K, 1%, 1/8W, Metalized Glass . .	2322	734	62002	6552	Zener Diode, 4.7 volt.	3198	010	24780
3909	Res, 2K7, 1%, 1/8W, Metalized Glass.	2322	734	62702	6801	Diode, Rect, BYD33J	9337	234	20133
3911	Res, 100 ohm, 5%, 1/10W, Metalized Gl				6802	Diode, Rect, BYV27-200.	9335	526	80133
	ass.	3198	021	51010	6803	Diode, Rect, BYV27-200.	9335	526	80133
3912	Res, 100 ohm, 5%, 1/10W, Metalized Gl				6806	Diode, Rect, BY228/24	9340	559	50112
	ass.	3198	021	51010	6807	Diode, Rect, BYD33M	9337	410	30133
3913	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	6808	Diode, Rect, BYW95C	9335	001	50133
3914	Res, 10 ohm, 5%, 1/10W, Metalized Gla								

S = Safety Part Be sure to use exact replacement part.

6900	Diode, Signal, BAS316.	3198 010 10630	0001	Shield, Top.	3135 011 02252	
6905	Diode, Signal, BAS316.	3198 010 10630	0002	Shield, Bottom	3135 011 01892	
6907	Diode, Signal, BAS316.	3198 010 10630	0009	Heatsink, T0-220	3135 011 03291	
6910	Diode, Signal, BAS316.	3198 010 10630	0010	Heatsink, T0-220	3135 011 03291	
6911	Diode, Signal, BAS316.	3198 010 10630	0012	Heatsink, Folded	3135 011 04555	
6912	Diode, Signal, BAS316.	3198 010 10630	0072	Spring, Clip, Horiz.	3135 011 04572	
6919	Zener Diode, 27 volt	3198 010 52790	0082	Spring, Clip, Horiz.	3135 011 04572	
6920	Diode, Signal, BAS316.	3198 010 10630	0123	Heatsink, Folded	3135 011 04555	
6921	Diode, Signal, BAS316.	3198 010 10630	0139	IC, Spring	3135 011 02331	
6922	Diode, Signal, BAS316.	3198 010 10630	0200	Heatsink, T0-220	3135 011 02511	
6950	Zener Diode, 4.7 volt.	3198 010 24780	0201	Heatsink, T0-220	3135 011 02511	
6951	Diode, Signal, BAS316.	3198 010 10630	1000	Connector, 5 Pin	2422 025 12481	
7208	Transistor, NPN, BC547B.	3198 020 40030	1001	Connector, 10 Pin	2422 025 12484	
7209	IC, MC34064P-5	9322 066 44676	1002	Connector, 3 Pin	2412 020 00725	
7211	IC, TOP221P.	9322 125 16682	1003	Connector, 3 Pin	2422 025 09191	
7213	Optic Coupler, CQY80NG	9338 941 50682	1005	Connector, 2 Pin	2412 020 00724	
7300	Transistor, NPN, BC547B.	3198 020 40030	1009	Connector, 2 Pin	2412 020 00724	
7301	F.E.T., Power, STW20NB50	9322 131 15687	1014	Connector, 7 Pin	2422 025 11244	
7302	IC, MC44603AP.	9322 108 36682	1015	Connector, 1 Pin	2422 015 18552	
7303	Optic Coupler, CQY80NG	9338 941 50682	1017	Connector, 12 Pin	2422 025 08333	
7304	IC, TL431BCLP.	9322 115 98676	1018	Connector, 12 Pin	2422 025 08333	
7307	IC, MC34063AP1	9322 036 71682	1020	Connector, 12 Pin	2422 025 08333	
7308	F.E.T., Power, IRF9224N.	9322 134 76687	1023	Connector, 1 Pin	2422 015 18552	
7309	Transistor, NPN, BC547B.	3198 020 40030	1026	Connector, SIMM, 80 Pin	2422 025 16599	
7500	Transistor, PNP, BC807-25.	3198 010 43130	1036	Connector, 3 Pin	2412 020 00725	
7501	Transistor, PNP, BC807-25.	3198 010 43130	1049	Connector, 5 Pin	2422 025 15832	
7550	IC, TDA4861/V3	9352 018 80112	1072	Connector, 3 Pin	2412 020 00725	
7551	Transistor, NPN, BC847B.	3198 010 42030	1073	Connector, 4 Pin	2422 025 12479	
7552	Transistor, PNP, TIP42C.	9336 594 40687	1074	Connector, 4 Pin	2422 025 12479	
7553	Transistor, NPN, BC847B.	3198 010 42030	1083	Connector, 10 Pin	2422 025 12484	
7590	Transistor, NPN, BC847B.	3198 010 42030	1262	Socket, Cinch, 12 Pin.	2422 026 05064	
7800	Transistor, NPN, BC847B.	3198 010 42030	1264	Socket, MDIN, 10 Pin	2422 026 04926	
7801	Transistor, NPN, 2SC2482	9322 103 07678	1301	Tuner, V+U, PLL	2422 542 90108	
7802	Transistor, NPN, BU4515AF.	9340 550 93127	S 1910	Fuse, 2 A, 250V IEC.	2422 086 10783	
7803	Transistor, PNP, BC557B.	3198 020 40110	S 1911	Fuse, 4 A, 250V IEC.	2422 086 10786	
7830	Transistor, NPN, 2SC3675	9322 122 57687	S 1912	Fuse, 4 A, 250V IEC.	2422 086 10786	
7905	Transistor, NPN, BC547B.	3198 020 40030	1913	Connector, 4 Pin	2422 025 12479	
7906	Transistor, NPN, BC817-25.	3198 010 43230	2000	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7907	Transistor, PNP, BC807-25.	3198 010 43130	2001	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
7908	Transistor, NPN, BC817-25.	3198 010 43230	2002	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
7909	Transistor, PNP, BC807-25.	3198 010 43130	2003	Cap, 10p, 5%, 50v, Ceramic.	3198 016 01090	
7910	Transistor, PNP, BC557B.	3198 020 40110	2004	Cap, 220p, 5%, 50v, Ceramic.	3198 016 02210	
9101	Wire Jumper, 0.58MM.	3198 036 90010	2005	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9102	Wire Jumper, 0.58MM.	3198 036 90010	2006	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9104	Wire Jumper, 0.58MM.	3198 036 90010	2007	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9105	Wire Jumper, 0.58MM.	3198 036 90010	2008	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9106	Wire Jumper, 0.58MM.	3198 036 90010	2009	Cap, 330p, 10%, 50v, Ceramic	3198 019 13310	
9107	Wire Jumper, 0.58MM.	3198 036 90010	2010	Cap, 10n, 10%, 50v, Ceramic.	3198 017 01030	
9108	Wire Jumper, 0.58MM.	3198 036 90010	2011	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9109	Wire Jumper, 0.58MM.	3198 036 90010	2012	Cap, 2n2, 10%, 50v, Ceramic.	3198 017 02220	
9110	Wire Jumper, 0.58MM.	3198 036 90010	2013	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9111	Wire Jumper, 0.58MM.	3198 036 90010	2014	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9112	Wire Jumper, 0.58MM.	3198 036 90010	2015	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9113	Wire Jumper, 0.58MM.	3198 036 90010	2016	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9114	Wire Jumper, 0.58MM.	3198 036 90010	2017	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9115	Wire Jumper, 0.58MM.	3198 036 90010	2018	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9116	Wire Jumper, 0.58MM.	3198 036 90010	2019	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9117	Wire Jumper, 0.58MM.	3198 036 90010	2020	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9119	Wire Jumper, 0.58MM.	3198 036 90010	2021	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9120	Wire Jumper, 0.58MM.	3198 036 90010	2022	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9123	Wire Jumper, 0.58MM.	3198 036 90010	2023	Cap, 27p, 5%, 50v, Ceramic	3198 016 02790	
9124	Wire Jumper, 0.58MM.	3198 036 90010	2024	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9127	Wire Jumper, 0.58MM.	3198 036 90010	2025	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9128	Wire Jumper, 0.58MM.	3198 036 90010	2026	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9129	Wire Jumper, 0.58MM.	3198 036 90010	2027	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9130	Wire Jumper, 0.58MM.	3198 036 90010	2028	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9131	Wire Jumper, 0.58MM.	3198 036 90010	2029	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9132	Wire Jumper, 0.58MM.	3198 036 90010	2030	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9133	Wire Jumper, 0.58MM.	3198 036 90010	2031	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9134	Wire Jumper, 0.58MM.	3198 036 90010	2032	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9136	Wire Jumper, 0.58MM.	3198 036 90010	2034	Cap, 220u, 20%, 25v, Electrolytic.	3198 025 32210	
9137	Wire Jumper, 0.58MM.	3198 036 90010	2035	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9139	Wire Jumper, 0.58MM.	3198 036 90010	2036	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9140	Wire Jumper, 0.58MM.	3198 036 90010	2037	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9142	Wire Jumper, 0.58MM.	3198 036 90010	2040	Cap, 10u, 20%, 16v, Electrolytic	3198 028 21090	
9143	Wire Jumper, 0.58MM.	3198 036 90010	2041	Cap, 100n, +80/-20%, 25v, Ceramic.	3198 023 21040	
9144	Wire Jumper, 0.58MM.	3198 036 90010	2042	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790	
9145	Wire Jumper, 0.58MM.	3198 036 90010	2043	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780	
9146	Wire Jumper, 0.58MM.	3198 036 90010	2044	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9147	Wire Jumper, 0.58MM.	3198 036 90010	2046	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9148	Wire Jumper, 0.58MM.	3198 036 90010	2049	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
9149	Wire Jumper, 0.58MM.	3198 036 90010	2050	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9150	Wire Jumper, 0.58MM.	3198 036 90010	2052	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9152	Wire Jumper, 0.58MM.	3198 036 90010	2053	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9153	Wire Jumper, 0.58MM.	3198 036 90010	2054	Cap, 100u, 20%, 50v, Electrolytic.	3198 025 51010	
9154	Wire Jumper, 0.58MM.	3198 036 90010	2055	Cap, 100n, 10%, 50v, Polyester	3198 014 01040	
9901	Wire Jumper, 0.58MM.	3198 036 90010	2056	Cap, 1000u, 20%, 50v, Electrolytic	3198 026 51020	
9902	Wire Jumper, 0.58MM.	3198 036 90010	2058	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010	
SSM PANEL ASSEMBLY				2061	Cap, 4u7, 20%, 50v, Electrolytic	3198 025 54780
SSM PANEL ASSEMBLY				2062	Cap, 100p, 5%, 50v, Ceramic.	3198 016 01010
CBA SSM Panel Parts.				2063	Cap, 330n, +80/-20%, 25v, Ceramic.	2222 910 19856
				2064	Cap, 47u, 20%, 25v, Electrolytic	3198 025 34790

S = Safety Part Be sure to use exact replacement part.

2065	Cap, 330n, +80/-20%, 25v, Ceramic. . .	2222	910	19856	2604	Cap, 82p, 5%, 50v, Ceramic.	3198	016	08290
2066	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790	2605	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2067	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2606	Cap, 22u, 20%, 50v, Electrolytic. . .	3198	025	52290
2068	Cap, 100n, 10%, 50v, Polyester. . . .	3198	014	01040	2607	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2069	Cap, 100u, 20%, 50v, Electrolytic. . .	3198	025	51010	2608	Cap, 10u, 20%, 50v, Electrolytic. . .	3198	025	51090
2070	Cap, 100u, 20%, 50v, Electrolytic. . .	3198	025	51010	2609	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2071	Cap, 100n, 10%, 50v, Polyester. . . .	3198	014	01040	2610	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2072	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2611	Cap, 22u, 20%, 50v, Electrolytic. . .	3198	025	52290
2073	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2612	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030
2074	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2613	Cap, 10u, 20%, 50v, Electrolytic. . .	3198	025	51090
2075	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2616	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2076	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2617	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2077	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2618	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198	017	21050
2078	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2619	Cap, 1u, +80/-20%, 16v, Ceramic. . .	3198	017	21050
2079	Cap, 330n, +80/-20%, 25v, Ceramic. .	2222	910	19856	2620	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2080	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790	2621	Cap, 100u, 20%, 25v, Electrolytic. .	3198	025	31010
2082	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	2622	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290
2201	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2623	Cap, 10p, 5%, 50v, Ceramic.	3198	016	01090
2203	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2624	Cap, 56p, 5%, 50v, Ceramic.	3198	016	05690
2206	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2625	Cap, 100u, 20%, 25v, Electrolytic. .	3198	025	31010
2208	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2626	Cap, 10p, 5%, 50v, Ceramic.	3198	016	01090
2211	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2627	Cap, 56p, 5%, 50v, Ceramic.	3198	016	05690
2217	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2629	Cap, 10p, 5%, 50v, Ceramic.	3198	016	01090
2219	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2630	Cap, 56p, 5%, 50v, Ceramic.	3198	016	05690
2224	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020	552	95499	2631	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010
2227	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2632	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810
2228	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	2633	Cap, 220p, 5%, 50v, Ceramic.	3198	016	02210
2229	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	2634	Cap, 180p, 5%, 50v, Ceramic.	3198	016	01810
2230	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	2704	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2231	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	2705	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2233	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2717	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2239	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2718	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790
2242	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	2719	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790
2244	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2720	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790
2249	Cap, 22p, 5%, 50v, Ceramic.	3198	016	02290	2721	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790
2250	Cap, 10u, 20%, 16v, Electrolytic. . .	3198	028	21090	2723	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2255	Cap, 10u, 20%, 16v, Electrolytic. . .	3198	028	21090	2724	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2260	Cap, 100n, +80/-20%, 50v, Ceramic. .	2020	552	95499	2725	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2300	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2726	Cap, 100n, +80/-20%, 25v, Ceramic. .	3198	023	21040
2301	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	2727	Cap, 47n, +80/-20%, 50v, Ceramic. . .	3198	017	24730
2302	Cap, 100u, 20%, 25v, Electrolytic. .	3198	025	31010	2764	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790
2303	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	3000	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710
2304	Cap, 15p, 5%, 50v, Ceramic.	3198	016	01590	3001	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710
2305	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730	3002	Res, 470 ohm, 5%, 1/6W, Carbon Film.	3198	011	04710
2306	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010	3003	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030
2307	Cap, 47n, 10%, 25v, Ceramic.	3198	023	04730	3004	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520
2308	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	3005	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198	011	02220
2310	Cap, 47u, 20%, 50v, Electrolytic. . .	3198	025	54790	3006	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010
2311	Cap, 10n, 10%, 50v, Ceramic.	3198	017	01030	3007	Res, 100 ohm, 5%, 1/10W, Metalized Gl			
2312	Cap, 470p, 5%, 50v, Ceramic.	3198	016	04710	ass.		3198	021	51010
2313	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198	017	21050	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	
2317	Cap, 560p, 5%, 50v, Ceramic.	2020	552	93609	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	
2318	Cap, 560p, 5%, 50v, Ceramic.	2020	552	93609	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	
2319	Cap, 560p, 5%, 50v, Ceramic.	2020	552	93609	Res, 33K, 5%, 1/10W, Metalized Glass	3198	021	53330	
2320	Cap, 4n7, 10%, 50v, Ceramic.	3198	017	04720	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	
2366	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010	Res, 3K3, 5%, 1/6W, Carbon Film. . .	3198	011	03320	
2401	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	Res, 2K7, 5%, 1/10W, Metalized Glass	3198	021	52720	
2402	Cap, 100u, 20%, 50v, Electrolytic. . .	3198	025	51010	Res, 220 ohm, 5%, 1/10W, Metalized Gl				
2403	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	ass.		3198	021	52210
2405	Cap, 470u, 20%, 35v, Electrolytic. . .	3198	026	44710	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	
2406	Cap, 100n, +80/-20%, 50v, Ceramic. . .	2020	552	95499	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322	205	33101	
2407	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	026	52220	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	
2410	Cap, 470u, 20%, 35v, Electrolytic. . .	3198	026	44710	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	
2419	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	Res, 10K, 5%, 1/10W, Metalized Glass	3198	021	51030	
2420	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	
2422	Cap, 1n, 10%, 50v, Ceramic.	3198	017	01020	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322	730	81132	
2430	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	
2431	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	Res, 100 ohm, 5%, 1/3W, Metal Film .	2322	205	33101	
2432	Cap, 2u2, 20%, 50v, Electrolytic. . .	3198	025	52280	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	
2433	Cap, 100n, 10%, 63v, Metalized Polyes				Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	
2434	ter.	2222	365	75104	Res, 6K8, 5%, 1/10W, Metalized Glass	3198	021	56820	
	Cap, 100n, 10%, 63v, Metalized Polyes				Res, 1K, 5%, 1/10W, Metalized Glass.	3198	021	51020	
	ter.	2222	365	75104	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	
2435	Cap, 10u, 20%, 100v, Electrolytic. . .	3198	025	71090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198	021	52220	
2443	Cap, 47u, 20%, 50v, Electrolytic. . .	3198	025	54790	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	
2500	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790	Res, 1K5, 5%, 1/10W, Metalized Glass	3198	021	51520	
2503	Cap, 33p, 5%, 50v, Ceramic.	3198	016	03390	Res, 4K7, 5%, 1/6W, Carbon Film. . .	3198	011	04720	
2504	Cap, 150p, 5%, 50v, Ceramic.	3198	016	01510	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322	734	61602	
2505	Cap, 330p, 5%, 50v, Ceramic.	3198	016	03310	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021	53320	
2506	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	21040	Res, 3K3, 5%, 1/10W, Metalized Glass	3198	021	53320	
2507	Cap, 100u, 20%, 25v, Electrolytic. . .	3198	025	31010	Res, 100 ohm, 5%, 1/6W, Carbon Film.	3198	011	01010	
2508	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	21040	Res, 100 ohm, 5%, 1/10W, Metalized Gl				
2509	Cap, 47u, 20%, 25v, Electrolytic. . .	3198	025	34790	ass.		3198	021	51010
2510	Cap, 470p, 5%, 50v, Ceramic.	3198	016	04710	Res, 1K3, 5%, 1/8W, Metalized Glass.	2322	730	81132	
2511	Cap, 470p, 5%, 50v, Ceramic.	3198	016	04710	Res, 100 ohm, 5%, 1/10W, Metalized Gl				
2512	Cap, 1n, 5%, 50v, Ceramic.	3198	016	01020	ass.		3198	021	51010
2513	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	21040	Res, 4K7, 5%, 1/10W, Metalized Glass	3198	021	54720	
2514	Cap, 1n, 5%, 50v, Ceramic.	3198	016	01020	Res, 1K6, 1%, 1/8W, Metalized Glass.	2322	734	61602	
2516	Cap, 1u, +80/-20%, 16v, Ceramic. . . .	3198	017	21050	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220	
2600	Cap, 1u, 20%, 50v, Electrolytic. . . .	3198	025	51080	Res, 1K2, 5%, 1/10W, Metalized Glass	3198	021	51220	
2601	Cap, 100n, +80/-20%, 25v, Ceramic. . .	3198	023	21040	Res, 27K, 5%, 1/10W, Metalized Glass	3198	021	52730	
2602	Cap, 100p, 5%, 50v, Ceramic.	3198	016	01010	Res, 27K, 5%, 1/10W, Metalized Glass	3198	021	52730	

3048	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3204	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3049	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3205	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3050	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3206	Res, 150 ohm, 5%, 1/10W, Metalized Gl	
3051	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 51510
3052	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3207	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240
3053	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3208	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3054	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3209	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3055	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730	3210	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
3056	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3211	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3057	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ss.	3198 021 57590
3058	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820	3212	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3059	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ass.	3198 021 51010
3060	Res, 15 ohm, 5%, 2 1/2W, Metal Film.	3198 012 31590	3216	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
3061	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 54790
3062	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3217	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3063	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 51010
3064	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3218	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3065	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ss.	3198 021 57590
3066	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3219	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3067	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210		ass.	3198 021 51010
3068	Res, 220 ohm, 5%, 1 1/3W, Metal Film	3198 012 22210	3220	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3069	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3221	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3070	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3222	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3071	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3223	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
3072	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	3198 021 56890
3073	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3224	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3074	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3225	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3075	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3226	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3076	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ss.	3198 021 57590
3077	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3227	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3078	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880		ass.	3198 021 51010
3079	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3233	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3080	Res, 6R8, 5%, 1W, Metal Film	3198 012 16880	3234	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3081	Res, 4K7, 5%, 1/6W, Carbon Film.	3198 011 04720	3235	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3082	Res, 820 ohm, 5%, 1/10W, Metalized Gl		3236	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.	3198 021 58210	3237	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3083	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3238	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	ass.	3198 021 52710	3239	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3084	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3240	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
	ass.	3198 021 55610	3241	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3085	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3242	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3086	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3243	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
3087	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ss.	3198 021 57590
3088	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3244	Res, 150 ohm, 5%, 1/10W, Metalized Gl	
3089	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220		ass.	3198 021 51510
3090	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3247	Res, 220 ohm, 5%, 1/10W, Metalized Gl	
3097	Res, 1K, 5%, 2 1/2W, Metal Film.	3198 012 31020		ass.	3198 021 52210
3098	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3248	Res, 75 ohm, 5%, 1/10W, Metalized Gla	
	ass.	3198 021 55610		ss.	3198 021 57590
3099	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3249	Res, 150 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 55610		ass.	3198 021 51510
3100	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3251	Res, 10K, 5%, 1/6W, Carbon Film.	3198 011 01030
	ass.	3198 021 55610	3252	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3101	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3260	Res, 10 ohm, 5%, 1/3W, Metal Film.	2322 205 33109
	ass.	3198 021 53310	3300	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
3102	Res, 330 ohm, 5%, 1/10W, Metalized Gl			ss.	3198 021 54790
	ass.	3198 021 53310	3301	Res, 47 ohm, 5%, 1/10W, Metalized Gla	
3103	Res, 330 ohm, 5%, 1/10W, Metalized Gl			ss.	3198 021 54790
	ass.	3198 021 53310	3302	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3104	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3303	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53310	3304	Res, Zero ohm, "Chip" Jumper	3198 021 90020
3105	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3307	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53310	3308	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
3106	Res, 330 ohm, 5%, 1/10W, Metalized Gl		3309	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 53310	3310	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3107	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3312	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3108	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220	3317	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3109	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3318	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3110	Res, 220 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 52710
	ass.	3198 021 52210	3332	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3111	Res, 220 ohm, 5%, 1/10W, Metalized Gl		3333	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
	ass.	3198 021 52210	3334	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3112	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3335	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3113	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3336	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3114	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040	3337	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720
3115	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730	3338	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3116	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3339	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3117	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3340	Res, 47K, 5%, 1/10W, Metalized Glass	3198 021 54730
3118	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3341	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520
3119	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3342	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
3120	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 53310
3121	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3343	Res, 680K, 5%, 1/10W, Metalized Glass	3198 021 56840
3122	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3344	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3123	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020		ass.	3198 021 51010
3124	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3403	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3125	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3404	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3126	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3405	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3127	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3406	Res, 27K, 5%, 1/10W, Metalized Glass	3198 021 52730
3201	Res, 150 ohm, 5%, 1/10W, Metalized Gl		3407	Res, 8K2, 5%, 1/10W, Metalized Glass	3198 021 58220
	ass.	3198 021 51510	3408	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3202	Res, 220K, 5%, 1/10W, Metalized Glass	3198 021 52240	3409	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530
3203	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3410	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820

S = Safety Part Be sure to use exact replacement part.

3424	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220	3619	Res, 390 ohm, 5%, 1/10W, Metalized Gl	
3425	Res, 2K2, 5%, 1/6W, Carbon Film. . .	3198 011 02220		ass.	3198 021 53910
3427	Res, 10 ohm, 5%, 1/10W, Metalized Gla		3620	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
	ss.	3198 021 51090		ss.	3198 021 56890
3428	Res, 10 ohm, 5%, 1/10W, Metalized Gla		3621	Res, 820 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 51090		ass.	3198 021 58210
3430	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3622	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820
3431	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3623	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3432	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930		ass.	3198 021 55610
3433	Res, 39K, 5%, 1/6W, Carbon Film. . .	3198 011 03930	3624	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3434	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478	3625	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3435	Res, 4R7, 5%, 1/4W, Carbon Film. . .	2120 101 74478		ass.	3198 021 51010
3445	Res, 15K, 5%, 1/10W, Metalized Glass	3198 021 51530	3626	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3446	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3627	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3450	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504		ass.	3198 021 55610
3451	Res, 150K, 1%, 1/8W, Metalized Glass	2322 734 61504	3628	Res, 560 ohm, 5%, 1/10W, Metalized Gl	
3452	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930		ass.	3198 021 55610
3453	Res, 39K, 5%, 1/10W, Metalized Glass	3198 021 53930	3629	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3500	Res, 6K8, 5%, 1/10W, Metalized Glass	3198 021 56820		ss.	3198 021 51090
3501	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3630	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3502	Res, 470 ohm, 5%, 1/10W, Metalized Gl		3631	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 54710		ass.	3198 021 53310
3503	Res, 75 ohm, 5%, 1/10W, Metalized Gla		3632	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 57590		ass.	3198 021 51010
3504	Res, 75 ohm, 5%, 1/10W, Metalized Gla		3633	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 57590		ass.	3198 021 52710
3505	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3634	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 52290		ass.	3198 021 51010
3506	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3635	Res, 390 ohm, 5%, 1/10W, Metalized Gl	
	ss.	3198 021 52290	3636	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3507	Res, 390 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 51010
	ass.	3198 021 53910	3637	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320
3508	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320	3638	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
3509	Res, 560 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 54710
	ass.	3198 021 55610	3639	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
3511	Res, 100 ohm, 5%, 1/10W, Metalized Gl		3640	Res, 330 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 51010		ass.	3198 021 53310
3512	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3641	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3513	Res, 22 ohm, 5%, 1/10W, Metalized Gla			ss.	3198 021 51090
	ss.	3198 021 52290	3642	Res, 1M, 5%, 1/10W, Metalized Glass.	3198 021 51050
3514	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3643	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
	ss.	3198 021 52290	3645	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3515	Res, 68 ohm, 5%, 1/10W, Metalized Gla		3647	Res, 2K2, 5%, 1/10W, Metalized Glass	3198 021 52220
	ss.	3198 021 56890	3648	Res, 270 ohm, 5%, 1/10W, Metalized Gl	
3516	Res, 22 ohm, 5%, 1/10W, Metalized Gla			ass.	3198 021 52710
	ss.	3198 021 52290	3650	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
3517	Res, 22 ohm, 5%, 1/10W, Metalized Gla		3651	Res, 1 ohm, 5%, 1/3W, Metal Film . .	2322 205 33108
	ss.	3198 021 52290	3652	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3518	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220		ss.	3198 021 51090
3519	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3653	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3520	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620		ss.	3198 021 51090
3521	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230	3654	Res, 10 ohm, 5%, 1/10W, Metalized Gla	
3522	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ss.	3198 021 51090
3523	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3655	Res, 3K9, 5%, 1/10W, Metalized Glass	3198 021 53920
3524	Res, 1K5, 5%, 1/10W, Metalized Glass	3198 021 51520	3656	Res, 1K2, 5%, 1/10W, Metalized Glass	3198 021 51220
3525	Res, 10 ohm, 5%, 1/10W, Metalized Gla		3657	Res, 68K, 5%, 1/10W, Metalized Glass	3198 021 56830
	ss.	3198 021 51090	3658	Res, 22K, 5%, 1/10W, Metalized Glass	3198 021 52230
3527	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109	3659	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
3528	Res, 390 ohm, 5%, 1/10W, Metalized Gl		3660	Res, 82K, 5%, 1/10W, Metalized Glass	3198 021 58230
	ass.	3198 021 53910	3661	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
3529	Res, 680 ohm, 5%, 1/10W, Metalized Gl		3663	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
	ass.	3198 021 56810		ss.	3198 021 56890
3600	Res, 560 ohm, 5%, 1/10W, Metalized Gl		3664	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 55610	3665	Res, 680 ohm, 5%, 1/10W, Metalized Gl	
3601	Res, 3K3, 5%, 1/10W, Metalized Glass	3198 021 53320		ass.	3198 021 56810
3602	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3666	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3603	Res, 100 ohm, 5%, 1/10W, Metalized Gl		3667	Res, 470 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 51010		ass.	3198 021 54710
3604	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3669	Res, 220 ohm, 5%, 1/10W, Metalized Gl	
	ass.	3198 021 52710		ass.	3198 021 52210
3605	Res, 100 ohm, 5%, 1/10W, Metalized Gl		3670	Res, 1K, 5%, 1/6W, Carbon Film . . .	3198 011 01020
	ass.	3198 021 51010	3698	Res, 68 ohm, 5%, 1/10W, Metalized Gla	
3606	Res, 390 ohm, 5%, 1/10W, Metalized Gl			ss.	3198 021 56890
	ass.	3198 021 53910	3712	Res, 10 ohm, 5%, 1/3W, Metal Film. .	2322 205 33109
3607	Res, 68 ohm, 5%, 1/10W, Metalized Gla		3713	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
	ss.	3198 021 56890	3714	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3608	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3715	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 52710	3716	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3609	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3717	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3610	Res, 4K7, 5%, 1/10W, Metalized Glass	3198 021 54720	3718	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3611	Res, 5K6, 5%, 1/10W, Metalized Glass	3198 021 55620	3719	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3612	Res, 270 ohm, 5%, 1/10W, Metalized Gl		3720	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
	ass.	3198 021 52710	3721	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030
3613	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	3722	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820
3614	Res, 1K8, 5%, 1/10W, Metalized Glass	3198 021 51820	3723	Res, 47K, 5%, 1W, Metal Film	3198 012 14730
3615	Res, 470 ohm, 5%, 1/10W, Metalized Gl		3724	Res, 100K, 5%, 1/10W, Metalized Glass	3198 021 51040
	ass.	3198 021 54710	3740	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3616	Res, 100 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 51010
	ass.	3198 021 51010	3741	Res, 100 ohm, 5%, 1/10W, Metalized Gl	
3617	Res, 270 ohm, 5%, 1/10W, Metalized Gl			ass.	3198 021 51010
	ass.	3198 021 52710	3746	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020
3618	Res, 100 ohm, 5%, 1/10W, Metalized Gl				
	ass.	3198 021 51010			

S = Safety Part Be sure to use exact replacement part.

3747	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5609	Coil, 1u	3198 018 11080
3756	Res, 10K, 5%, 1/10W, Metalized Glass	3198 021 51030	5700	Coil, 6u8.	2422 535 97326
3759	Res, 47K, 5%, 1W, Metal Film	3198 012 14730	5701	Coil, 6u8.	2422 535 97326
3760	Res, 1K, 5%, 1/10W, Metalized Glass.	3198 021 51020	5702	Coil, 22u.	3198 018 72290
4000	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6000	Diode, Varistor, BB148	9340 332 80135
4007	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6001	Diode, Signal, BAS316.	3198 010 10630
4008	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6003	Diode, Signal, BAS321.	9340 553 52115
4009	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6004	Diode, Signal, BAS316.	3198 010 10630
4010	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6005	Diode, Signal, BAS316.	3198 010 10630
4013	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6006	Diode, Signal, BAS316.	3198 010 10630
4014	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6007	Diode, Signal, BAS316.	3198 010 10630
4019	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6008	Diode, Signal, BAS316.	3198 010 10630
4020	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6009	IC, MC78M05CT.	9334 703 90687
4104	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6010	IC, MC78M05CT.	9334 703 90687
4106	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6011	Diode, Signal, BAS316.	3198 010 10630
4107	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6012	Diode, Signal, BAS316.	3198 010 10630
4109	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6013	Diode, Signal, BAS316.	3198 010 10630
4122	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6014	IC, MC79M05CT.	9337 783 20687
4124	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6015	Diode, Signal, BAS316.	3198 010 10630
4125	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6016	Diode, Signal, BAS316.	3198 010 10630
4126	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6017	Zener Diode, 15 volt	9340 387 20115
4127	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6018	Diode, Signal, BAS316.	3198 010 10630
4128	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6019	Diode, Signal, BAS316.	3198 010 10630
4129	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6020	Diode, Signal, BAS316.	3198 010 10630
4130	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6021	Diode, Signal, BAS316.	3198 010 10630
4131	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6022	Diode, Signal, BAS316.	3198 010 10630
4134	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6023	Diode, Signal, BAS316.	3198 010 10630
4136	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6024	Diode, Signal, BAS316.	3198 010 10630
4137	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6025	Diode, Signal, BAS316.	3198 010 10630
4138	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6201	Zener Diode, 6.8 volt.	9340 386 40115
4139	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6202	Zener Diode, 6.8 volt.	9340 386 40115
4140	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6203	Zener Diode, 6.8 volt.	9340 386 40115
4143	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6204	Zener Diode, 6.8 volt.	9340 386 40115
4300	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6205	Zener Diode, 6.8 volt.	9340 386 40115
4301	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6206	Zener Diode, 6.8 volt.	9340 386 40115
4302	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6207	Zener Diode, 6.8 volt.	9340 386 40115
4304	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6208	Zener Diode, 6.8 volt.	9340 386 40115
4307	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6209	Zener Diode, 6.8 volt.	9340 386 40115
4402	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6210	Zener Diode, 6.8 volt.	9340 386 40115
4403	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6213	Zener Diode, 6.8 volt.	9340 386 40115
4650	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6214	Zener Diode, 6.8 volt.	9340 386 40115
4700	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6215	Zener Diode, 6.8 volt.	9340 386 40115
4701	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6216	Zener Diode, 6.8 volt.	9340 386 40115
4702	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6221	Zener Diode, 6.8 volt.	9340 386 40115
4703	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6222	Zener Diode, 6.8 volt.	9340 386 40115
4704	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6223	Zener Diode, 6.8 volt.	9340 386 40115
4705	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6224	Zener Diode, 6.8 volt.	9340 386 40115
4708	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6225	Zener Diode, 6.8 volt.	9340 386 40115
4709	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6226	Zener Diode, 6.8 volt.	9340 386 40115
4710	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6227	Zener Diode, 6.8 volt.	9340 386 40115
4711	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6228	Zener Diode, 6.8 volt.	9340 386 40115
4713	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6229	Zener Diode, 6.8 volt.	9340 386 40115
4714	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6230	Zener Diode, 6.8 volt.	9340 386 40115
4715	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6231	Zener Diode, 6.8 volt.	9340 386 40115
4716	Res, Zero ohm, "Chip" Jumper	3198 021 90020	6232	Zener Diode, 6.8 volt.	9340 386 40115
5000	Coil, 5u6.	3198 018 15680	6300	Diode, Signal, BAS316.	3198 010 10630
5001	Coil, 5u6.	3198 018 15680	6301	Diode, Signal, BAS316.	3198 010 10630
5002	Coil, 5u6.	3198 018 15680	6306	Diode, Signal, BAS316.	3198 010 10630
5003	Coil, 5u6.	3198 018 15680	6309	Diode, Signal, BAS316.	3198 010 10630
5004	Coil, 5u6.	3198 018 15680	6402	Zener Diode, 12 volt	3198 010 21290
5005	Coil, 5u6.	3198 018 15680	6500	Diode, Signal, BAS316.	3198 010 10630
5006	Coil, 5u6.	3198 018 15680	6600	Diode, Signal, BAS316.	3198 010 10630
5007	Coil, 5u6.	3198 018 15680	6602	Diode, Signal, BAS316.	3198 010 10630
5008	Coil, 5u6.	3198 018 15680	6603	Diode, Signal, BAS316.	3198 010 10630
5009	Coil, 5u6.	3198 018 15680	6604	Diode, Signal, BAS316.	3198 010 10630
5010	Coil, 5u6.	3198 018 15680	6605	Diode, Signal, BAS316.	3198 010 10630
5011	Coil, 5u6.	3198 018 15680	6606	Diode, Signal, BAS316.	3198 010 10630
5012	Coil, 22u.	3198 018 72290	6607	Diode, Signal, BAS316.	3198 010 10630
5014	Coil, 22u.	3198 018 72290	6608	Diode, Signal, BAS316.	3198 010 10630
5015	Coil, 22u.	3198 018 72290	6609	Diode, Signal, BAS316.	3198 010 10630
5016	Coil, 22u.	3198 018 72290	6610	Diode, Signal, BAS316.	3198 010 10630
5017	Coil, 22u.	3198 018 72290	6611	Diode, Signal, BAS316.	3198 010 10630
5018	Coil, 5u6.	3198 018 15680	6612	Diode, Signal, 1N4148.	3198 010 10010
5019	Coil, 22u.	3198 018 72290	6613	Diode, Signal, BAS316.	3198 010 10630
5020	Coil, 22u.	3198 018 72290	6617	Diode, Signal, 1N4148.	3198 010 10010
5021	Coil, 22u.	3198 018 72290	6700	Zener Diode, 33 volt	9340 388 00115
5022	Coil, 6u8.	3198 018 16880	6708	Zener Diode, 33 volt	9340 388 00115
5302	Coil, 6u8.	2422 535 97326	7000	Transistor, PNP, BF450	9331 677 40126
5304	Coil, 1m	3198 018 21020	7001	IC, LM833N	9322 068 83682
5500	Coil, 2u2.	3198 018 12280	7002	Transistor, NPN, BC847B.	3198 010 42030
5501	Coil, 4u7.	3198 018 14780	7003	IC, UPD65654GF-260	9322 121 87671
5502	Coil, 4u7.	3198 018 14780	7004	Transistor, NPN, BC847B.	3198 010 42030
5503	Coil, 4u7.	3198 018 14780	7005	Transistor, NPN, BC847B.	3198 010 42030
5600	Coil, 3u9.	3198 018 13980	7007	IC, M24C32-WBN6.	9322 122 09682
5601	Coil, 8u2.	3198 018 18280	7008	Transistor, NPN, BC547B.	3198 020 40030
5602	Coil, 4u7.	2422 535 96514	7009	IC, SM LC78817M.	9322 154 56682
5603	Coil, 3u9.	3198 018 13980	7010	IC, SM LC78817M.	9322 154 56682
5604	Coil, 8u2.	3198 018 18280	7011	IC, SM LC78817M.	9322 154 56682
5605	Coil, 3u9.	3198 018 13980	7012	IC, STK392-110	9322 130 35682
5606	Coil, 8u2.	3198 018 18280	7013	Transistor, NPN, BC547B.	3198 020 40030
5607	Coil, 1u	3198 018 11080	7014	IC, STK392-110	9322 130 35682
5608	Coil, 1u	3198 018 11080	7015	Transistor, NPN, BC547B.	3198 020 40030

S = Safety Part Be sure to use exact replacement part.

9533	Wire Jumper, 0.58MM.	3198 036 90010	2050	CAPACITOR, NP0, 50V, 100PF.	3198 016 31010
9534	Wire Jumper, 0.58MM.	3198 036 90010	2051	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9536	Wire Jumper, 0.58MM.	3198 036 90010	2053	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9538	Wire Jumper, 0.58MM.	3198 036 90010	2301	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9539	Wire Jumper, 0.58MM.	3198 036 90010	2302	CAPACITOR, NP0, 50V, 330PF.	3198 016 33310
9545	Wire Jumper, 0.58MM.	3198 036 90010	2303	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9548	Wire Jumper, 0.58MM.	3198 036 90010	2306	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9549	Wire Jumper, 0.58MM.	3198 036 90010	2309	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9550	Wire Jumper, 0.58MM.	3198 036 90010	2311	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9551	Wire Jumper, 0.58MM.	3198 036 90010	2312	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9552	Wire Jumper, 0.58MM.	3198 036 90010	2313	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9553	Wire Jumper, 0.58MM.	3198 036 90010	2314	CAPACITOR, POLYSTYRENE, 16V, 100NF., 5%.	2020 319 90005
9555	Wire Jumper, 0.58MM.	3198 036 90010	2316	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9556	Wire Jumper, 0.58MM.	3198 036 90010	2317	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9557	Wire Jumper, 0.58MM.	3198 036 90010	2319	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9558	Wire Jumper, 0.58MM.	3198 036 90010	2321	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9560	Wire Jumper, 0.58MM.	3198 036 90010	2322	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9561	Wire Jumper, 0.58MM.	3198 036 90010	2323	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9563	Wire Jumper, 0.58MM.	3198 036 90010	2324	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9564	Wire Jumper, 0.58MM.	3198 036 90010	2325	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9565	Wire Jumper, 0.58MM.	3198 036 90010	2326	CAPACITOR, Y5V, 50V, 22NF.	3198 017 42230
9566	Wire Jumper, 0.58MM.	3198 036 90010	2327	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9567	Wire Jumper, 0.58MM.	3198 036 90010	2328	CAPACITOR, NP0, 50V, 33PF.	3198 016 33390
9568	Wire Jumper, 0.58MM.	3198 036 90010	2332	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9569	Wire Jumper, 0.58MM.	3198 036 90010	2333	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9570	Wire Jumper, 0.58MM.	3198 036 90010	2334	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9571	Wire Jumper, 0.58MM.	3198 036 90010	2335	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9572	Wire Jumper, 0.58MM.	3198 036 90010	2338	CAPACITOR, X7R, 50V, 2N2	3198 017 32220
9573	Wire Jumper, 0.58MM.	3198 036 90010	2342	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9574	Wire Jumper, 0.58MM.	3198 036 90010	2345	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9575	Wire Jumper, 0.58MM.	3198 036 90010	2348	CAPACITOR, NP0, 50V, 15PF.	3198 016 31590
9576	Wire Jumper, 0.58MM.	3198 036 90010	2350	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780
9577	Wire Jumper, 0.58MM.	3198 036 90010	2354	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9578	Wire Jumper, 0.58MM.	3198 036 90010	2355	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9579	Wire Jumper, 0.58MM.	3198 036 90010	2356	CAPACITOR, Y5V, 10V, 470NF.	3198 017 44740
9580	Wire Jumper, 0.58MM.	3198 036 90010	2357	CAPACITOR, NP0, 50V, 10PF.	3198 016 31090
9581	Wire Jumper, 0.58MM.	3198 036 90010	2372	CAPACITOR, X7R, 50V, 4N7	3198 017 34720
9582	Wire Jumper, 0.58MM.	3198 036 90010	2373	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20%.	3198 030 81080
9583	Wire Jumper, 0.58MM.	3198 036 90010	2374	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9584	Wire Jumper, 0.58MM.	3198 036 90010	2375	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9585	Wire Jumper, 0.58MM.	3198 036 90010	2376	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9587	Wire Jumper, 0.58MM.	3198 036 90010	2377	CAPACITOR, NP0, 25V, 1NF.	3198 016 31020
9588	Wire Jumper, 0.58MM.	3198 036 90010	2380	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9589	Wire Jumper, 0.58MM.	3198 036 90010	2381	CAPACITOR, Y5V, 25V, 100NF.	3198 023 41040
9590	Wire Jumper, 0.58MM.	3198 036 90010	2382	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9591	Wire Jumper, 0.58MM.	3198 036 90010	2401	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9592	Wire Jumper, 0.58MM.	3198 036 90010	2402	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9593	Wire Jumper, 0.58MM.	3198 036 90010	2403	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050
9594	Wire Jumper, 0.58MM.	3198 036 90010	2404	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9596	Wire Jumper, 0.58MM.	3198 036 90010	2405	CAPACITOR, X7R, 25V, 22NF.	3198 017 32230
9597	Wire Jumper, 0.58MM.	3198 036 90010	2407	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9598	Wire Jumper, 0.58MM.	3198 036 90010	2408	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040
9599	Wire Jumper, 0.58MM.	3198 036 90010	2412	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9600	Wire Jumper, 0.58MM.	3198 036 90010	2413	ELECTROLYTIC CAPACITOR, 16V, 47UF., 20%.	3198 030 44790
9601	Wire Jumper, 0.58MM.	3198 036 90010	2415	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240
9602	Wire Jumper, 0.58MM.	3198 036 90010	2417	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9603	Wire Jumper, 0.58MM.	3198 036 90010	2421	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9604	Wire Jumper, 0.58MM.	3198 036 90010	2422	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9605	Wire Jumper, 0.58MM.	3198 036 90010	2423	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9606	Wire Jumper, 0.58MM.	3198 036 90010	2424	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9607	Wire Jumper, 0.58MM.	3198 036 90010	2425	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9608	Wire Jumper, 0.58MM.	3198 036 90010	2427	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9609	Wire Jumper, 0.58MM.	3198 036 90010	2428	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9610	Wire Jumper, 0.58MM.	3198 036 90010	2429	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9611	Wire Jumper, 0.58MM.	3198 036 90010	2430	CAPACITOR, NP0, 50V, 68PF.	3198 016 36890
9612	Wire Jumper, 0.58MM.	3198 036 90010	2431	CAPACITOR, NP0, 50V, 27PF.	3198 016 32790
9613	Wire Jumper, 0.58MM.	3198 036 90010	2432	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9614	Wire Jumper, 0.58MM.	3198 036 90010	2435	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9615	Wire Jumper, 0.58MM.	3198 036 90010	2437	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9616	Wire Jumper, 0.58MM.	3198 036 90010	2438	CAPACITOR, NP0, 50V, 180PF.	3198 016 31810
9617	Wire Jumper, 0.58MM.	3198 036 90010	2439	CAPACITOR, NP0, 50V, 150PF.	3198 016 31510
9618	Wire Jumper, 0.58MM.	3198 036 90010	2440	CAPACITOR, NP0, 50V, 56PF.	3198 016 35690
9619	Wire Jumper, 0.58MM.	3198 036 90010	2453	CAPACITOR, X7R, 50V, 10NF.	3198 017 31030
9620	Wire Jumper, 0.58MM.	3198 036 90010	2457	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9621	Wire Jumper, 0.58MM.	3198 036 90010	2458	ELECTROLYTIC CAPACITOR, 50V, 1UF., 20%.	3198 030 81080
9622	Wire Jumper, 0.58MM.	3198 036 90010	2461	ELECTROLYTIC CAPACITOR, 16V, 10UF., 20%.	3198 030 41090
9623	Wire Jumper, 0.58MM.	3198 036 90010	2462	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9624	Wire Jumper, 0.58MM.	3198 036 90010	2463	CAPACITOR, Y5V, 50V, 10NF.	3198 017 41030
9625	Wire Jumper, 0.58MM.	3198 036 90010	2601	CAPACITOR, NP0, 50V, 470PF.	3198 016 34710
9626	Wire Jumper, 0.58MM.	3198 036 90010	2602	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040

SSB MODULE ASSEMBLY

0205	SSB MODULE ASSEMBLY				
0320	CONNECTOR, 10PIN, F 1.00 FFC SMT	2422 025 16677			
1057	FACTORY PLATE.	3122 120 01701			
1327	CRYSTAL RESONATOR, 12MHZ., 20P DSX840	2422 543 01095			
1451	CRYSTAL RESONATOR, 12MHZ., 20P DSX840	2422 543 01095			
1630	SAW FILTER, 45.75MHZ., OFWM1967L	2422 549 44377			
2010	CRYSTAL RESONATOR, 18M432, 12P DSX840	2422 543 01059			
2014	CAPACITOR, NP0, 25V, 820PF.	3198 016 38210			
2015	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050			
2016	CAPACITOR, Y5V, 10V, 1UF.	3198 017 41050			
2017	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040			
2018	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040			
2041	CAPACITOR, X7R, 50V, 2N2	3198 017 32220			
2042	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290			
2043	CAPACITOR, NP0, 50V, 22PF.	3198 016 32290			
2044	ELECTROLYTIC CAPACITOR, 35V, 4.7UF., 20%.	3198 030 74780			
2045	CAPACITOR, X7R, 16V, 100NF.	3198 017 31040			
2046	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890			
2049	CAPACITOR, NP0, 50V, 18PF.	3198 016 31890			
2049	CAPACITOR, Y5V, 16V, 220NF.	3198 017 42240			

S = Safety Part Be sure to use exact replacement part.

2606	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3305	RESISTOR, 3K9, 5%	3198 021 33920
	0%	3198 030 41090		3307	RESISTOR, 390R, 5%	3198 021 33910
2607	CAPACITOR, Y5V, 16V, 220NF	3198 017 42240		3311	RESISTOR, 27K, 5%	3198 021 32730
2612	CAPACITOR, X7R, 50V, 1NF	3198 017 31020		3312	RESISTOR, 10K, 5%	3198 021 31030
2613	CAPACITOR, X7R, 50V, 1NF	3198 017 31020		3315	RESISTOR, 39K, 5%	3198 021 33930
2619	CAPACITOR, X7R, 50V, 4N7	3198 017 34720		3316	RESISTOR, 220R, 5%	3198 021 32210
2620	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3324	RESISTOR, 390R, 5%	3198 021 33910
2621	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3326	RESISTOR, 1K, 5%	3198 021 31020
2623	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3327	RESISTOR, 560R, 5%	3198 021 35610
	0%	3198 030 41090		3328	RESISTOR, 390R, 5%	3198 021 33910
2624	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3329	RESISTOR, 100R, 5%	3198 021 31010
2625	ELECTROLYTIC CAPACITOR, 16V, 22UF., 2			3330	RESISTOR, 100R, 5%	3198 021 31010
	0%	3198 030 42290		3331	RESISTOR, FUSABLE, 2R2, 5%	2322 750 62208
2628	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3332	RESISTOR, FUSABLE, 2R2, 5%	2322 750 62208
2629	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3333	RESISTOR, 1K, 5%	3198 021 31020
	0%	3198 030 41090		3334	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2635	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3339	RESISTOR, 10K, 5%	3198 021 31030
2636	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3340	RESISTOR, 560R, 5%	3198 021 55610
2637	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3341	RESISTOR, 150R, 5%	3198 021 31510
2638	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3342	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2639	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3344	RESISTOR, 150R, 5%	3198 021 31510
2640	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3345	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2641	CAPACITOR, X7R, 50V, 330PF	3198 017 33310		3348	RESISTOR, 150R, 5%	3198 021 31510
2642	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3349	RESISTOR, 0 OHM, JUMPER	3198 021 90030
2655	CAPACITOR, X7R, 50V, 4N7	3198 017 34720		3358	RESISTOR, 100R, 5%	3198 021 31010
2657	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3361	RESISTOR, 100R, 5%	3198 021 31010
	0%	3198 030 41090		3362	RESISTOR, 100R, 5%	3198 021 31010
2661	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3363	RESISTOR, 100R, 5%	3198 021 31010
2662	ELECTROLYTIC CAPACITOR, 16V, 10UF., 2			3364	RESISTOR, 1K, 5%	3198 021 31020
	0%	3198 030 41090		3365	RESISTOR, 560R, 5%	3198 021 55610
2663	CAPACITOR, NP0, 50V, 47PF	3198 016 34790		3371	RESISTOR, 15K, 5%	3198 021 31530
2664	CAPACITOR, NP0, 50V, 56PF	3198 016 35690		3372	RESISTOR, 10R, 5%	3198 021 31090
2665	CAPACITOR, NP0, 50V, 27PF	3198 016 32790		3373	RESISTOR, 100R, 5%	3198 021 31010
2666	CAPACITOR, NP0, 50V, 180PF	3198 016 31810		3374	RESISTOR, 3K3, 5%	3198 021 33320
2667	CAPACITOR, NP0, 50V, 15PF	3198 016 31590		3375	RESISTOR, 1K, 5%	3198 021 31020
2675	CAPACITOR, NP0, 50V, 3.3PF	3198 016 33380		3376	RESISTOR, 1K, 5%	3198 021 31020
2676	CAPACITOR, NP0, 50V, 3.3PF	3198 016 33380		3377	RESISTOR, 100R, 5%	3198 021 31010
2678	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3378	RESISTOR, 1K, 5%	3198 021 31020
2679	CAPACITOR, X7R, 16V, 100NF	3198 017 31040		3381	RESISTOR, 100R, 5%	3198 021 31010
2682	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3382	RESISTOR, 100R, 5%	3198 021 31010
2683	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3383	RESISTOR, 100R, 5%	3198 021 31010
2684	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3384	RESISTOR, 8K2, 5%	3198 021 38220
2685	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3385	RESISTOR, 10K, 5%	3198 021 31030
2686	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3387	RESISTOR, 100R, 5%	3198 021 31010
2687	CAPACITOR, Y5V, 10V, 1UF	3198 017 41050		3388	RESISTOR, 47R, 5%	3198 021 34790
3002	RESISTOR, 8K2, 5%	3198 021 38220		3393	RESISTOR, 27K, 5%	3198 021 52730
3003	RESISTOR, 10K, 5%	3198 021 31030		3394	RESISTOR, 18K, 5%	3198 021 31830
3004	RESISTOR, 8K2, 5%	3198 021 38220		3397	RESISTOR, 10R, 5%	3198 021 31090
3007	RESISTOR, 8K2, 5%	3198 021 38220		3401	RESISTOR, 100R, 5%	3198 021 31010
3008	RESISTOR, 8K2, 5%	3198 021 38220		3402	RESISTOR, 100R, 5%	3198 021 31010
3009	RESISTOR, 8K2, 5%	3198 021 38220		3403	RESISTOR, 100R, 5%	3198 021 31010
3013	RESISTOR, 8K2, 5%	3198 021 38220		3404	RESISTOR, 100R, 5%	3198 021 31010
3014	RESISTOR, 8K2, 5%	3198 021 38220		3405	RESISTOR, 100R, 5%	3198 021 31010
3015	RESISTOR, 10K, 5%	3198 021 31030		3411	RESISTOR, 1K5, 5%	3198 021 31520
3017	RESISTOR, 100R, 5%	3198 021 31010		3412	RESISTOR, 1K5, 5%	3198 021 31520
3018	RESISTOR, 100R, 5%	3198 021 31010		3413	RESISTOR, 560R, 5%	3198 021 55610
3019	RESISTOR, 100R, 5%	3198 021 31010		3414	RESISTOR, 1K5, 5%	3198 021 31520
3021	RESISTOR, 100R, 5%	3198 021 31010		3415	RESISTOR, 1K5, 5%	3198 021 31520
3022	RESISTOR, 2K2, 5%	3198 021 32220		3416	RESISTOR, 560R, 5%	3198 021 55610
3023	RESISTOR, 8K2, 5%	3198 021 38220		3417	RESISTOR, 1K, 5%	3198 021 31020
3024	RESISTOR, 1K, 5%	3198 021 31020		3418	RESISTOR, 560R, 5%	3198 021 55610
3030	RESISTOR, 1K, 5%	3198 021 31020		3419	RESISTOR, 470R, 5%	3198 021 34710
3031	RESISTOR, 470R, 5%	3198 021 34710		3422	RESISTOR, 470R, 5%	3198 021 34710
3034	RESISTOR, 47K, 5%	3198 021 34730		3423	RESISTOR, 100R, 5%	3198 021 31010
3035	RESISTOR, 470R, 5%	3198 021 34710		3424	RESISTOR, 4K7, 5%	3198 021 34720
3042	RESISTOR, 150R, 5%	3198 021 31510		3425	RESISTOR, 100R, 5%	3198 021 31010
3043	RESISTOR, 150R, 5%	3198 021 31510		3426	RESISTOR, 820R, 5%	3198 021 38210
3044	RESISTOR, 10K, 5%	3198 021 31030		3427	RESISTOR, 100R, 5%	3198 021 31010
3045	RESISTOR, 2K7, 5%	3198 021 32720		3428	RESISTOR, 47K, 5%	3198 021 34730
3046	RESISTOR, 4K7, 5%	3198 021 34720		3429	RESISTOR, 1K, 5%	3198 021 31020
3051	RESISTOR, RC22H, 24K, 1%	2322 704 62403		3430	RESISTOR, 1K, 5%	3198 021 31020
3054	RESISTOR, 10K, 5%	3198 021 31030		3434	RESISTOR, 47K, 5%	3198 021 34730
3055	RESISTOR, 10K, 5%	3198 021 31030		3437	RESISTOR, 47K, 5%	3198 021 34730
3056	RESISTOR, 47K, 5%	3198 021 34730		3438	RESISTOR, 47K, 5%	3198 021 34730
3057	RESISTOR, 10K, 5%	3198 021 31030		3466	RESISTOR, 10K, 5%	3198 021 31030
3058	RESISTOR, 470R, 5%	3198 021 34710		3467	RESISTOR, 10K, 5%	3198 021 31030
3059	RESISTOR, 150R, 5%	3198 021 31510		3468	RESISTOR, 10K, 5%	3198 021 31030
3061	RESISTOR, 470R, 5%	3198 021 34710		3471	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3062	RESISTOR, 4K7, 5%	3198 021 34720		3472	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3064	RESISTOR, 4K7, 5%	3198 021 34720		3473	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3065	RESISTOR, 4K7, 5%	3198 021 34720		3474	RESISTOR, 0 OHM, JUMPER	3198 021 90030
3066	RESISTOR, 8K2, 5%	3198 021 38220		3477	RESISTOR, 4K7, 5%	3198 021 34720
3081	RESISTOR, 4K7, 5%	3198 021 34720		3478	RESISTOR, 10R, 5%	3198 021 31090
3082	RESISTOR, 10K, 5%	3198 021 31030		3483	RESISTOR, 560R, 5%	3198 021 55610
3083	RESISTOR, 470R, 5%	3198 021 34710		3484	RESISTOR, 1K, 5%	3198 021 31020
3084	RESISTOR, 100R, 5%	3198 021 31010		3488	RESISTOR, 220R, 5%	3198 021 32210
3085	RESISTOR, 100R, 5%	3198 021 31010		3489	RESISTOR, 390R, 5%	3198 021 33910
3086	RESISTOR, 100R, 5%	3198 021 31010		3490	RESISTOR, 390R, 5%	3198 021 33910
3088	RESISTOR, 100R, 5%	3198 021 31010		3491	RESISTOR, 820R, 5%	3198 021 38210
3092	RESISTOR, 100R, 5%	3198 021 31010		3492	RESISTOR, 560R, 5%	3198 021 35610
3301	RESISTOR, 1K, 5%	3198 021 31020		3493	RESISTOR, 390R, 5%	3198 021 33910
3302	RESISTOR, 560R, 5%	3198 021 35610		3601	RESISTOR, 100R, 5%	3198 021 31010

3602	RESISTOR, 100R, 5%	3198 021 31010	3022	RESISTOR, 10K, 5%	3198 021 51030
3606	RESISTOR, 27K, 5%	3198 021 32730	3025	RESISTOR, 330R, 5%	3198 021 53310
3619	RESISTOR, 100R, 5%	3198 021 31010	6002	LED, VS TLD5400 (TEG0)	9322 110 34682
3621	RESISTOR, 100R, 5%	3198 021 31010	6005	IR RECEIVER, TSOP1736 (VISH)	9322 152 44687
3665	RESISTOR, 2K2, 5%	3198 021 32220	6009	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4008	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6011	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4304	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6013	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4308	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6014	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4309	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6015	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4312	RESISTOR, 0 OHM, JUMPER	3198 021 90030	6016	DIODE REGULATOR, BZX284-C6V8 (PHSE)	9340 386 40115
4313	RESISTOR, 0 OHM, JUMPER	3198 021 90030	CBA	KEYBOARD PANEL ASSEMBLY, 50" TO 64" M	
4316	RESISTOR, 0 OHM, JUMPER	3198 021 90030		OELS	3135 017 07611
4317	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4318	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4319	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4320	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4401	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4402	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4403	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4410	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4411	RESISTOR, 0 OHM, JUMPER	3198 021 90020			
4434	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4435	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4436	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4451	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4455	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4465	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
4684	RESISTOR, 0 OHM, JUMPER	3198 021 90030			
5040	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5041	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5042	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5309	FIXED INDUCTOR, 6.8UH, 5%	3198 018 66880			
5332	FIXED INDUCTOR, 6.8UH, 5%	3198 018 66880			
5333	FIXED INDUCTOR, 6.8UH, 5%	3198 018 66880			
5401	FIXED INDUCTOR, .82UH, 10%	3198 018 38270			
5421	FIXED INDUCTOR, 22UH, 20%	3198 018 32290			
5422	FIXED INDUCTOR, 15UH, 20%	3198 018 31590			
5425	FIXED INDUCTOR, 22UH, 20%	3198 018 32290			
5426	FIXED INDUCTOR, 15UH, 20%	3198 018 31590			
5601	FIXED INDUCTOR, 1UH, 5%	3198 018 61080			
5602	FIXED INDUCTOR, 4.7UH, 5%	3198 018 64780			
5625	FIXED INDUCTOR, 1UH, 5%	3198 018 61080			
5665	FIXED INDUCTOR, 15UH, 5%	3198 018 61590			
6031	DIODE, REGULATOR, UD22.4B (RHM0)	9322 131 13685			
6302	DIODE, REGULATOR, BZX384-C8V2	3198 020 58280			
6303	DIODE, REGULATOR, BZX384-C6V8	3198 020 56880			
6412	DIODE, SIGNAL, BAS316	3198 010 10630			
6415	DIODE, SIGNAL, BAS316	3198 010 10630			
6605	DIODE, SIGNAL, BAS316	3198 010 10630			
7053	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7063	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7064	IC, SAA5667HL/M1/ (PHSE)	4835 310 57615			
7066	IC, M24C32-WMN6 (ST00)	9322 124 74668			
7301	IC, TDA8887H/N1 (PHSE)	9352 638 72557			
7305	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7307	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7331	TRANSISTOR, SIGNAL, BC847BW	3198 010 42320			
7368	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7401	IC, 74HC4053PW (PHSE)	9351 869 40118			
7405	IC, TC90A45F (TOSJ)	9322 144 38668			
7407	IC, 74HC4066PW (PHSE)	9351 750 00118			
7412	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7415	TRANSISTOR, SIGNAL, BC847BS (PHSE)	9340 425 20115			
7421	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7425	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7442	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7446	TRANSISTOR, SIGNAL, BC847BW	3198 010 42310			
7630	IC, 74HC4052PW (PHSE)	9351 874 90118			
7651	IC, MSP3435G-FH-B5 (MIAS)	9322 143 55671			
CBA	SSB MODULE ASSEMBLY, FIGHTER	3139 127 25881			
KEYBOARD PANEL ASSEMBLY					
KEYBOARD PANEL ASSEMBLY					
1001	TACTILE SWITCH	2422 128 02742			
1002	TACTILE SWITCH	2422 128 02742			
1003	TACTILE SWITCH	2422 128 02742			
1004	TACTILE SWITCH	2422 128 02742			
1006	TACTILE SWITCH	2422 128 02742			
1007	TACTILE SWITCH	2422 128 02742			
1214	CONNECTOR, 7 PIN	2422 025 12491			
1215	CONNECTOR, 1 PIN	2422 015 18551			
2003	CAPACITOR, CERAMIC, X7R, 16V, 100NF	3198 017 01040			
2004	ELECTROLYTIC, CAPACITOR, 16V, 100UF, 20%	3198 028 21010			
3008	RESISTOR, 1K5, 5%	3198 021 51520			
3010	RESISTOR, 1K5, 1%	2322 734 61502			
3011	RESISTOR, 750R, 1%	2322 734 87501			
3012	RESISTOR, 2K, 1%	2322 734 62002			
3013	RESISTOR, 270R, 1%	2322 734 62701			
3015	RESISTOR, 2K7, 1%	2322 734 62702			
3017	RESISTOR, 3K9, 1%	2322 734 63902			
3020	RESISTOR, 470R, 5%	3198 021 54710			
SIDE JACK PANEL ASSEMBLY					
SIDE JACK PANEL ASSEMBLY					
RED & BLUE CRT PANEL ASSEMBLIES					
RED & BLUE CRT PANEL ASSEMBLIES					
0079	HEATSINK, T0-220, USE SI COMP THERMAL	3135 011 01231			
1000	CONNECTOR, 1 PIN, M RT-01T-1.0B	2422 034 20021			
1001	CONNECTOR, 1 PIN, M RT-01T-1.0B	2422 034 20021			
1701	CRT SOCKET, 10PIN, F HPS0521	2422 500 80051			
S 1702	SURGE PROTECTOR, DSP-501N-A21F	2422 549 42349			
1871	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484			
1872	CONNECTOR, 2 PIN, M 3.96 VH	2422 025 10646			
1873	CONNECTOR, 2 PIN, M 3.96 VH	2422 025 10646			
1875	CONNECTOR, 1 PIN, M 4.8 X 0.5	2422 015 18552			
2701	CAPACITOR, METALIZED POLYESTER, 400V, 10NF, 10%	2222 365 55103			
S 2702	CAPACITOR, METALIZED POLYESTER, 400V, 10NF, 10%	2222 365 55103			
S 2705	CAPACITOR, CERAMIC, 2KV, 1NF, 10%	2020 558 90487			
2717	ELECTROLYTIC CAPACITOR, 400V, 10UF, 20%	2020 012 93487			
2720	ELECTROLYTIC CAPACITOR, 50V, 10UF, 20%	3198 025 51090			
2721	CAPACITOR, METALIZED POLYESTER, 63V, 100NF, 10%	2222 365 75104			
2722	CAPACITOR, CERAMIC, B 500V S 560P, 10	2020 557 90147			
2750	CAPACITOR, CERAMIC, NP0 50V S 220PF	3198 019 02210			
2751	CAPACITOR, PLOYPROPHYLENE, 50V, 1NF, 2%	2020 310 90049			
2752	CAPACITOR, CERAMIC, Y5P, 1KV, 1NF	3198 019 51020			
3703	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010			
3710	RESISTOR, CARBON FILM, 1K5, 10%	2120 101 28152			
S 3716	RESISTOR, CARBON FILM, 100R, 20%	2120 103 90057			
S 3718	RESISTOR, CARBON FILM, 1/2W, 22K, 5%	2120 103 90075			
3719	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608			
S 3720	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608			
S 3730	RESISTOR, METAL OXIDE, 5W, 3K3, 5%	2322 257 41332			
S 3731	RESISTOR, METAL OXIDE, 5W, 3K3, 5%	2322 257 41332			
3733	RESISTOR, METAL OXIDE, 10M, 5%	2322 241 53106			
3735	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010			
3737	RESISTOR, CARBON FILM, 1/2W, 3K3, 20%	3198 013 03320			
3738	RESISTOR, CARBON FILM, 1/6W, 100K, 5%	3198 011 01040			
3740	RESISTOR, CARBON FILM, 1/6W, 1K, 5%	3198 011 01020			
3742	RESISTOR, METAL FILM, 1K, 1%	2322 156 21002			
3743	RESISTOR, METAL FILM, 220R, 1%	2322 156 22201			
3745	RESISTOR, METAL FILM, 75R, 1%	2138 116 17509			
3750	RESISTOR, CARBON FILM, 1/6W, 100R, 5%	3198 011 01010			
3751	RESISTOR, METAL FILM, 15R, 1%	2138 116 11509			
3752	RESISTOR, 22K, 5%	2120 103 90075			
3753	RESISTOR, CARBON FILM, 27R, 5%	2120 101 74279			
3755	RESISTOR, POWER, 1W, 47R, 5%	3198 012 14790			
3756	RESISTOR, POWER, 1W, 68R, 5%	3198 012 16890			
5701	FIXED INDUCTOR, 100UH, 5%	3198 018 11010			
5702	FIXED INDUCTOR, 15UH, 10%	2422 535 97331			
5703	FIXED INDUCTOR, 47UH, 5%	3198 018 14790			
5704	FIXED INDUCTOR, 47UH, 5%	3198 018 14790			
5705	FIXED INDUCTOR, 22UH, 10%	2422 535 97333			
6701	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133			
6702	DIODE REGULATOR, BZX79-B6V2 (PHSE)	9331 668 30133			
6705	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133			
6706	DIODE RECTIFIER, BYD33J (PHSE)	9337 234 20133			
7701	TRANSISTOR, POWER, 2SC3790E (TSAJ)	9322 122 58682			
7702	TRANSISTOR, SIGNAL, BC337-25)	3198 020 43530			
7703	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ)	9322 103 08678			
7705	TRANSISTOR, SIGNAL, BF421 (PHSE)	9334 196 60126			
9701	WIRE JUMPER 0.6MM	0322 179 00003			
9702	WIRE JUMPER 0.6MM	0322 179 00003			
CBA	RED & BLUE CRT PANEL ASSEMBLIES	3135 017 04961			
GREEN CRT PANEL ASSEMBLY					
GREEN CRT PANEL ASSEMBLY					
0089	HEATSINK T0-220, USE SI COMP THERMAL	3135 011 01231			
1000	CONNECTOR, 1 PIN, M RT-01T-1.0	2422 034 20021			
1001	CONNECTOR, 1 PIN, M 4.8 X 0.5	2422 015 18552			
1002	CONNECTOR, 1 PIN, M RT-01T-1.0	2422 034 20021			
S 1801	CRT SOCKET, 10 PIN, HPS0521	2422 500 80051			
S 1802	SURGE PROTECTOR, DSP-501N-A21	2422 549 42349			
1881	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484			
1882	CONNECTOR, 4 PIN, M 2.50 EH	2422 025 12479			

1883	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484	2812	ELECTROLYTIC CAPACITOR, 25V, 47UF., 2		
1884	CONNECTOR, 10 PIN, M 2.50 EH	2422 025 12484		0%.	3198 025 34790	
1885	CONNECTOR, 2 PIN, M 3.96 VH	2422 025 10646	2813	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2		
1886	CONNECTOR, 4 PIN, M 3.96 VH	2422 025 10647		0%.	3198 025 51090	
2801	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222 365 55103	2814	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
S 2805	CAPACITOR, CERAMIC, 2KV, 1NF., 10%	2020 558 90487	2815	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
2807	CAPACITOR, POLYESTER, 400V, 10NF., 10	2222 365 55103	2816	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
2817	ELECTROLYTIC CAPACITOR, 400V, 10UF.,		2817	CAPACITOR, NP0, 50V, 10PF.	3198 016 01090	
	20%.	2020 012 93487	2818	CAPACITOR, NP0, 50V, 10PF.	3198 016 01090	
2820	ELECTROLYTIC CAPACITOR, 50V, 10UF., 2		2819	CAPACITOR, NP0, 50V, 12PF.	3198 016 01290	
	0%.	3198 025 51090	2820	CAPACITOR, Y5V, 25V, 220NF.	3198 023 22240	
2821	CAPACITOR, POLYESTER, 63V, 100NF., 10	2222 365 75104	2821	CAPACITOR, Y5V, 25V, 220NF.	3198 023 22240	
2822	CAPACITOR, CERAMIC DISK, 500V, 560P,		2822	CAPACITOR, X7R, 50V, 33NF.	3198 017 03330	
	10%.	2020 557 90147	2823	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
2850	CAPACITOR, CERAMIC DISK, NP0, 50V, 22		2824	ELECTROLYTIC CAPACITOR, 25V, 47UF., 2		
	0PF.	3198 019 02210		0%.	3198 025 34790	
2851	CAPACITOR, POLYPROPYLENE, 50V, 1NF.,		2825	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
	2%.	2020 310 90049	2826	CAPACITOR, NP0, 50V, 560PF.	3198 016 05610	
2852	CAPACITOR, CERAMIC DISK, Y5P, 1KV, 1N		2827	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
	F.	3198 019 51020	2828	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3803	RESISTOR, CARBON, 1/6W, 100R, 5% . .	3198 011 01010	2829	CAPACITOR, Y5V, 16V, 1UF.	3198 017 21050	
3810	RESISTOR, CARBON, 1/2W, 1K5, 10% . .	2120 101 28152	2830	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3816	RESISTOR, CARBON, 1/2W, 100R, 20% . .	2120 103 90057	2831	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3818	RESISTOR, CARBON, 1/2W, 22K, 5% . . .	2120 103 90075	2832	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3819	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608	2833	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
S 3820	RESISTOR, METAL FILM, 5R6, 1%	2322 156 25608	2834	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
3825	RESISTOR, METAL FILM, 220K, 1%	2322 156 22204	2836	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
3826	RESISTOR, METAL FILM, 100K, 1%	2322 156 21004	2837	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
S 3830	RESISTOR, METALOXIDE, 5W, 3K3, 5% . .	2322 257 41332	2840	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
S 3831	RESISTOR, METALOXIDE, 5W, 3K3, 5% . .	2322 257 41332	2841	CAPACITOR, Y5V, 16V, 470NF.	3198 017 24740	
3833	RESISTOR, METAL FILM, 1/2W, 10M, 5% .	2322 241 53106	2890	ELECTROLYTIC CAPACITOR, 25V, 220UF.,		
3835	RESISTOR, CARBON, 1/6W, 100R, 5% . .	3198 011 01010		20%.	3198 025 32210	
3837	RESISTOR, CARBON, 1/2W, 3K3, 20% . .	3198 013 03320	2891	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
3838	RESISTOR, CARBON, 1/6W, 100K, 5% . .	3198 011 01040	2892	ELECTROLYTIC CAPACITOR, 25V, 47UF., 2		
3840	RESISTOR, CARBON, 1/6W, 1K, 5%	3198 011 01020		0%.	3198 025 34790	
3842	RESISTOR, METAL FILM, 1K, 1%	2322 156 21002	2893	ELECTROLYTIC CAPACITOR, 25V, 220UF.,		
3843	RESISTOR, METAL FILM, 220R, 1%	2322 156 22201		20%.	3198 025 32210	
3845	RESISTOR, METAL FILM, 75R, 1%	2138 116 17509	2894	CAPACITOR, X7R, 50V, 10NF.	3198 017 01030	
3850	RESISTOR, CARBON, 1/6W, 100R, 5% . .	3198 011 01010	2895	CAPACITOR, NP0, 50V, 47PF.	3198 019 04790	
3851	RESISTOR, METAL FILM, 15R, 1%	2138 116 11509	2911	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3852	RESISTOR, CARBON, 1/2W, 22K, 5% . . .	2120 103 90075	2930	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3853	RESISTOR, CARBON, 27R, 5%	2120 101 74279	2931	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3855	RESISTOR, POWER, 1W, 47R, 5%	3198 012 14790	2932	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3856	RESISTOR, POWER, 1W, 68R, 5%	3198 012 16890	2933	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
3857	RESISTOR, METAL FILM, 10K, 5%	2322 193 14103	2934	CAPACITOR, X7R, 16V, 100NF.	3198 017 01040	
5801	FIXED INDUCTOR, 100UH., 5%	3198 018 11010	2935	ELECTROLYTIC CAPACITOR, 25V, 100UF.,		
5802	FIXED INDUCTOR, 15UH., 10%	2422 535 97331		20%.	3198 025 31010	
5803	FIXED INDUCTOR, 47UH., 5%	3198 018 14790	2936	RESISTOR, JUMPER, 0R05	3198 021 90020	
5804	FIXED INDUCTOR, 47UH., 5%	3198 018 14790	2937	CAPACITOR, Y5V, 16V, 1UF.	3198 017 21050	
5805	FIXED INDUCTOR, 22UH., 10%	2422 535 97333	3801	RESISTOR, 100R, 5%	3198 021 51010	
6801	DIODE, RECTIFIER, BYD33J (PHSE) . . .	9337 234 20133	3802	RESISTOR, 100R, 5%	3198 021 51010	
6802	DIODE, REGULATOR, BZX79-B6V2 (PHSE).	9331 668 30133	3805	RESISTOR, 1K, 5%	3198 021 51020	
6805	DIODE, RECTIFIER, BYD33J (PHSE) . . .	9337 234 20133	3806	RESISTOR, 1K5, 5%	3198 021 51520	
6806	DIODE, RECTIFIER, BYD33J (PHSE) . . .	9337 234 20133	3807	RESISTOR, 1K5, 5%	3198 021 51520	
7801	TRANSISTOR, POWER, 2SC3790E (TSAJ) .	9322 122 58682	3812	RESISTOR, 10K, 5%	3198 021 51030	
7802	TRANSISTOR, SIGNAL, BC337-25 (COL) . .	3198 020 43530	3813	RESISTOR, 15K, 5%	3198 021 51530	
7803	TRANSISTOR, SIGNAL, 2SC2383-0 (TOSJ)	9322 103 08678	3814	RESISTOR, 1K, 5%	3198 021 51020	
7805	TRANSISTOR, SIGNAL, BF421 (PHSE) . . .	9334 196 60126	3815	RESISTOR, 1K, 5%	3198 021 51020	
9801	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3816	RESISTOR, 820R, 5%	3198 021 58210	
9802	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3817	RESISTOR, 1K, 5%	3198 021 51020	
9803	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3818	RESISTOR, 15K, 5%	3198 021 51530	
9804	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3819	RESISTOR, 10K, 5%	3198 021 51030	
9805	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3820	RESISTOR, 1K, 5%	3198 021 51020	
9806	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3821	RESISTOR, 390R, 5%	3198 021 53910	
9807	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3822	RESISTOR, 390R, 5%	3198 021 53910	
9808	WIRE JUMPER, SNPB-PLATED, 0.6MM. . .	0322 179 00003	3823	RESISTOR, 390R, 5%	3198 021 53910	
CBA	GREEN CRT PANEL ASSEMBLY	3135 017 04981	3824	RESISTOR, 15K, 5%	3198 021 51530	
			3825	RESISTOR, 150R, 5%	3198 021 51510	
			3826	RESISTOR, 150R, 5%	3198 021 51510	
			3827	RESISTOR, 330R, 5%	3198 021 53310	
			3828	RESISTOR, 4M7, 5%	3198 021 54750	
			3829	RESISTOR, 15K, 5%	3198 021 51530	
			3830	RESISTOR, 2K2, 5%	3198 021 52220	
			3831	RESISTOR, 1M, 5%	3198 021 51050	
			3832	RESISTOR, 1K, 5%	3198 021 51020	
			3833	RESISTOR, 100R, 5%	3198 021 51010	
			3834	RESISTOR, 100R, 5%	3198 021 51010	
			3836	RESISTOR, 1K, 5%	3198 021 51020	
			3839	RESISTOR, 1K, 5%	3198 021 51020	
			3840	RESISTOR, JUMPER, 0R05	3198 021 90020	
			3844	RESISTOR, 1K, 5%	3198 021 51020	
			3845	RESISTOR, JUMPER, 0R05	3198 021 90020	
			3849	RESISTOR, 1K, 5%	3198 021 51020	
			3850	RESISTOR, JUMPER, 0R05	3198 021 90020	
			3853	RESISTOR, 3K3, 5%	3198 021 53320	
			3854	RESISTOR, 15K, 5%	3198 021 51530	
			3855	RESISTOR, 1K, 5%	3198 021 51020	
			3856	RESISTOR, 1K, 5%	3198 021 51020	
			3857	RESISTOR, CARBON, 1/6W, 1K, 5% . . .	3198 011 01020	
			3858	RESISTOR, CARBON, 1/6W, 1K, 5% . . .	3198 011 01020	
			3859	RESISTOR, 47K, 5%	3198 021 54730	
			3860	RESISTOR, 47K, 5%	3198 021 54730	

S = Safety Part Be sure to use exact replacement part.

3864	RESISTOR, 1K, 5%	3198 021 51020	9907	WIRE JUMPER, 0.6MM	0322 179 00003
3866	RESISTOR, 330R, 5%	3198 021 53310	9908	WIRE JUMPER, 0.6MM	0322 179 00003
3870	RESISTOR, 220R, 5%	3198 021 52210	9912	WIRE JUMPER, 0.6MM	0322 179 00003
3871	RESISTOR, 220R, 5%	3198 021 52210	9915	WIRE JUMPER, 0.6MM	0322 179 00003
3872	RESISTOR, 220R, 5%	3198 021 52210	9921	WIRE JUMPER, 0.6MM	0322 179 00003
3890	RESISTOR, CARBON, 1/6W, 68R, 5%	3198 011 06890	9922	WIRE JUMPER, 0.6MM	0322 179 00003
3914	RESISTOR, JUMPER, 0R05	3198 021 90020	9923	WIRE JUMPER, 0.6MM	0322 179 00003
3915	RESISTOR, JUMPER, 0R05	3198 021 90020	CBA	SINGLE TUNER PIP PANEL ASSEMBLY.	3139 137 22971
3916	RESISTOR, JUMPER, 0R05	3198 021 90020			
3917	RESISTOR, JUMPER, 0R05	3198 021 90020			
3918	RESISTOR, JUMPER, 0R05	3198 021 90020			
3919	RESISTOR, JUMPER, 0R05	3198 021 90020			
3920	RESISTOR, 100R, 5%	3198 021 51010			
3921	RESISTOR, 100R, 5%	3198 021 51010			
3922	RESISTOR, 4K7, 5%	3198 021 54720			
3923	RESISTOR, 4K7, 5%	3198 021 54720			
3924	RESISTOR, 4K7, 5%	3198 021 54720			
3925	RESISTOR, 4K7, 5%	3198 021 54720			
3926	RESISTOR, 4K7, 5%	3198 021 54720			
3927	RESISTOR, 470R, 5%	3198 021 54710			
3956	RESISTOR, JUMPER, 0R05	3198 021 90020			
3958	RESISTOR, 120R, 5%	3198 021 51210			
3960	RESISTOR, JUMPER, 0R05	3198 021 90020			
3961	RESISTOR, 1K, 5%	3198 021 51020			
3962	RESISTOR, 4K7, 5%	3198 021 54720			
3968	RESISTOR, 4K7, 5%	3198 021 54720			
3969	RESISTOR, 330R, 5%	3198 021 53310			
3970	RESISTOR, 390R, 5%	3198 021 53910			
4803	RESISTOR, JUMPER, 0R05	3198 021 90020			
4804	RESISTOR, JUMPER, 0R05	3198 021 90020			
4805	RESISTOR, JUMPER, 0R05	3198 021 90020			
4807	RESISTOR, JUMPER, 0R05	3198 021 90020			
4808	RESISTOR, JUMPER, 0R05	3198 021 90020			
4809	RESISTOR, JUMPER, 0R05	3198 021 90020			
4810	RESISTOR, JUMPER, 0R05	3198 021 90020			
4812	RESISTOR, JUMPER, 0R05	3198 021 90020			
4813	RESISTOR, JUMPER, 0R05	3198 021 90020			
4814	RESISTOR, JUMPER, 0R05	3198 021 90020			
4815	RESISTOR, JUMPER, 0R05	3198 021 90020			
4816	RESISTOR, JUMPER, 0R05	3198 021 90020			
4817	RESISTOR, JUMPER, 0R05	3198 021 90020			
4818	RESISTOR, JUMPER, 0R05	3198 021 90020			
4819	RESISTOR, JUMPER, 0R05	3198 021 90020			
4821	RESISTOR, JUMPER, 0R05	3198 021 90020			
4901	RESISTOR, JUMPER, 0R05	3198 021 90020			
5890	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5891	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5892	FIXED INDUCTOR, 10MUH., 10% (UAW)	3198 018 21090			
5902	FIXED INDUCTOR, 4MUH7, 10% (UAW)	3198 018 24780			
6801	DIODE, SIGNAL, BAT85 (PHSE)	9336 247 60133			
6890	DIODE, REGULATOR, BZX384-C3V9	3198 020 53980			
7801	IC, HEF4053BT (PHSE)	9333 729 60653			
7803	IC, M65669SP (MITJ)	9322 146 60682			
7804	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7805	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7806	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7807	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7810	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7813	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7816	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7817	TRANSISTOR, SIGNAL, BC847B	3198 010 42030			
7891	TRANSISTOR, SIGNAL, BC337-25	3198 020 43530			
7910	IC, M62320FP (MITJ)	9322 127 15668			
7919	IC, TDA8601T/C1 (PHSE)	9351 538 90518			
7920	TRANSISTOR, SIGNAL, BC857B	3198 010 42150			
9800	WIRE JUMPER, 0.6MM	0322 179 00003			
9801	WIRE JUMPER, 0.6MM	0322 179 00003			
9802	WIRE JUMPER, 0.6MM	0322 179 00003			
9803	WIRE JUMPER, 0.6MM	0322 179 00003			
9804	WIRE JUMPER, 0.6MM	0322 179 00003			
9805	WIRE JUMPER, 0.6MM	0322 179 00003			
9807	WIRE JUMPER, 0.6MM	0322 179 00003			
9808	WIRE JUMPER, 0.6MM	0322 179 00003			
9810	WIRE JUMPER, 0.6MM	0322 179 00003			
9811	WIRE JUMPER, 0.6MM	0322 179 00003			
9812	WIRE JUMPER, 0.6MM	0322 179 00003			
9813	WIRE JUMPER, 0.6MM	0322 179 00003			
9814	WIRE JUMPER, 0.6MM	0322 179 00003			
9815	WIRE JUMPER, 0.6MM	0322 179 00003			
9816	WIRE JUMPER, 0.6MM	0322 179 00003			
9817	WIRE JUMPER, 0.6MM	0322 179 00003			
9818	WIRE JUMPER, 0.6MM	0322 179 00003			
9820	WIRE JUMPER, 0.6MM	0322 179 00003			
9821	WIRE JUMPER, 0.6MM	0322 179 00003			
9822	WIRE JUMPER, 0.6MM	0322 179 00003			
9823	WIRE JUMPER, 0.6MM	0322 179 00003			
9824	WIRE JUMPER, 0.6MM	0322 179 00003			
9901	WIRE JUMPER, 0.6MM	0322 179 00003			
9902	WIRE JUMPER, 0.6MM	0322 179 00003			
9903	WIRE JUMPER, 0.6MM	0322 179 00003			
9905	WIRE JUMPER, 0.6MM	0322 179 00003			
9906	WIRE JUMPER, 0.6MM	0322 179 00003			

2 TUNER PIP PANEL ASSEMBLY

2 TUNER PIP PANEL ASSEMBLY


Field Fix - Intermittent Video Blink

Step 1 - Remove SSB Panel


Remove SSB from the PTV using the described safety precautions.

Step 2 - Locate & Remove IC7407

Remove IC7407 from the SSB using caution as not to lift any traces. It is preferred to cut the legs with an XACTO knife or something similar.

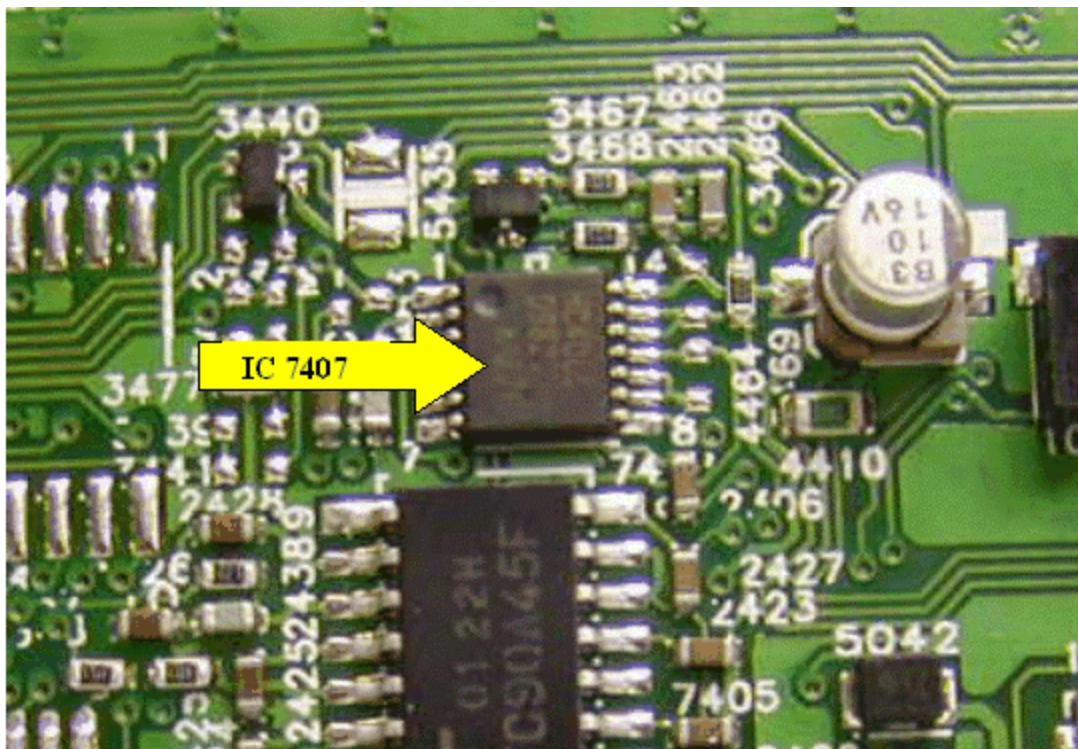


Area With IC7407 Removed:

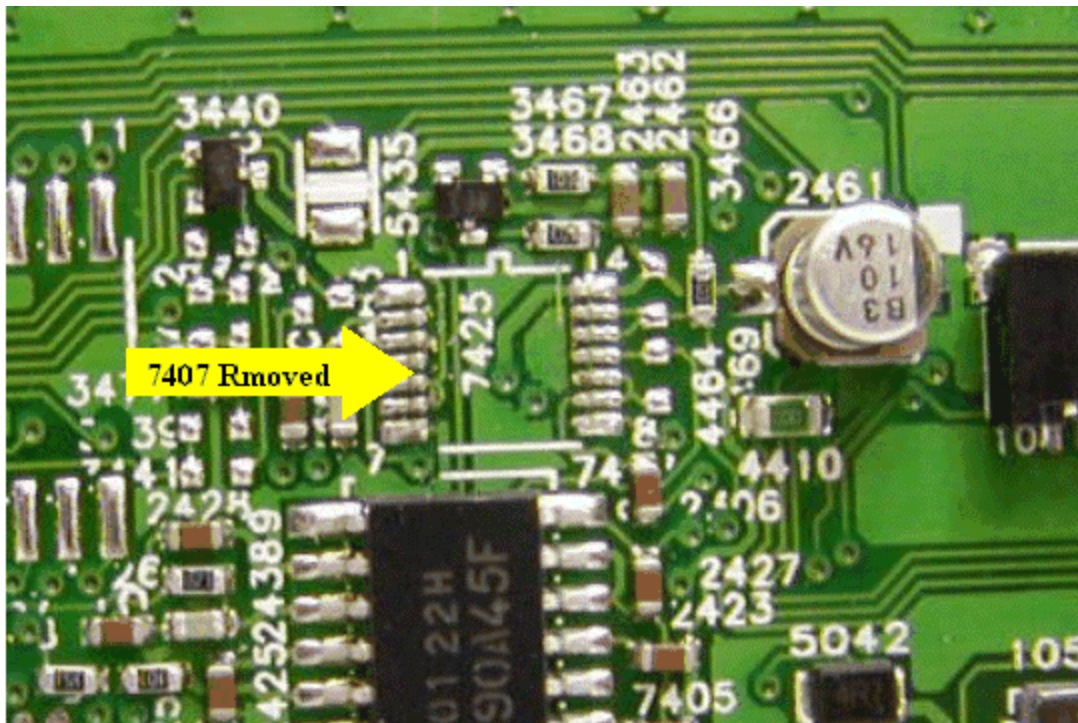


Step 3 - Jumper Legs 13 and 14

Jumper legs 13 and 14 of IC7407 with solder as shown below.

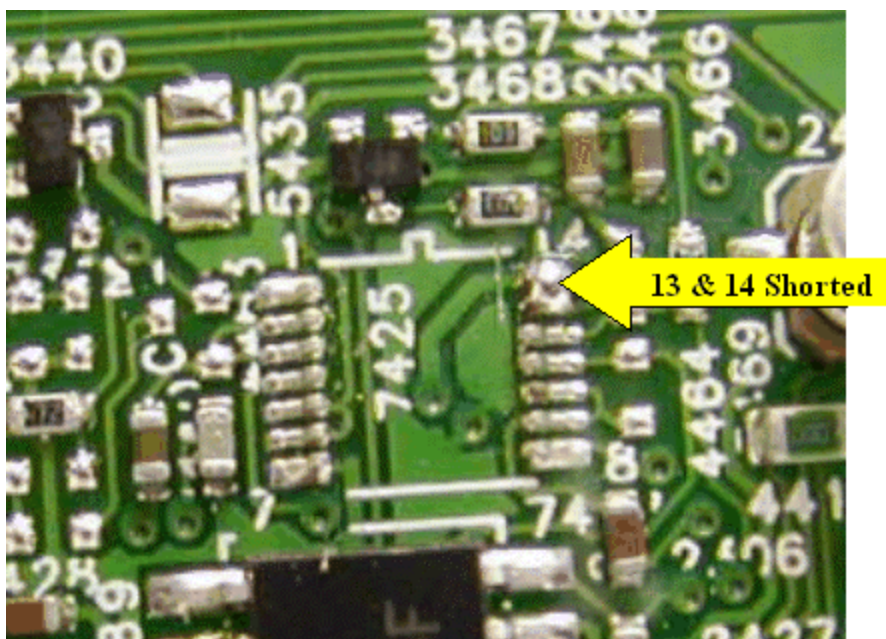


Step 4 - Locate Component 2311

Locate component 2311 as shown below.

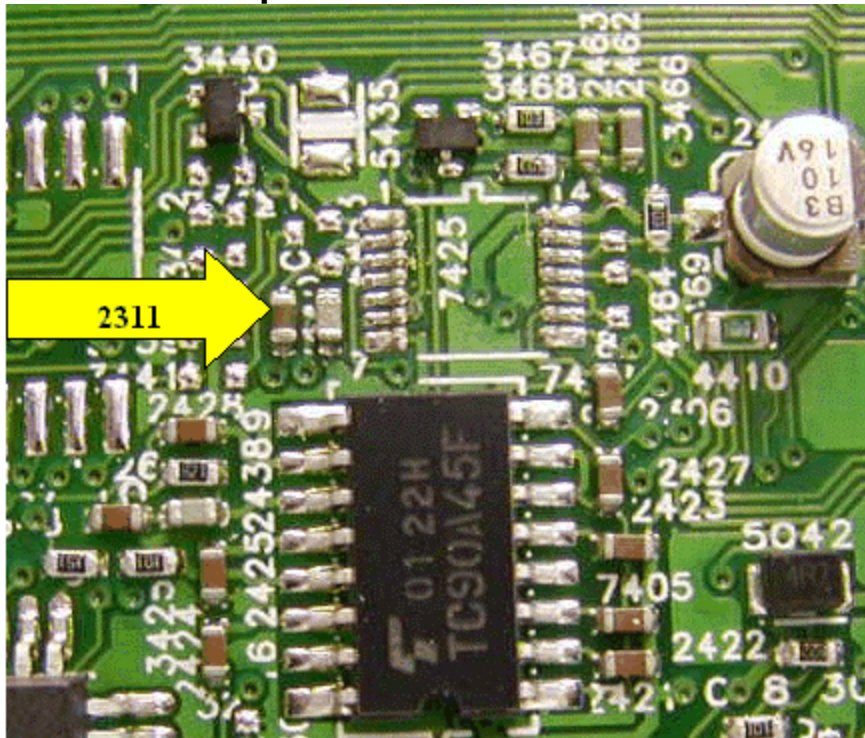


Step 5 - Place Jumper (Top)

Place Jumper Wire at the top of component.

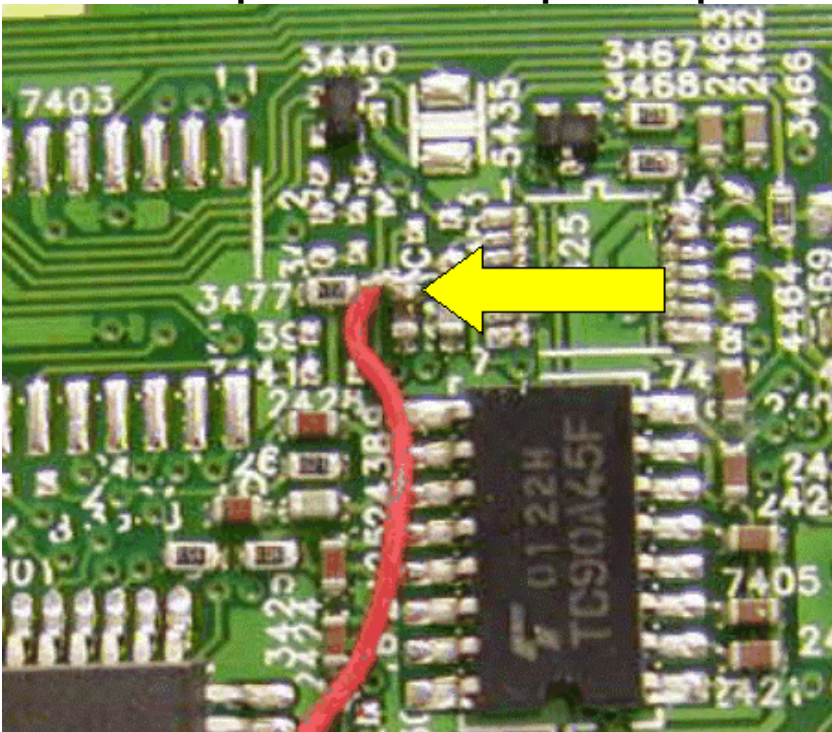


Step 6 - Locate Component 3413

Locate Component 3413 as shown below.

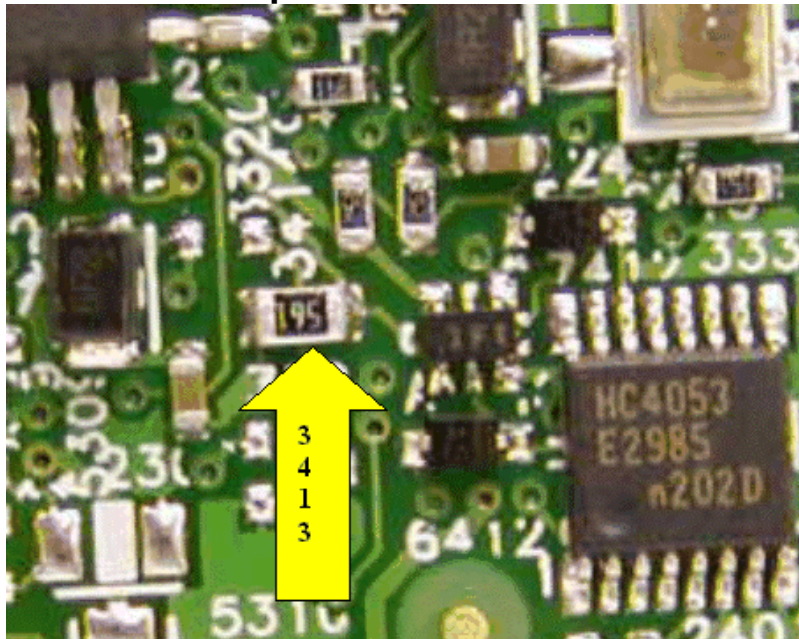

Step 7 - Place Jumper (Bottom)

Place the other end of jumper on the component 3413 as shown below:

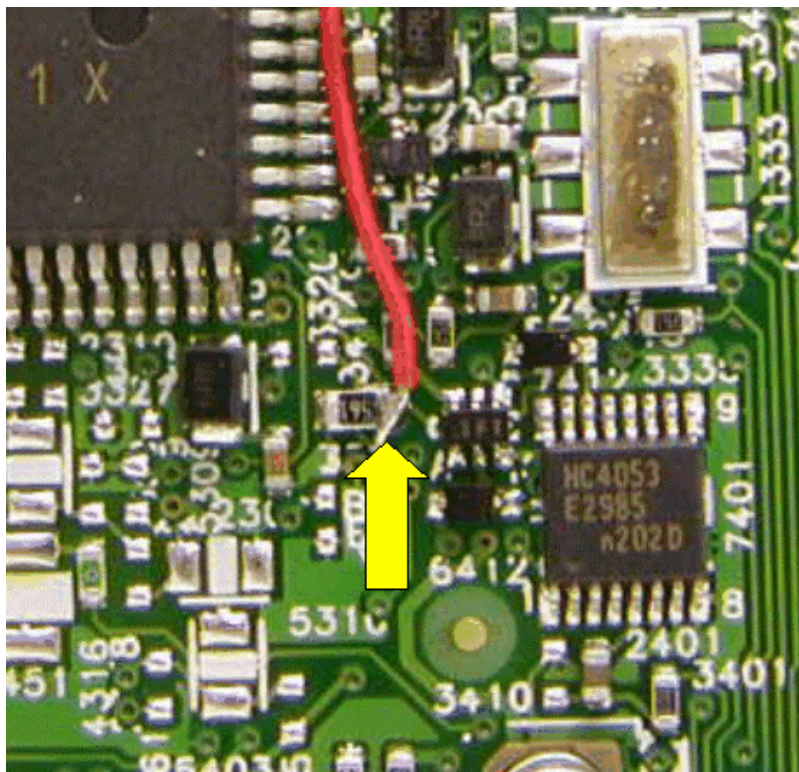

Step 8 - Enter SAM (Service Alignment Mode)

After completing the hardware fix, enter the SAM (service alignment mode). Under options, turn CBFL off (comb filter). Replace SSB using prescribe precautions and check for proper operation.