


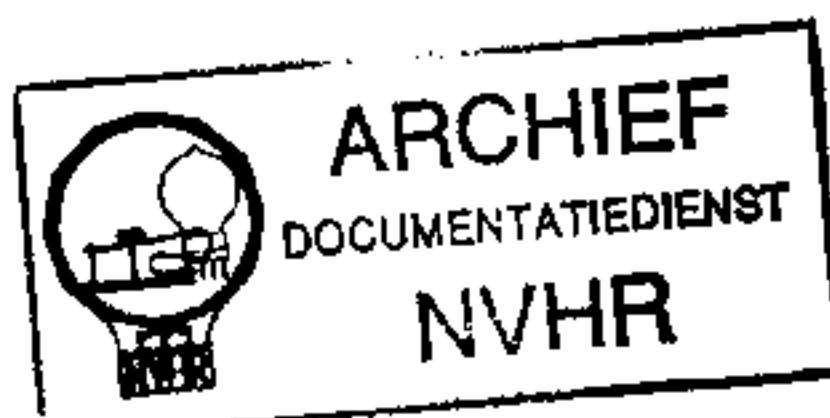


PHILIPS

SERVICE DOCUMENTATIE

voor de ontvanger

BX600A

uitvoering 00 en 01

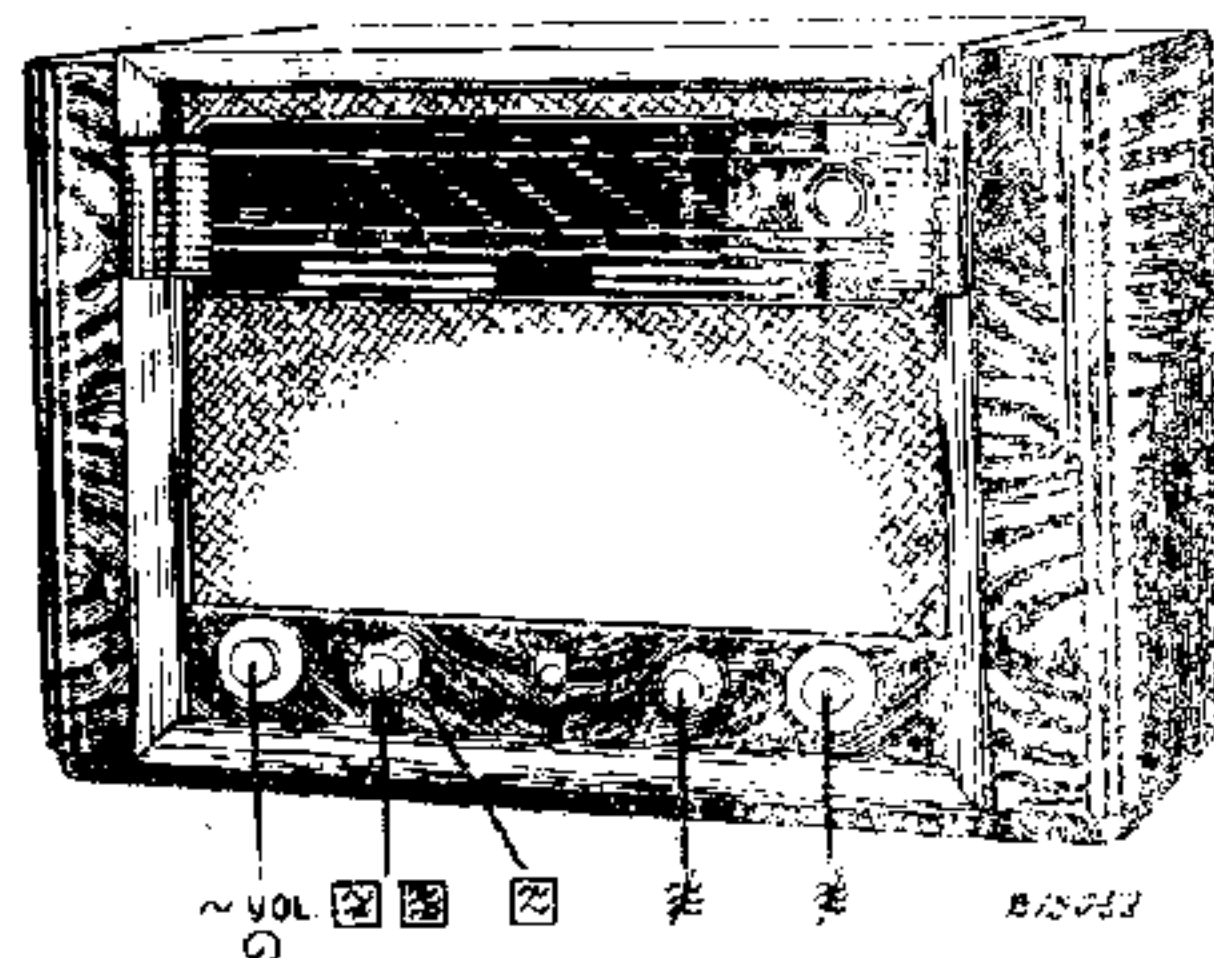

1950

Voor wisselspanningsnetten

ALGEMEEN

GOLFBEREIKEN

K.G.2a	: 25	- 32,1 M	{ 12	- 9,35 MHz	bandspreiding op 25 en 30m
K.G.2b	: 40,5	- 50,8 M	{ 7,4	- 5,9 MHz	bandspreiding op 40 en 50m
K.G.2	: 13,7	- 43 M	{ 21,9	- 7,0 MHz	
K.G.	: 185	- 580 M	{ 1620	- 518 kHz	
L.G.	: 760	- 2000 M	{ 395	- 150 kHz	

BEDIENINGSKNOPPEN

