



296 A

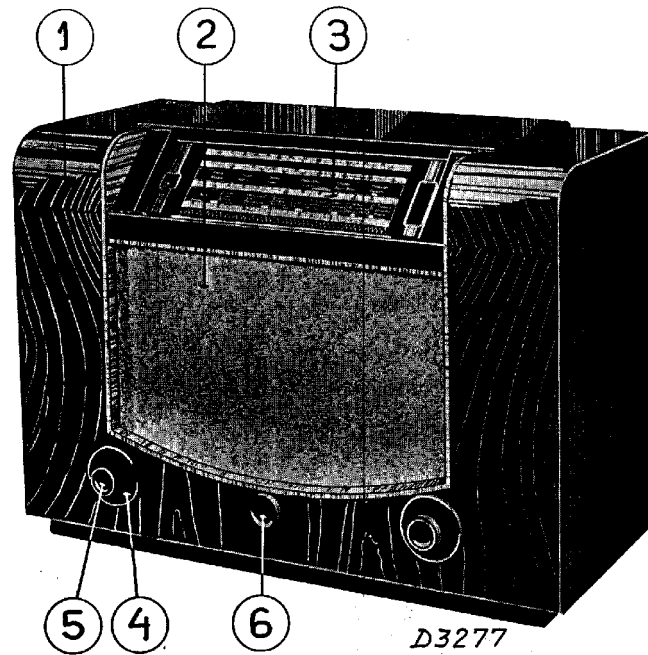

D3277

Fig. 6

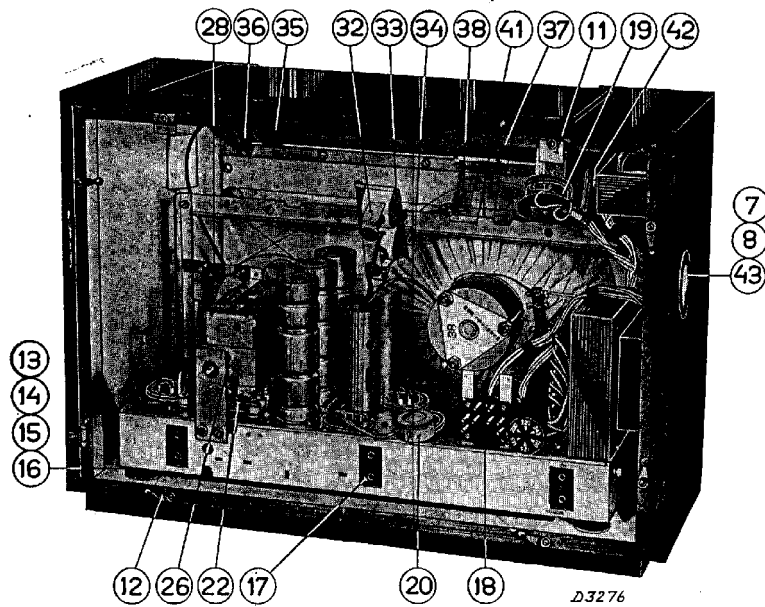

D3276

Fig. 7

SPOELEN

	Waarde	Codenummer	Prijs
S1	—		
S2	250 ohm	28 573 10.0	
S3	< 1 ohm		
S4	< 1 ohm		
S5	200 ohm	28 546 85.0	
S6	6 ohm		
S7	3.5 ohm	28 573 10.4	
S8	< 1 ohm		
S9	9 ohm		
S10	1 ohm		
S11	28 ohm		
S12	5 ohm		
S13	110 ohm		
S14	45 ohm		
S15	< 1 ohm	28 573 12.4	
S16	1 ohm		
S17	2 ohm		
S18	1 ohm		
S19	250 ohm		
S20	4 ohm		
S21	480 ohm		
S22	40 ohm		
S23	< 1 ohm	28 573 11.3	
S24	< 1 ohm		
S25	< 1 ohm		
S26	1.3 ohm		
S27	8 ohm		
S28	3 ohm		
S29	20 ohm		
S30	6 ohm		
S31	10 ohm	28 573 59.1	
S32	10 ohm		
S39	< 1 ohm		
C41	94 $\mu\mu\text{F}$		
C42	113 $\mu\mu\text{F}$	28 573 51.0	
S33	—		
S34	4.5 ohm		
S35	6 ohm		
S41	7 ohm		
C43	113 $\mu\mu\text{F}$		
C44	113 $\mu\mu\text{F}$	28 537 39.0	
S36	355 ohm		
S37	< 1 ohm	Zie onder S32 28 220 43.1	
S39			
S40	1.5 ohm		
S41			
S42	40 ohm	Zie onder S35 28 546 93.0	

LAMPEN

L1	L2	L3	L4	L5	L6	L7	L8	L9	L10 .	L11
EF8	EK2	EF9	EAB1	EF6	EL3	AZ1	EM3	8091 D-00	8091 D-00	4496

R1
R2
R3
R4
R5
R6
R7
R8
R9
R10
R13
R14
R15
R17

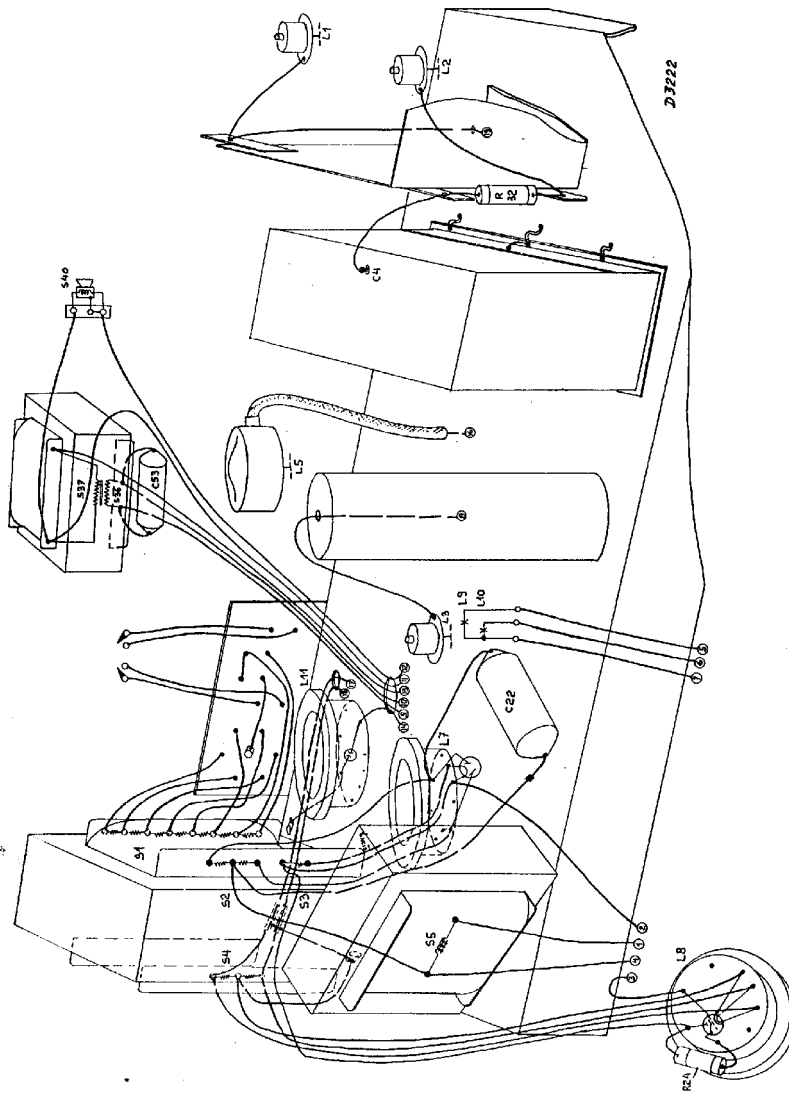


Fig. 10

[illegible]

WELINGSTANDEN									
	Waarde	Codenummer	Prijs		Waarde	Codenummer	Prijs		
R1	50 ohm	28 770 12.0		R18	2 Mohm	28 771 23.0		R31	2500 ohm
R2	0.1 Mohm	28 770 45.0		R19	5 Mohm	28 771 27.0		R32	40 ohm
R3	0.8 Mohm	28 770 54.0		R20	30 ohm	28 770 10.0		R33	0.16 Mohm
R4	16 ohm	28 773 52.0		R21	50000 ohm	28 770 42.0		R36	50 ohm
R5	50 ohm	28 773 57.0		R22	0.28 Mohm	49 470 52.0		R37	10 ohm
R6	500 ohm	28 770 22.0		R44	0.07 Mohm	28 771 22.0		R38	10 ohm
R7	125 ohm	28 770 16.0		R23	1.6 Mohm	28 770 49.0		R39	25 ohm
R8	125 ohm	28 770 21.0		R24	0.25 Mohm	28 803 56.1		R40	0.25 Mohm
R9	40 ohm	28 770 11.0		R25	0.3 Mohm	28 770 51.0		R41	4 ohm
R10	20000 ohm	28 773 83.0		R26	0.4 Mohm	28 773 93.0		R42	64 ohm
R13	64000 ohm	28 770 43.0		R27	0.2 Mohm	49 472 50.0		R43	20,000 ohm
R14	12500 ohm	28 802 74.0		R28	2>0.3 Mohm	28 773 70.0		R44	Zie onder R22
R15	25000 ohm	28 770 39.0		R29	1000 ohm	28 773 52.0			
R17	80000 ohm	28 770 44.0		R30	0.5 Mohm	28 770 52.0			