



SERVICIO PHILIPS

BE 362 A

13-51 m
180-570 m

P 3027 -
110 V, 125 V, 145 V
200 V, 240 V, 245 V

180-570 m	A	13-51 m	B	180-570 m	C
470 Kc/s-23460 pF-glt.		20 Mc/s - Y		R6	
R6		C1, C4, 20 Mc/s.		470 Kc/s - Y	
S15, S16, S17, S18 max.		C6 max.		S27 min.	
R6		180-570 m			
		1600 Kc/s - Y			
		C1, C4 - 1600 Kc/s			
		C7, C8 max.			
		600 Kc/s - Y			
		C3, C4 - 600 Kc/s			
		C9, max.			

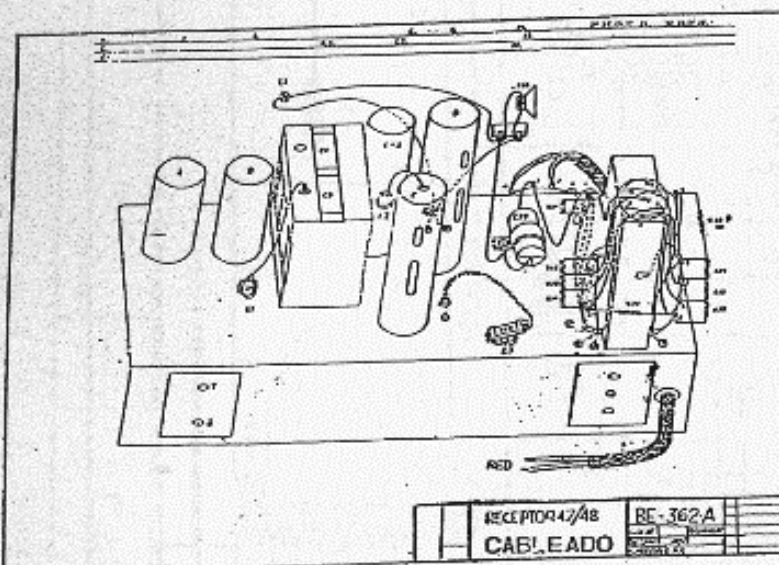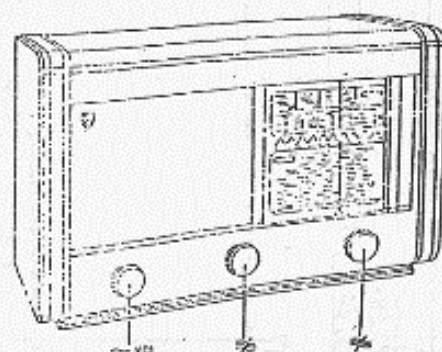

C1	40 pF	F 10350	R3	1500 Ω	49 356 29
C2	25 pF		R6	56000 Ω	49 375 45
C3	12-490 pF	49 600 69	R8	1 M Ω	49 376 60
C4	12-490 pF		R9	33000 Ω	49 377 42
C5	3,9 pF	49 055 11	R12	1 M Ω	49 376 60
C6	0-20 pF		R13	0,1 M Ω	49 376 48
C7	0-20 pF	49 005 03	R14	0,5 M Ω	49 500 11
C8	0-20 pF		R15	0,1 M Ω	49 376 48
C9	0-200 pF	28 212 08	R17	150 Ω	49 377 14
C11	4700 pF	49 129 10	R19	56000 Ω	49 377 45
C12	4700 pF		R20	1000 Ω	49 373 24
C15	0,1 pF	49 127 63	R21	0,82 M Ω	49 376 89
C16	180 pF	49 055 31	R22	1 M Ω	49 376 60
C17	56 pF	49 055 25	R23	1 M Ω	49 376 60
C18	100 pF	49 055 25	R24	150 Ω	49 376 14
C21	400 pF	49 057 00	R25	820 Ω	49 375 23
C22	100 pF	1.ª Bob. F.I.	R26	56000 Ω	49 376 45
C23	106 pF		R27	22000 Ω	49 377 40
C26	100 pF				
C27	113 pF	2.ª Bob. F.I.			
C28	10000 pF	49 127 57			
C29	220 pF	49 055 32			
C31	10900 pF	49 128 14			
C32	0,1 pF	49 129 26			
C33	4700 pF	49 129 82			
C34	0,22 pF	49 128 30			
C35	0,1 pF	49 127 63			
C36	25 pF	28 182 24			
C37	100 pF	28 185 68			
C38	0,1 pF	49 127 63			
C39	22000 pF	49 129 90			
C40	22 pF	49 055 20			
C42	22000 pF	49 129 90			

	L1		L2		L3	L4	
	ECH 4		ECH 4		EBL 1	A2 1	
	Heptodo	Triodo	Heptodo	Triodo			
V1	6,3		6,3		6,3		Volts.
Va	250	115	250	135	230		Volts.
Vg*	100	—	95	—	250		Volts.
- Vg	1,9		7,3		5,9		Volts.
Ia	3	3,8	3	1,1	36		m.A.
Ig*	6	—	3,1	—	4		m.A.


S3, S4, S7, S8
S9, S10, S13, S14
S15, S16
S17, S18, S19
S20, S22
S27
S29, S30, S31 -
S32, S33, S34 -
S35, S37, S38

F3238
F3239
F3207
F3208
F2533
F3209

F2522

S: 27, 3, 7, 35, 29, 30, 31, 32, 33, 34, 38, 37, 4, 8, 3, 13, 10, 14, 15, 16, 17, 18, 19, 20, 22, 28,
 C: 39, 16, 11, 12, 6, 7, 15, 3, 34, 5, 35, 1, 17, 18, 21, 9, 2, 8, 4, 22, 23, 38, 32, 36, 26, 28, 31, 40, 27, 29, 42, 37, 33,
 R: 26, 24, 27, 6, 9, 3, 19, 25, 8, 15, 12, 13, 14, 20, 21, 17, 23, 22.


Commutador en posición E.C.

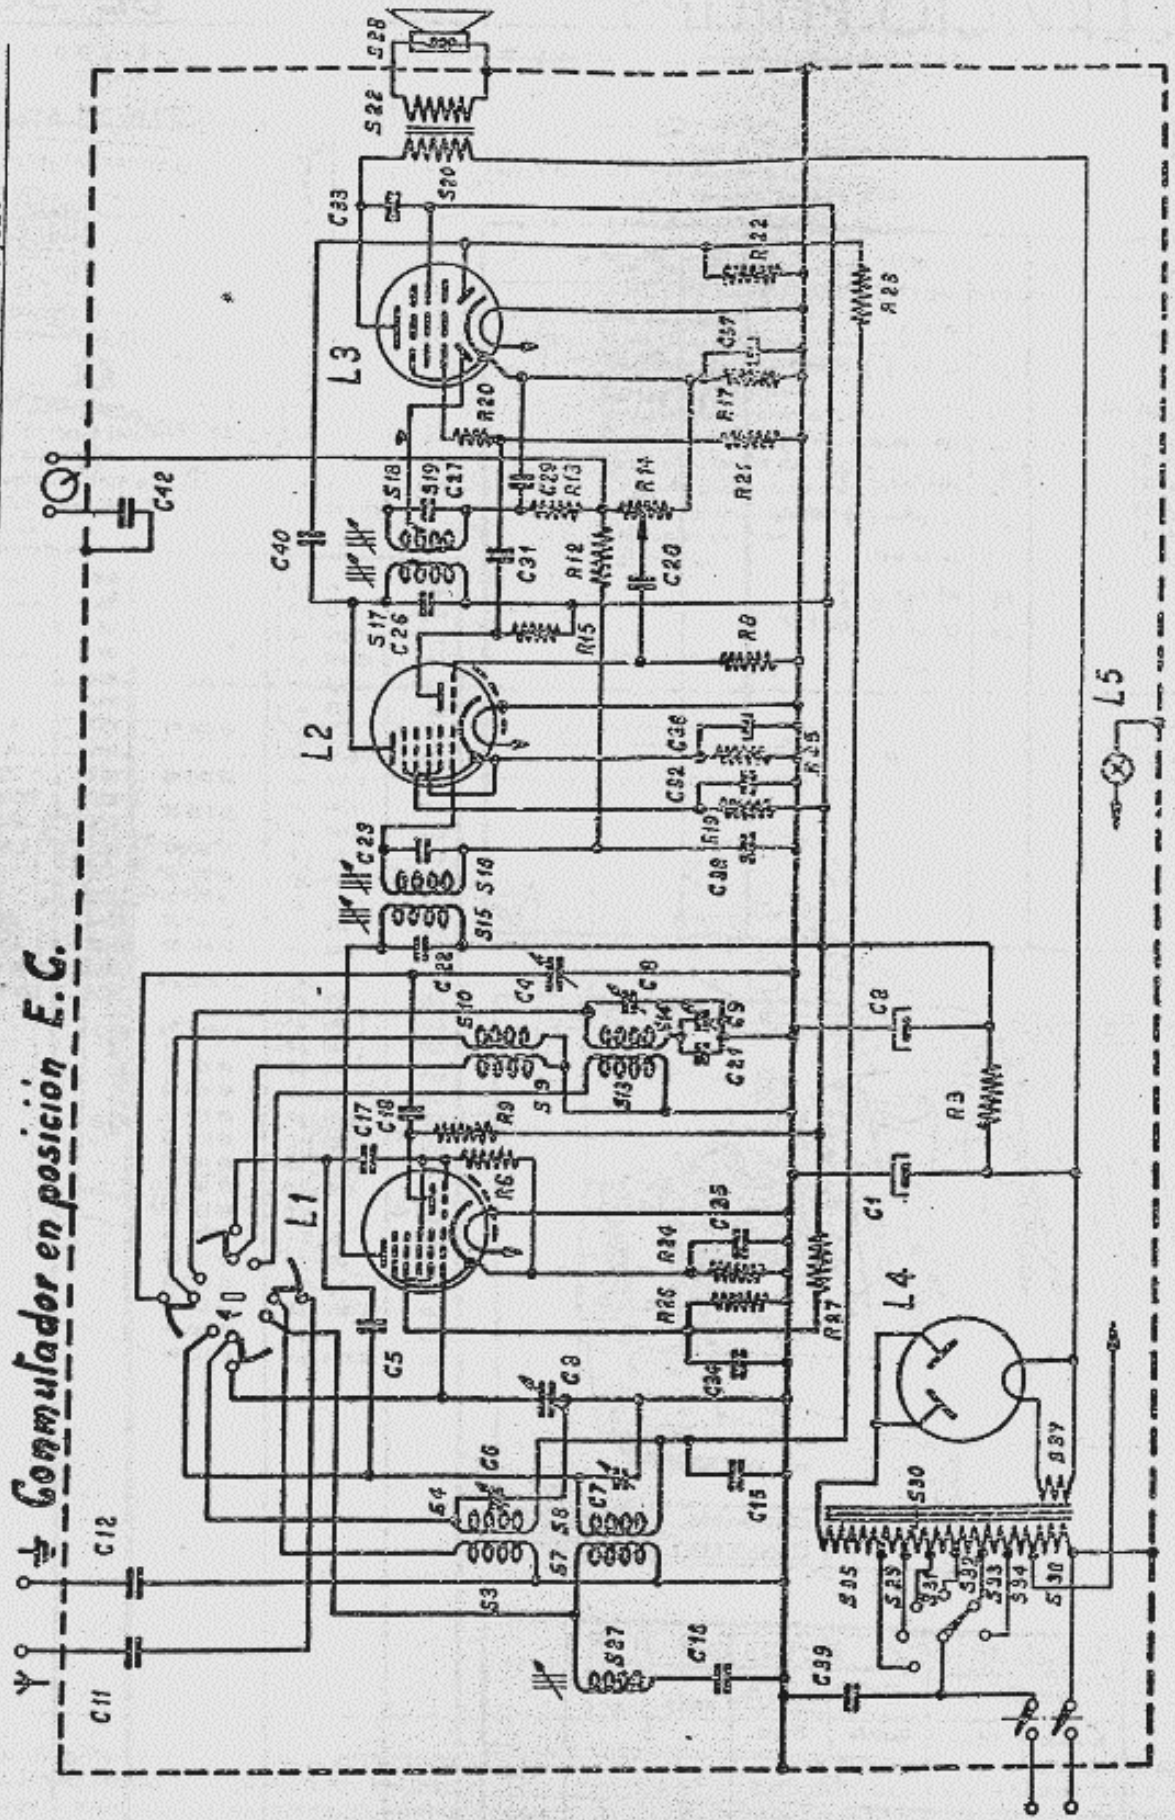

ESQUEMA

BE 362 A

β_1	β_{critical}	O_1	C_1	β_{critical}	β_1	A_1	β_2
0	30.22	40	1	2	32	17	15.11
0.01	36.35	31	1	2	32	17	15.11
0.02	42.97	23	2	22	17	15.11	15.11
0.03	48.13	17	2	22	17	15.11	15.11
0.04	52.97	12	2	22	17	15.11	15.11
0.05	57.53	8	2	22	17	15.11	15.11
0.06	61.85	5	2	22	17	15.11	15.11
0.07	65.97	3	2	22	17	15.11	15.11
0.08	69.93	2	2	22	17	15.11	15.11
0.09	73.76	1	2	22	17	15.11	15.11
0.10	77.48	0	2	22	17	15.11	15.11

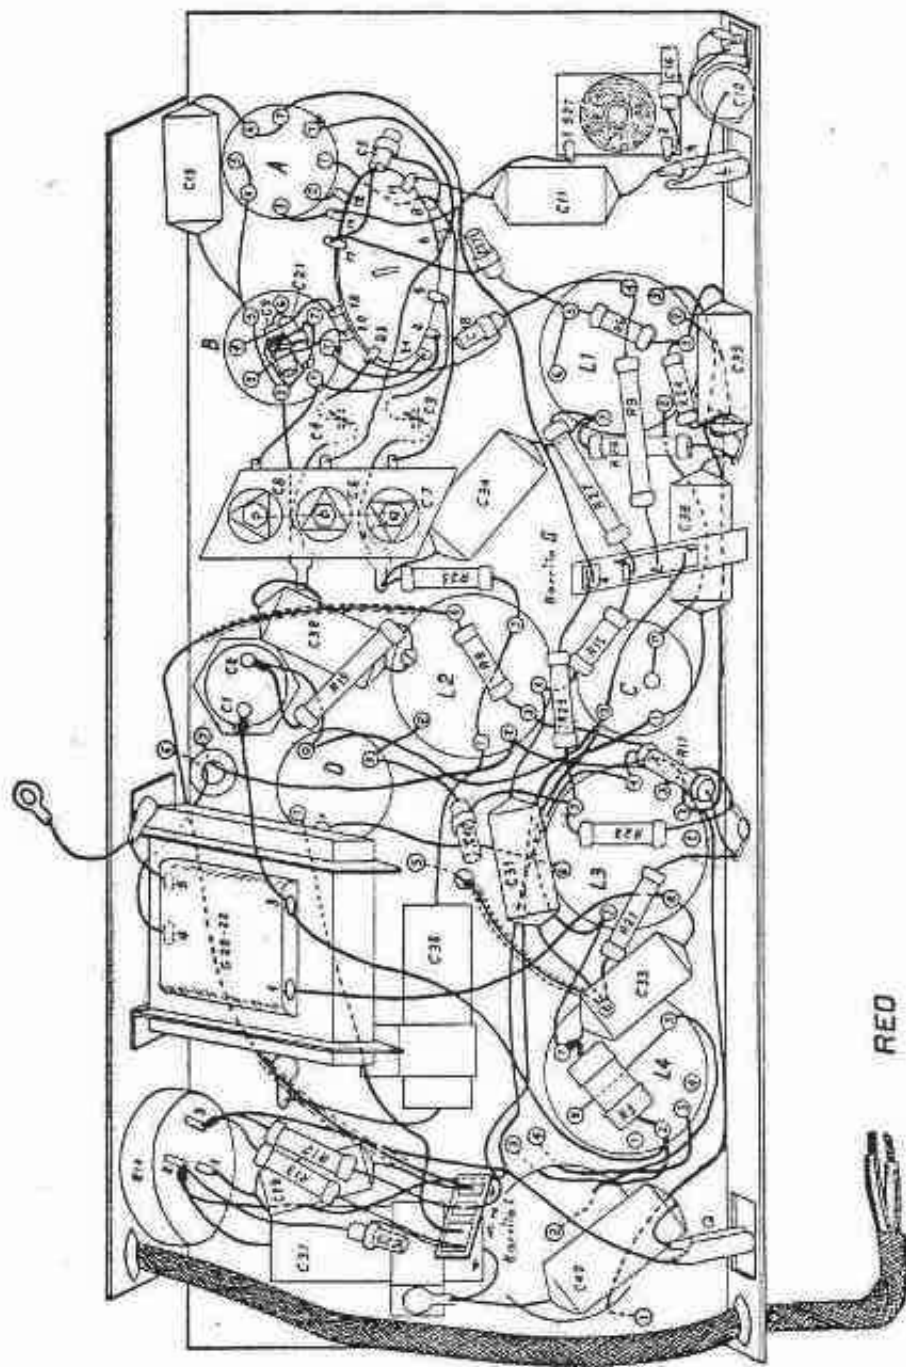

REO

			CABLEADO	BE 362 A	
--	--	--	----------	----------	--