

SERVICIO PHILIPS


BE 363 A

29

16-29 m.
27-51 m.
180-578 m.


F2027

110 V, 125 V, 145 V,
200 V, 220 V, 245 V.

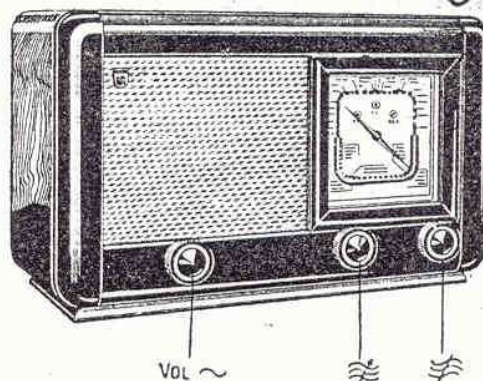

VOL ~

180-578 m. A	16-29 m. B	180-578 m. C
470 Kc/s 25000 pF-glL1	17 Mc/s- Y	R3
R3	C4, C5 17 Mc/s.	470 Kc/s- Y
S20, S21, S22, S23 máx.	C11, C24 máx.	Si mín.
R3	(Este ajuste es también válido para la banda de 27-51 m.)	
	180-578 m.	
	1600 Kc/s- Y	
	C4, C5 1600 Kc/s	
	C9, C22 máx.	
	600 Kc/s- Y	
	C4, C5 600 Kc/s	
	C21 máx.	

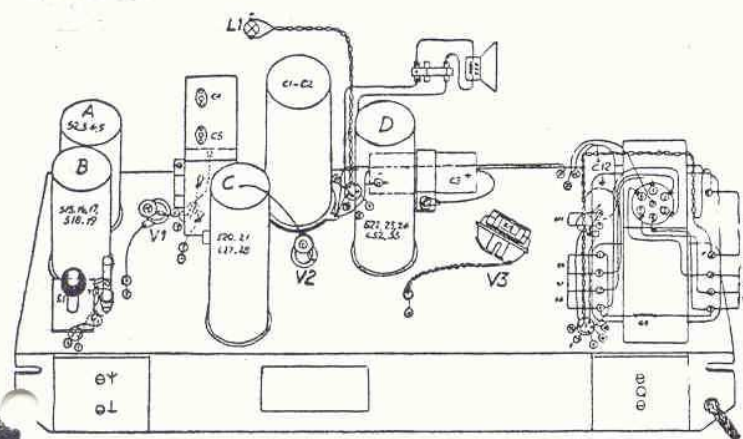


C1	40 μF	F 10350	R1	1 M Ω	48 426 10/1M
C2	25 μF		R2	22000 Ω	48 427 10/22K
C3	100 μF	28 185 68	R3	56000 Ω	48 425 10/56K
C4	12-492 pF	A3 345 00	R4	1500 Ω	48 467 10-1K5
C5	12-492 pF		R5	56000 Ω	48 427 10/56K
C6	4700 pF	48 752 10/4K7	R6	33 Ω	48 425 10/33E
C7	4700 pF	48 752 10/4K7	R7	68 Ω	48 425 10/68E
C8	470 pF	48 406 20/470E	R8	1 M Ω	48 426 10/1M
C9	30 pF	28 212 36	R9	0,56 M Ω	48 425 10/560K
C10	220 pF	48 406 20/220E	R10	0,1 M Ω	48 426 10/100K
C11	30 pF	28 212 36	R11	0,1 M Ω	48 425 10/100K
C12	22000 pF	48 756 20/22K	R12	0,65 M Ω	49 500 19
C13	120 pF	48 406 02/120E	R13	0,2 M Ω	
C14	220 pF	48 406 02/220E	R14	12000 Ω	48 425 10/12K
C15	0,1 μF	48 751 20/100K	R15	0,82 M Ω	48 426 10/820K
C16	220 pF	48 406 20/220E	R16	1,5 M Ω	48 426 10/1M5
C17	47000 pF	48 750 20/47K	R17	0,82 M Ω	48 426 10/820K
C18	56 pF	48 406 10/56E	R18	1000 Ω	48 425 10/1K
C19	200 pF	28 212 08	R19	22000 Ω	48 427 10/22K
C20	220 pF	48 406 20/220E	R20	0,56 M Ω	48 425 10/560K
C21	350-550 pF	49 005 46			
C22	30 pF	28 212 36			
C23	1,5 pF	49 055 60			
C24	30 pF	28 212 36			
C25	113 pF	48 406 02/113E			
C26	220 pF	48 406 02/220E			
C27	100 pF	1.ª bobina de F.I.			
C28	106 pF				
C29	0,1 μF	48 751 20/100K			
C30	0,1 μF	48 750 20/100K			
C31	10000 pF	48 750 20/10K			
C32	100 pF	2.ª bobina de F.I.			
C33	113 pF				
C34	180 pF	48 406 10/180E			
C35	22 pF	48 406 10/22E			
C36	27000 pF	48 750 10/27K			
C37	47000 pF	48 757 20/47K			
C38	10000 pF	48 751 10/10K			
C39	4700 pF	48 757 20/4K7			
S1	F 3245				
S2, S3, S4, S5	F 3244				
S6, S7, S8, S9, S10, S11, S12, S13, S14	F 2547				
S15, S16, S17, S18, S19	F 3243				
S20, S21	F 3207				
S22, S23, S24	F 3208				
S25, S26	F 2533				

	V1		V2		V3	V4	
	ECH4		ECH4		EBL1	AZ1	
	Heptodo	Triodo	Heptodo	Triodo			
V1	6,3		6,3		6,3		Volts.
Va	250	115	250	135	230		Volts.
Vg'	100	—	95	—	250		Volts.
-Vg	1,9		7,2		5,9		Volts.
Ia	3	3,8	5	1,1	36		m.A.
Ig'	6	—	3,1	—	4		m.A.

S.E.R.

S: 1	2-4	3-5	6-7-8-9-10-11-12-13-14	15	16-18-17-19	20-21	22	23-24	25	26	28
C: 8-6-12-7	9-11-3-4-14-15-16	17	20	18-26-25-19-21-1-24-22-5-2	27	29-28	30-30	32-31-34-38	33-36	37-35	39
R: 2	19-1	3	4	5	6-7	8-9	10-15	17	11-15-12-14	16	18-20

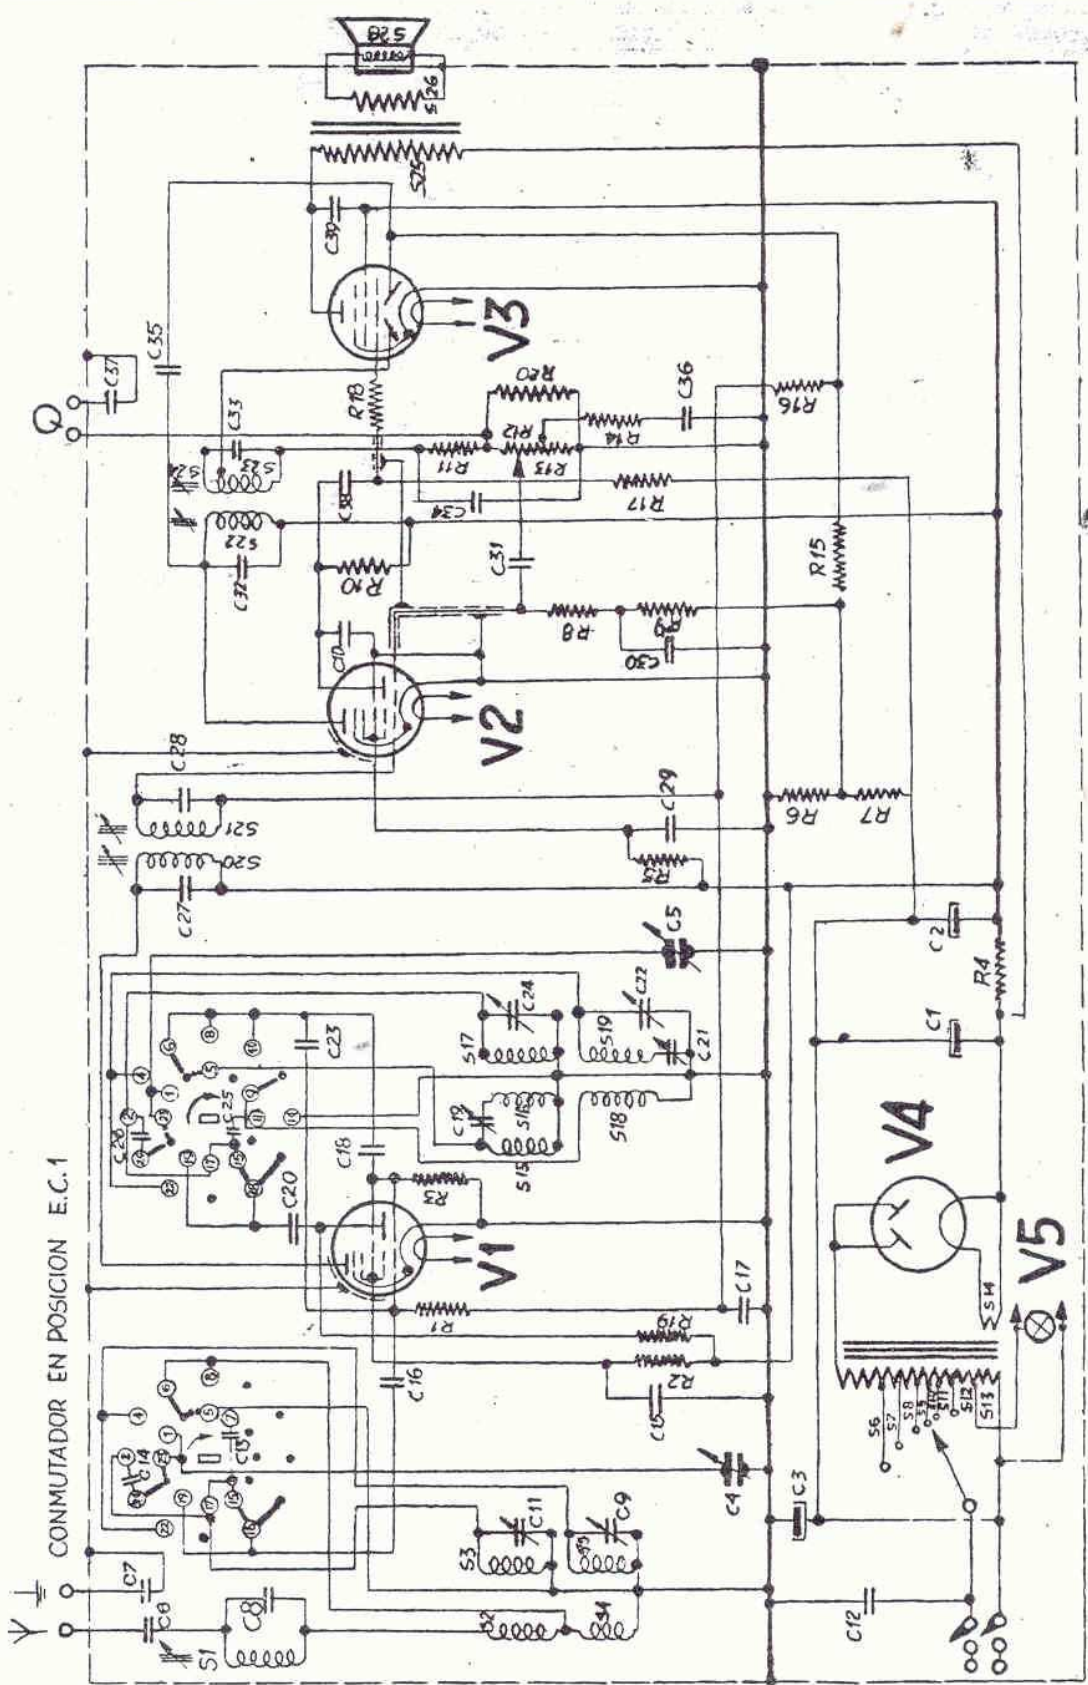

RECEPTOR 48-49

BE-363-A

5-VII-40

ESQUEMA

HOJA 21
FECHA 5-III-48
DISEÑANTE Agut
SUBSTITUYE A1

