


SERVICIO PHILIPS

BE 521-A


25 — 30 m.
40 — 50 m.
13 — 40 m.
160 — 315 m.

F 2036/95 — 5 Ω
90 V. — 110 V.
125 V. — 150 V.

160 — 315 m.	A	160 — 315 m.	B	160 — 315 m.	C
1452 Kc/s — 32000 pF — g1V1		1750 Kc/s —		452 Kc/s —	
C4, C5 mín.		C4, C5 1750 Kc/s		C4, C5 mín.	
S29, S30, S27, S26,		C23, C19 máx.		C6 mín.	
S23, S24, S25, S26 máx.		616 Kc/s —			
		C4, C5 616 Kc/s			
		C24 máx.			
		13 — 40 m.			
		21 Mc/s —			
		C21, C9 máx.			
		7,45 Mc/s —			
		C20 máx.			

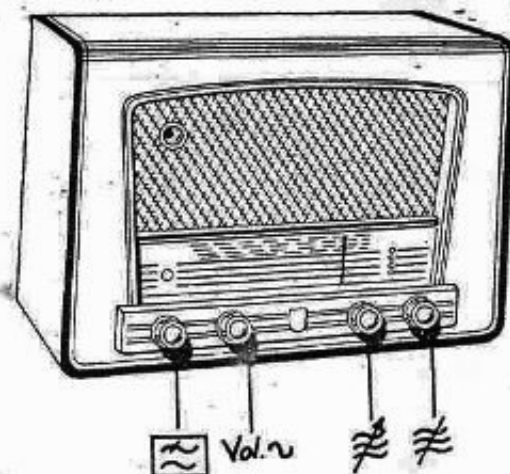

C1	40 pF	P10350/40-40	R1	1200 Ω	49 379 78
C2	40 pF		R4	0,62 M Ω	48 555 10/320K
C4	12-492 pF		R5	33000 Ω	48 555 10/33K
C5	12-492 pF	ZB 49 801 31	R6	32000 Ω	48 557 10/33K
C6	30 pF	ZB 28 212 36	R7	56000 Ω	48 427 10/56K
C7	575 pF	48 601 01/575E	R8	1,5 M Ω	48 555 10/1M5
C8	175 pF	49 005 52	R9	150 Ω	48 556 10/150E
C9	50 pF	49 005 50	R10	47000 Ω	48 555 10/47K
C10	25 pF	49 005 49	R11	1 M Ω	48 555 10/1M
C13	22000 pF	28 43 750 20/22K	R12	0,45 M Ω	
C14	47000 pF	28 43 750 20/47K	R14	0,05 M Ω	ZB 49 590 34
C15	56 pF	48 601 10/56E	R15	27400 Ω	48 555 10/27K
C16	330 pF	48 601 20/330E	R16	1500 Ω	48 555 10/1K5
C17	452 pF	28 43 750 01/452E	R17	58000 Ω	ZB 49 472 49
C18	240 pF	28 43 750 01/240E	R18	39000 Ω	48 555 05/39K
C19	30 pF	ZB 28 212 26	R19	0,1 M Ω	48 555 10/100K
C20	100 pF	49 005 51	R20	0,12 M Ω	48 557 05/120K
C21	30 pF	ZB 28 212 36	R21	0,68 M Ω	48 555 10/680K
C22	275 pF	49 005 53	R22	1800 Ω	48 555 10/1K
C23	30 pF	ZB 28 212 26	R25	10 Ω	48 550 10/10E
C24	400-375 pF	49 005 55	R27	1 M Ω	48 555 10/1M
C25	100 pF	48 601 20/100E	R28	1 M Ω	48 555 10/1M
C26	12000 pF	28 43 750 20/12K			
C28	0,10 pF	28 43 750 20/100E			
C29					
C30		1.ª Bob. F.I.			
C31					
C32		2.ª Bob. F.I.			
C34	52 pF	48 601 10/52E			
C36	8200 pF	28 43 750 20/82K			
C37	15000 pF	28 43 750 10/15K			
C40	2300 pF	28 43 750 20/23K			
C41	0,1 pF	28 43 750 20/100E			
C42	6800 pF	28 43 750 20/68K			
C44	220 pF	48 601 20/22E			
C45	2700 pF	28 43 750 20/27K			

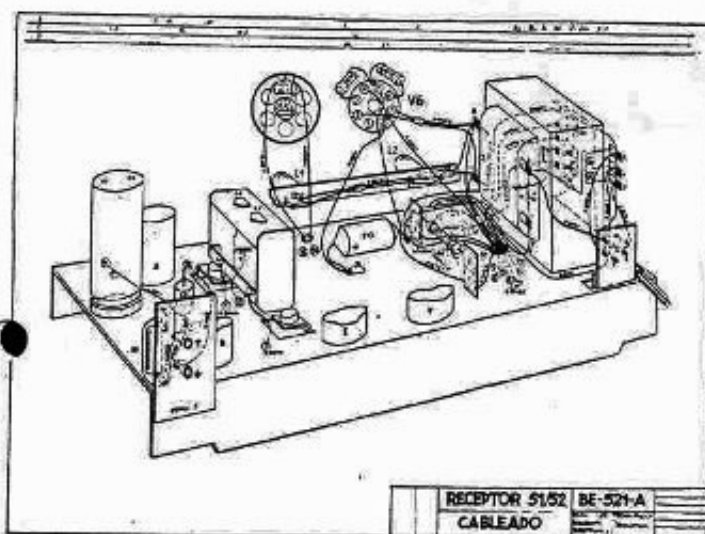

RECEPTOR 51/52 BE-521-A
CABLEADO

	V1		V2	V3	V4	
	ECH42		BAF42	EDC41	EL41	
	Hexodo	Triodo				
V1	4,3		6,3	6,3	6,3	Volts.
V2	229	118	229	100	233	Volts.
Vg 2 + 4	53		53		233	Volts.
- Vg	0,8		0,8	1,3	5,8	Volts.
Ia	1,5	3,7	3,8	0,65	36	m.A.
- Ig 2 + 4	2,1		1,2		4,8	m.A.

S1, S2, S3, S4
S5.
S6, S7, S10, S11
S8, S9,
S17, S18
S14, S15, S16
S19, S20
Varilla ajuste
S23, S24, S25
S26, C29, C30
S27, S28, S29
S30, C31, C32
S31, S32, S33

F 2589
ZB A3 110 60
F 3256
F 3257
F 3259

P 3238
ZB A3 599 56

ZB A3 121 94

ZB A3 121 94
F 2391

S. E. P.

