

6FY7

COMPACTRON DISSIMILAR DOUBLE TRIODE FOR TV VERTICAL-DEFLECTION OSCILLATOR AND AMPLIFIER APPLICATIONS

DESCRIPTION AND RATING

The 6FY7 is a compactron containing two dissimilar triode sections, designed for use as a combined vertical-deflection oscillator and amplifier in television receivers. Section 1 is intended for service as an oscillator and Section 2 as an amplifier.

GENERAL

ELECTRICAL

Cathode - Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC* . . . 6.3±0.6 Volts

Heater Current† 1.05 Amperes

Direct Interelectrode Capacitances, approximate§

Section 1 Section 2

Grid to Plate: (g to p) 4.4 9.5 pf

Input: g to (h + k) . . 2.2 6.5 pf

Output: p to (h + k). . 0.4 1.2 pf

MECHANICAL

Operating Position - Any

Envelope - T-9, Glass

Base - E12-70, Button 12-Pin

Outline Drawing - EIA 9-60

Maximum Diameter 1.188 Inches

Maximum Over-all Length . . . 2.875 Inches

Maximum Seated Height 2.500 Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS

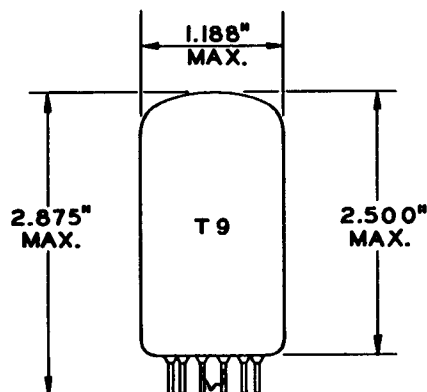


EIA 9-60

TERMINAL CONNECTIONS

- Pin 1 - Heater
- Pin 2 - No Connection
- Pin 3 - Grid (Section 2)
- Pin 4 - No Connection
- Pin 5 - Plate (Section 2)
- Pin 6 - No Connection
- Pin 7 - Cathode (Section 2)
- Pin 8 - Internal Connection - Do Not Use
- Pin 9 - Cathode (Section 1)
- Pin 10 - Grid (Section 1)
- Pin 11 - Plate (Section 1)
- Pin 12 - Heater

BASING DIAGRAM



EIA 12EO

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or elements. In the absence of an

express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

MAXIMUM RATINGS (Cont'd)

DESIGN-MAXIMUM VALUES	Vertical Oscillator Service¶ (Section 1)	Vertical Deflection Amplifier¶ (Section 2)	
DC Plate Voltage	330	275	Volts
Peak Positive Pulse Plate Voltage	---	2000	Volts
Peak Negative Grid Voltage.	400	250	Volts
Plate Dissipation.	1.0	7.0#	Watts
DC Cathode Current	20	50	Milliamperes
Peak Cathode Current.	70	175	Milliamperes
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component	100	100	Volts
Total DC and Peak.	200	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak.	200	200	Volts
Grid Circuit Resistance.	2.2	2.2	Megohms

CHARACTERISTICS AND TYPICAL OPERATION

AVERAGE CHARACTERISTICS	Section 1 (Oscillator)	Section 2 (Amplifier)	
Plate Voltage	250	60 150	Volts
Grid Voltage	-3.0	0‡ -17.5	Volts
Amplification Factor.	65	---	6.0
Plate Resistance, approximate.	40500	---	920
Transconductance	1600	---	6500
Plate Current	1.4	95	35
Plate Current, approximate			
Ec = -25 Volts.	---	---	6
Grid Voltage, approximate			
Ib = 30 Microamperes.	-5.5	---	---
Grid Voltage, approximate			
Ib = 50 Microamperes.	---	---	-36

NOTES

* The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.

‡ Heater current of a bogey tube at Ef = 6.3 volts.


§ Without external shield.

¶ For operation in a 525-line, 30-frame television system as described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations", Federal Communications Commission. The duty cycle of the voltage pulse must not exceed 15 percent of one scanning cycle.


In stages operating with grid-leak bias, an adequate cathode-bias resistor or other suitable means is required to protect the tube in the absence of excitation.

‡ Applied for short interval (two seconds maximum) so as not to damage tube.

AVERAGE PLATE CHARACTERISTICS

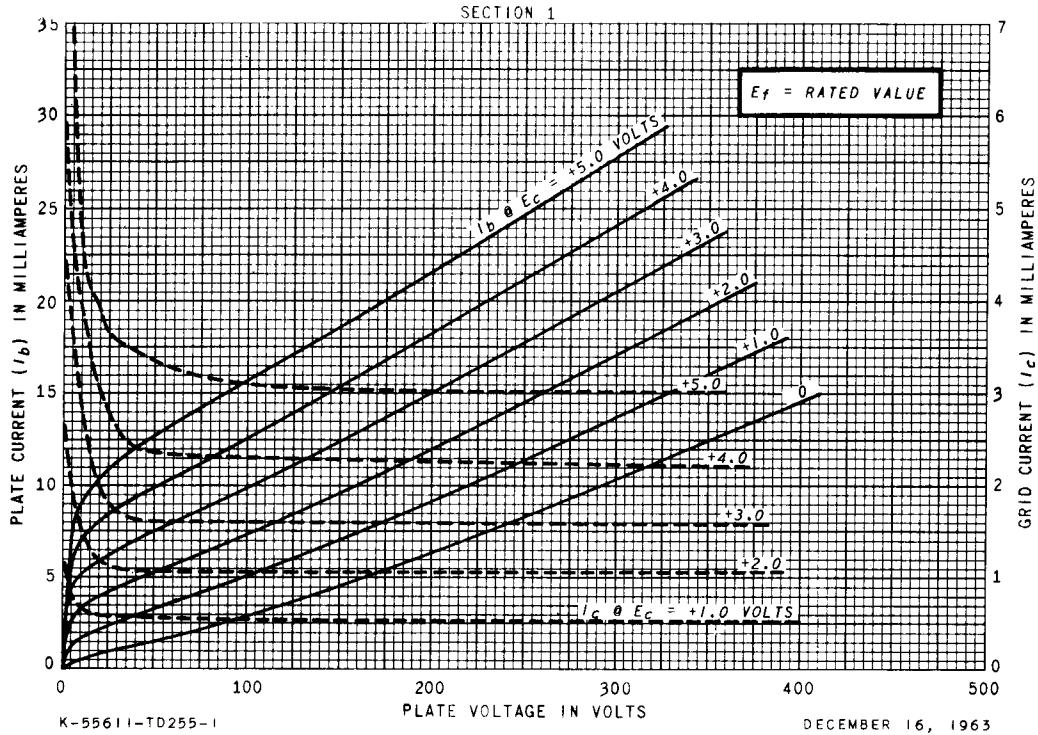


AVERAGE PLATE CHARACTERISTICS

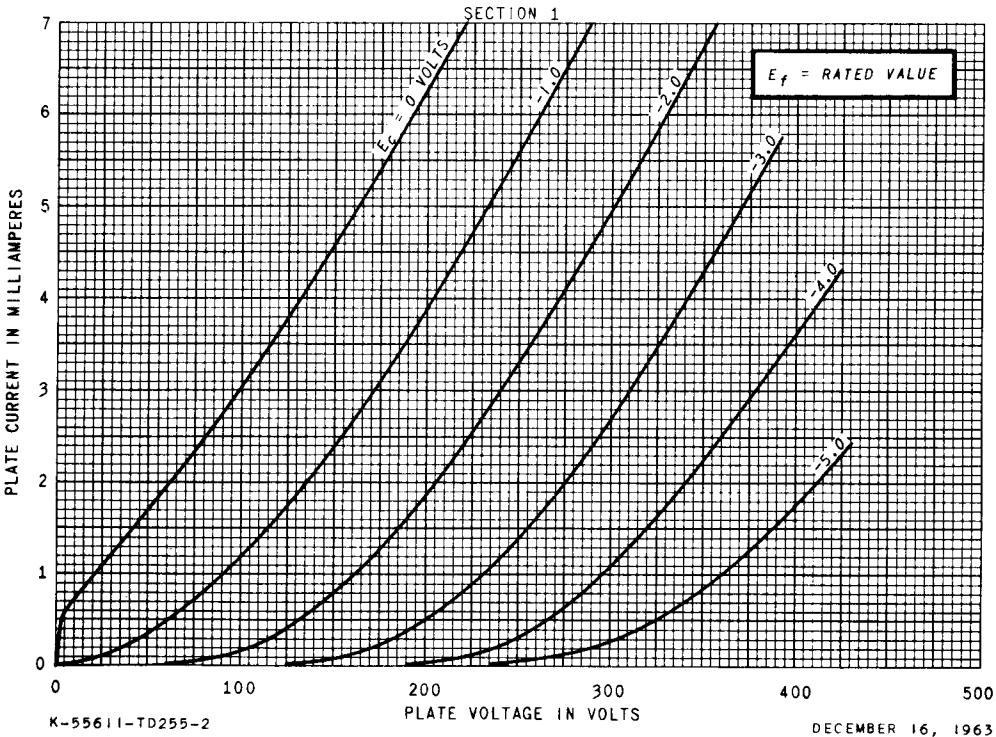


AVERAGE TRANSFER CHARACTERISTICS

SECTION 1

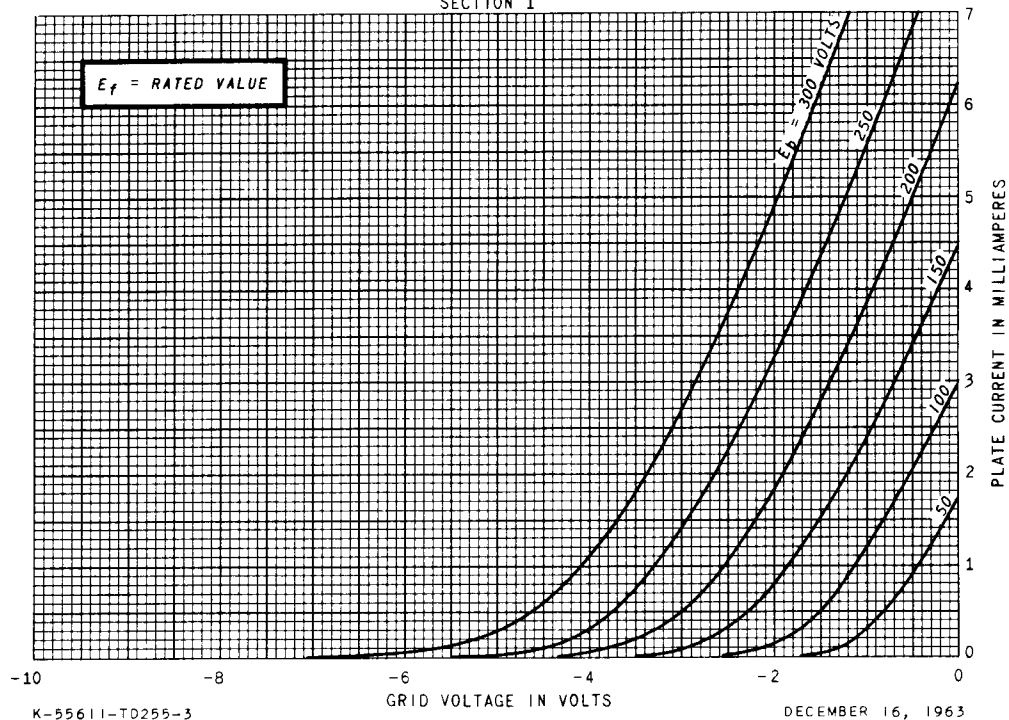


AVERAGE CHARACTERISTICS


SECTION 1

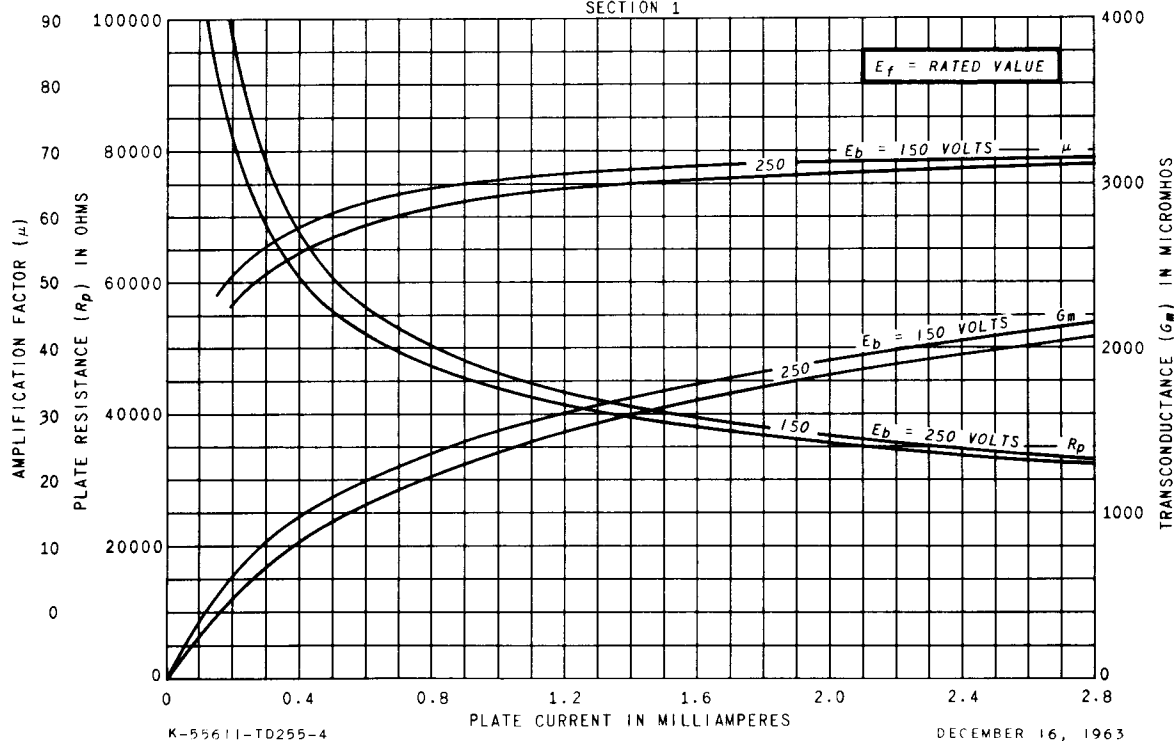


AVERAGE PLATE CHARACTERISTICS

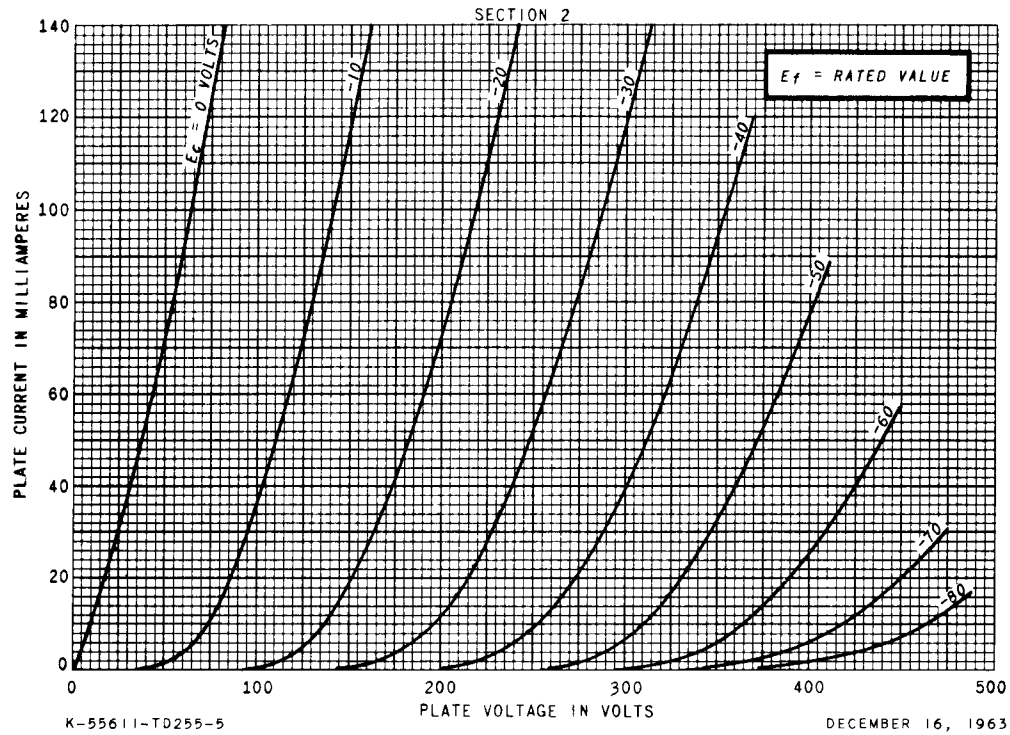

AVERAGE TRANSFER CHARACTERISTICS

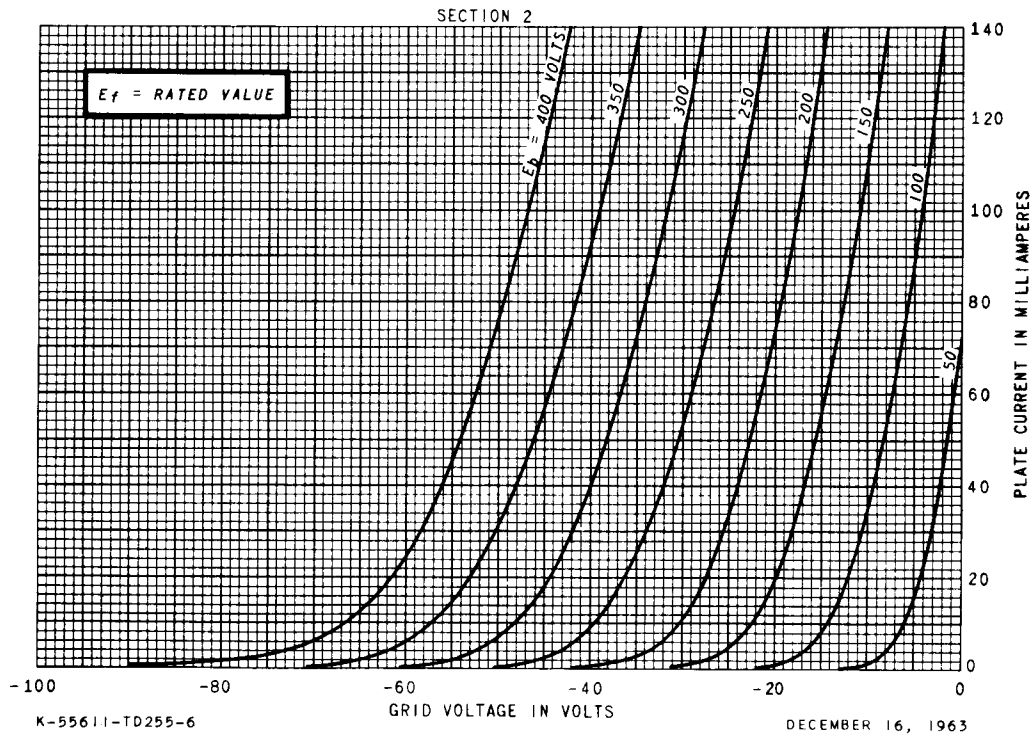

AVERAGE CHARACTERISTICS

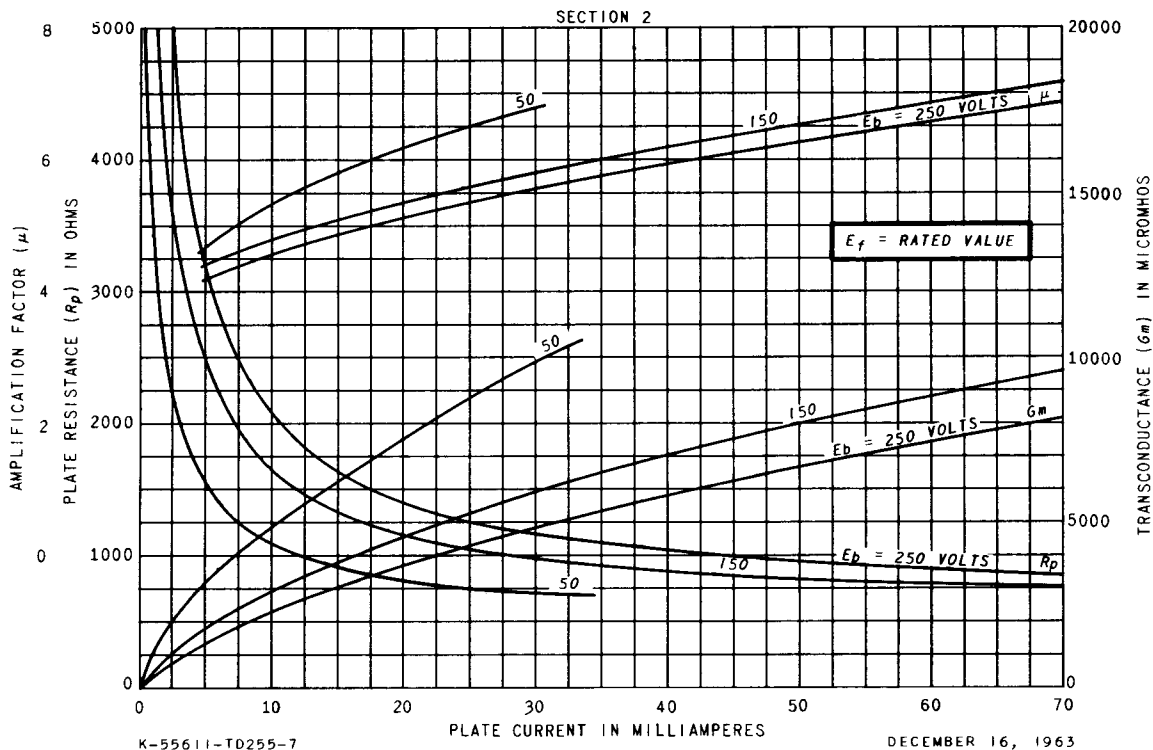

TUBE DEPARTMENT

GENERAL  ELECTRIC

Owensboro, Kentucky