


SERVICIO PHILIPS


BE 362 U

13 - 51 m.
180 - 570 m.

tipo 9726 - 5 Ω
110 - 250 V.

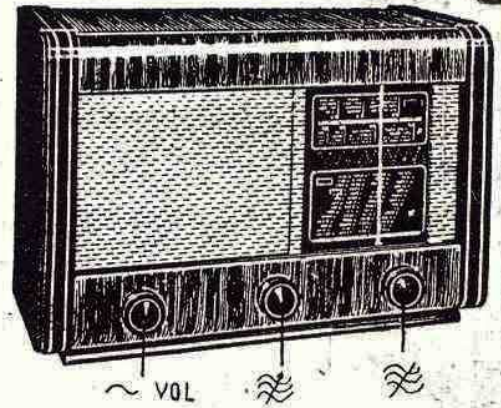

180 - 570 m. A	13 - 51 m. B	180 - 570 m C
470 Kc/s 25000 pF - g1L1	20 Mc/s - Y	470 Kc/s - Y
R6	C3, C4 20 Mc/s	S27 mín.
S15, S16, S17, S18 máx.	C6 máx	
R6	180 - 570 m.	
	1600 Kc/s - Y	
	C3, C4 1600 Kc/s	
	C7, C8 máx.	
	600 Kc/s - Y	
	C3, C4 600 Kc/s	
	C9 máx.	

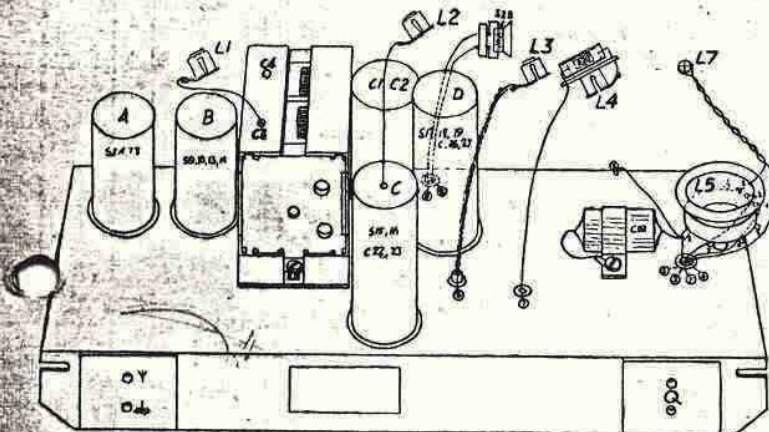

	L1		L2	L3	L4	
	HEXODO	TRIODO				
V _a	85	40	80	40	95	Volts.
V _g	40		45		90	Volts.
-V _g	2		2,2		6	Volts.
I _a	1,5	2	1,5	1	20	m.A.
I _g	2		1		17	m.A.
V _i	6,3		6,3	6,3	33	Volts.

C1	40 μF	F10330/40+25	R3	1500 Ω	48 467 10/1K5
C2	25 μF		R5	220 Ω	48 425 10/220
C3	12-490 pF	49 000 69	R6	47000 Ω	48 425 10/47K
C4	12-490 pF		R8	2,7 M Ω	48 427 10/2M1
C5	3,9 pF	48 406 99/3E9	R9	22000 Ω	48 427 10/22K
C6	20 pF	49 005 03	R12	1,8 M Ω	48 427 10/1M8
C7	20 pF	49 005 03	R13	56000 Ω	48 425 10/56K
C8	20 pF	49 005 03	R14	0,35 M Ω	49 500 13
C9	200 pF	28 212 08	R15	0,1 M Ω	48 426 10/100
C11	4700 pF	48 752 10/4K7	R17	150 Ω	48 427 10/150
C12	4700 pF	48 752 10/4K7	R19	22000 Ω	48 427 10/22K
C15	0,1 μF	48 750 20/100K	R20	1000 Ω	48 425 10/1K
C16	180 pF	48 406 10/180E	R21	0,47 M Ω	48 425 10/470
C17	56 pF	48 406 10/56E			
C18	100 pF	48 406 10/100E			
C21	400 pF	48 406 10/400E			
C28	10000 pF	48 750 20/10K			
C29	100 pF	48 406 10/100E			
C31	10000 pF	48 751 10/10K			
C33	4700 pF	48 752 20/4K7			
C34	0,22 μF	48 751 10/220K			
C39	22000 pF	48 756 20/22K			
C42	22000 pF	48 756 20/22K			
S3, S4, S7, S8		F 3238			
S9, S10, S13, S14		F 3239			
S15, C22, S16, C23		F 3207			
S17, C26, S18,					
S19, C27		F 3208			
S20, S21, S22		F 2536			
S27		F 3209			

S:	27	3-7	4-8	9-13	10-14	15-16	17-18-19	20-21-22-28				
C:	11-16	12-39-6	7-15-3	5	17	18	21-9-8-4-22-23	1	26-2-42	27-29-28	31-34	33
R:					5-6-9				3	12-13-14	8-15-19-20-21	17

Commutador en posición E.C.

