


15 — 51 m. F 3038 — 5 Ω
185 — 580 m. 110 — 150 V

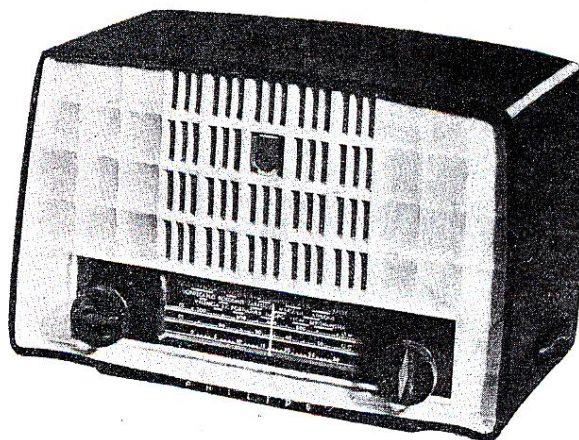

185 — 580 m. A	15 — 51 m. B
C3, C4 mín. 452 Kc/s 32000 pFgl-Vt S8, S7, S5, S6, S7	C3, C4 mín. 6,1 Mc/s — S4, S2 máx. 21,8 Mc/s — C8, C6 máx. 185 — 580 m. 548 Kc/s — S14, S12 máx. 1630 Kc/s — C23, C22 máx.

VALVULAS

T I P O	P O S I C I O N
UCH-42	V-1
UF-41	V-2
UBC-41	V-3
UL-41	V-4
UY-41	V-5
8097 D-00	L-1 (piloto)
8097 D-00	L-2 (piloto)

C1 50 μF	F 5008	R1 1800 Ω	48 553 10/1K8
C2 50 μF		R2 22000 Ω	48 555 10/22K
C3 12-500 pF	ZB 49 001 61	R3 18000 Ω	48 557 10/18K
C4 12-500 pF		R4 2,2 MΩ	48 556 10/2M2
C5 1000 pF	48 757 20/1K	R5 0,05 MΩ	F 6009
C6 25 pF	49 005 49	R6 0,45 MΩ	
C7 47000 pF	48 750 20/47K	R7 4,7 MΩ	48 555 10/4M7
C8 30 pF	28 212 36	R8 0,22 MΩ	48 556 10/220K
C9 490 pF	48 429 01/490E	R9 0,68 MΩ	48 555 10/680K
C10 110 pF	1.ª Bob. FI	R10 150 Ω	48 557 10/150E
C11 195 pF		R13 800 Ω	48 495 10/800E
C12 82000 pF	48 751 20/82K	R14 15000 Ω	48 557 10/15K
C13 110 pF	2.ª Bob. FI	R15 120 Ω	48 555 10/120E
C14 195 pF		R16 47000 Ω	48 555 10/47K
C15 100 pF	48 203 20/100E		
C16 2700 pF	48 751 20/2K7		
C17 10000 pF	48 751 20/10K		
C18 10000 pF	48 757 20/10K		
C19 22000 pF	48 757 20/22K		
C20 220 pF	48 203 20/220E		
C21 27 pF	48 203 10/27E		
C22 25 pF	49 005 49		
C23 30 pF	28 212 36		
C24 56 pF	48 203 20/56E		
C25 100 pF	48 203 20/100E		
C26 120 pF	48 203 02/120E		
S1, S2	ZB A3 125 27		
S11, S12	ZB A3 125 35		
S3, S3a, S4	ZB A3 125 56		
S13, S14	F 3298		
S5, S6, C10, C11	ZB A3 126 84		
S7, S8, C13, C14	ZB A3 126 84		
S9, S10	F 2583		

	V1		V2	V3	V4	
	UCH 42					
	Hexodo	Triodo	UF 41	UBC 41	UL 41	
Vf	14		12,6	14	45	Volts.
Va	105	72	105	40	125	Volts.
Vg 2 + 4	46		46		105	Volts.
- Vg	0,6		0,6	0,6	5,6	Volts.
Ia	1,2	2,8	3,8	0,23	30	m. A.
Ig 2 + 4	1		2,2		5,1	m. A.

ESQUEMA


RECEPTOR 55/56

BE-252-U


 HOJA 27
 DIBUJANTE Preparas
 SUBSTITUYE A:

 FECHA 21-9-54
 15-12-54
 26-4-55


S: 1. 11. 2. 12 3a. 3.4.13.14. 5. 6. 7. 8. 9. 10. 15
 C: 5. 24. 7. 6. 22. 3 19. 21. 26. 1. 9. 2. 20. 8. 23. 4. 10 11. 12. 13. 25. 14. 15. 16. 17. 18
 R: 13. 2. 15. 1. 14. 3. 4. 16. 6. 5. 7. 8. 9. 10

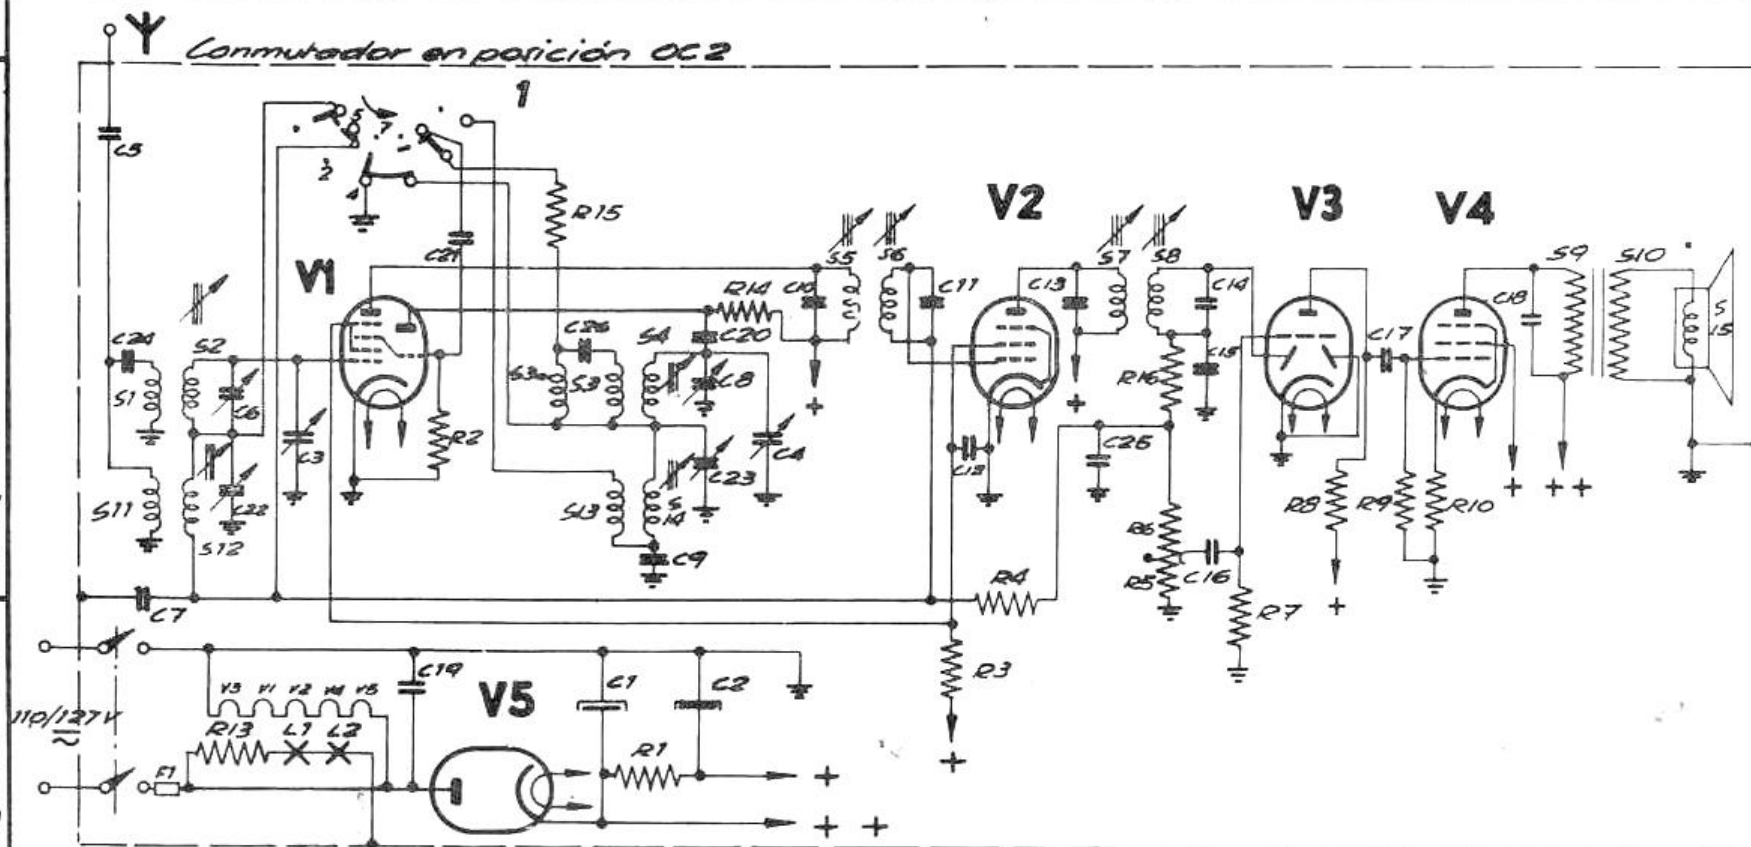

Márgenes: OC2. OM.

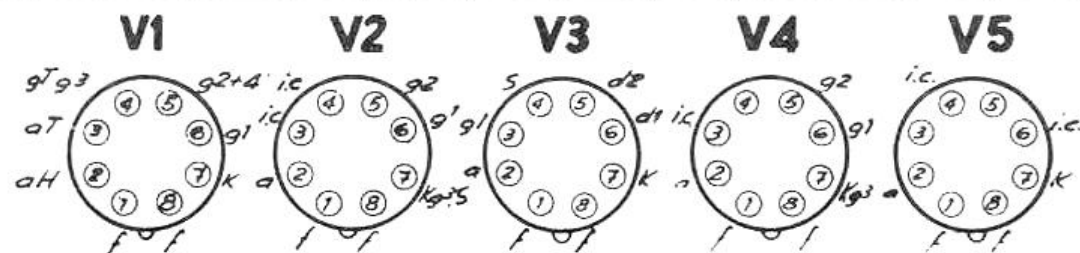

F

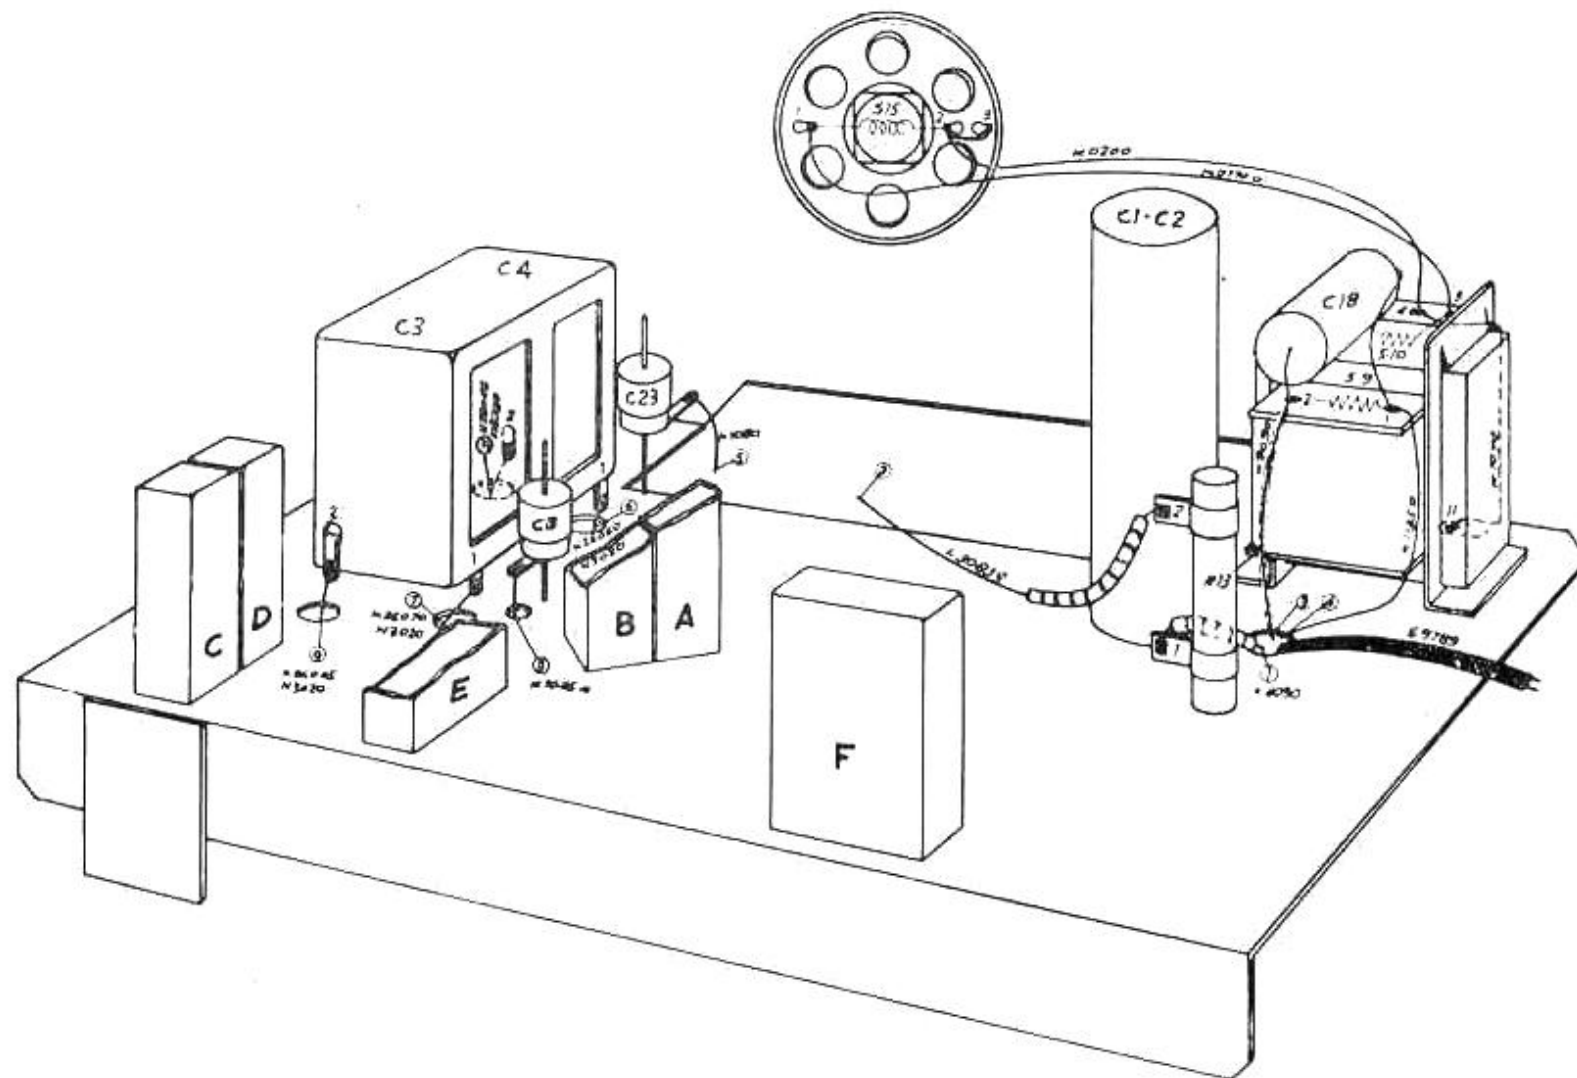

RECEPTOR 54/55	BE-252-U
CABLEADO	

22-11-54