
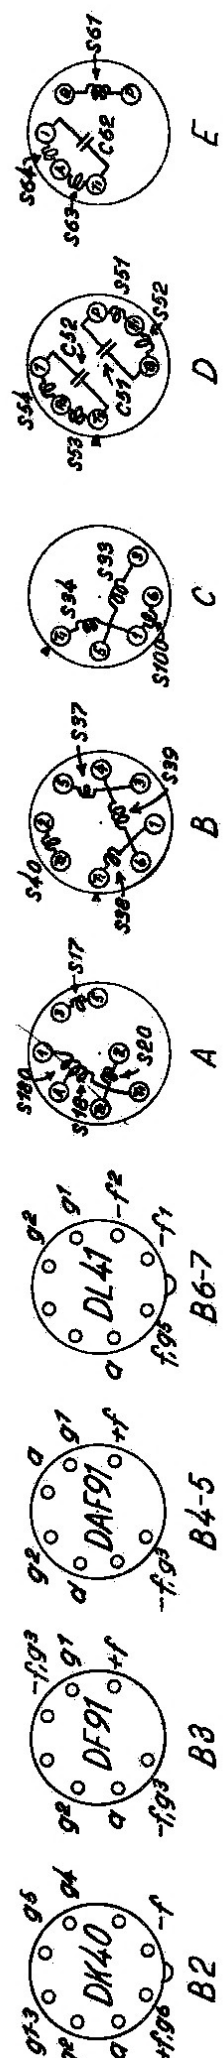


44-101	17-20-18-91-18a	100-33-37-39-34-30-40	61-63	81-82-83-76	S
19-20-1	91-92-4-18-103-105-6	33 48-50-47-34-40-107-38-51-89-52	109 88-87 62-111 110-82 112	83-84	2
103	106-8-104	50-81 33	109 40-11-49 42 110 43	44-45 48-46-47-2	R

BØLGELÆNGDEOMSKIFTER 3 STILLINGER: LB-MB-KB. (STILL.KB.)

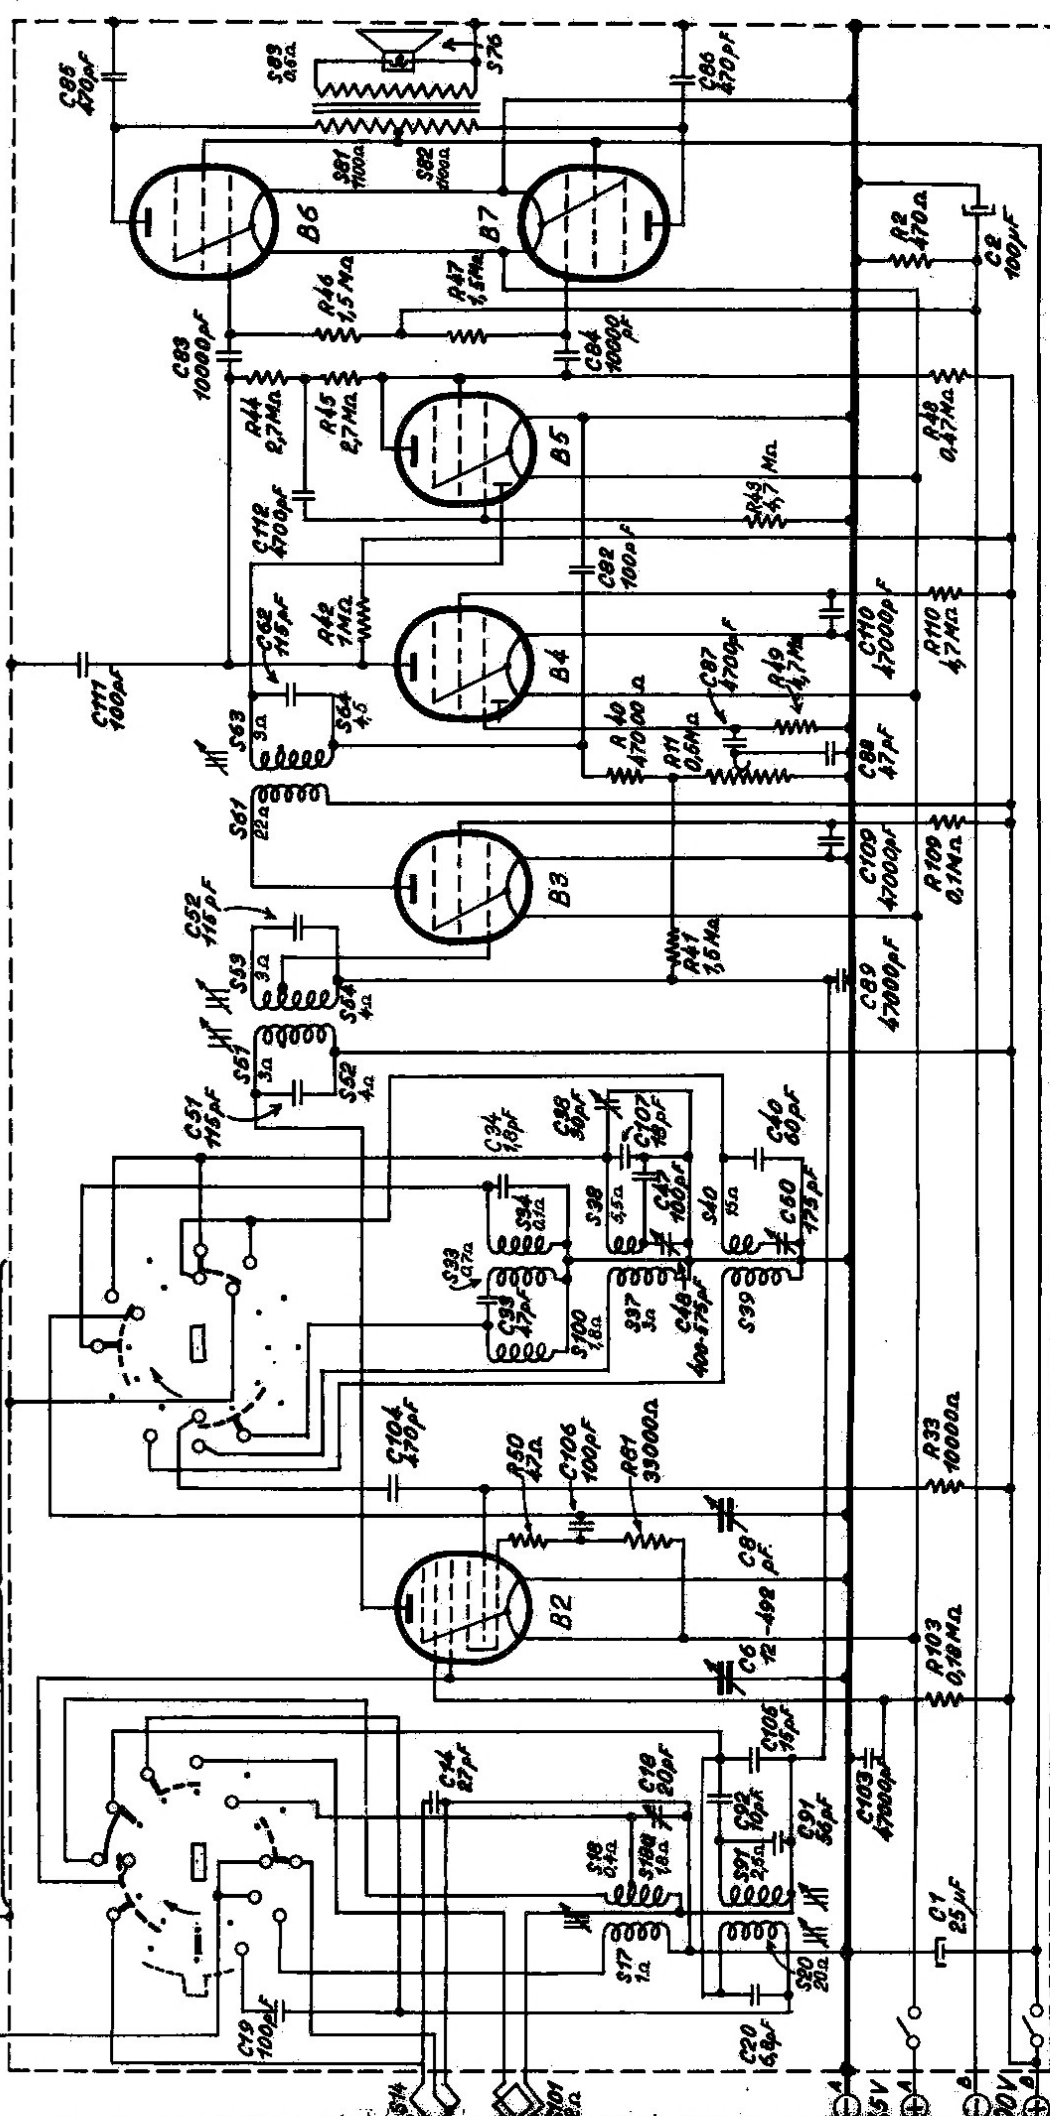

Modestände

Kondensatorer

382 B.

R 2	470 ohm	DK 61	205/470E	C 1	25 mf	48	312	09/25
R 11	0,5Mohm	49	500 11	C 2	100 mf	28	185	68
R 35	10000 ohm	DK 61	110/10K	C 6	12-492 pf)	49	001	13
R 40	47000 ohm	DK 61	110/47K	C 8	12-492 pf)			
R 41	1,5Mohm	DK 61	110/1M5	C 14	27 pf	48	406	99/27E
R 42	1 Mohm	DK 61	110/1M	C 18	20 pf	49	005	03
R 43	4,7Mohm	DK 61	405/4M7	C 19	100 pf	48	406	20/100E
R 44	2,7Mohm	DK 61	405/2M7	C 20	6,8 pf	48	406	99/6E8
R 45	2,7Mohm	DK 61	405/2M7	C 35	47 pf	48	406	99/47E
R 46	1,5Mohm	DK 61	110/1M5	C 34	1,8 pf	49	056	21
R 47	1,5Mohm	DK 61	110/1M5	C 38	30 pf	28	212	36
R 48	0,47Mohm	DK 61	110/470K	C 40	60 pf	48	406	99/60E
R 49	4,7Mohm	DK 61	410/4M7	C 47	100 pf	48	406	20/100E
R 50	47 ohm	DK 61	210/47E	C 48	400-575 pf	49	005	46
R 81	33000 ohm	DK 61	110/33K	C 50	175 pf	49	005	52
R 105	0,18Mohm	DK 61	110/180K	C 51	115 pf			
R 109	0,1Mohm	DK 61	110/100K	C 52	115 pf			
R 110	4,7Mohm	DK 61	210/4M7	C 62	115 pf			
				C 82	100 pf	48	406	10/100E
				C 83	10000 pf	48	750	20/10K
				C 84	10000 pf	48	750	20/10K
				C 85	470 pf	48	406	20/470E
				C 86	470 pf	48	406	20/470E
				C 87	4700 pf	48	751	20/4K7
				C 88	47 pf	48	406	10/47E
				C 89	47000 pf	48	750	20/47K
				C 91	56 pf	48	406	10/56E
				C 92	10 pf	48	406	10/10E
				C 103	47000 pf	48	750	20/47K
				C 104	470 pf	48	601	10/470E
				C 105	15 pf	48	406	99/15E
				C 106	100 pf	48	406	10/100E
				C 107	18 pf	48	406	20/18E
				C 109	47000 pf	48	750	20/47K
				C 110	47000 pf	48	750	20/47K
				C 111	100 pf	48	406	20/100E
				C 112	4700 pf	48	751	20/4K7