


Service
Service
Service

Ned. Ver. v. Historie v/d Radio

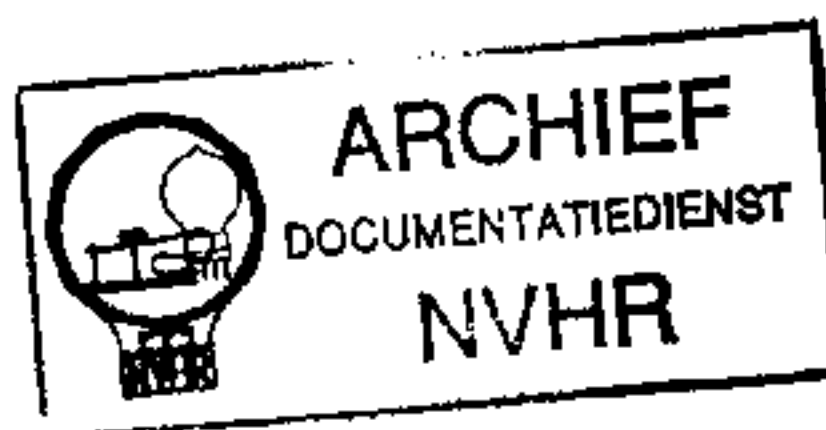

Service Manual

LOCK

110-127-220-240V
50/60Hz
P=3,5W

RECORD PLAYER
22 GC 023/90

9V $\equiv$
6x1,5V (R20)

GP214-GP215

33-45-78

R501

0,5W (d=10%)
8 Ω

7278A

Safety regulations require that the set be restored to its original condition and that parts which are identical with those specified, be used

Documentation Technique Service Dokumentation Documentazione di Servizio Huolto-Ohje Manual de Servicio Manual de Servicio

Subject to modification

4822 276 11582

Printed in The Netherlands

PHILIPS

CS53707



MISC	TS401 D403,404 TS402 TS405,406 S426			D474 ÷ 476 SK-2 TS451 T468 TS452 M F462 SK-1		
C	502	503	506	505	509	511 512
R	501	502	503	506	505	509 507 508 510

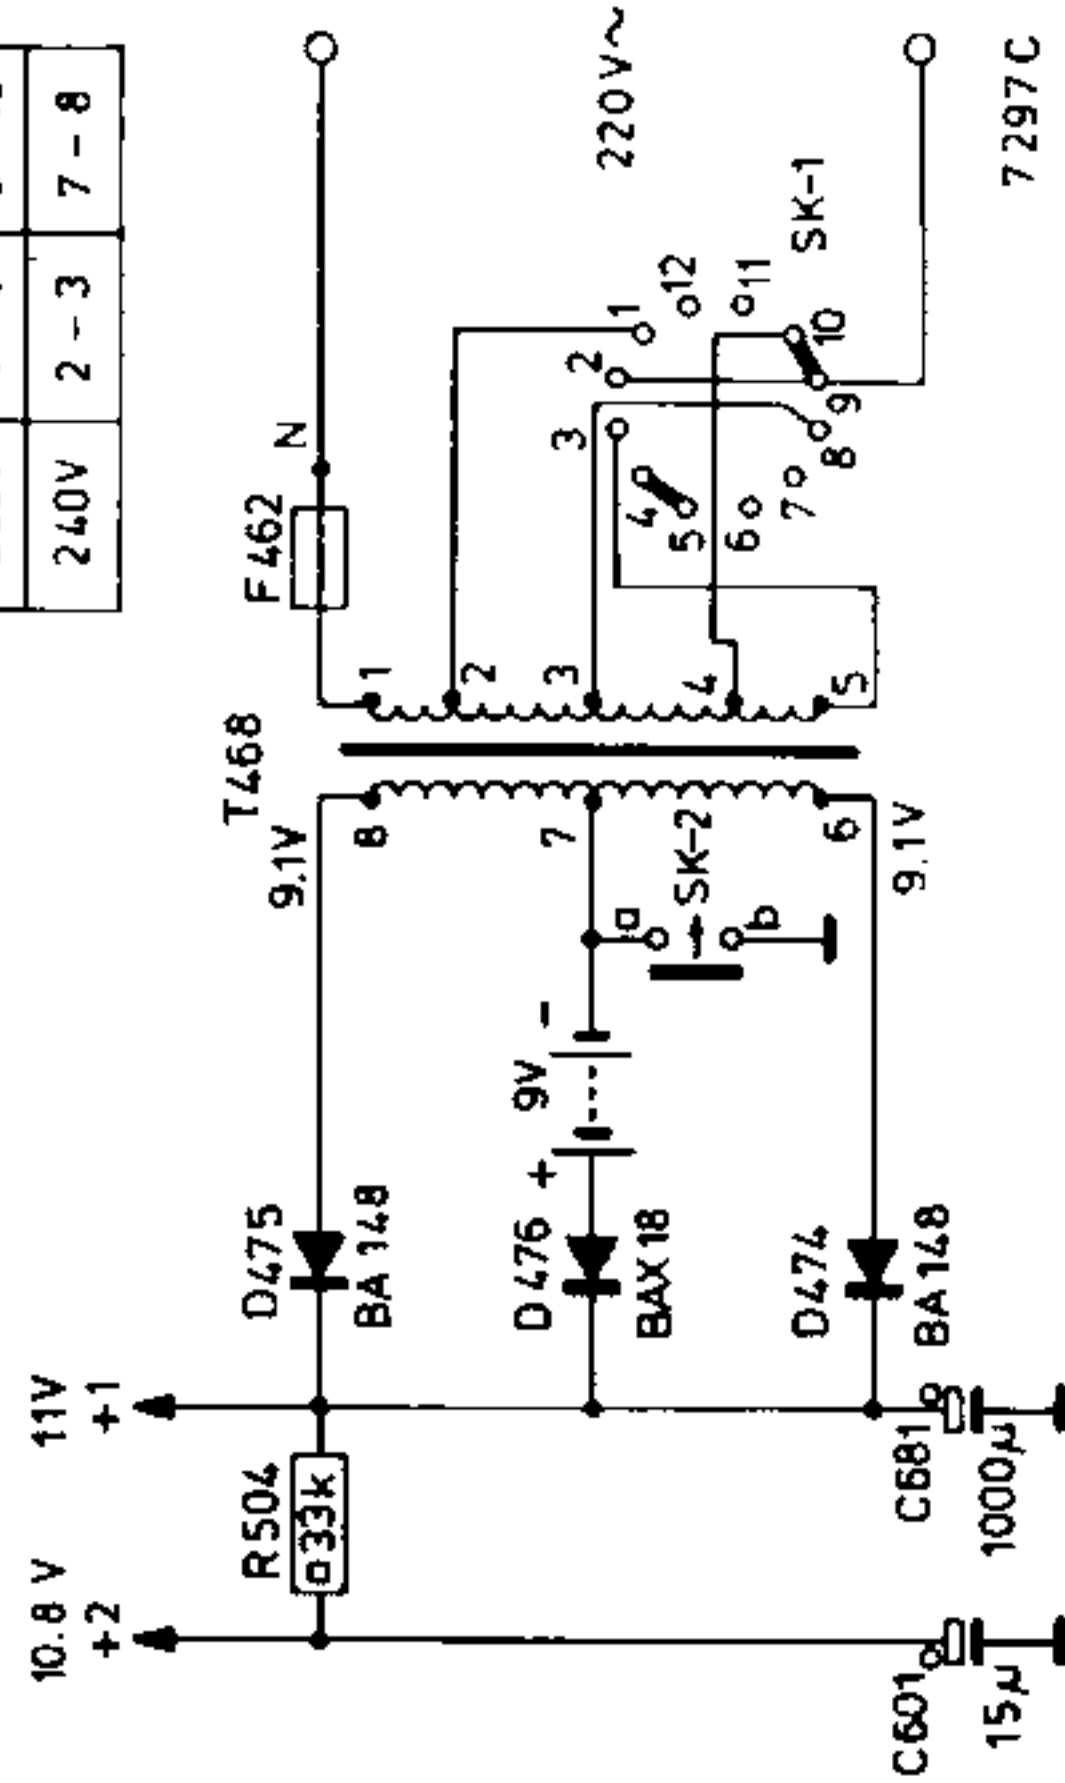
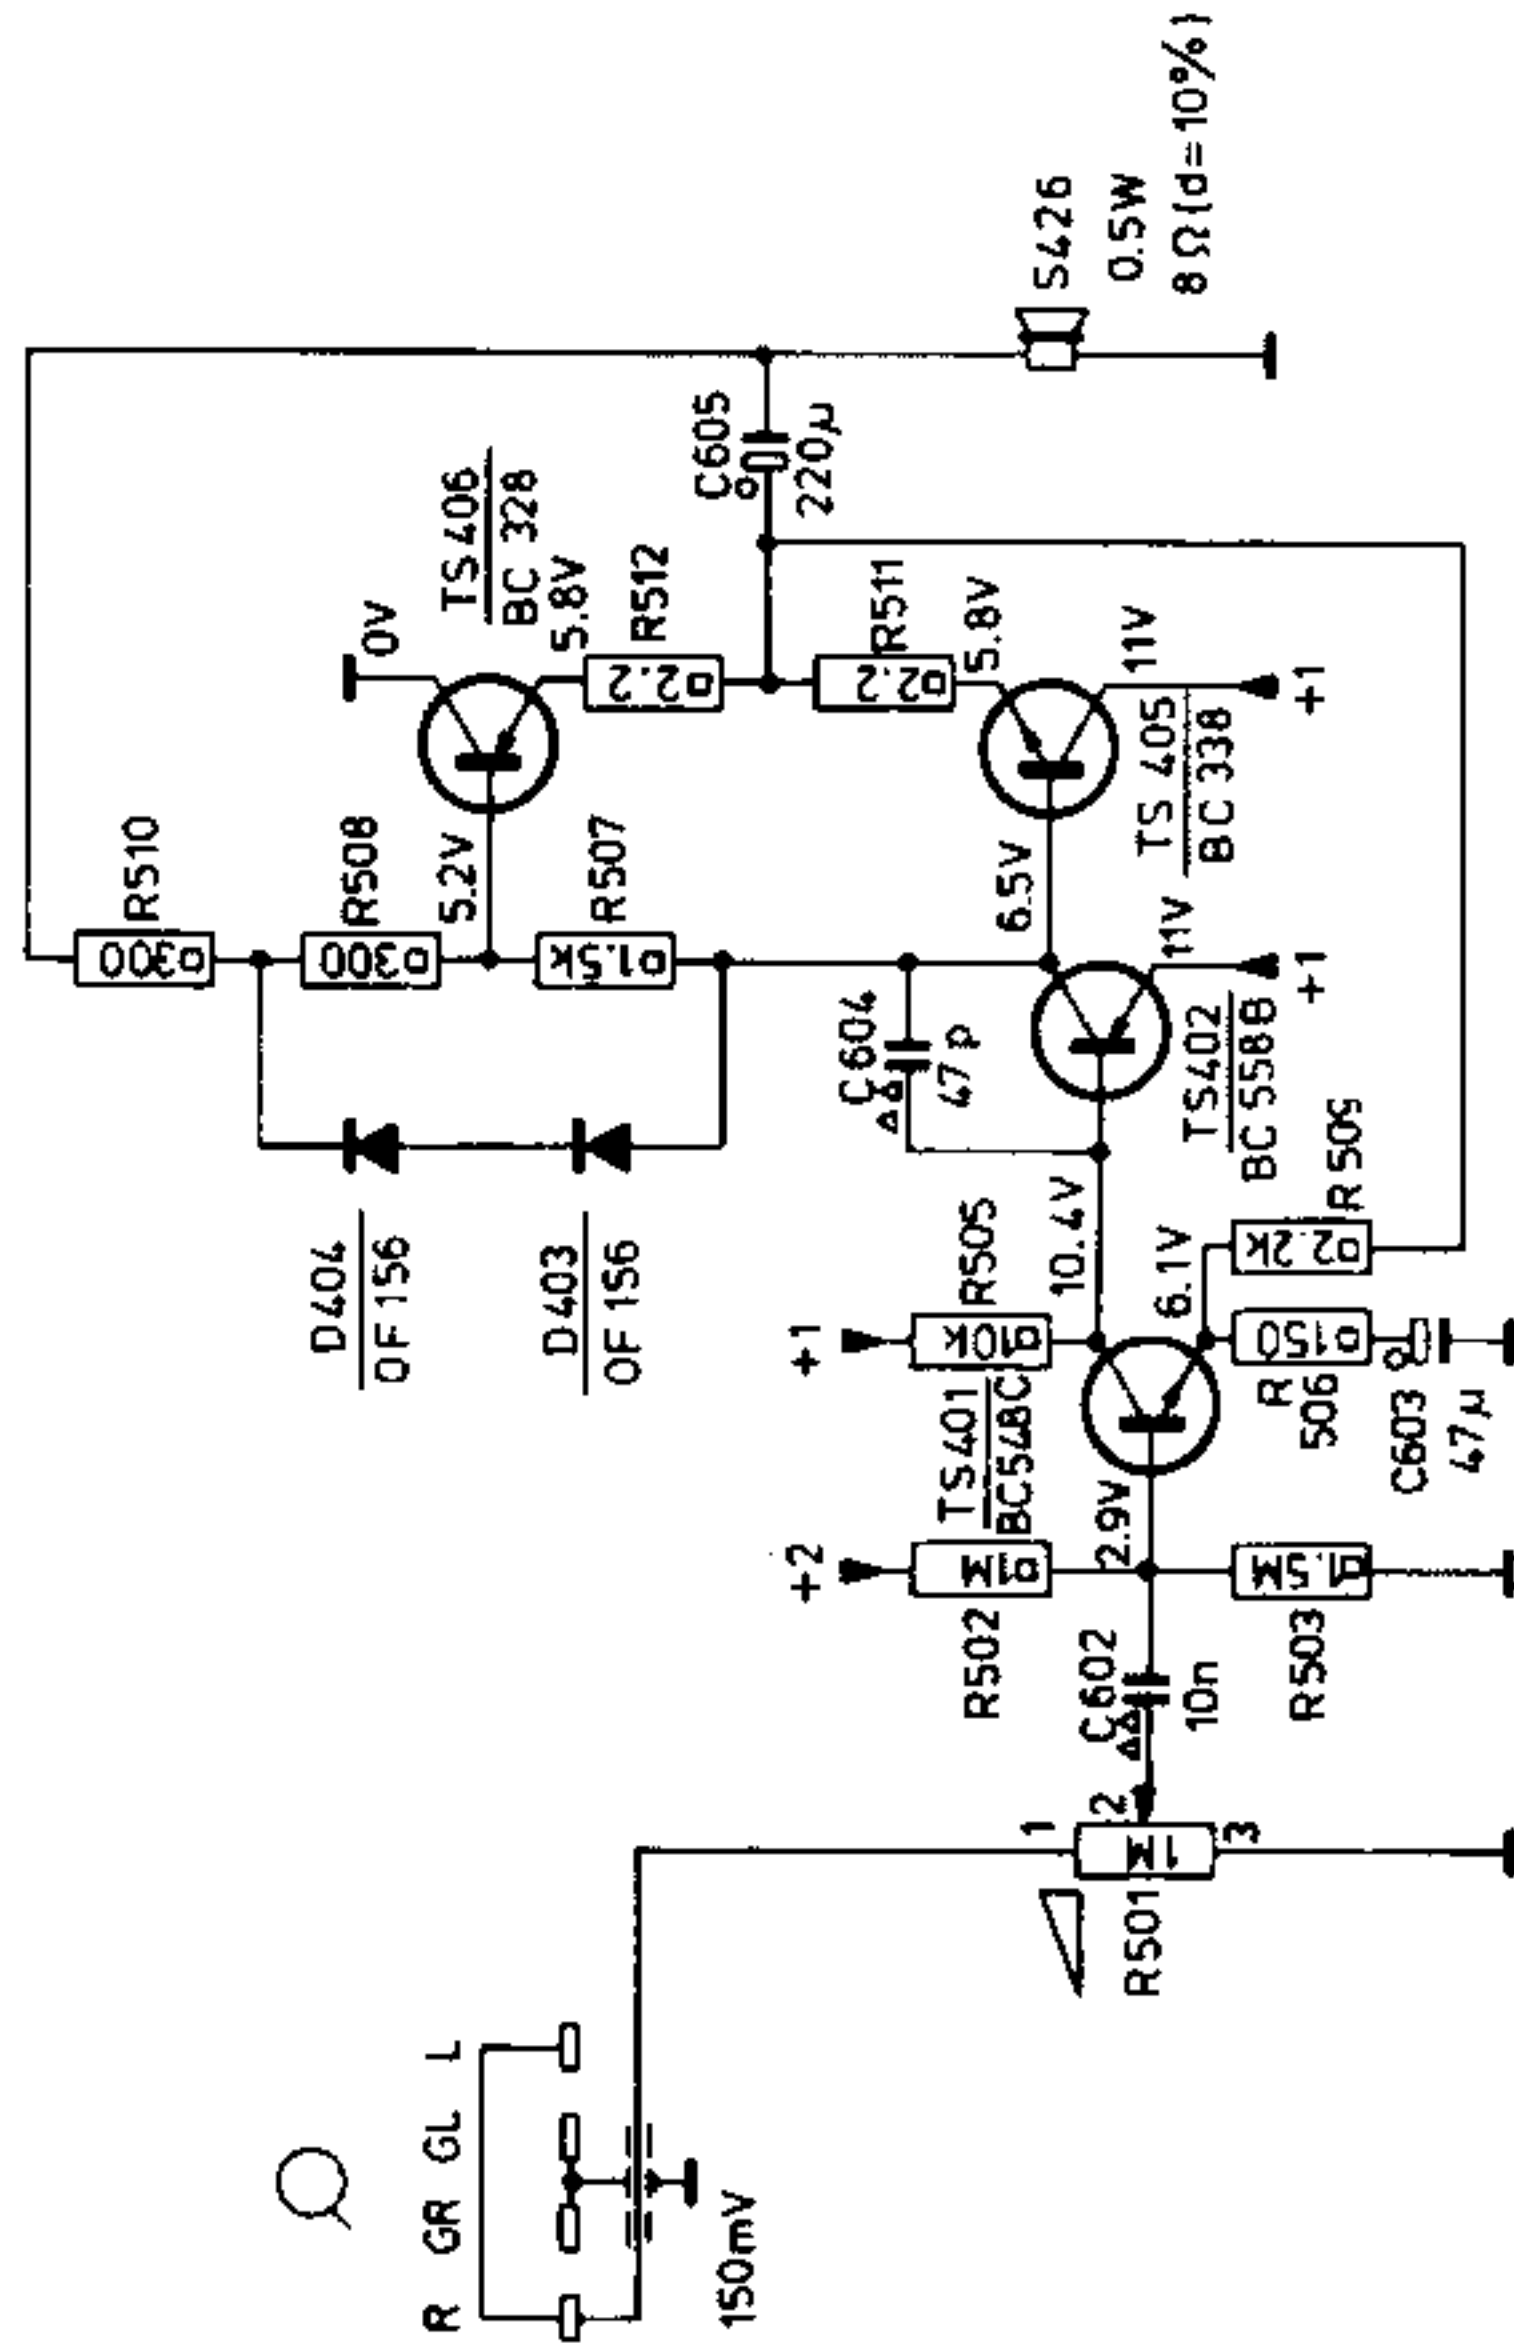


Fig. 1

MINIATURE ELECTROLYTIC CAPACITOR

PLATE CERAMIC CAPACITOR

0.125W 5%

T468	4822 145 30163	TS406	BC328	5322 130 44104	8222 124 20589
F462	4822 252 20007	TS451	BC548B	5322 130 40937	4822 124 20524
SK2a	4822 290 80225	TS452	AC187	5322 130 40314	4822 105 10231
SK2b	4822 290 80226	D403-D404	OF156	4822 130 30265	4822 101 20254
M	4822 361 70264	D474-D475	BY206	4822 130 30839	4822 157 50746
S426	4822 240 40051	D476	BAX18	5322 130 34121	
TS401	5322 130 44196	C601	15 µF - 16 V	4822 124 20467	
TS402	5322 130 44197	C603	47 µF - 10 V	4822 124 20461	
TS405	5322 130 44121				

C605	220 µF - 10 V	8222 124 20589
C681	1000 µF - 16 V	4822 124 20524
R501	1 MΩ log.	4822 105 10231
R566	100 Ω	4822 101 20254
R571	4.8 Ω	4822 157 50746

CONNECTION	VOLTAGE	ADAPTER
1-2	110V	6-7
3-4	127V	8-9
4-5	220V	9-10
2-3	240V	7-8

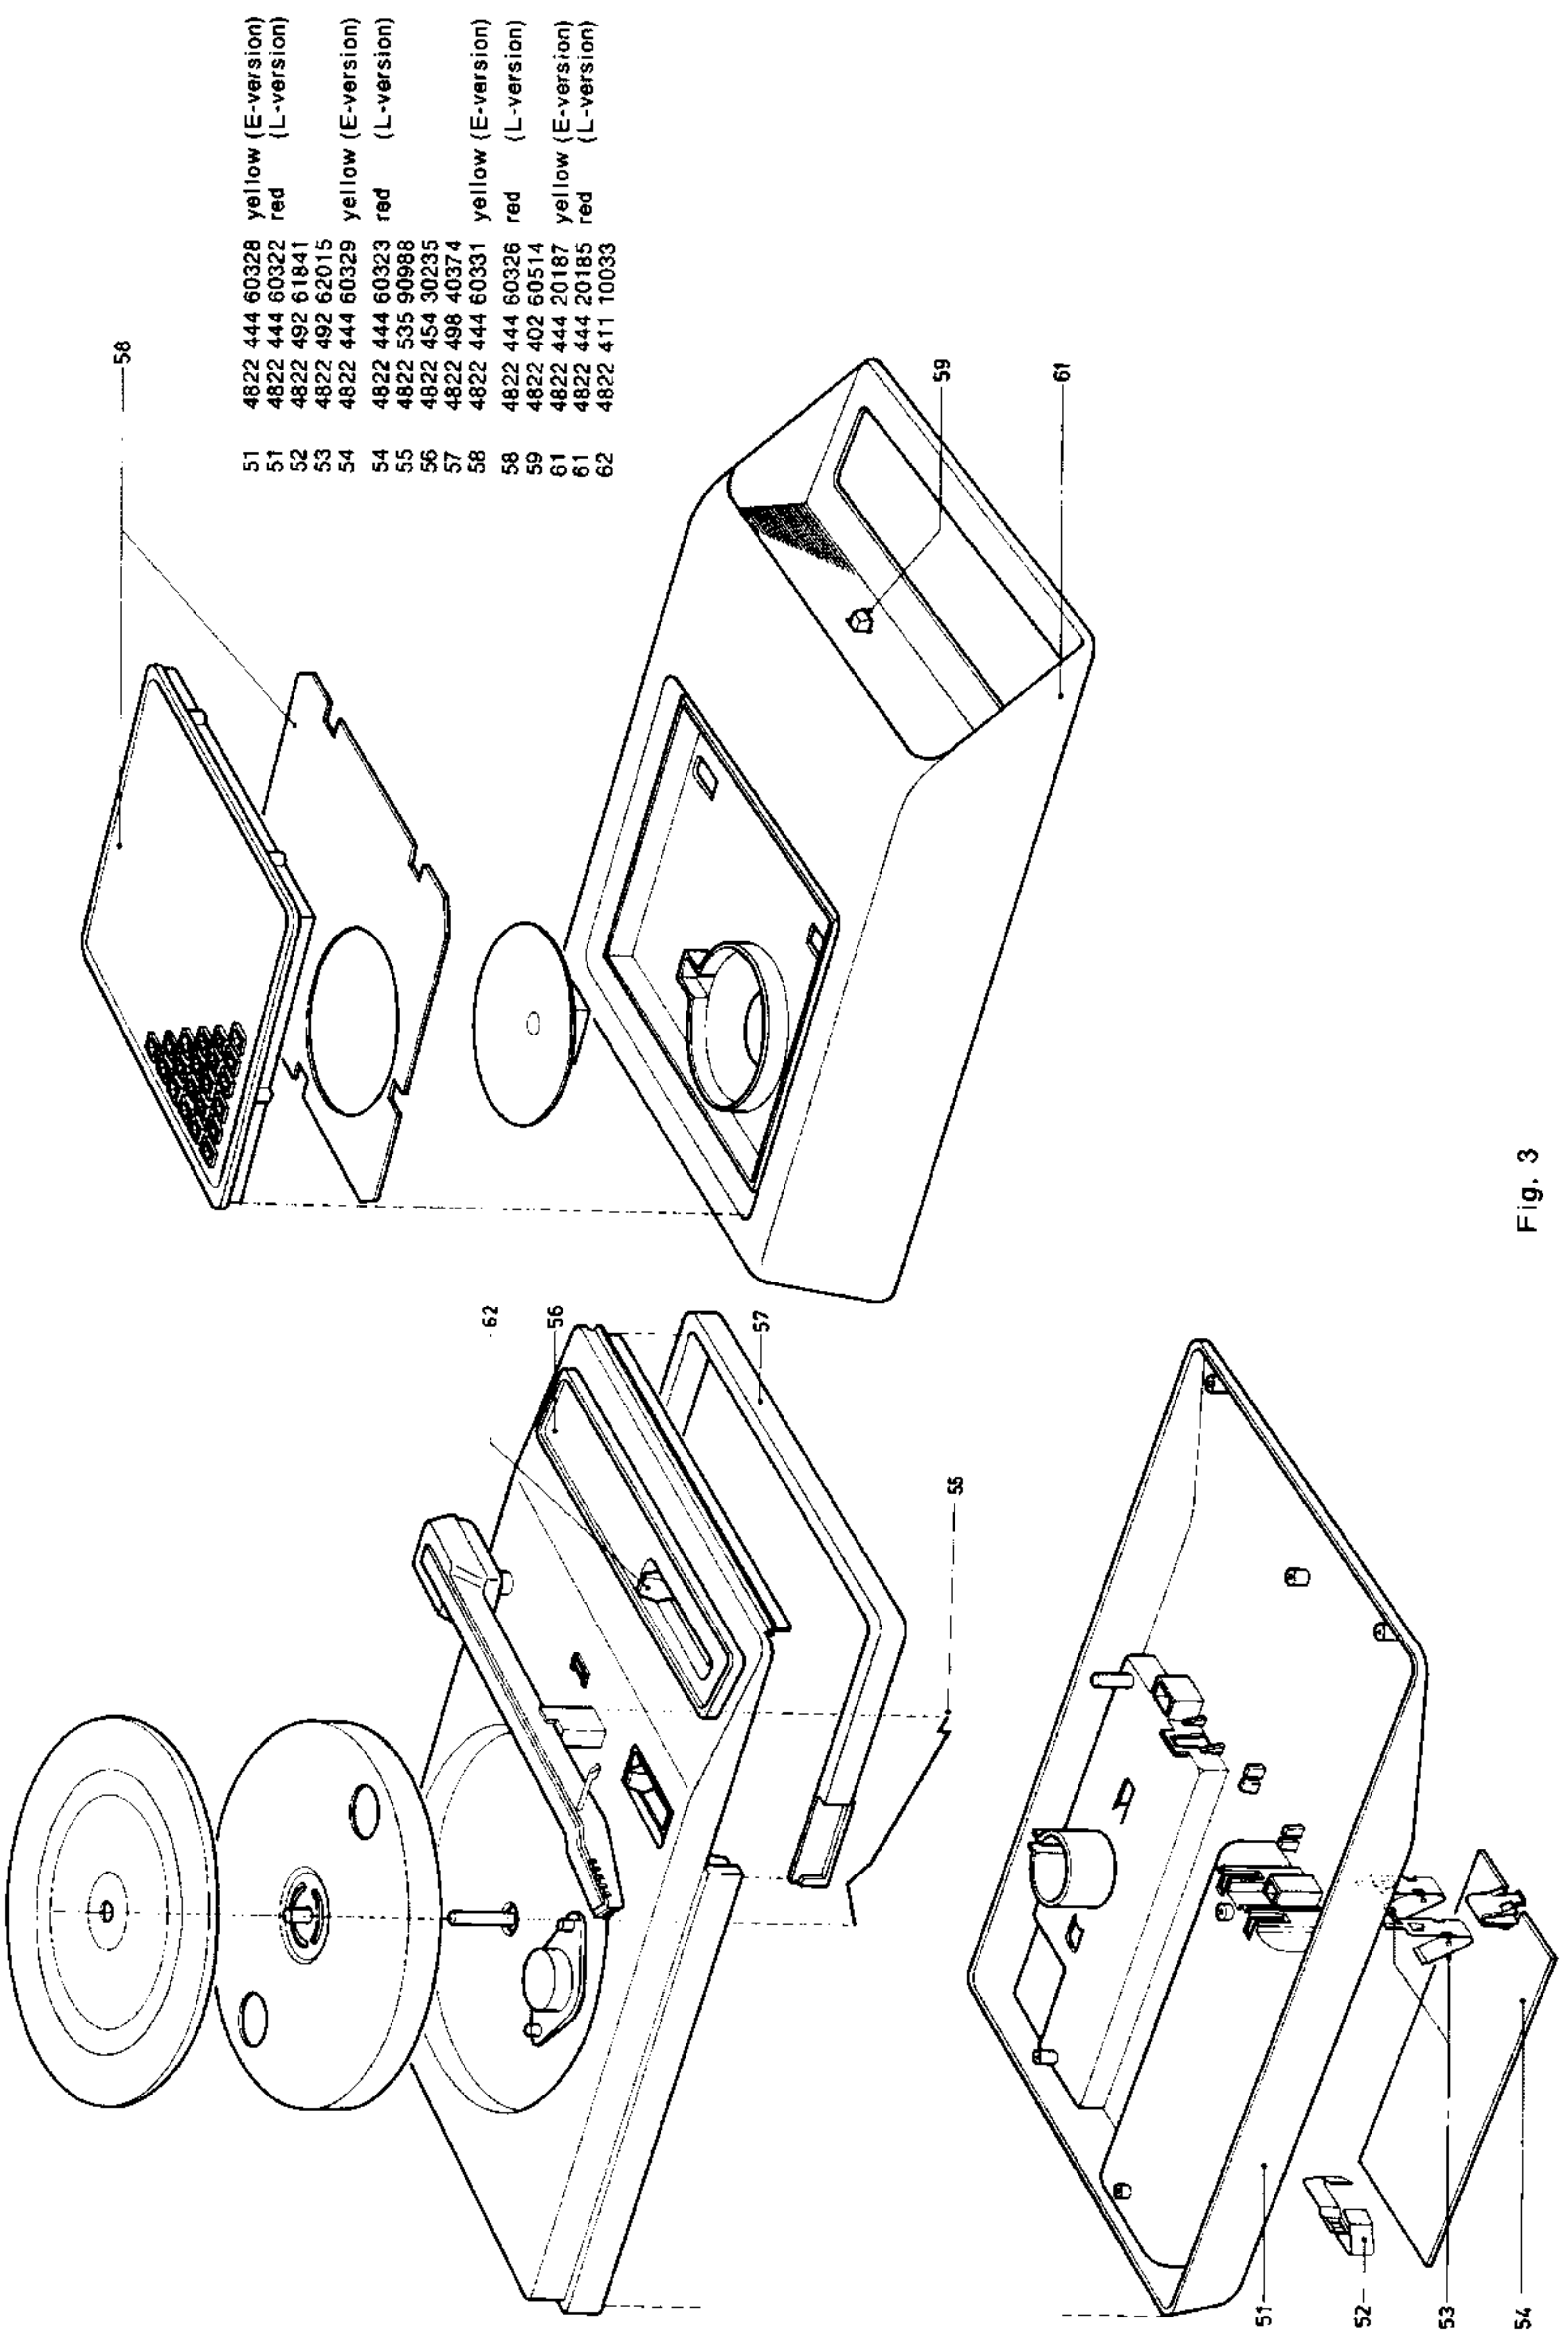


Fig. 3