



6AG7

POWER PENTODE

SINGLE-ENDED METAL TYPE

6AG7

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage 6.3 ac or dc volts

Current 0.65 amp

Direct Interelectrode Capacitances:

With Pin No.1 and Pin No.3 connected to Pin No.5

Grid No.1 to Plate 0.06 max. μ f

Input 13 μ f

Output 7.5 μ f

Characteristics, Amplifier Class A₁

Plate Voltage 300 volts

Grid-No.2 Voltage 150 volts

Grid-No.1 Voltage -3 volts

Peak AF Grid-No.1 Signal Voltage 3 volts

Zero-Signal DC Plate Current 30 ma

Max.-Signal DC Plate Current 30.5 ma

Zero-Signal DC Grid-No.2 Current 7 ma

Max.-Signal DC Grid-No.2 Current 9 ma

Plate Resistance (Approx.) 0.13 megohm

Transconductance 11000 μ mhos

Load Resistance 10000 ohms

Total Harmonic Distortion 7 per cent

Max.-Signal Power Output 3 watts

Mechanical:

Mounting Position Any

Maximum Overall Length 3-1/4"

Seated Length 2-19/32" $\pm$ 3/32" ←

Maximum Diameter 1-5/16"

Bulb Metal Shell, MT-8

Base Small-Wafer Octal 8-Pin (JETEC No.BB-21)


Basing Designation for BOTTOM VIEW 8Y ←

Pin 1-Shell,
Grid No.3

Pin 2-Heater

Pin 3-No
Connection

Pin 4-Grid No.1



Pin 5-Cathode

Pin 6-Grid No.2

Pin 7-Heater

Pin 8-Plate

AMPLIFIER - Class A₁

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE 300 max. volts

GRID-No.2 (SCREEN) VOLTAGE 300 max. volts

← Indicates a change

NOV. 1, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

DATA 1

6AG7



6AG7

POWER PENTODE

GRID-No.1 (CONTROL-GRID) VOLTAGE:

Positive bias value 0 max. volts

PLATE DISSIPATION 9 max. watts

GRID-No.2 INPUT 1.5 max. watts

→ PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode 90 max. volts

Heater positive with respect to cathode 90 max. volts

Typical Operation in 4-Mc Bandwidth Video Amplifier

Circuit of Fig. 1:

*With Grid-Resistor Bias**Used where dc restoration is accomplished in grid-No.1 circuit of the 6AG7*

Plate Supply Voltage 300 volts

Grid-No.2 Voltage† 115 volts

Zero-Signal Grid-No.1 Voltage 0 volts

Grid-No.1 Resistor 0.25 to 0.5 megohm

Grid-No.1 Signal Voltage (Peak to Peak) 4 volts

Zero-Signal Plate Current 45 ma

Zero-Signal Grid-No.2 Current 13 ma

Load Resistor 3500 ohms

Voltage Output (Peak to Peak) 135 volts

With Cathode-Resistor Bias

Plate Supply Voltage 300 volts

Grid-No.2 Voltage° 125 volts

from series resistor of 25000 ohms

Grid-No.1 Voltage -2 volts

Cathode Resistor (Bypassed with
capacitor of 250 μ f, approx.) 57 ohms

Grid-No.1 Signal Voltage (Peak to Peak) 4 volts

Zero-Signal Plate Current 28 ma

Zero-Signal Grid-No.2 Current 7 ma

Load Resistor 3500 ohms

Voltage Output (Peak to Peak) 140 volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For fixed-bias operation 0.25 max. megohm

For cathode-bias operation 1.0 max. megohm

† obtained from supply having good regulation.

° obtained preferably from 300-volt plate supply through resistor of value shown.

→ indicates a change

NOV. 1, 1952

TUBE DEPARTMENT

DATA 1

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY




6AG7

POWER PENTODE

6AG7

Fig. 1 - Typical Video Voltage Amplifier Circuit
Having Bandwidth of 4 Mc.

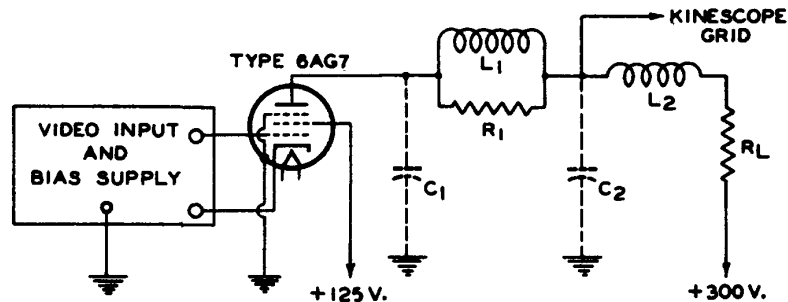

$C_1 = 9.5 \mu\mu f$ = Tube Output Capacitance + Socket Capacitance + Wiring Capacitance + Coil Capacitance

$C_2 = 19 \mu\mu f$ = Kinescope Capacitance + Socket Capacitance + Wiring Capacitance + Coil Capacitance

$L_1 = 250 \mu h$ Filter Inductor

$L_2 = 125 \mu h$ Filter Inductor

$R_1 = 20000\text{-Ohm}$, Non-Reactive Resistor

$R_L = 3500\text{-Ohm}$, 10-Watt, Non-Reactive Resistor


Devices and arrangements shown or described herein may use patents of RCA or others. Information contained herein is furnished without responsibility by RCA for its use and without prejudice to RCA's patent rights.

6AG7



6AG7

AVERAGE PLATE CHARACTERISTICS WITH E_{C1} AS VARIABLE

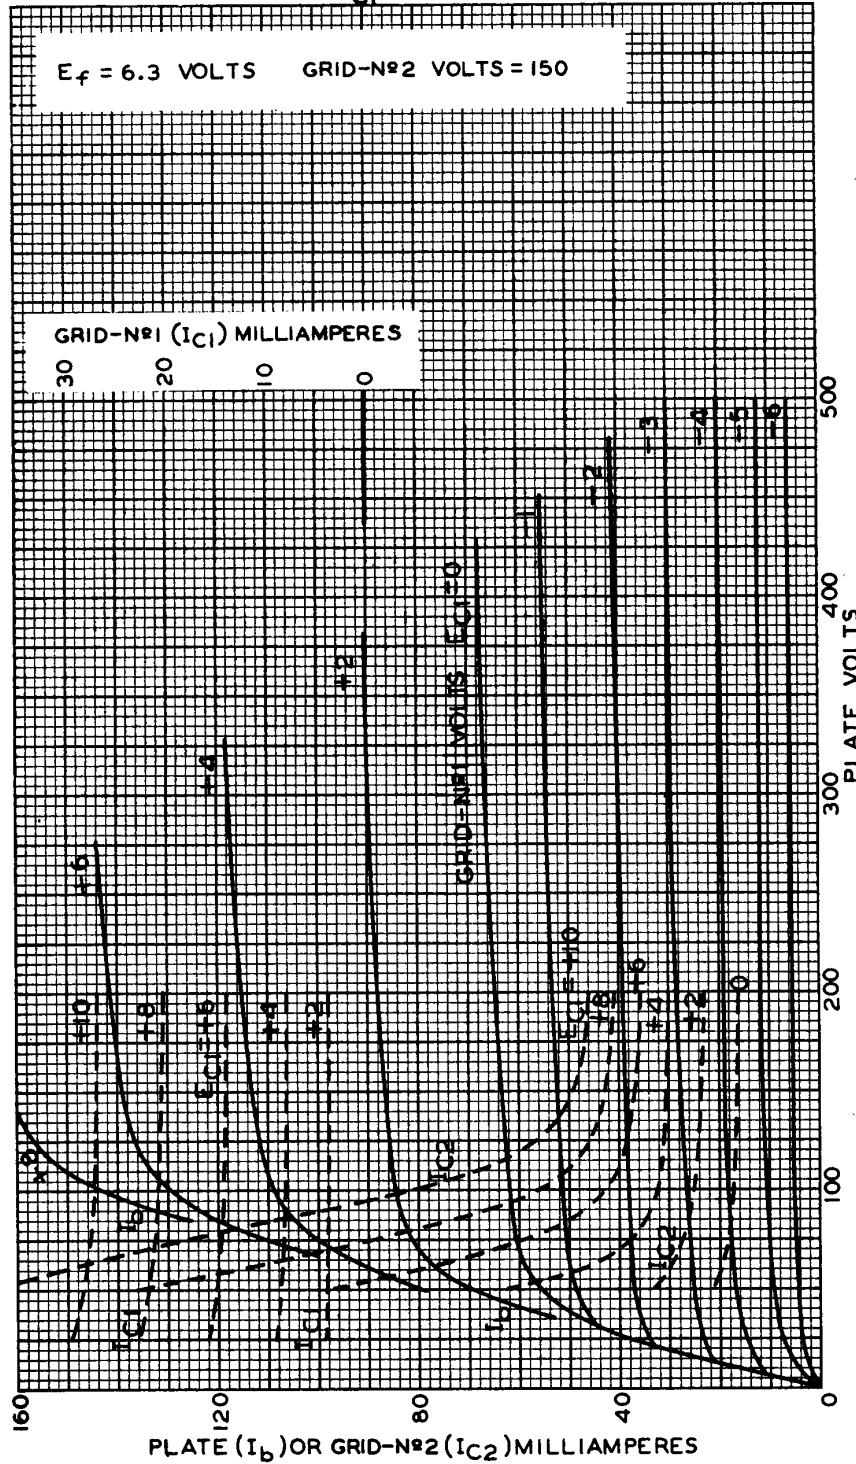

OCT. 2, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6034R2




6AG7


POWER PENTODE

6AG7

AVERAGE PLATE CHARACTERISTICS
WITH E_{C1} AS VARIABLE

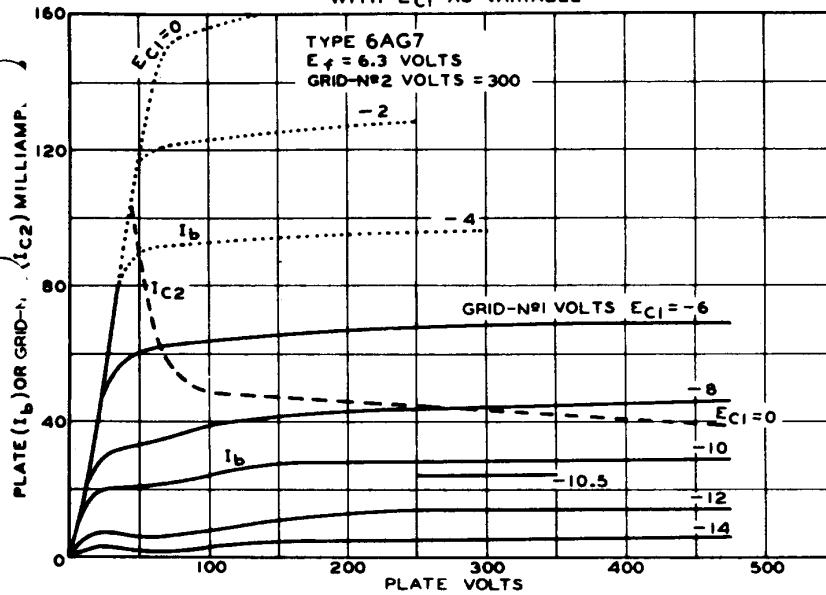

AVERAGE PLATE CHARACTERISTICS
WITH E_{C2} AS VARIABLE

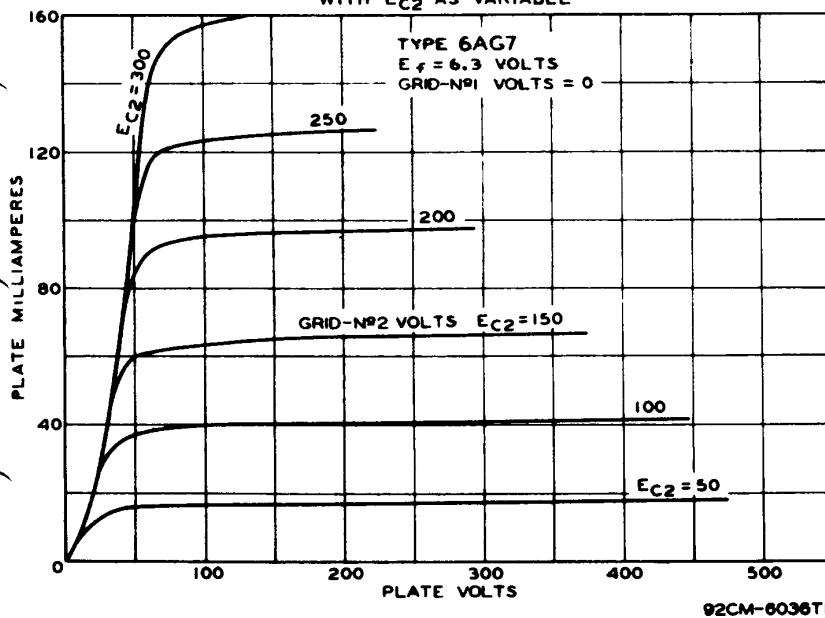

NOV. 1, 1952

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6035T1
CE-6036T1


6AG7




6AG7

POWER PENTODE

AVERAGE CHARACTERISTICS

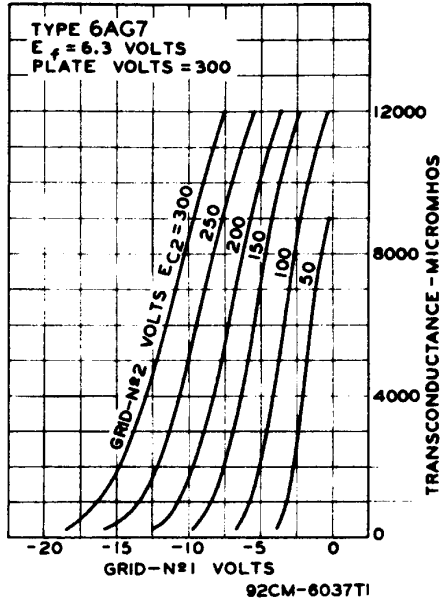

AVERAGE CHARACTERISTICS

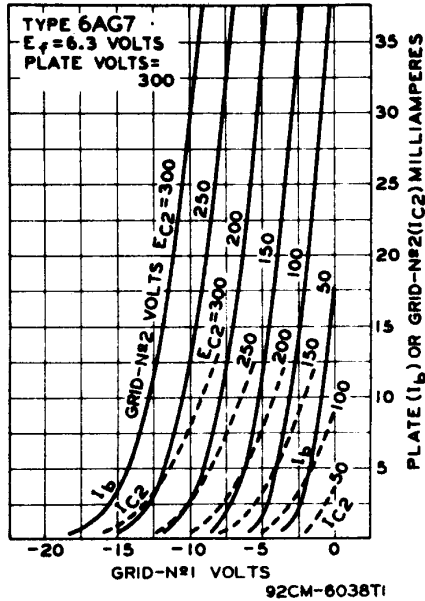

NOV. 1, 1952

TUBE DEPARTMENT
 RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

CE-6037T1
 CE-6038T1