

6GW6

Beam Power Tube

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC) 6.3 $\pm$ 10% volts
Current at 6.3 volts. 1.2 amp

Mu-Factor, Grid No.2 to Grid No.1

for plate volts = 150, grid-No.2
volts = 150, grid-No.1 volts =
-22.5 4.4

Direct Interelectrode Capacitances

(Approx.):^a

Grid No.1 to plate. 0.5 μ f
Grid No.1 to cathode & grid No.3,
grid No.2, and heater 17 μ f
Plate to cathode & grid No.3,
grid No.2, and heater 7 μ f


Characteristics, Class A₁ Amplifier:

Plate Voltage 60 250 volts
Grid-No.2 Voltage 150 150 volts
Grid-No.1 Voltage 0 -22.5 volts
Plate Resistance (Approx.) - 15000 ohms
Transconductance. - 7100 μ mhos
Plate Current 390^b 70 ma
Grid-No.2 Current 32^b 2.1 ma
Grid-No.1 Voltage (Approx.) for
plate ma. = 1 - -42 volts

Mechanical:

Operating Position. Any
Maximum Overall Length. 4-1/4"
Seated Length 3-1/2" $\pm$ 3/16"
Diameter. 1.438" to 1.562"
Bulb. T12
Cap Skirted Miniature (JEDEC No.C1-3)
Base. Short Medium-Shell Octal 6-Pin
with External Barriers, Style B, Arrangement 2
(JEDEC No.B6-122)
Basing Designation for BOTTOM VIEW. 6AM

Pin 2 - Heater
Pin 3 - No Con-
nection
Pin 4 - Grid No.2
Pin 5 - Grid No.1



Pin 7 - Heater
Pin 8 - Cathode,
Grid No.3
Cap - Plate



RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 1
3-61

6GW6

HORIZONTAL-DEFLECTION AMPLIFIER

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^c

DC PLATE-SUPPLY VOLTAGE	770	max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE ^d	6500	max.	volts
PEAK NEGATIVE-PULSE PLATE VOLTAGE	1500	max.	volts
DC GRID-No.2 (SCREEN-GRID) VOLTAGE	220	max.	volts
DC GRID-No.1 (CONTROL-GRID) VOLTAGE	-55	max.	volts
PEAK NEGATIVE-PULSE GRID-No.1 VOLTAGE . . .	330	max.	volts
CATHODE CURRENT:			
Peak	550	max.	ma
Average	175	max.	ma
GRID-No.2 INPUT	3.5	max.	watts
PLATE DISSIPATION ^e	17.5	max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode .	200	max.	volts
Heater positive with respect to cathode .	200 ^f	max.	volts
BULB TEMPERATURE (At hottest			
point on bulb surface).	240	max.	°C

Maximum Circuit Values:

Grid-No.1-Circuit Resistance:

For grid resistor-bias operation. 1 max. megohm

^a Without external shield.

^b This value can be measured by a method involving a recurrent wave form such that the maximum ratings of the tube will not be exceeded.

^c As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.


^d This rating is applicable where the duration of the voltage pulse does not exceed 15 per cent of one horizontal scanning cycle. In a 525-line, 30-frame system, 15 per cent of one horizontal scanning cycle is 10 microseconds.

^e An adequate bias resistor or other means is required to protect the tube in the absence of excitation.

^f The dc component must not exceed 100 volts.



6GW6

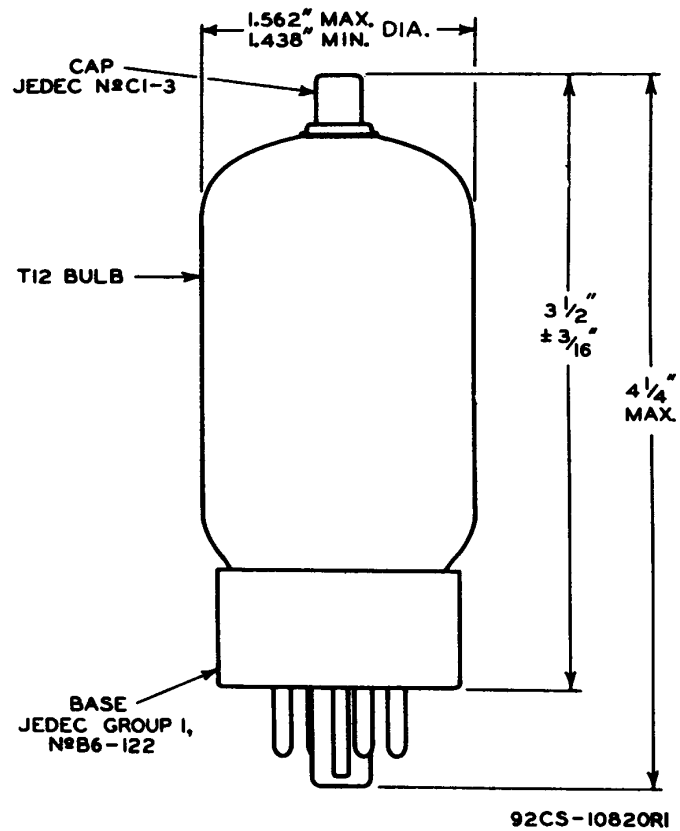


RADIO CORPORATION OF AMERICA
Electron Tube Division
Harrison, N. J.

DATA 2
3-61

6GW6

AVERAGE CHARACTERISTICS

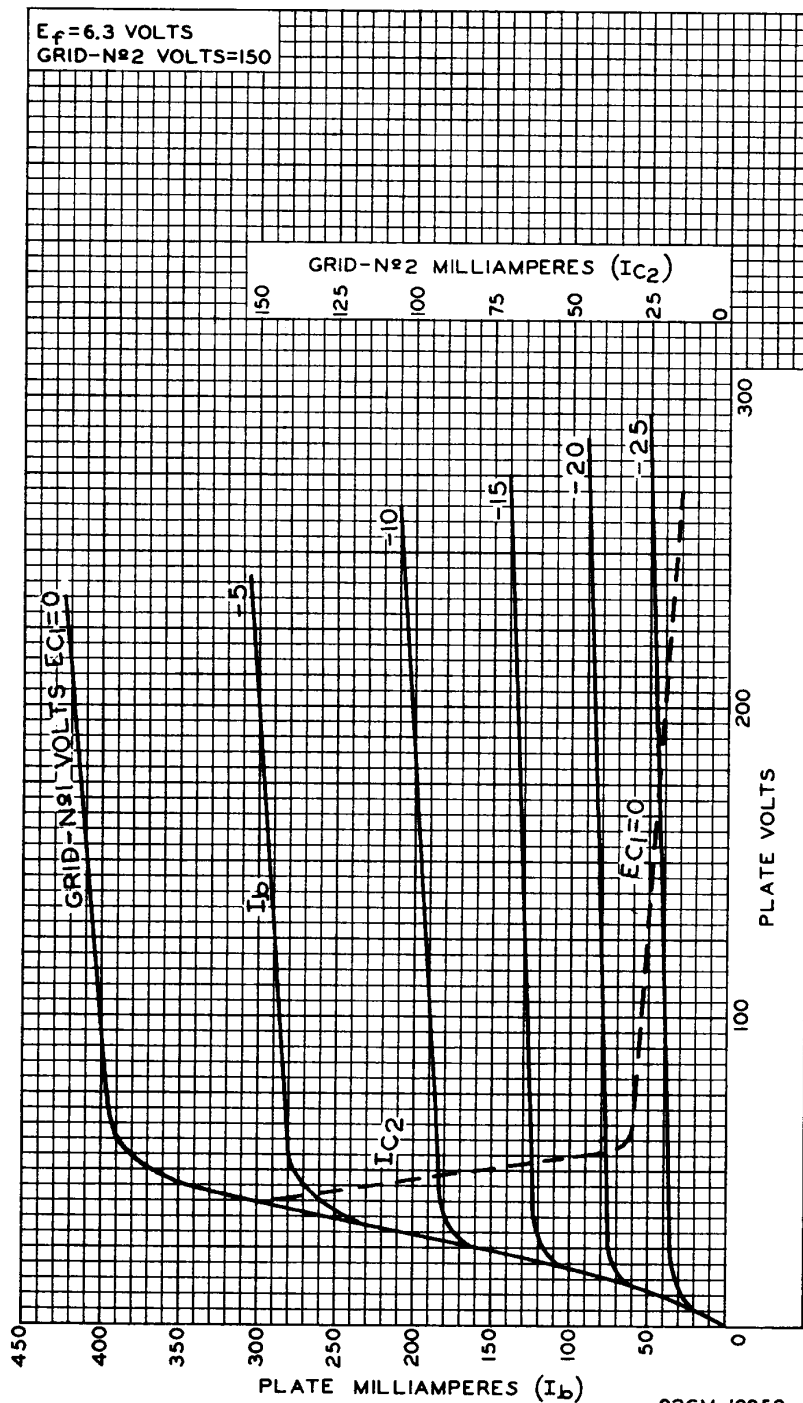

RADIO CORPORATION OF AMERICA
Electron Tube Division

Harrison, N. J.

