

Heizspannung . . . . .	$V_f$	=	4,0 V	
Tension de chauffage				
Filament voltage . . . . .				
Heizstrom . . . . .	$I_f$	=	ca.	
Courant de chauffage				
Filament current . . . . .		=	env. 1,1 A	
				appr.
Anodenspannung . . . . .	$V_u$	=	200 V	
Tension anodique . . . . .				
Anode voltage . . . . .				
Steilheit (max.) . . . . .	$S_{max.}$	=	3,0 mA/V	
Inclinaison (max.) . . . . .				
Slope (max.) . . . . .				
Schirmgitterspannung . . . . .	$V_{g'}$	=	33 V	
Tension de grille-écran				
Screen-grid voltage . . . . .				
Normaler Anodenstrom . . . . .	$I_a$	=	0,35 mA	
Courant anodique normal . . . . .				
Normal anode current . . . . .				
Neg. Gittervorspannung . . . . .	$V_g$	=	ca.	} $R_u = 0,3 M\Omega$
Polarisation négative de grille		=	env. 2,3 V	
Negative grid bias . . . . .			appr.	
Verstärkungsfaktor . . . . .	$g(k)$	=	1000	
Coefficient d'amplification . . . . .				
Amplification factor . . . . .				
Innerer Widerstand . . . . .	$R_i$	=	2,5 M. Ohm	
Résistance intérieure . . . . .				
Internal resistance . . . . .				
Schirmgitterspannung . . . . .	$V_{g'}$	=	45 V	
Tension de grille-écran . . . . .				
Screen-grid voltage . . . . .				
Normaler Anodenstrom . . . . .	$I_a$	=	0,9 mA	
Courant anodique normal . . . . .				
Normal anode current . . . . .				
Neg. Gittervorspannung . . . . .	$V_g$	=	ca.	} $R_u = 0,1 M\Omega$
Polarisation négative de grille		=	env. 2,3 V	
Negative grid bias . . . . .			appr.	
Verstärkungsfaktor . . . . .	$g(k)$	=	800	
Coefficient d'amplification . . . . .				
Amplification factor . . . . .				
Innerer Widerstand . . . . .	$R_i$	=	1,0 M. Ohm	
Résistance intérieure . . . . .				
Internal resistance . . . . .				
Anoden-Gitterkapazität . . . . .	$C_{ug}$	=	0,003 $\mu\mu F$	
Capacité grille-plaque . . . . .				
Anode-grid capacity . . . . .				
Max. Länge . . . . .	$l$	=	130 mm	
Longueur max. . . . .				
Overall length . . . . .				
Grösster Durchmesser . . . . .	$d$	=	51 mm	
Diamètre max. . . . .				
Max. diameter . . . . .				
Sockel . . . . .		=	B 35	
Culot . . . . .				
Base . . . . .				
Sockelschaltung . . . . .		=	S XV	
Connexion du culot . . . . .				
Base connection . . . . .				

Anwendung: Diodengleichrichtung und N.F.-Verstärkung  
 Application: Détection par diode et amplification b.f.  
 Function: Rectifying at diode and i.f. amplification

**PHILIPS  
MINIWATT  
E 444**

$I_a$  (mA) 6

$V_f = 4,0V$   
 $V_{amax} = 200V$   
 $S_{max} = 3,0mA/V$   
 $C_{ag} = 0,003\mu F$

5

4

3

2

1

$R_a = 20000 \Omega, V_g' = 90V$


$R_a = 60000 \Omega, V_g' = 55V$

$R_a = 100000 \Omega, V_g' = 45V$

$R_a = 300000 \Omega, V_g' = 33V$

$V_g$  (V)

-16 -14 -12 -10 -8 -6 -4 -2 0

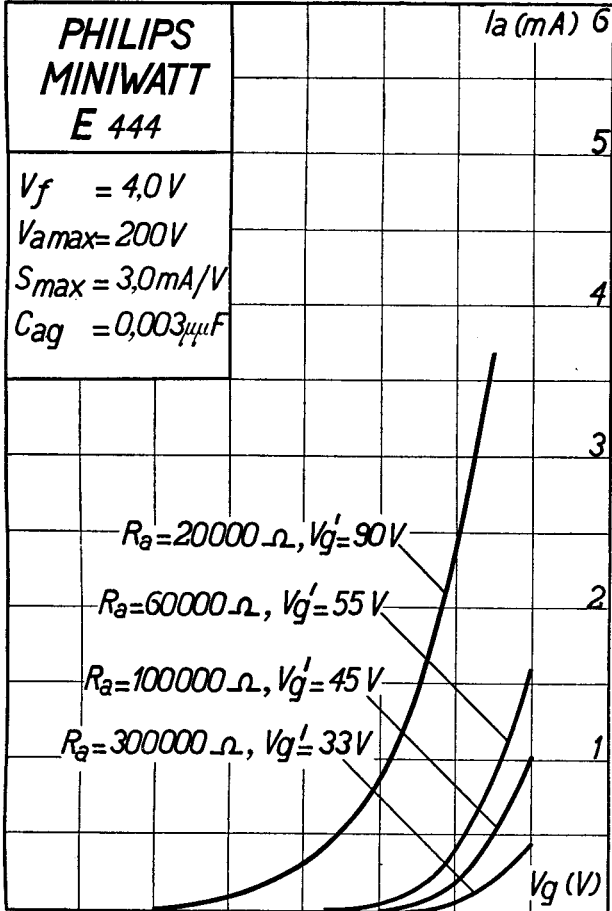

## PHILIPS „MINIWATT“

Max. Anodenspannung .....	$V_{a0}$	= 400 V
Tension anodique max. ....	$V_{aR}$	= 250 V
Max. anode voltage .....	$V_{aL}$	= 200 V
Max. Anodenbelastung .....		
Dissipation anodique max. ....	$W_a$	= 1,0 W
Max. anode dissipation .....		
Max. Kathodenstrom .....		
Courant cathodique max. ....	$I_c$	= 10 mA
Max. cathode current .....		
Max. Schirmgitterspannung .....	$V_{g^1 0}$	= 300 V
Tension de grille-écran max. ....		= $V_a - 50$ V
Max. screen-grid voltage .....	$V_{g^1}$	max. 150 V
Max. Schirmgitterbelastung .....		
Dissipation de grille-écran max. ....	$W_{g^1}$	= 0,25 W
Max. screen-grid dissipation .....		
Mittlerer Schirmgitterstrom .....		
Courant de grille-écran moyen .....	$I_{g^1}$	= 0,5 mA*)
Average screen-grid current .....		
Gitterstrom-Einsatzpunkt .....		
Point de commenc. du courant de grille	$V_{gi}$	= -1,3 V
Starting point of grid current .....		
Max. Hilfsanodenspannung .....		
Tension anodique auxiliaire max. ....	$V_{a^1}$ max	= 20 V
Max. auxiliary anode voltage .....		
Max. Hilfsanodenstrom .....		
Courant anodique auxiliaire max. ....	$I_{a^1}$ max	= 0,5 mA
Max. auxiliary anode current .....		
Max. Widerstand im Gitterkreis .....	$R_{g1}$	= 2 M. Ohm
Résistance max. dans le circuit de grille	$R_{g2}$	= 1 M. Ohm
Max. resistance in grid circuit .....		
Max. Spann. zwischen Faden und Kath.		
Tension max. entre filament et cathode	$V_{fc}$	= 50 V
Max. voltage between filam. and cathode		
Max. Widerst. zwischen Faden und Kath.		
Résist. max. entre filament et cathode	$R_{fc}$	= 20000 Ohm
Max. resist. betw. filament and cathode		
Kapazitäten .....	$C_g$	= 12 $\mu\mu\text{F}$
Capacités .....	$C_a$	= 6,8 $\mu\mu\text{F}$
Capacities .....	$C_{ag}$	= 0,003 $\mu\mu\text{F}$

\*) Gemessen bei  $\left\{ \begin{array}{l} V_a = 200 \text{ V} \\ V_{g^1} = 90 \text{ V} \\ R_a = 0,02 \text{ M. Ohm} \\ I_a = 3,3 \text{ mA} \end{array} \right.$

Mesuré pour

Measured at

$I_a$  (mA)

