

21DLP4



21DLP4 PICTURE TUBE

GRID-DRIVE[▲] SERVICE

Unless otherwise specified, voltage values are positive with respect to cathode

Maximum and Minimum Ratings, Design-Center Values:

ULTOR VOLTAGE.	{ 20000 max. volts
	{ 12000* min. volts

GRID-No.4 (FOCUSING) VOLTAGE:

Positive value	1000 max. volts
--------------------------	-----------------

Negative value	500 max. volts
--------------------------	----------------

GRID-No.2 VOLTAGE.	500 max. volts
----------------------------	----------------

GRID-No.1 VOLTAGE:

Negative-peak value.	200 max. volts
------------------------------	----------------

Negative-bias value.	140 max. volts
------------------------------	----------------

Positive-bias value.	0 max. volts
------------------------------	--------------

Positive-peak value.	? max. volts
------------------------------	--------------

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode:

During equipment warm-up period

not exceeding 15 seconds	410 max. volts
------------------------------------	----------------

After equipment warm-up period . . .	180 max. volts
--------------------------------------	----------------

Heater positive with respect to cathode.	180 max. volts
--	----------------

Equipment Design Ranges:

With any ultor voltage (E_{c5k}) between 12000 and 20000 volts and grid-No.2 voltage (E_{c2k}) between 200 and 500 volts

Grid-No.4 Voltage for focus§	-50 to +400	volts
--	-------------	-------

Grid-No.1 Voltage (E_{c1k}) for visual extinction of focused raster.	See Raster-Cutoff-Range Chart for Grid-Drive Service	
--	--	--

Grid-No.1 Video Drive

from Raster Cutoff

(Black Level):

White-level value

(Peak positive).	Same value as determined for E_{c1k} except video drive is a positive voltage
--------------------------	---

Grid-No.4 Current.	-25 to +25	μ a
----------------------------	------------	---------

Grid-No.2 Current.	-15 to +15	μ a
----------------------------	------------	---------

Field Strength of Adjustable Centering Magnet* . .	0 to 8	gausses
--	--------	---------

Examples of Use of Design Ranges:

With ultor voltage of	16000	volts
and grid-No.2 voltage of	300	volts

Grid-No.4 Voltage for focus.	0 to 400	volts
--------------------------------------	----------	-------

▲,*,§,*: See next page.



21DLP4

21DLP4

PICTURE TUBE

Grid-No.1 Voltage for
visual extinction of
focused raster -28 to -72 volts

Grid-No.1 Video Drive
from Raster Cutoff
(Black Level):
White-level value. 28 to 72 volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance 1.5 max. megohms

CATHODE-DRIVE[■] SERVICE

*Unless otherwise specified, voltage values are positive
with respect to grid No.1*

Maximum and Minimum Ratings, Design-Center Values:

ULTOR-TO-GRID-No.1 VOLTAGE $\begin{cases} 20000 \text{ max. volts} \\ 12000^* \text{ min. volts} \end{cases}$

GRID-No.4-TO-GRID-No.1 VOLTAGE:

Positive value 1000 max. volts
Negative value 500 max. volts

GRID-No.2-TO-GRID-No.1 VOLTAGE 640 max. volts

GRID-No.2-TO-CATHODE VOLTAGE 500 max. volts

CATHODE-TO-GRID-No.1 VOLTAGE:

Positive-peak value. 200 max. volts
Positive-bias value. 140 max. volts
Negative-bias value. 0 max. volts
Negative-peak value. 2 max. volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode:

During equipment warm-up period
not exceeding 15 seconds 410 max. volts

After equipment warm-up period 180 max. volts

Heater positive with respect to cathode. 180 max. volts

Equipment Design Ranges:

*With any ultor-to-grid-No.1 voltage (E_{c5g1}) between 12000
and 20000 volts and grid-No.2-to-grid-No.1 voltage (E_{c2g1})
between 225 and 640 volts*

Grid-No.4-to-Grid-No.1
Voltage for focus[§] 0 to 450 volts

Cathode-to-Grid-No.1
Voltage (E_{kg1}) for
visual extinction
of focused raster. See Raster-Cutoff-Range Chart
for Cathode-Drive Service

▲, ◆, §, *, ■: See next page.



21DLP4

PICTURE TUBE

Cathode-to-Grid-No.1

Video Drive from Raster

Cutoff (Black Level):

White-level value

(Peak negative)

Same value as determined for
E_{kg1} except video drive is a
negative voltage

Grid-No.4 Current

-25 to +25

μa

Grid-No.2 Current

-15 to +15

μa

Field Strength of Adjust-

able Centering Magnet*. . .

0 to 8

gausses

Examples of Use of Design Ranges:

*With ultor-to-grid-**No.1 voltage of*

16000

volts

*and grid-No.2-to-grid-**No.1 voltage of*

300

volts

Grid-No.4-to-Grid-No.1

Voltage for focus

0 to 400

volts

Cathode-to-Grid-No.1

Voltage for visual

extinction of focused

raster.

28 to 60

volts

Cathode-to-Grid-No.1

Video Drive from

Raster Cutoff

(Black Level):

White-level value

-28 to -60

volts

Maximum Circuit Values:

Grid-No.1-Circuit Resistance. 1.5 max. megohms

▲ Grid drive is the operating condition in which the video signal varies the grid-No.1 potential with respect to cathode.

● This value is a working design-center minimum. The equivalent absolute minimum ultor- or ultor-to-grid-No.1 voltage is 11,000 volts, below which the serviceability of the 21DLP4 will be impaired. The equipment designer has the responsibility of determining a minimum design value such that under the worst probable operating conditions involving supply-voltage variation and equipment variation the absolute minimum ultor- or ultor-to-grid-No.1 voltage is never less than 11,000 volts.

§ The grid-No.4 voltage or grid-No.4-to-grid-No.1 voltage required for focus of any individual tube is independent of ultor current and will remain essentially constant for values of ultor voltage (or ultor-to-grid-No.1 voltage) or grid-No.2 voltage (or grid-No.2-to-grid-No.1 voltage) within design ranges shown for these items.

* Distance from Reference Line for suitable PM centering magnet should not exceed 2-1/4". Excluding extraneous fields, the center of the undeflected focused spot will fall within a circle having a 7/16-inch radius concentric with the center of the tube face. It is to be noted that the earth's magnetic field can cause as much as 1/2-inch deflection of the spot from the center of the tube face.

■ Cathode drive is the operating condition in which the video signal varies the cathode potential with respect to grid No.1 and the other electrodes.

For X-ray shielding considerations, see sheet

X-RAY PRECAUTIONS FOR CATHODE-RAY TUBES


at front of this Section



21DLP4


21DLP4

RASTER-CUTOFF-RANGE CHARTS GRID-DRIVE SERVICE

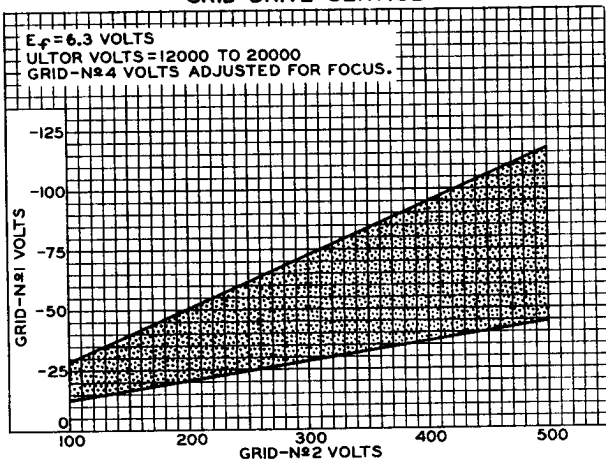

92CS-9349V


CATHODE-DRIVE SERVICE

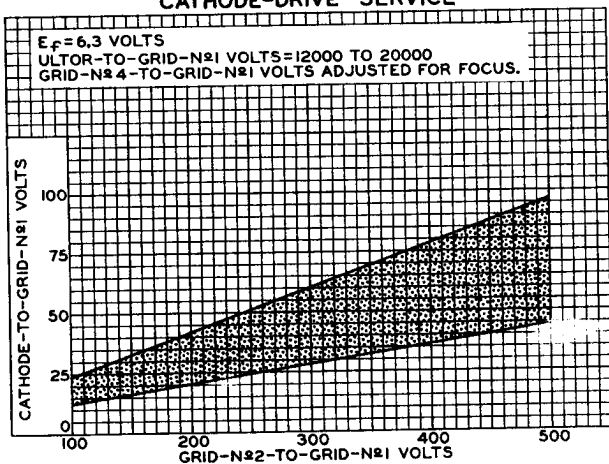

92CS-9350V




21DLP4 PICTURE TUBE

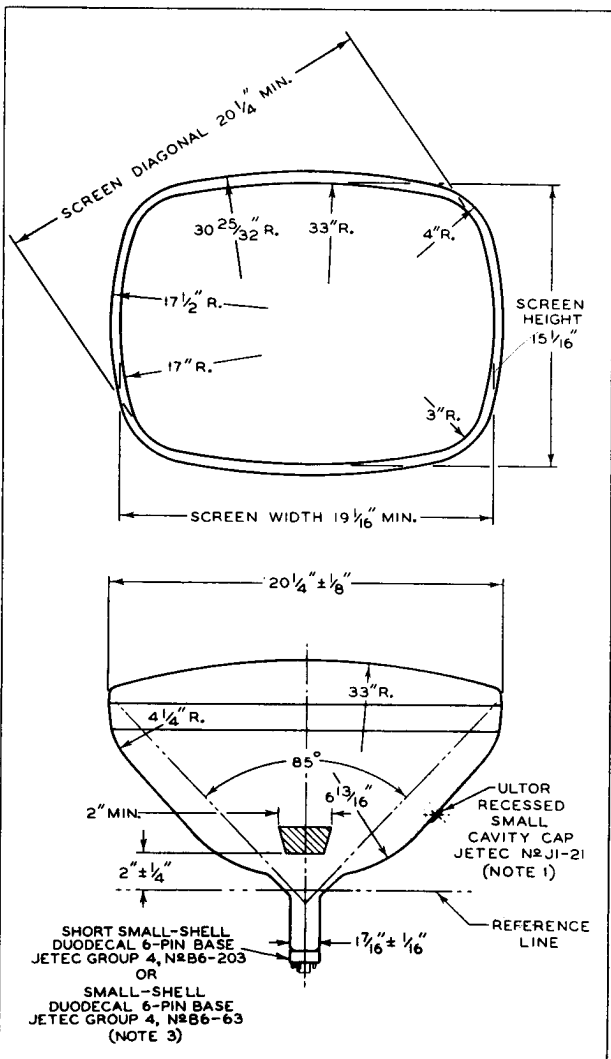




21DLP4

21DLP4 PICTURE TUBE

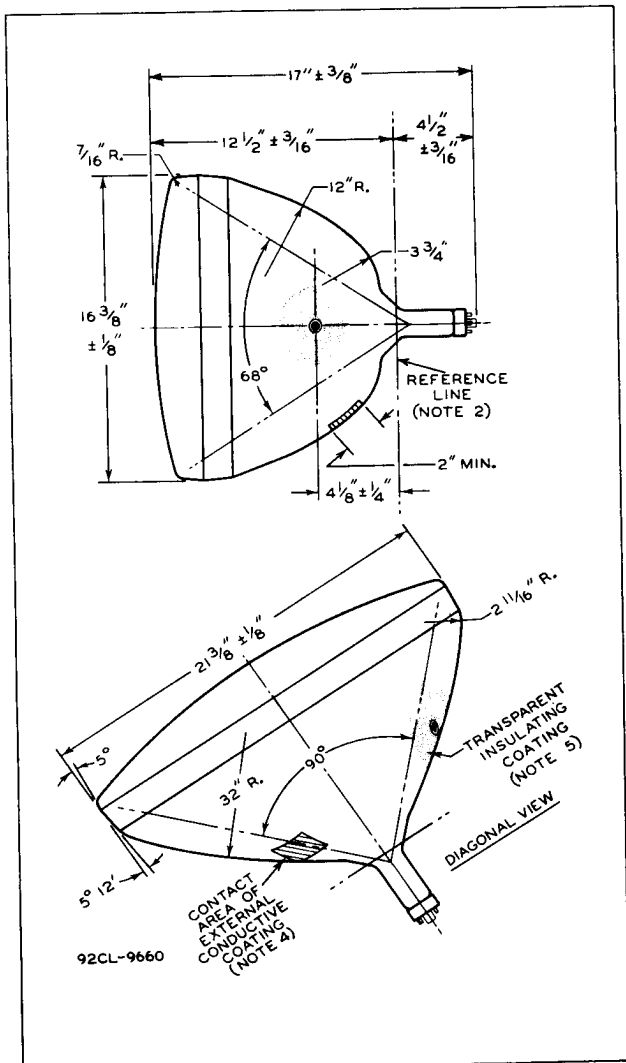



2IDLP4 PICTURE TUBE

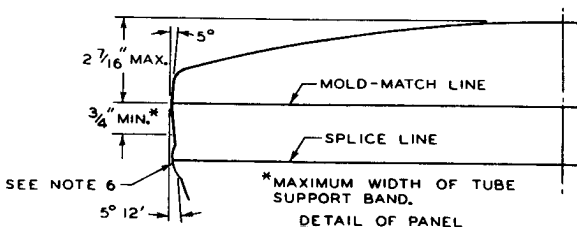

NOTE 1: THE PLANE THROUGH THE TUBE AXIS AND PIN 6 MAY VARY FROM THE PLANE THROUGH THE TUBE AXIS AND ULTOR TERMINAL BY ANGULAR TOLERANCE (MEASURED ABOUT THE TUBE AXIS) OF $\pm 30^\circ$. ULTOR TERMINAL IS ON SAME SIDE AS PIN 6.

NOTE 2: WITH TUBE NECK INSERTED THROUGH FLARED END OF REFERENCE-LINE GAUGE JETEC No. G-116 (SHOWN AT FRONT OF THIS SECTION) AND WITH TUBE SEATED IN GAUGE, THE REFERENCE LINE IS DETERMINED BY THE INTERSECTION OF THE PLANE CC' OF THE GAUGE WITH THE GLASS FUNNEL.

NOTE 3: SOCKET FOR THIS BASE SHOULD NOT BE RIGIDLY MOUNTED; IT SHOULD HAVE FLEXIBLE LEADS AND BE ALLOWED TO MOVE FREELY. BOTTOM CIRCUMFERENCE OF BASE SHELL WILL FALL WITHIN A CIRCLE CONCENTRIC WITH BULB AXIS AND HAVING A DIAMETER OF 2-3/4\".

NOTE 4: THE DRAWING SHOWS THE MINIMUM SIZE AND LOCATION OF THE CONTACT AREA OF THE EXTERNAL CONDUCTIVE COATING. THE ACTUAL AREA OF THIS COATING WILL BE GREATER THAN THE CONTACT AREA SO AS TO PROVIDE THE REQUIRED CAPACITANCE. EXTERNAL CONDUCTIVE COATING MUST BE GROUNDED.


NOTE 5: TO CLEAN THIS AREA, WIPE ONLY WITH SOFT DRY LINTLESS CLOTH.

NOTE 6: BULGE AT SPLICE-LINE SEAL MAY INCREASE THE INDICATED MAXIMUM VALUE FOR ENVELOPE WIDTH, DIAGONAL, AND HEIGHT BY NOT MORE THAN 1/8\", BUT AT ANY POINT AROUND THE SEAL, THE BULGE WILL NOT PROTRUDE MORE THAN 1/16\" BEYOND THE ENVELOPE SURFACE AT THE MOLD-MATCH LINE.



AVERAGE DRIVE CHARACTERISTICS

CATHODE-DRIVE SERVICE	GRID-DRIVE SERVICE
$E_f = 6.3$ VOLTS	$E_f = 6.3$ VOLTS
ULTOR-TO-GRID-No.1 VOLTS = 16000	ULTOR VOLTS = 16000
CATHODE BIASED POSITIVE WITH RESPECT TO GRID No.1 TO GIVE FOCUSED RASTER CUTOFF.	GRID No.1 BIASED NEGATIVE WITH RESPECT TO CATHODE TO GIVE FOCUSED RASTER CUTOFF.
RASTER FOCUSED AT AVERAGE BRIGHTNESS.	RASTER FOCUSED AT AVERAGE BRIGHTNESS.
RASTER SIZE = $18" \times 13\frac{1}{2}"$	RASTER SIZE = $18" \times 13\frac{1}{2}"$

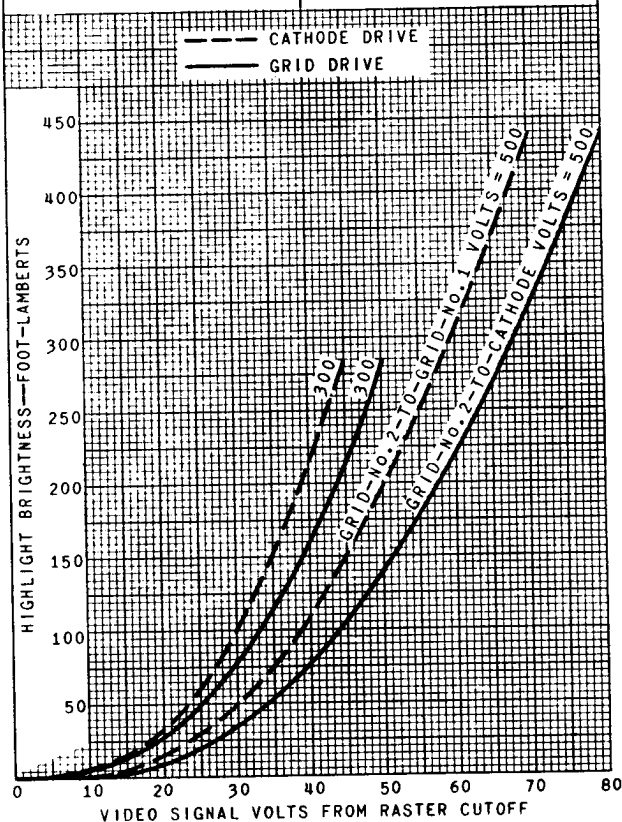



21DLP4

AVERAGE DRIVE CHARACTERISTICS

CATHODE-DRIVE SERVICE

 $E_f = 6.3$ VOLTS

ULTOR-TO-GRID-No.1

VOLTS = 12000 TO 20000

CATHODE BIASED POSITIVE
WITH RESPECT TO GRID No.1
TO GIVE FOCUSED RASTER
CUTOFF.

GRID-DRIVE SERVICE

 $E_f = 6.3$ VOLTS

ULTOR VOLTS =

12000 TO 20000

GRID No.1 BIASED NEGATIVE
WITH RESPECT TO CATHODE
TO GIVE FOCUSED RASTER
CUTOFF.

--- CATHODE DRIVE
— GRID DRIVE

