

MECHANICAL DATA

Bulb	ST-12
Base	B7-2 Small Shell Octal
Basing	6AM
Top Cap	C1-2 or C1-3 Skirted Miniature
Cathode	Coated Unipotential
Mounting Position	Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage	6.3 Volts
Heater Current	1.2 Amperes
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
Total DC and Peak	200 Volts
Heater Positive with Respect to Cathode	
DC	100 Volts
Total DC and Peak	200 Volts

DIRECT INTERELECTRODE CAPACITANCES (Approximate)

Grid to Plate	0.6 μf
Input	15 μf
Output	7.5 μf

RATINGS (Design Center Values — Except as Noted)

Horizontal Deflection Amplifier¹

DC Plate Supply Voltage	
(Boost + DC Power Supply)	600 Volts Max.
Peak Positive Plate Voltage (Abs. Max.)	6000 Volts
Peak Negative Plate Voltage	1250 Volts Max.
Plate Dissipation ²	11 Watts Max.
Peak Negative Grid #1 Voltage	300 Volts Max.
DC Grid #2 Voltage	175 Volts Max.
Grid #2 Dissipation	2.5 Watts Max.
Average Cathode Current	110 Ma Max.
Peak Cathode Current	400 Ma Max.
Grid #1 Circuit Resistance	0.47 Megohm Max.
Bulb Temperature (At Hottest Point)	200° C Max.

AVERAGE CHARACTERISTICS

Pentode Operation: With $E_b=250$ V, $E_{c2}=150$ V and $E_{c1}=-22.5$ V

Plate Current	55 Ma
Grid #2 Current	2.1 Ma
Transconductance	5500 μmhos
Plate Resistance	20,000 Ohms

Zero Bias: With $E_b=60$ V and $E_{c2}=150$ V (Instantaneous Values)

Plate Current	225 Ma
Grid #2 Current	25 Ma

Cutoff: For $I_b=1$ ma with $E_b=250$ V and $E_{c2}=150$ V



Grid #1 Voltage (approx.)	-46 Volts
---------------------------	-----------

Triode Amplification Factor: With

$E_b=E_{c2}=150$ V and $E_{c1}=22.5$ V	4.3
--	-----

QUICK REFERENCE DATA

Beam power amplifier designed for use as a driver tube in horizontal deflection amplifiers. It is identical to the type 6BQ6GT except for bulb size. The larger ST-12 bulb provides a better safety margin for dissipation.

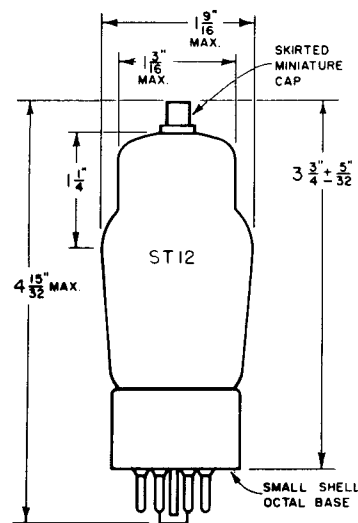

SYLVANIA ELECTRIC
PRODUCTS INC.

Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA

APRIL 1953

SYLVANIA

6BQ6G

NOTES:

1. *For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission". The duty cycle of the voltage pulse not to exceed 15% of a scanning cycle.*
2. *In stages operating with grid leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.*