



6BA7

PENTAGRID CONVERTER

9-PIN MINIATURE TYPE

6BA7

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage	6.3	ac or dc volts
Current	0.3	amp

Direct Interelectrode Capacitances:^o


Grid No.3 to All Other Electrodes (RF Input)	9.5	μf
Plate to All Other Electrodes (Mixer Output)	8.3	μf
Grid No.1 to All Other Electrodes (Osc. Input)	6.7	μf
Grid No.3 to Plate	0.19 max.	μf
Grid No.3 to Grid No.1	0.1 max.	μf
Grid No.1 to Plate	0.05 max.	μf
Grid No.1 to All Other Electrodes Except Cathode	3.4	μf
Grid No.1 to Cathode	3.3	μf
Cathode to All Other Electrodes Except Grid No.1	4.0	μf

^o With no external shield.

Mechanical:

Mounting Position	Any
Maximum Overall Length	2-5/8"
Maximum Seated Length	2-3/8"
Length, Base Seat to Bulb Top (excluding tip)	2" ± 3/32"
Maximum Diameter	7/8"
Bulb	T-6-1/2
Base	Small-Button Noval 9-Pin
Basing Designation for BOTTOM VIEW	8CT

- Pin 1-Grids No.2 & No.4
- Pin 2-Grid No.1
- Pin 3-Cathode
- Pin 4-Heater
- Pin 5-Heater



- Pin 6-Grid No.5, Internal Shield
- Pin 7-Grid No.3
- Pin 8-Internal Shield
- Pin 9-Plate

CONVERTER SERVICE

Maximum Ratings, Design-Center Values:

PLATE VOLTAGE	300 max.	volts
GRID-No.5 & INTERNAL-SHIELD VOLTAGE ▲	0 max.	volts
GRIDS-No.2 & No.4 VOLTAGE	100 max.	volts
GRIDS-No.2 & No.4 SUPPLY VOLTAGE	300 max.	volts
PLATE DISSIPATION	2.0 max.	watts
GRIDS-No.2 & No.4 DISSIPATION	1.5 max.	watts
TOTAL CATHODE CURRENT	22 max.	ma

▲ See next page.

6BA7



6BA7 PENTAGRID CONVERTER

GRID-NO. 3 VOLTAGE:

Negative bias value.	100 max.	volts
Positive bias value.	0 max.	volts

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	90 max.	volts
Heater positive with respect to cathode.	90 max.	volts

Characteristics - Separate Excitation:*

Plate Voltage.	100	250	volts
Grid-No. 5 & Internal Shield.	Connected directly to ground		
Grids-No. 2 & No. 4 (Screen) Voltage	100	100	volts
Grid-No. 3 (Control Grid) Voltage	-1	-1	volt
Grid-No. 1 (Oscillator Grid) Resistor	20000	20000	ohms
Plate Resistance (Approx.)	0.5	1	megohm
Conversion Transconductance	900	950	μ mhos
Conversion Transconductance (Approx.)#	3.5	3.5	μ mhos
Plate Current.	3.6	3.8	ma
Grids-No. 2 & No. 4 Current.	10.2	10	ma
Grid-No. 1 Current.	0.35	0.35	ma
Total Cathode Current.	14.2	14.2	ma

NOTE: The transconductance between grid No. 1 and grids No. 2 & No. 4 connected to plate (not oscillating) is approximately 8000 micromhos under the following conditions: signal applied to grid No. 1 at zero bias; grids-No. 2 and No. 4 and plate at 100 volts; grid No. 3 grounded. Under the same conditions, the plate current is 32 milliamperes and the amplification factor is 16.5.

▲ Internal shield (Pins No. 6 and No. 8) connected directly to ground.

* The characteristics shown with separate excitation correspond very closely with those obtained in a self-excited oscillator circuit operating with zero bias.


With grid-No. 3 bias of -20 volts.



6BA7

6BA7

OPERATION CHARACTERISTICS

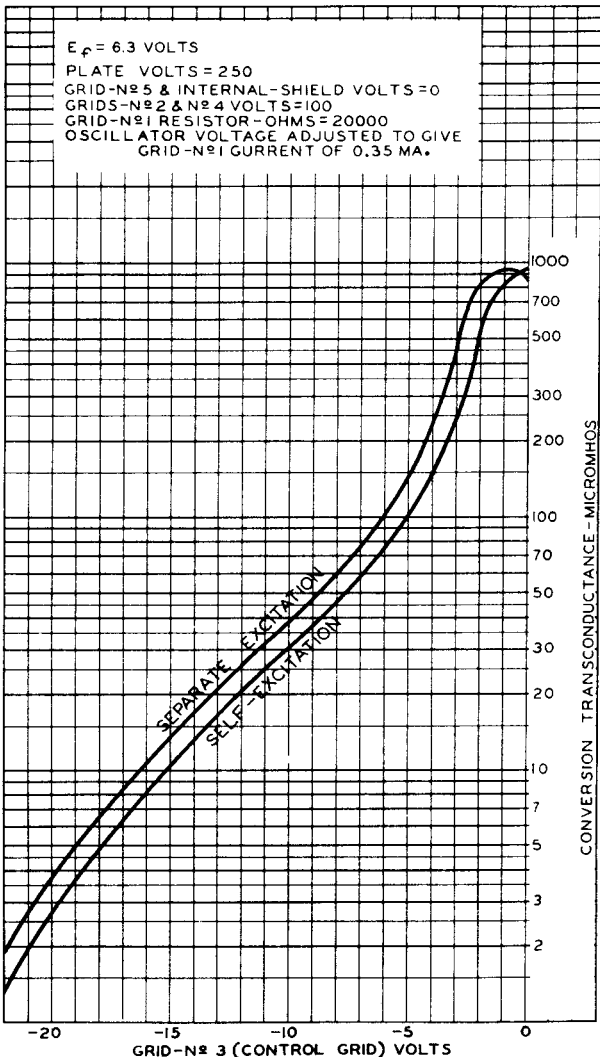

6BA7



6BA7

OPERATION CHARACTERISTICS WITH SELF-EXCITATION

$E_f = 6.3$ VOLTS

PLATE VOLTS = 250

GRID-N^o 5 & INTERNAL-SHIELD VOLTS = 0

GRIDS-N^o 2 & N^o 4 VOLTS = 100


GRID-N^o 3 (CONTROL GRID) VOLTS = -1

GRID-N^o 1 RESISTOR-OHMS = 20000

P-PERCENTAGE RATIO OF E_k TO $E_k + E_g$, WHERE

E_k = VOLTAGE ACROSS OSCILLATOR-COIL SECTION
BETWEEN GROUND AND CATHODE AND

E_g = OSCILLATOR VOLTAGE BETWEEN CATHODE
AND GRID

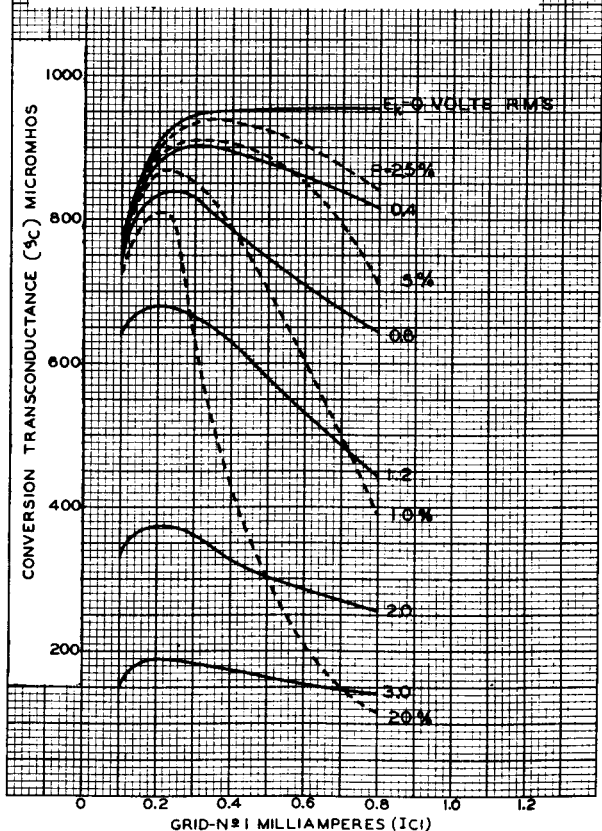

AUGUST 25, 1948

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6981R1



6BA7

6BA7

OPERATION CHARACTERISTICS
WITH SEPARATE OSCILLATOR EXCITATION

$E_f = 6.3$ VOLTS
PLATE VOLTS = 250
GRID-N \circ 5 & INTERNAL - SHIELD VOLTS = 0
GRIDS - N \circ 2 & N \circ 4 VOLTS = 100
GRID - N \circ 3 (CONTROL GRID) VOLTS = -1
GRID - N \circ 1 RESISTOR - OHMS = 20000
GRID - N \circ 1 CURRENT VARIED BY ADJUSTMENT
OF OSCILLATOR VOLTAGE

