



835

R-F POWER AMPLIFIER, A-F POWER AMPLIFIER, MODULATOR

Filament	Thoriated Tungsten	
Voltage	10	a-c or d-c volts
Current	3.25	amp.
Amplification Factor	12	
Direct Interelectrode Capacitances:		
Grid to Plate	9.25	μ f
Grid to Filament	6	μ f
Plate to Filament	5	μ f
Maximum Overall Length		7-7/8"
Maximum Diameter		2-5/16"
Bulb		T-18
Base		Jumbo 4-Pin
RCA Socket (Type UT-541-A)		Stock No. 9936

For additional data, see Type 211. The 211 and the 835 are identical except for interelectrode capacitances.

Data on operating frequencies for the 835 are given on the sheet TRANS. TUBE RATINGS vs FREQUENCY.

836

HALF-WAVE HIGH-VACUUM RECTIFIER

Heater	Coated Unipotential Cathodes*	
Voltage	2.5	a-c volts
Current	5.0	amp.
Maximum Overall Length		6-9/16"
Maximum Diameter		2-7/16"
Bulb		ST-19
Cap		Medium
Base		Medium 4-Pin, Bayonet
RCA Socket (Type UR-542-A)		Stock No. 9937

Maximum Ratings Are Absolute Values

MAXIMUM RATINGS

Peak Inverse Plate Voltage	5000 max. volts
Peak Plate Current	1.0 max. amp.
Average Plate Current	0.25 max. amp.

* The cathodes should be allowed to come up to operating temperature before plate current is drawn from the tube. For average conditions the delay is approximately 40 seconds.

The 836 has two separate cathodes each of which is connected to its respective heater. Plate circuit return should be made to the center-tap of the heater transformer.

← Indicates a change.

Dec. 1, 1942

RCA RADITRON DIVISION
RCA MANUFACTURING COMPANY, INC.



DATA

836



836


HALF-WAVE HIGH VACUUM RECTIFIER

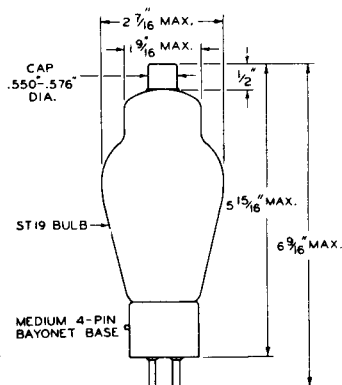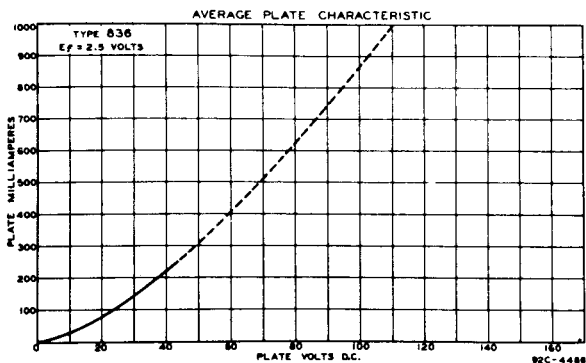

TUBE MOUNTING POSITION
Any

- Pin 1 - Heater & Cathode
Pin 2 - No Connection
Pin 3 - No Connection
Pin 4 - Heater & Cathode
Cap - Plate

BOTTOM VIEW OF
SOCKET CONNECTIONS



← Indicates a change.

Dec. 1, 1942

RCA RADOTRON DIVISION
RCA MANUFACTURING COMPANY, INC.

DATA