


SYLVANIA TYPE 6DQ5 **HORIZONTAL DEFLECTION AMPLIFIER**



MECHANICAL DATA

Bulb.....	T-12
Base.....	B8-118, Short Medium Shell
Outline.....	Octal, 8-Pin
Basing.....	12-21
Top Cap.....	8JC
Cathode.....	C1-1 Small
Mounting Position.....	Coated Unipotential Any

ELECTRICAL DATA

HEATER CHARACTERISTICS

Heater Voltage.....	6.3 Volts
Heater Current.....	2.5 Amperes
Maximum Heater-Cathode Voltage	
Heater Negative with Respect to Cathode	
Total D C and Peak.....	200 Volts
Heater Positive with Respect to Cathode	
D C.....	100 Volts
Total D C and Peak.....	200 Volts

DIRECT INTERELECTRODE CAPACITANCES (Unshielded)

Grid No. 1 to Plate.....	0.5 $\mu\mu\text{f}$
Input.....	23 $\mu\mu\text{f}$
Output.....	11 $\mu\mu\text{f}$

MAXIMUM RATINGS (Design Center Values—Except as Noted) **Horizontal Deflection Amplifier¹**

D C Plate Supply Voltage	
(Boost + D C Power Supply).....	900 Volts
Peak Positive Pulse Plate Voltage (Abs. Max.).....	7000 Volts
Peak Negative Pulse Plate Voltage.....	1500 Volts
Plate Dissipation ²	24 Watts
Grid No. 2 Input.....	3.2 Watts
Peak Negative Grid No. 1 Voltage.....	200 Volts
D C Grid No. 2 Voltage.....	175 Volts
Average Cathode Current.....	285 Ma
Peak Cathode Current.....	1000 Ma
Grid No. 1 Circuit Resistance.....	0.47 Megohm
Bulb Temperature (At Hottest Point).....	240 Degrees C

AVERAGE CHARACTERISTICS

Plate Voltage.....	175 Volts
Grid No. 2 Voltage.....	125 Volts
Grid No. 1 Voltage.....	-25 Volts
Plate Current.....	110 Ma
Grid No. 2 Current.....	5.0 Ma
Transconductance.....	10,500 μmhos
Amplification Factor ³	3.3
Plate Resistance (Approx.).....	5500 Ohms
E _{c1} for I _b = 1.0 Ma (Approx.).....	-55 Volts
Instantaneous Plate Knee Values	
E _b = 70 V, E _{c2} = 125 V, and E _{c1} = 0 V	
I _b = 550 Ma and I _{c2} = 42 Ma	

NOTES:


1. For operation in a 525-line, 30-frame system as described in "Standards of Good Engineering Practice for Television Broadcasting Stations; Federal Communications Commission". The duty cycle of the voltage pulse must not exceed 15% of one scanning cycle.
2. In stages operating with grid-leak bias, an adequate cathode bias resistor or other suitable means is required to protect the tube in the absence of excitation.
3. Amplification factor obtained with Grid No. 2 tied to plate and operating as a triode connected amplifier. E_b = 125 V and E_{c1} = -25 V.

APPLICATION

The Sylvania Type 6DQ5 is a beam power amplifier designed for use as a horizontal deflection amplifier in color television receivers.

6DQ5 (Cont'd)

AVERAGE PLATE CHARACTERISTICS

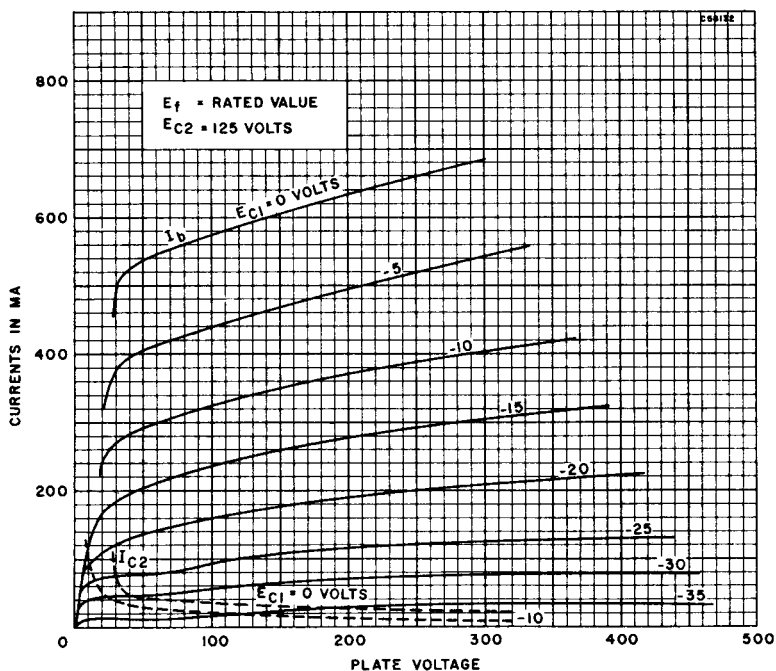

AVERAGE PLATE CHARACTERISTICS

