



DESCRIPTION AND RATING

The 6GN8 is a miniature tube containing a sharp-cutoff pentode and a high-mu triode in one envelope. The pentode section is intended primarily for use as a video amplifier. The triode section is suitable for use as a voltage amplifier or sync separator.

GENERAL

ELECTRICAL

Cathode—Coated Unipotential

Heater Characteristics and Ratings

Heater Voltage, AC or DC*.....6.3 $\pm$ 0.6 Volts

Heater Current†.....0.75 Amperes

Direct Interelectrode Capacitances‡

Pentode Section

Grid-Number 1 to Plate: (Pg1 to Pp).....0.1 pf

Input: Pg1 to (h+k+Pg2+Pg3+i.s.)......11 pf

Output: Pp to (h+k+Pg2+Pg3+i.s.).....4.2 pf

Triode Section

Grid to Plate (Tg to Tp).....4.4 pf

Input: Tg to (h+Tk).....2.2 pf

Output: Tp to (h+Tk).....0.36 pf

Pentode Grid-Number 1 to Triode Plate: (Pg1 to Tp), maximum....0.005 pf

Triode Grid to Pentode Plate: (Tg to Pp), maximum.....0.018 pf

Pentode Plate to Triode Plate: (Pp to Tp), maximum.....0.17 pf

MECHANICAL

Mounting Position—Any

Envelope—T-6½, Glass

Base—E9-1, Small Button 9-Pin

Outline Drawing—EIA 6-3

Maximum Diameter..... $\frac{7}{8}$ Inches

Maximum Over-all

Length.....2 $\frac{5}{8}$ Inches

Maximum Seated

Height.....2 $\frac{3}{8}$ Inches


MAXIMUM RATINGS

Design-Maximum ratings are limiting values of operating and environmental conditions applicable to a bogey electron tube of a specified type as defined by its published data and should not be exceeded under the worst probable conditions.

The tube manufacturer chooses these values to provide acceptable serviceability of the tube, making allowance for the effects of changes in operating conditions due to variations in the characteristics of the tube under consideration.

The equipment manufacturer should design so that initially and throughout life no design-maximum value for the intended service is exceeded with a bogey tube under the worst probable operating conditions with respect to supply-voltage variation, equipment component variation, equipment control adjustment, load variation, signal variation, environmental conditions, and variations in the characteristics of all other electron devices in the equipment.

PHYSICAL DIMENSIONS



EIA 6-3

TERMINAL CONNECTIONS

Pin 1—Triode Cathode

Pin 2—Triode Grid

Pin 3—Triode Plate

Pin 4—Heater

Pin 5—Heater


Pin 6—Pentode Cathode, Grid Number 3, and Internal Shield

Pin 7—Pentode Grid Number 1

Pin 8—Pentode Grid Number 2 (Screen)

Pin 9—Pentode Plate

BASING DIAGRAM



EIA 9DX

MAXIMUM RATINGS (Continued)**DESIGN-MAXIMUM VALUES**

	Pentode Section	Triode Section	
Plate Voltage.....	330	330	Volts
Screen Supply Voltage.....	330		Volts
Screen Voltage—See Screen Rating Chart			
Positive DC Grid-Number 1 Voltage.....	0	0	Volts
Plate Dissipation.....	5.0	1.0	Watts
Screen Dissipation.....	1.1		Watts
Heater-Cathode Voltage			
Heater Positive with Respect to Cathode			
DC Component.....	100	100	Volts
Total DC and Peak.....	200	200	Volts
Heater Negative with Respect to Cathode			
Total DC and Peak.....	200	200	Volts
Grid-Number 1 Circuit Resistance			
With Fixed Bias.....	0.25	0.5	Megohms
With Cathode Bias.....	1.0	1.0	Megohms

CHARACTERISTICS AND TYPICAL OPERATION**AVERAGE CHARACTERISTICS**

	Pentode Section	Triode Section	
Plate Voltage.....	60 200	250	Volts
Screen Voltage.....	150 150		Volts
Grid-Number 1 Voltage.....	0§	- 2	Volts
Cathode-Bias Resistor.....	100		Ohms
Amplification Factor.....		100	
Plate Resistance, Approximate.....	60000	37000	Ohms
Transconductance.....	11500	2700	Micromhos
Plate Current.....	55 25	2.0	Milliamperes
Screen Current.....	18 5.5		Milliamperes
Grid-Number 1 Voltage, Approximate			
Ib = 10 Microamperes.....		- 5	Volts
Grid-Number 1 Voltage, Approximate			
Ib = 100 Microamperes.....	- 10		Volts

* The equipment designer should design the equipment so that heater voltage is centered at the specified bogey value, with heater supply variations restricted to maintain heater voltage within the specified tolerance.

† Heater current of a bogey tube at $E_f = 6.3$ volts.


‡ Without external shield.

§ Applied for short interval (two seconds maximum) so as not to damage tube.

The tubes and arrangements disclosed herein may be covered by patents of General Electric Company or others. Neither the disclosure of any information herein nor the sale of tubes by General Electric Company conveys any license under patent claims covering combinations of tubes with other devices or

elements. In the absence of an express written agreement to the contrary, General Electric Company assumes no liability for patent infringement arising out of any use of the tubes with other devices or elements by any purchaser of tubes or others.

SCREEN RATING CHART

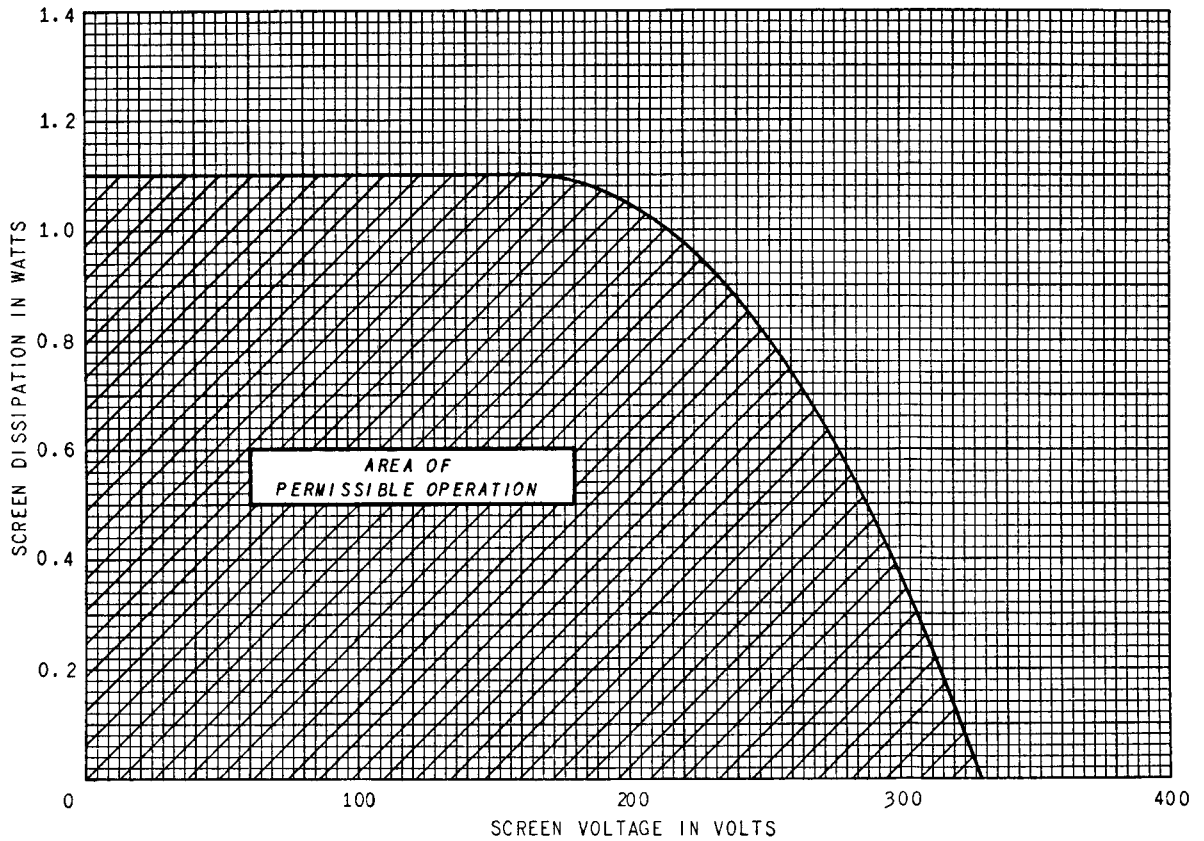

RECEIVING TUBE DEPARTMENT

GENERAL  **ELECTRIC**

Owensboro, Kentucky