


6F6
6F6-G

6F6
6F6-G

PENTHODE
(E_{AB})

V_f	=	6,3	V.
I_f	=	0,7	A.
E_A - PENTHODE			
V_a	=	250	315(max) V.
V_{g2}	=	250	315(max) V.
V_{g1}	=	-16,5	-22 V.
I_a	=	34	42 mA.
I_{g2}	=	6,5	8,0 mA.
R_i	=	80.000	75.000 Ω
g	=	200	200
S	=	2,5	2,65 mA/V.
R_a	=	7.000	7.000 Ω
$W_o(7\%)$	=	3	5 Wtt.
R_k	=	400	400 Ω

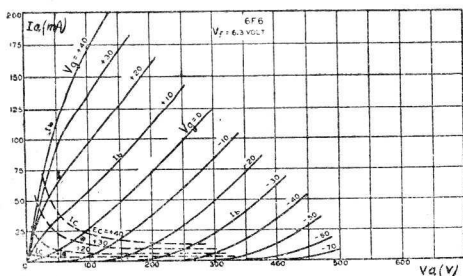

6 F 6
6 F 6-G

6 F 6
6 F 6-G

E_A - TRIODE

V_a	=	250	$V.$
V_{g1}	=	-20	$V.$
I_a	=	31	mA.
R_i	=	2.600	Ω
g	=	7	
S	=	2,7	mA/V.
R_a	=	4.000	Ω
$W_o(5\%)$	=	0,85	$W_{tt.}$
R_k	=	650	Ω

E_{AB} - PENTHODE

		FB	SB	
$V_a(max)$	=	375	375	$V.$
$V_{g2}(max)$	=	250	250	$V.$
V_{g1}	=	-26(min)		$V.$
R_k	=		340(min)	Ω
I_a	=	34	54	mA.
I_{g2}	=	5	8	mA.
$R_a(pl)$	=	2.500	2.500	Ω
$R_a(p.p)$	=	10.000	10.000	Ω
$W_o(5\%)$	=	19	19	$W_{tt.}$