

TA-FA5ES/FA7ES

SERVICE MANUAL

AEP Model

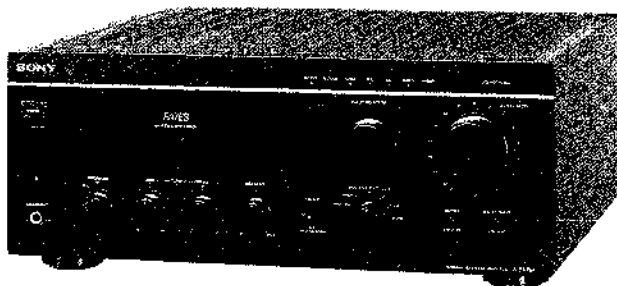


Photo: TA-FA7ES (Black)

SPECIFICATIONS

System

Power Amplifier: Pure-complementary SEPP MOS
FET power amplifier with all stages directly coupled
Preamplifier: Low-noise, high-gain equalizer amplifier
Power section: Large-capacity power supply advanced
STD

Rated output	TA-FA7ES 4 ohms, 150 W + 150 W (DIN 0.7%) 8 ohms, 100 W + 100 W (DIN 0.7%) TA-FA5ES 4 ohms, 135 W + 135 W (DIN 0.7%) 8 ohms, 90 W + 90 W (DIN 0.7%)
Speakers impedance	4 to 16 ohms
Output bandwidth (8 ohms)	10 Hz to 100 kHz (at 40 W output, and high-frequency distortion rate of 0.08%)
Dynamic headroom	at 4 ohms: TA-FA7ES 2 dB TA-FA5ES 3 dB at 8 ohms: TA-FA7ES 1.2 dB TA-FA5ES 2 dB
Total harmonic distortion	0.005% (at 8 ohms, 10 W output)
Damping factor	100 (8 ohms, 1 kHz)
Intermodulation (IM) distortion (60 Hz:7 kHz=4:1)	0.005% (8 ohms)
Throughrate	125 V/ μ sec, 250 V/ μ sec (Inside)
Residual noise	Less than 115 μ V (network A)
Equalizer deviation	PHONO MM: 20 Hz to 20 kHz, ± 0.2 dB
Frequency response	TUNER, CD, AUX, TAPE 1, 2, 3: 2 Hz to 100 kHz ± 3 dB
S/N	PHONO MC: TA-FA7ES 78 dB (A Fil, 0.5 mV) TA-FA5ES 76 dB (A Fil, 0.5 mV) MM: 87 dB (A Fil, 5 mV) TUNER, CD, AUX, TAPE 1, 2, 3: 105 dB

Inputs

Input sensitivity and impedance	PHONO MC: 0.25 mV, 100 ohms MM: 2.5 mV, 50 kilohms TUNER, CD, AUX, TAPE 1, 2, 3: 150 mV, 30 kilohms
Maximum input capability (1 kHz)	PHONO MC: 9 mV MM: 150 mV

Outputs

Output level / impedance	REC OUT 1, 2, 3: 150 mV, 1 kilohms PHONES: 10 mW (at 8 ohms)
Tone controls	BASS (100 Hz): ± 7 dB TREBLE (10 kHz): ± 6 dB

General

Power requirements	220 - 230 V AC, 50/60 Hz
Power consumption	TA-FA7ES: 330 W TA-FA5ES: 300 W
Dimensions (approx.) (w/h/d)	430 \times 175 \times 450 mm (17 \times 7 \times 17 $\frac{3}{4}$ inches) incl. projecting parts and controls
Mass (approx.)	TA-FA7ES: 19.8 kg (43 lb 6 oz) TA-FA5ES: 17.5 kg (38 lb 10 oz)

Supplied accessories

Remote commander (remote)
RM-S703 (1)
Sony batteries SUM-3(NS) (2)

Design and specifications are subject to change without
notice.



INTEGRATED STEREO AMPLIFIER
SONY



TABLE OF CONTENTS

<u>Section</u>	<u>Title</u>	<u>Page</u>
	Specifications	1
1.	GENERAL	
	Location of Controls	3
2.	DISASSEMBLY	4
3.	ELECTRICAL ADJUSTMENT	7
4.	DIAGRAMS	
4-1.	IC Pin Function Description	8
4-2.	Schematic Diagram	11
4-3.	Printed Wiring Boards	
	-- MAIN Section --	15
4-4.	Printed Wiring Boards	
	-- CONTROL Section --	19
5.	EXPLODED VIEWS	23
6.	ELECTRICAL PARTS LIST	27

SAFETY-RELATED COMPONENT WARNING!!


COMPONENTS IDENTIFIED BY MARK  OR DOTTED LINE WITH MARK  ON THE SCHEMATIC DIAGRAMS AND IN THE PARTS LIST ARE CRITICAL TO SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

SECTION 1 GENERAL


This section is extracted from instruction manual.

• Location of Controls

Front Panel Descriptions

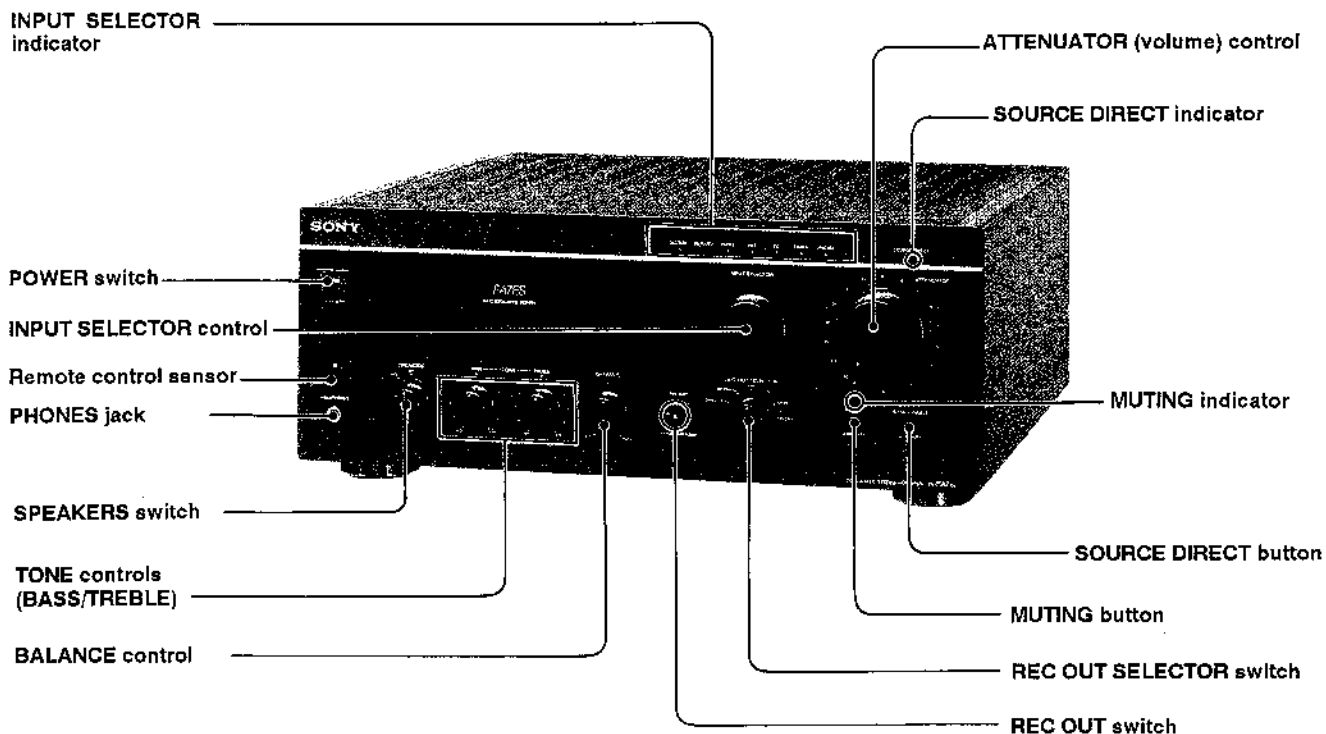

Rear Panel Descriptions

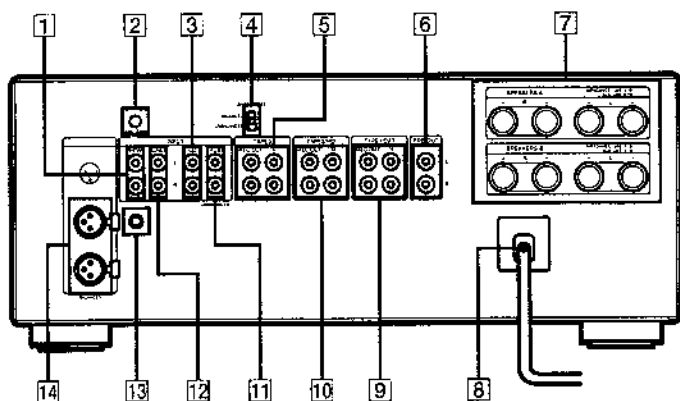


- 1 PHONO
- 2 CARTRIDGE MC/MM
- 3 CD
- 4 AUX INPUT (TA-FA7ES only)
- 5 TAPES
- 6 PRE OUT
- 7 SPEAKERS A/B
- 8 Mains lead
- 9 TAPE1/DAT
- 10 TAPE2/MD
- 11 AUX(UNBALANCED)
- 12 TUNER
- 13 \hbar (earth)
- 14 AUX(BALANCED) (TA-FA7ES only)


SECTION 2 DISASSEMBLY

Note: Follow the disassembly procedure in the numerical order given.


FRONT PANEL, SIDE PANEL

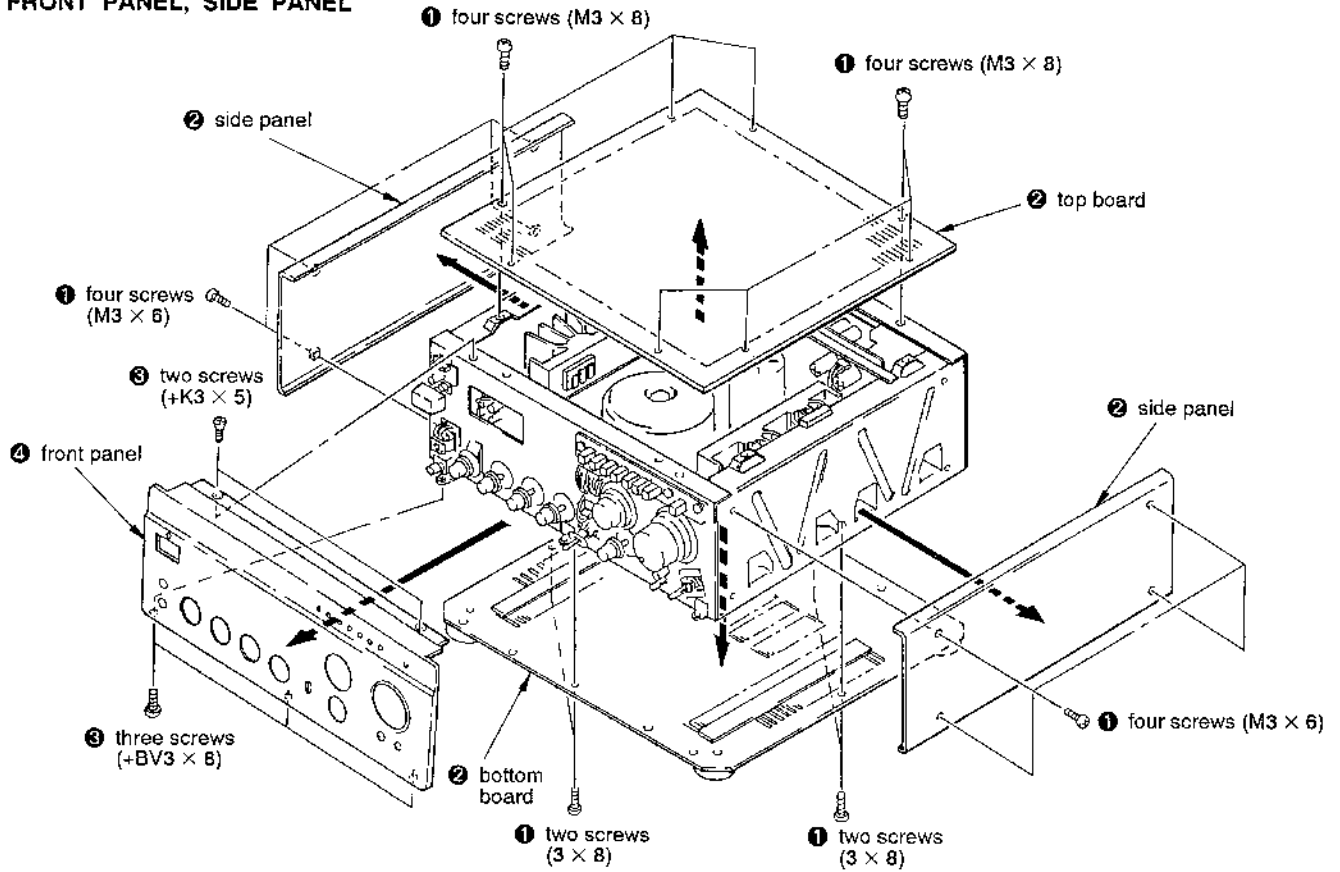


PRO LED, MEDAMA, HP, FUNCTION LED, MUT LED, REC OUT BOARDS

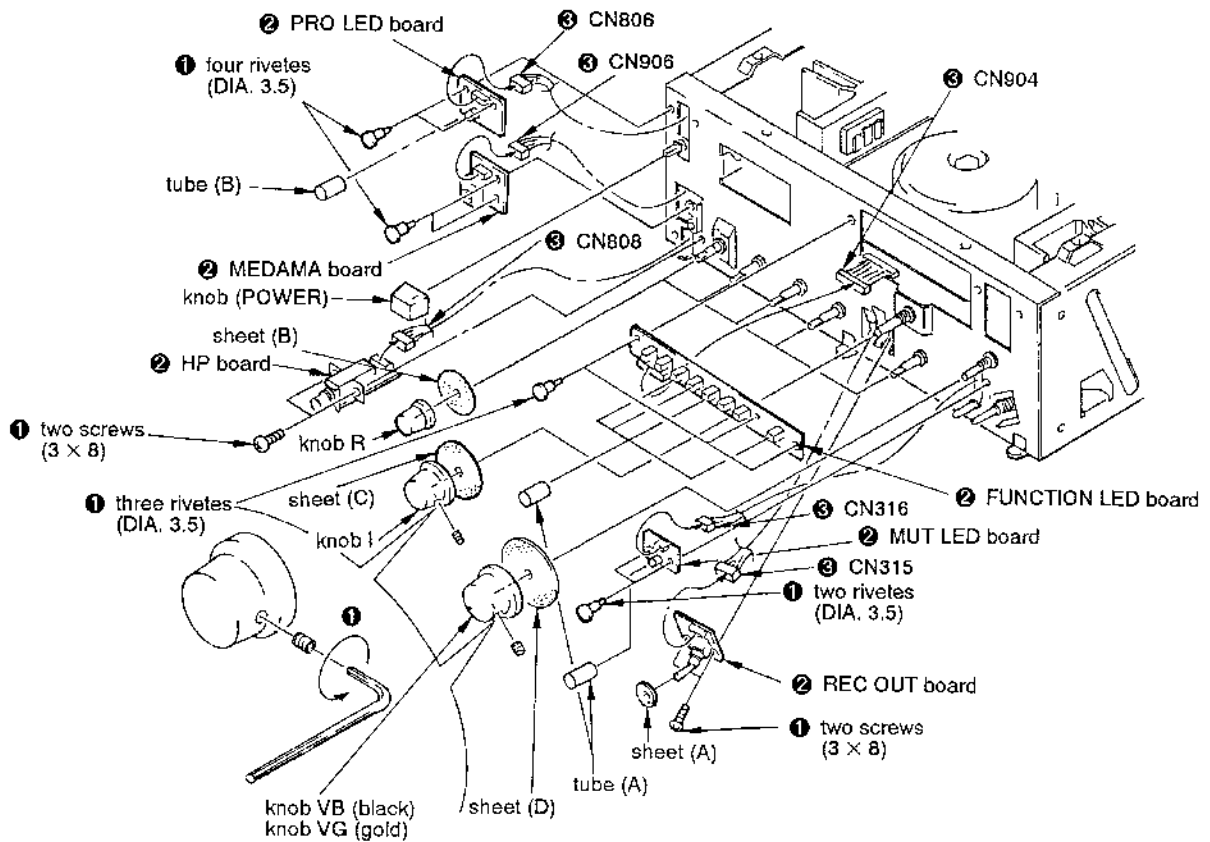


AC SW, TONE CONTROL, VOL BOARDS

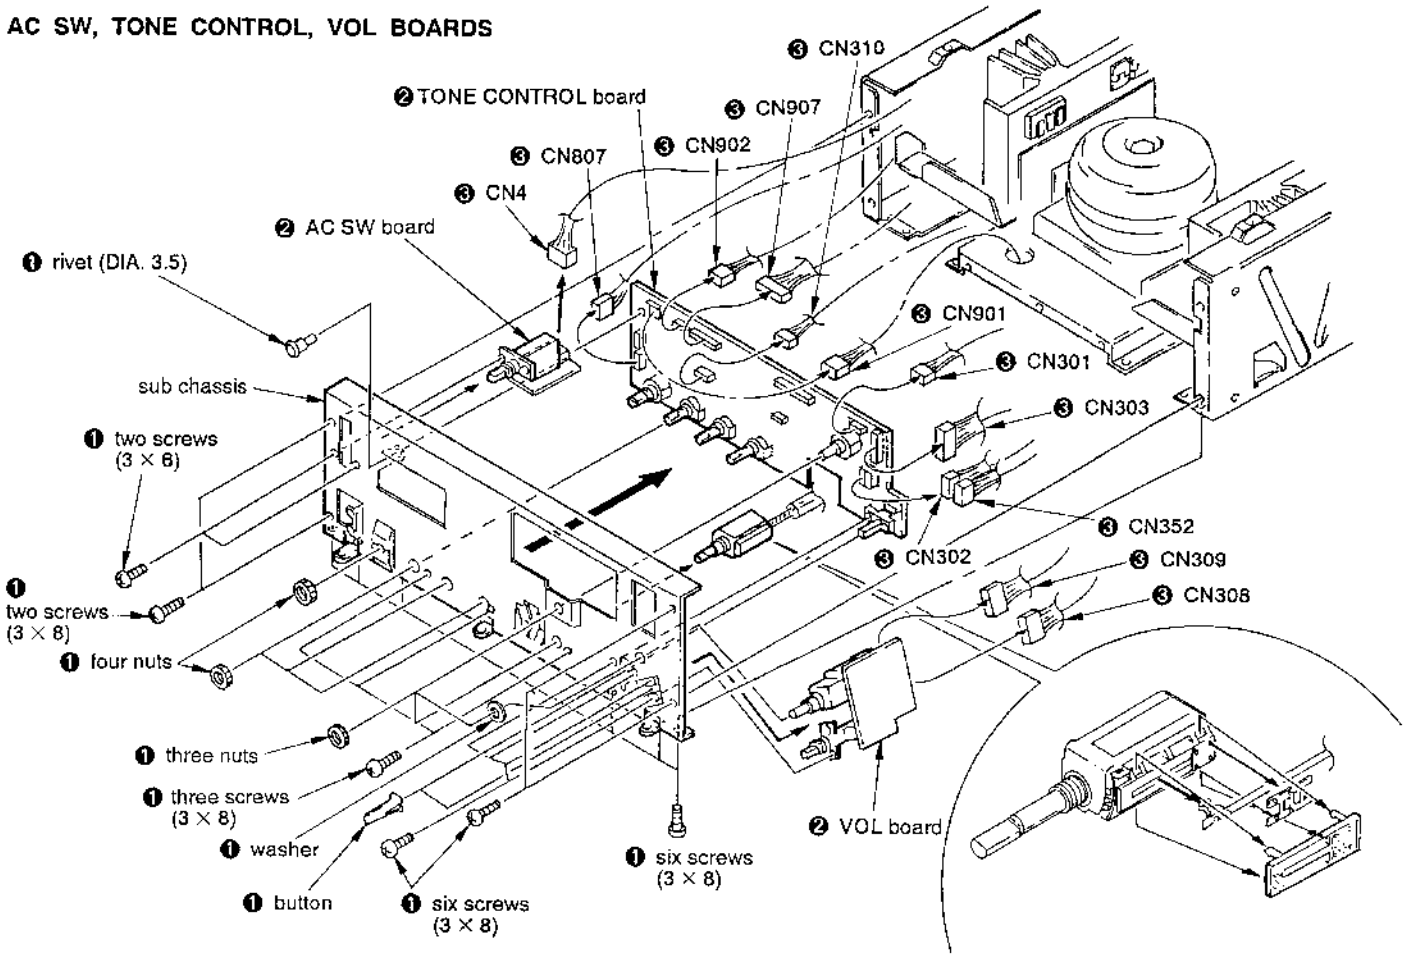


PS, PS JUMPER BOARDS AND POWER TRANSFORMER

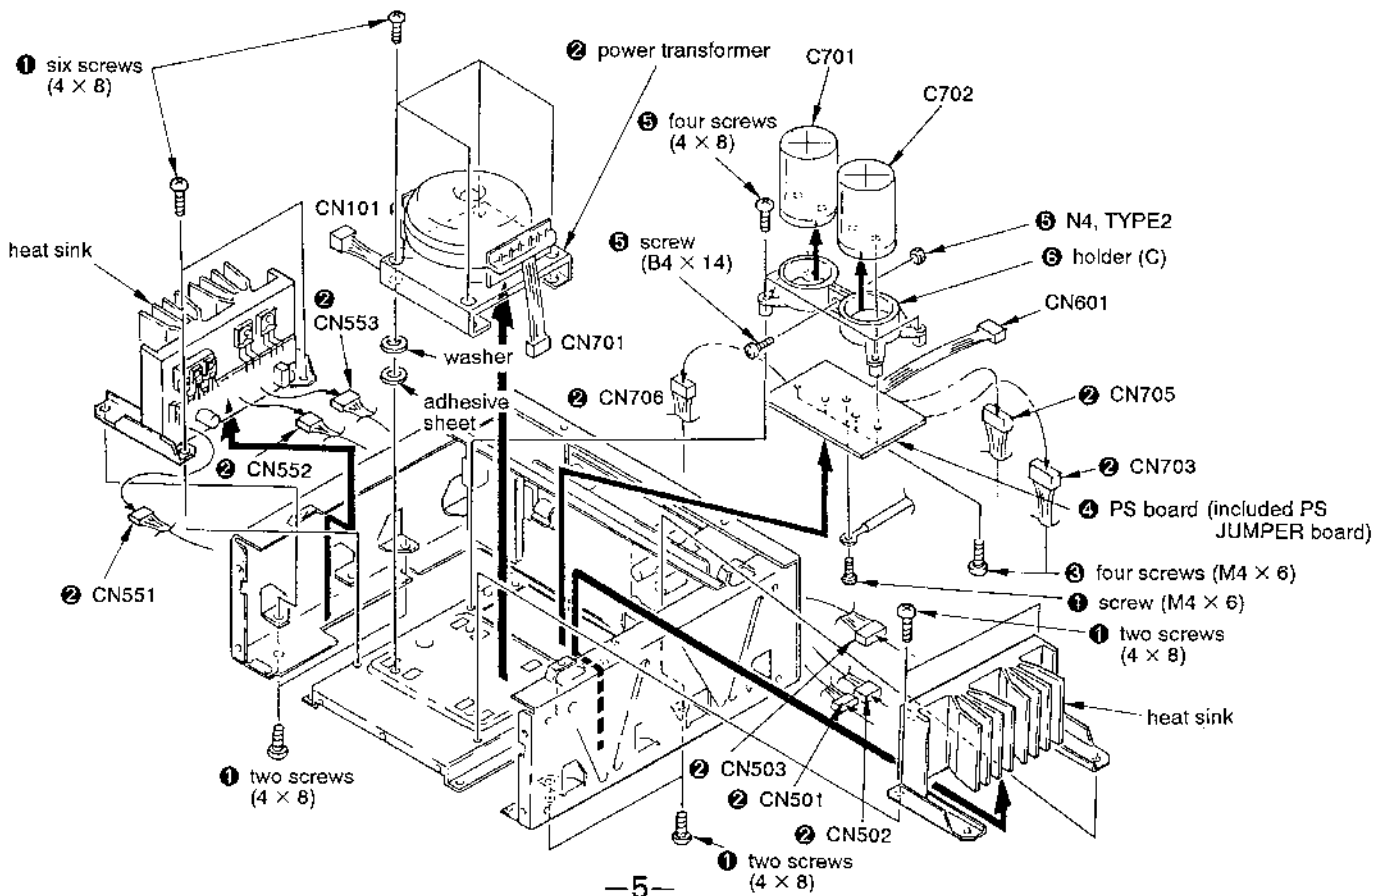

OUT LET, SP-TM, JUMPER, INPUT BOARDS

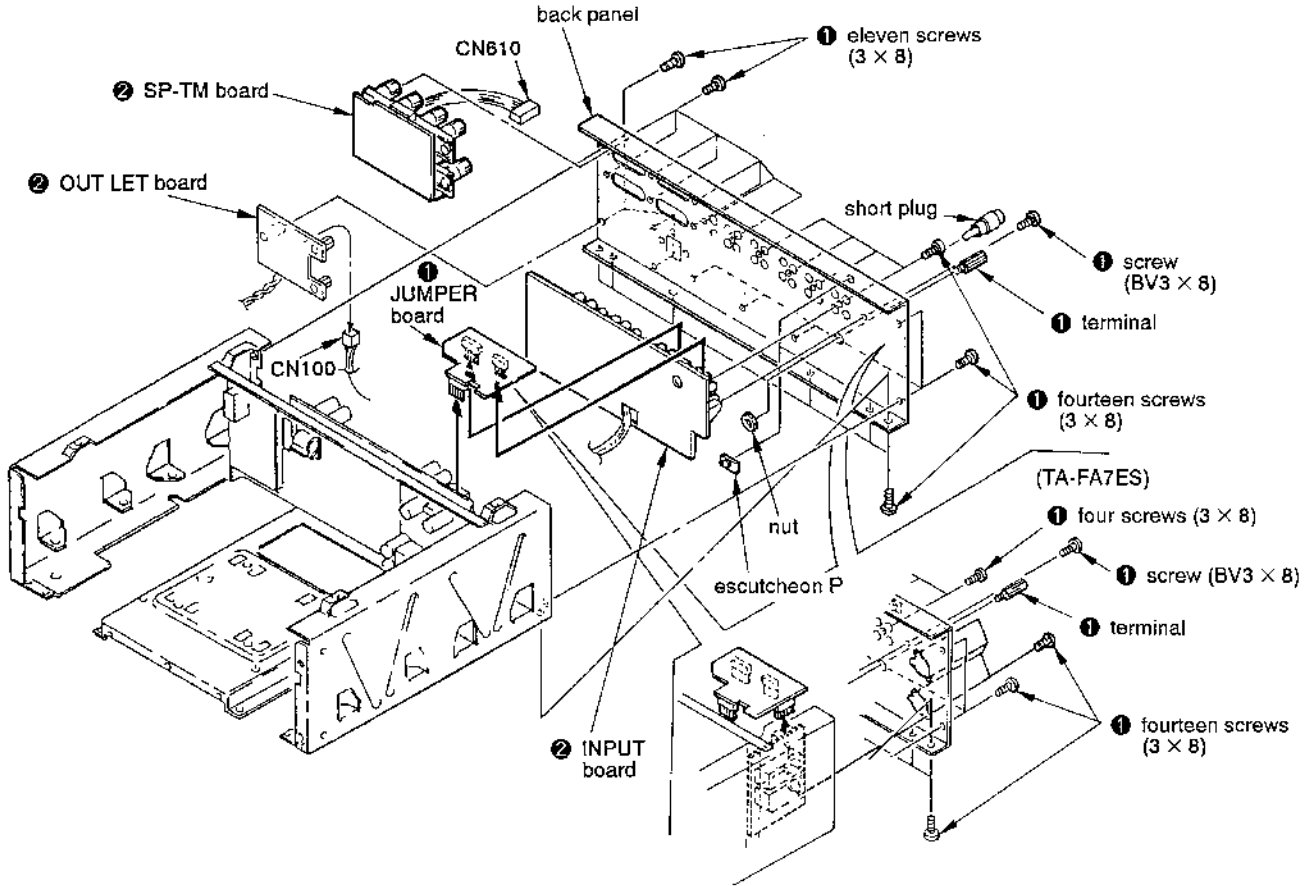

PRO, MAIN. A, PRE PS, BALANCE BOARDS AND HOLDER (P)

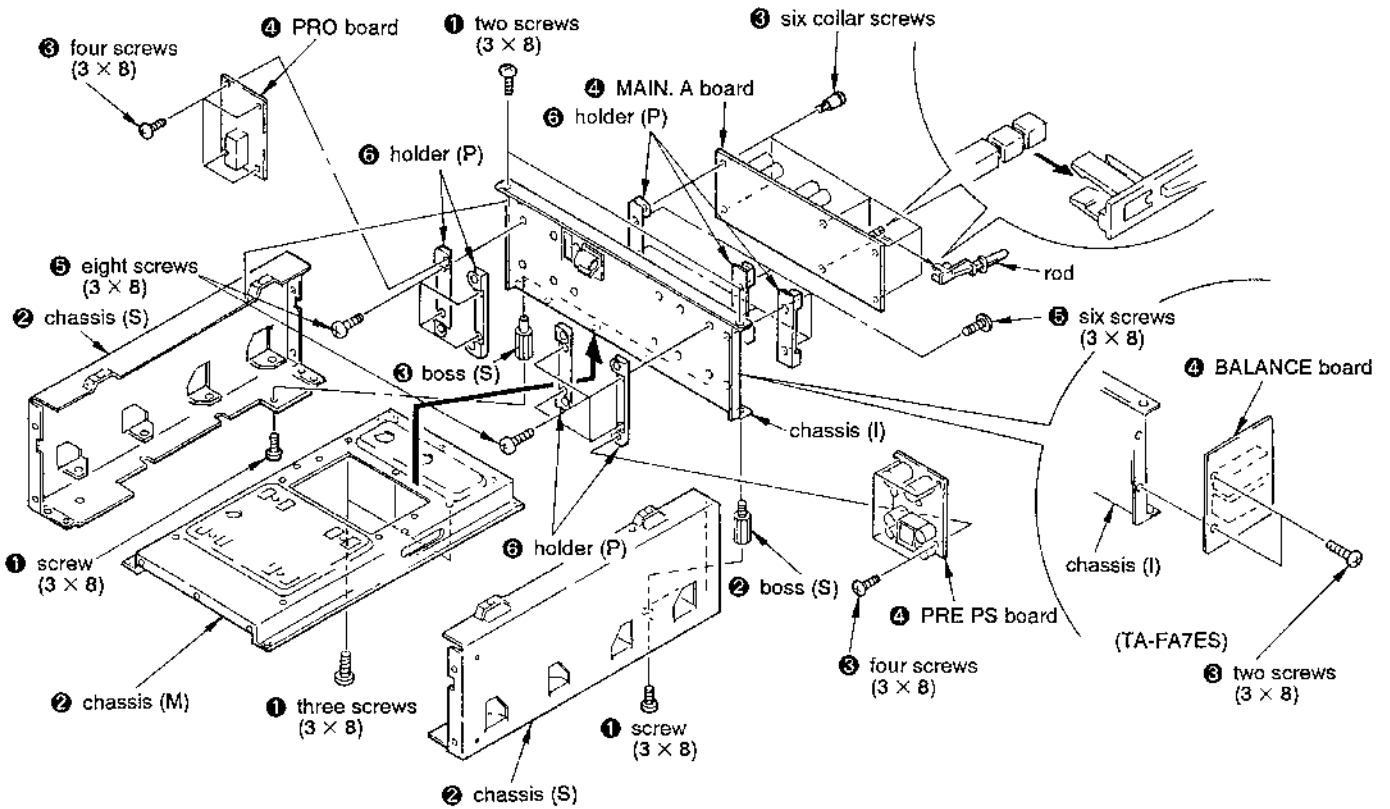

SECTION 3 ELECTRICAL ADJUSTMENT

Note: Adjustment should be performed 5 minutes later, after the power switch is on.

Bias Adjustment





Setting:

ATTENUATOR (Volume) control: minimum
Input signal: No signal input

Procedure:

Adjust RT501 (L-CH) and RT551 (R-CH) for 45 mV reading on the VTVM.

Adjustment Location: MAIN B-L, B-R BOARD

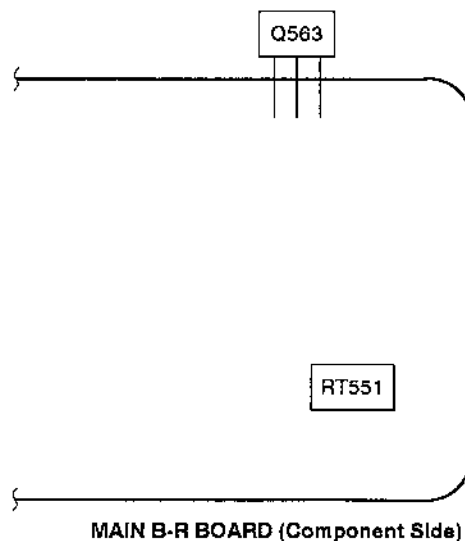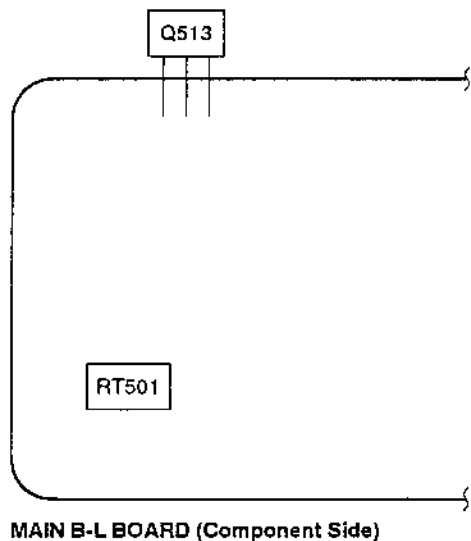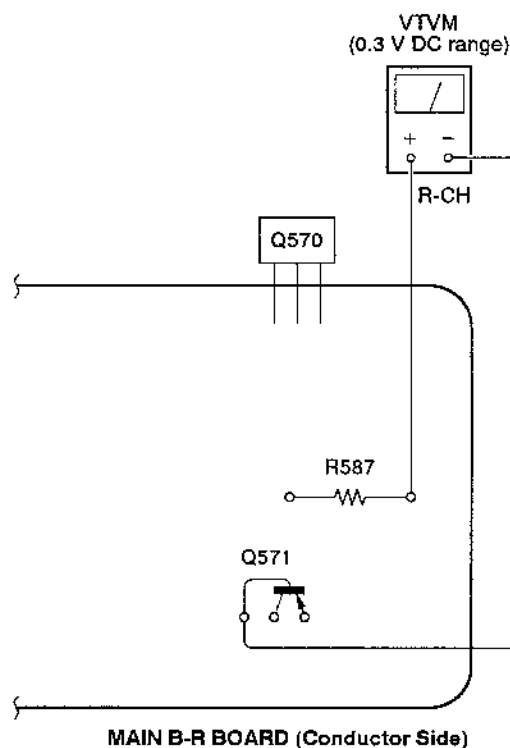
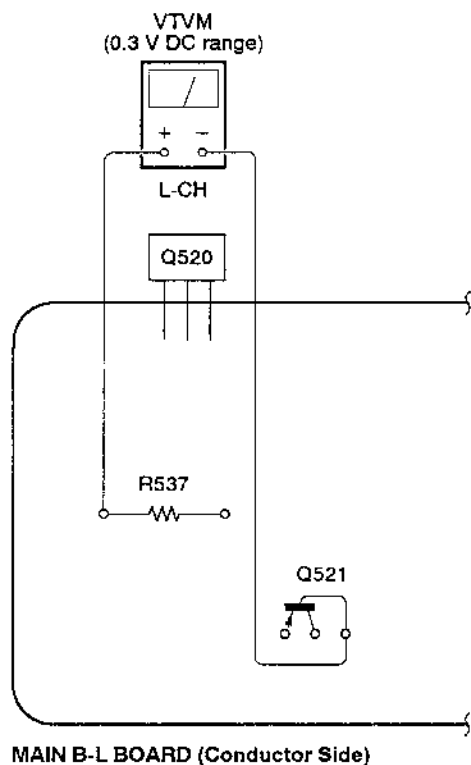


SECTION 4 DIAGRAMS

4-1. IC PIN FUNCTION DESCRIPTION IC901 TMP47C200BN-H327 (SYSTEM CONTROL)

Pin No.	Pin Name	I/O	Function
1	RCL	O	Clock Data } Serial data of EEPROM (X24C01P)
2	RDT	I/O	
3	VDW	O	Down Up } VR motor control signal (Active: H, Stop: L-L, Brake: H-H)
4	VUP	O	
5	CD	O	Function relay select signal output (ON: L)
6	MUT	O	Mute control signal output when switching (Mute: H)
7	AUX	O	Function relay select signal output (ON: L)
8	T3	O	Function relay select signal output (ON: L)
9	T2	O	Function relay select signal output (ON: L)
10	T1	O	Function relay select signal output (ON: L)
11	SW0	I	Relativity position detection signal of rotary switch (One of them terminal: H, the other terminal: L) Direction from SW5 to SW0, TUNER → CD → AUX → TAPE2 → TAPE1 → PHONO → TUNER →
12	SW1	I	
13	SW2	I	
14	SW3	I	
15	SW4	I	
16	SW5	I	
17	PHONO	O	Function LED drive signal (ON: L)
18	TUNER	O	
19	CD	O	
20	AUX	O	
21	GND	—	GND terminal
22	TAPE1	O	Function LED drive signal (ON: L)
23	TAPE2	O	
24	TAPE3	O	
25	—	O	Not used (Connected to GND)
26	—	I	Not used (Connected to GND)
27	—	I	Not used (Connected to GND)
28	—	I	Not used (Connected to GND)
29	—	I	Not used (Connected to GND)
30	TEST	—	Test terminal (Open)
31	XIN	—	Oscillation signal 8.19 MHz
32	XOUT	—	
33	RESET	I	Reset signal (Reset: L)
34	HOLD	I	Cancellation of hold mode signal (Start: H)
35	TUNER	O	Function relay select signal output (ON: L)
36	PHONO	O	Function relay select signal output (ON: L)
37	SIRCS	I	SIRCS signal (Active: L)
38	—	O	Not used (Connected to GND)
39	—	O	Not used (Connected to GND)
40	--	O	Not used (Connected to GND)
41	—	O	Model mode switch signal (Connected to GND)
42	VDD	—	POWER supply (+5 V) terminal


• Circuit Boards Location

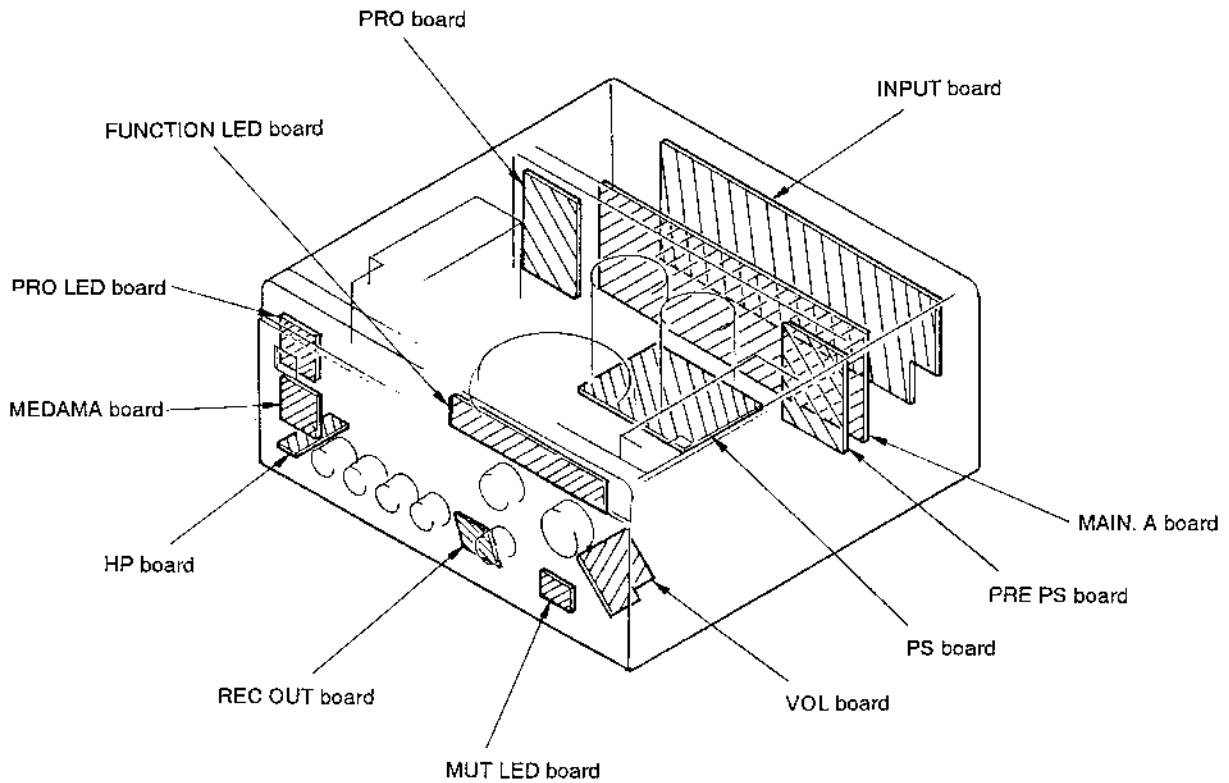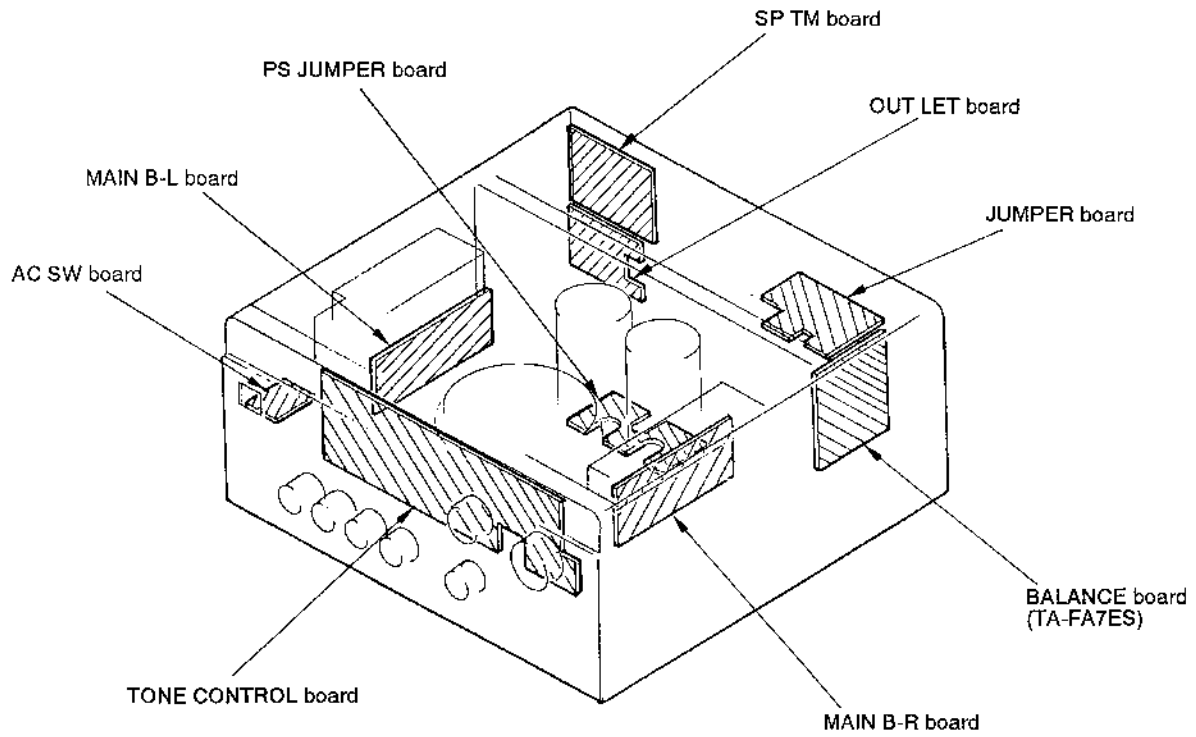

• IC Block Diagrams


PRO board

IC601 μ PC1237HA

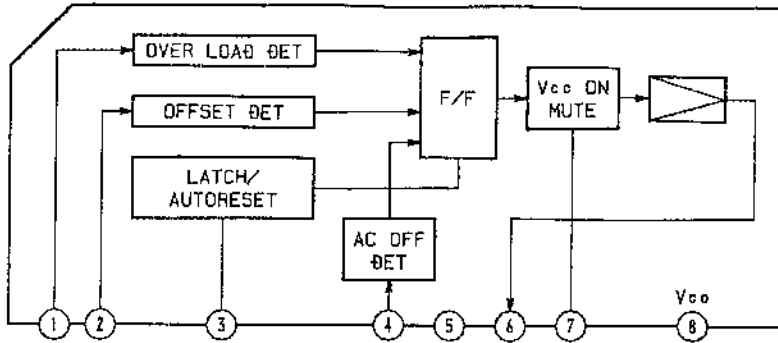



TONE CONTROL board

IC903 X24C01P-S

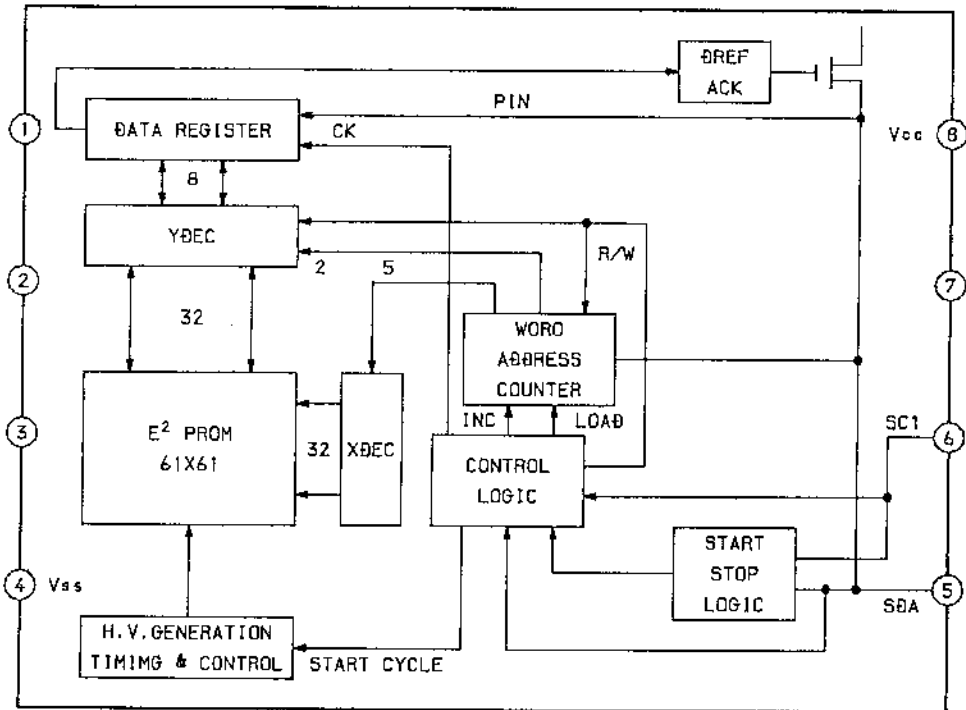


IC904 BA6208

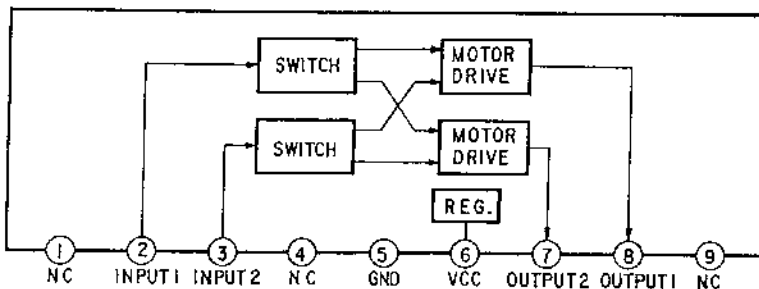

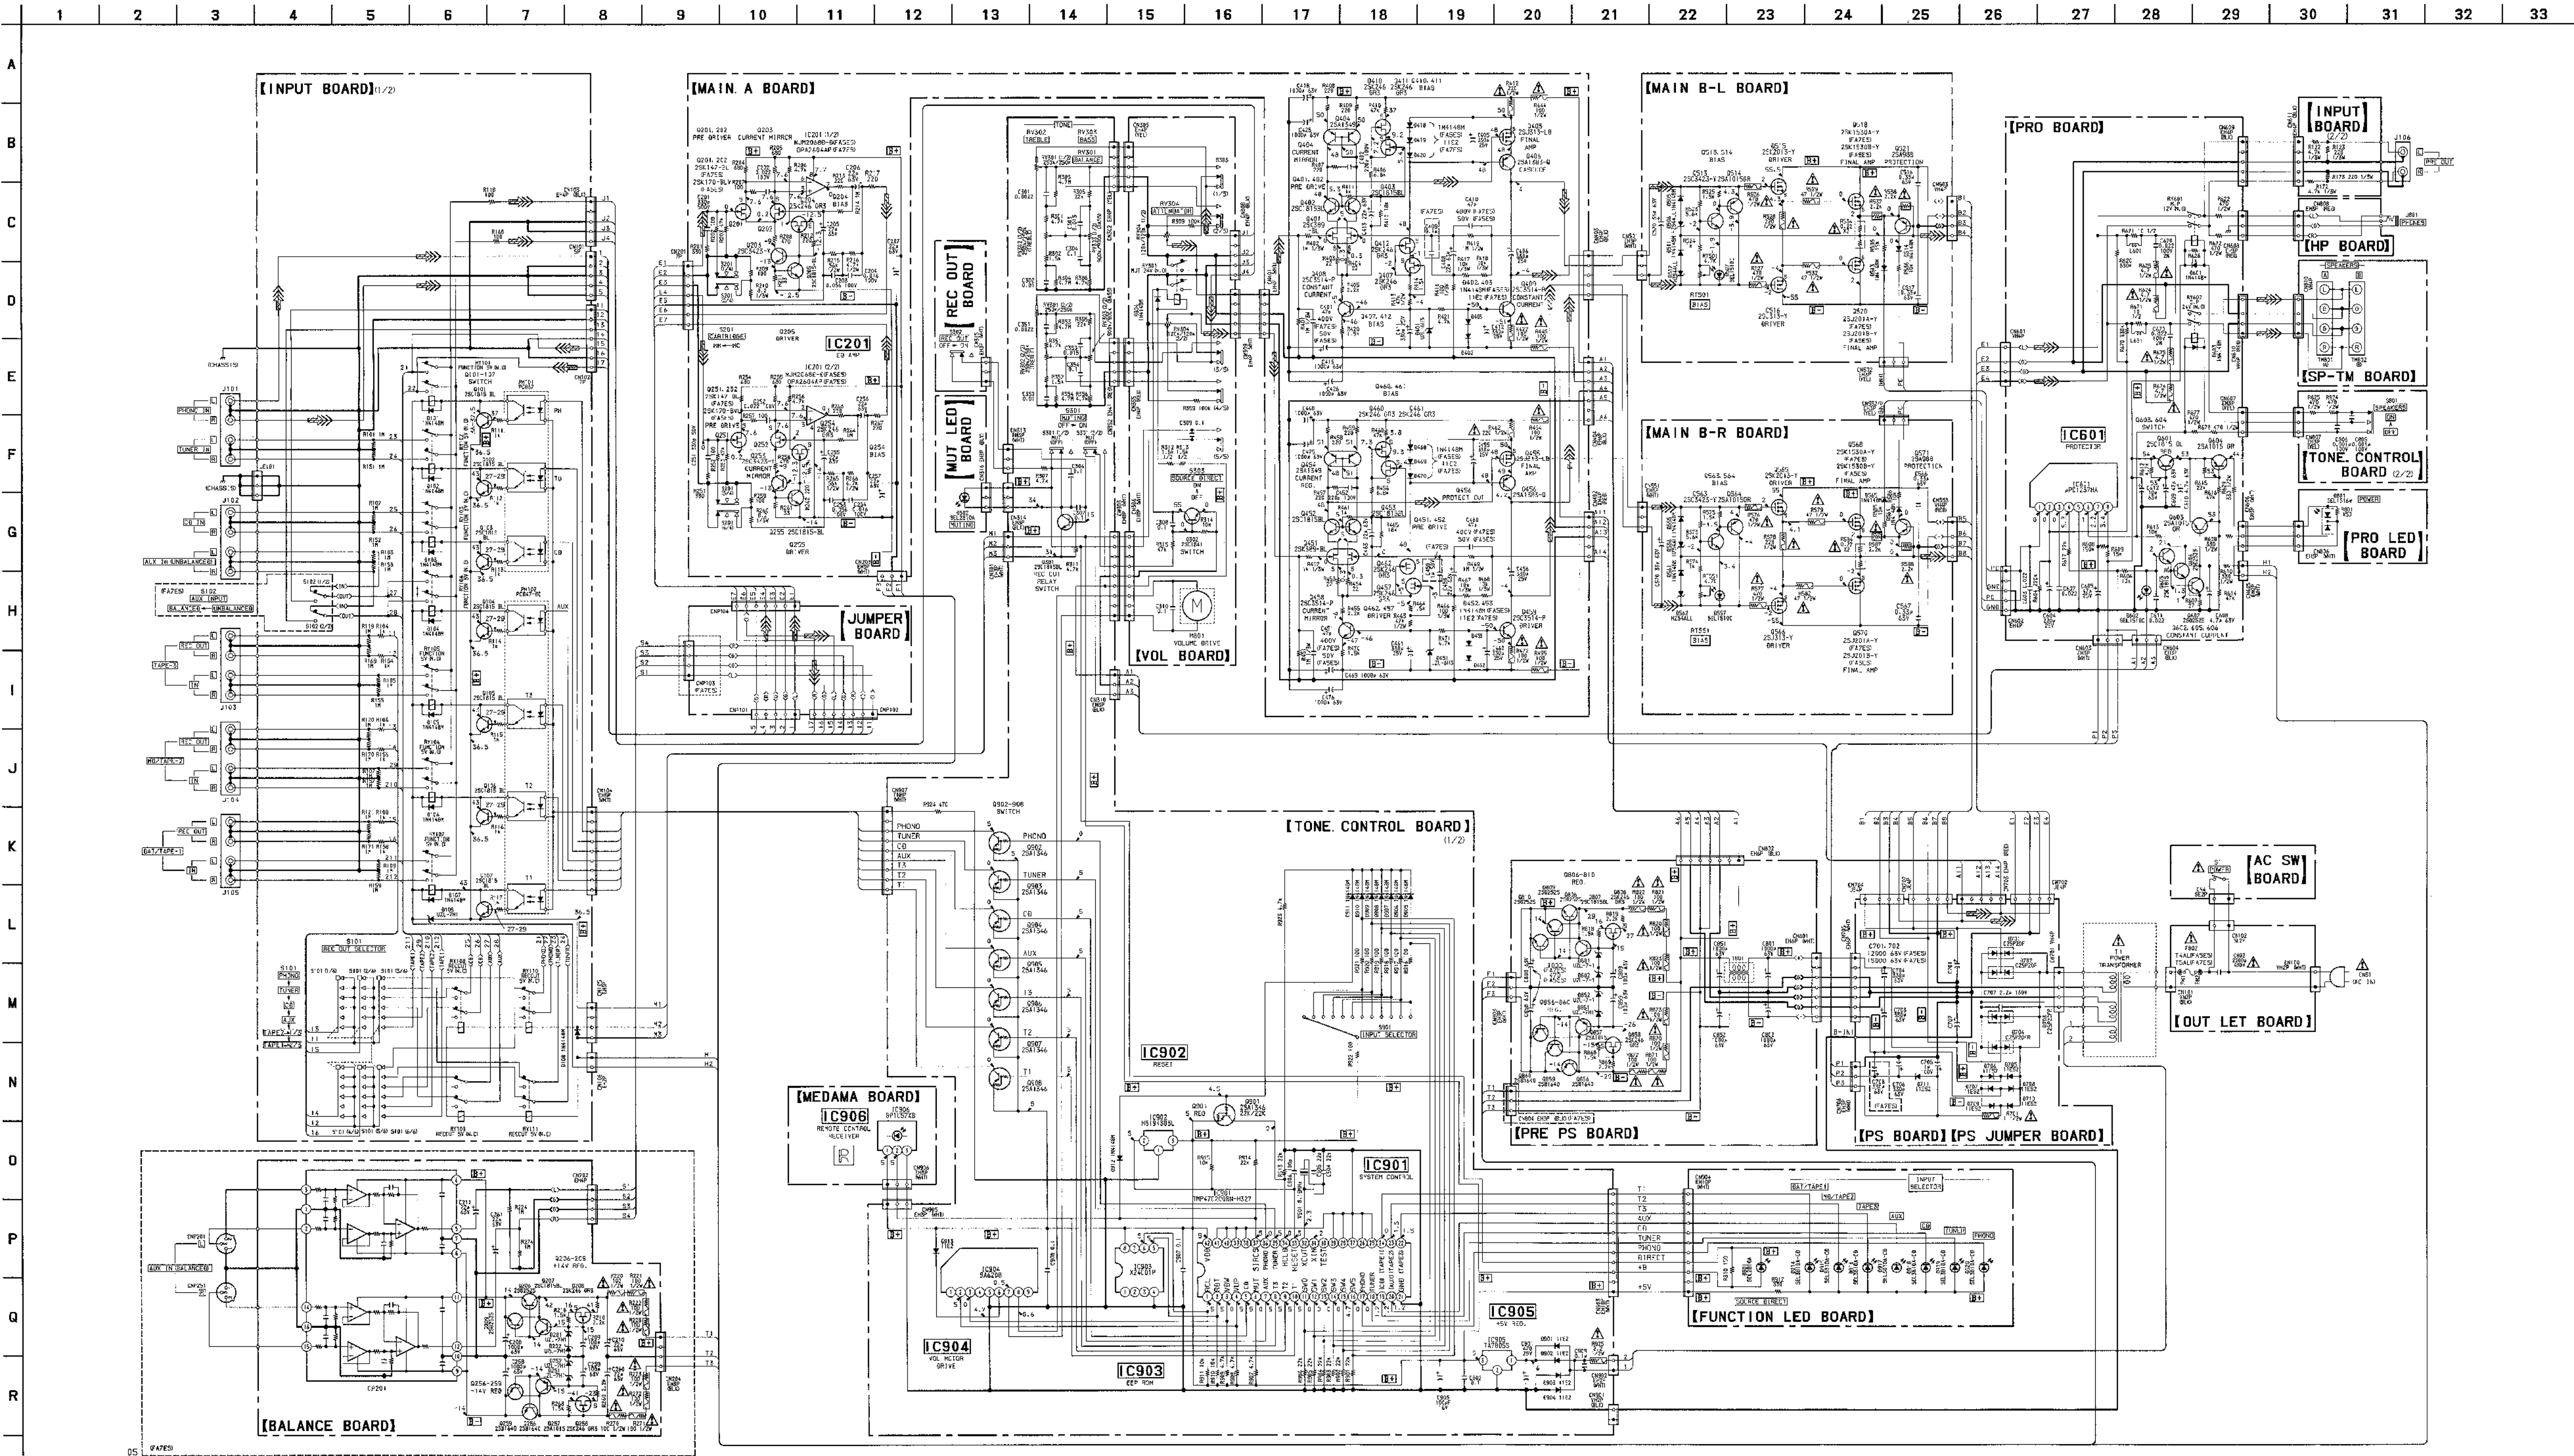

- Note:
- All capacitors are in μF unless otherwise noted. pF : μF 50 WV or less are not indicated except for electrolytics and tantalums.
 - All resistors are in Ω and $\frac{1}{4}$ W or less unless otherwise specified.
 - % : indicates tolerance.
 - \square : nonflammable resistor.
 - \square : fusible resistor.
- Note: The components identified with mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.
- B + : B + Line.
 - B - : B - Line.
 - \square : panel designation.
 - \square : adjustment for repair.
 - Voltages and waveforms are dc with respect to ground under no-signal (detuned) condition.
 - Voltages are taken with a VOM (10 M Ω).
 - Voltage variations may be noted due to normal production tolerances.
 - Signal path.
 - \Rightarrow : PHONO

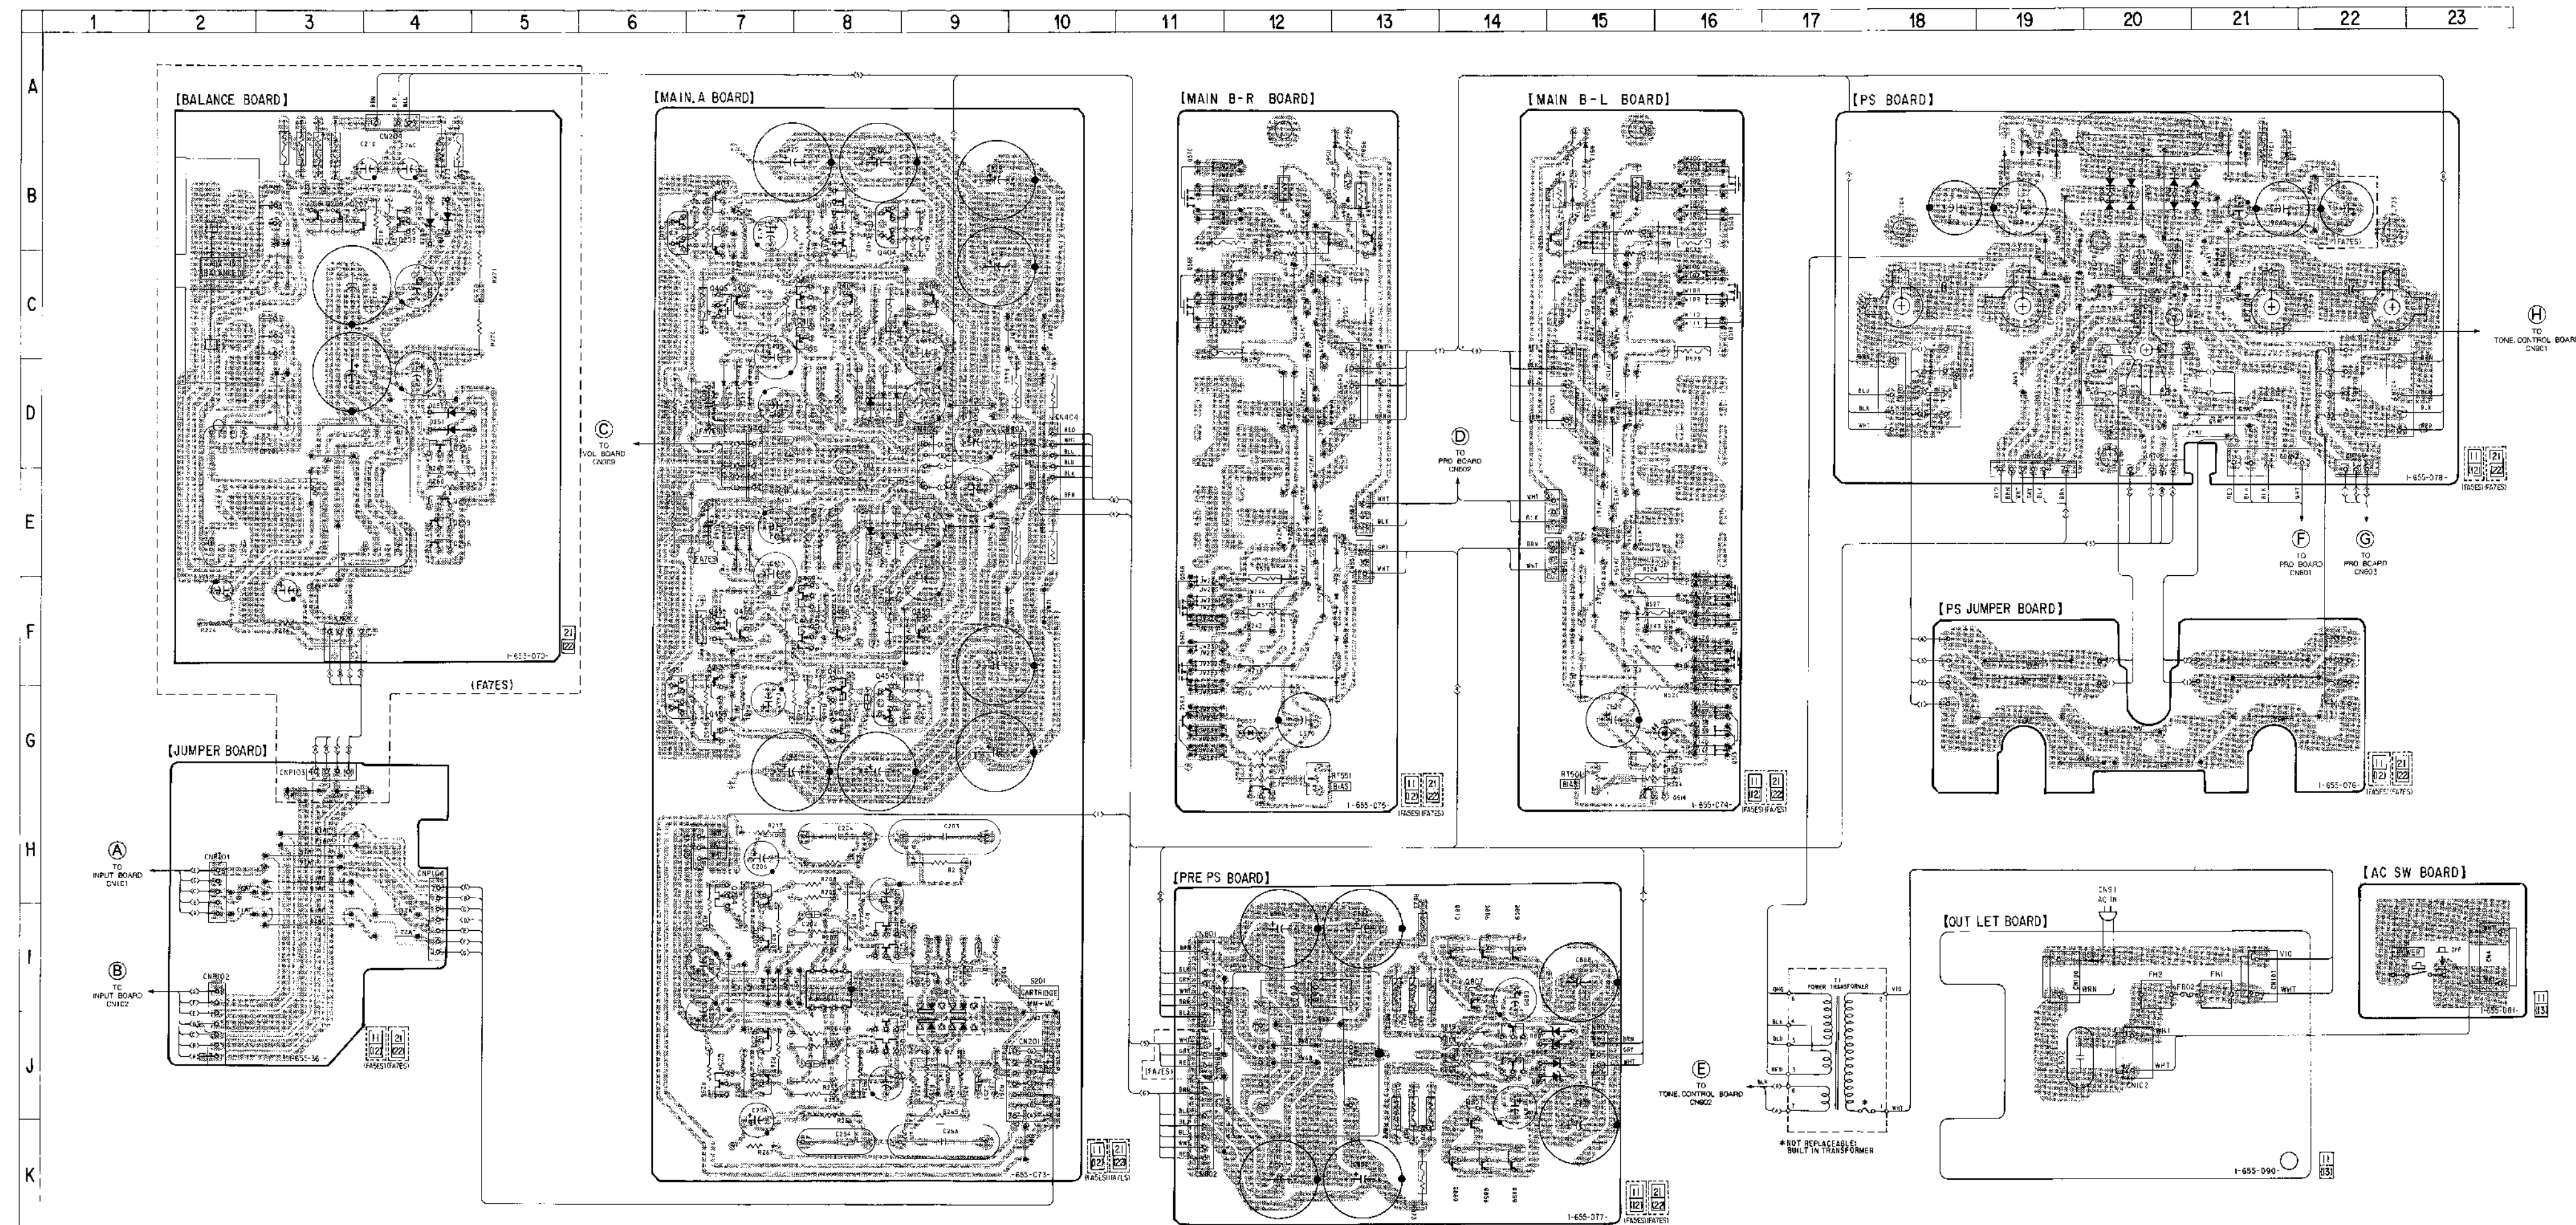

• Semiconductor Location

Ref. No.	Location	Ref. No.	Location
○ D201	B-4	○ Q251	J-8
○ D202	B-4	○ Q252	J-8
○ D251	D-4	○ Q253	J-7
○ D252	D-4	○ Q254	J-7
D401	D-8	○ Q255	J-7
D402	D-8	○ Q256	E-4
D403	D-8	○ Q257	E-4
D418	D-7	○ Q258	D-4
D419	D-7	○ Q259	E-4
D420	D-7	○ Q401	B-6
D451	E-8	○ Q402	B-7
D452	E-8	○ Q403	B-7
D453	E-8	○ Q404	B-8
D468	E-7	○ Q405	C-7
D469	E-7	○ Q406	C-7
D470	E-7	○ Q407	C-8
D505	F-15	○ Q408	C-8
D506	F-15	○ Q409	C-9
D507	G-16	○ Q410	B-8
D511	F-15	○ Q411	B-8
D512	F-15	○ Q412	C-8
D513	B-15	○ Q451	G-6
D514	B-15	○ Q452	G-7
D555	G-13	○ Q453	G-7
D558	F-13	○ Q454	G-8
D557	G-12	○ Q455	F-7
D551	F-13	○ Q456	F-7
D562	E-13	○ Q457	F-8
D564	B-13	○ Q458	F-8
D565	B-13	○ Q459	F-9
D701	B-20	○ Q460	G-8
D702	B-20	○ Q461	G-8
D703	B-20	○ Q462	F-8
D704	B-21	○ Q513	G-16
D705	B-19	○ Q514	H-16
D706	B-19	○ Q515	G-16
D707	B-19	○ Q516	F-16
D708	B-19	○ Q518	C-16
D709	B-21	○ Q520	B-16
D710	B-21	○ Q521	C-15
D711	B-21	○ Q563	G-11
D801	J-15	○ Q564	H-12
D802	J-15	○ Q565	F-11
D851	J-15	○ Q566	F-11
D852	J-15	○ Q568	C-11
		○ Q570	B-11
IC201	J-8	○ Q571	B-13
		○ Q806	I-14
○ Q201	I-8	○ Q807	I-14
○ Q202	I-8	○ Q808	J-14
○ Q203	I-7	○ Q809	I-14
○ Q204	I-7	○ Q810	I-14
○ Q205	I-7	○ Q856	K-14
○ Q206	B-3	○ Q857	K-14
○ Q207	B-3	○ Q858	J-14
○ Q208	B-4	○ Q859	K-14
○ Q209	B-3	○ Q860	K-14

Note:
○ : FATES ONLY


Note:
○ : parts extracted from the component side.
● : Pattern from the side which enables seeing.

4-4. PRINTED WIRING BOARDS - CONTROL Section -


• Semiconductor Location

Ref. No.	Location
D101	G-19
D102	G-19
D103	G-18
D104	H-17
D105	H-16
D106	H-15
D107	H-14
D108	J-18
D109	H-13
D301	H-25
D302	C-10
D304	C-2
D501	I-3
D502	I-6
D503	H-4
D301	F-7
D901	B-22
D902	B-22
D903	B-22
D904	B-22
D905	C-16
D906	C-16
D907	C-17
D908	C-17
D909	C-17
D910	C-17
D911	B-16
D912	B-16
D913	C-20
D914	C-25
D915	C-25
D916	D-25
D917	D-25
D918	E-25
D919	F-25
D920	F-25
PH101	G-13
PH102	G-14
IC601	I-5
IC501	B-18
IC502	B-20
IC503	C-19
IC504	C-21
IC505	B-23
IC506	E-10
Q101	G-13
Q102	G-13
Q103	H-13
Q104	G-17
Q105	G-16
Q106	G-15
Q107	G-14
Q301	B-14
Q302	B-2
Q601	H-4
Q602	H-6
Q603	H-4
Q604	H-5
Q605	H-6
Q606	H-6
Q901	B-18
Q902	B-21
Q903	B-21
Q904	B-21
Q905	B-21
Q906	B-21
Q907	B-22
Q908	B-22

Note:
 • — : parts extracted from the component side.
 • — : Pattern from the side which enables seeing.

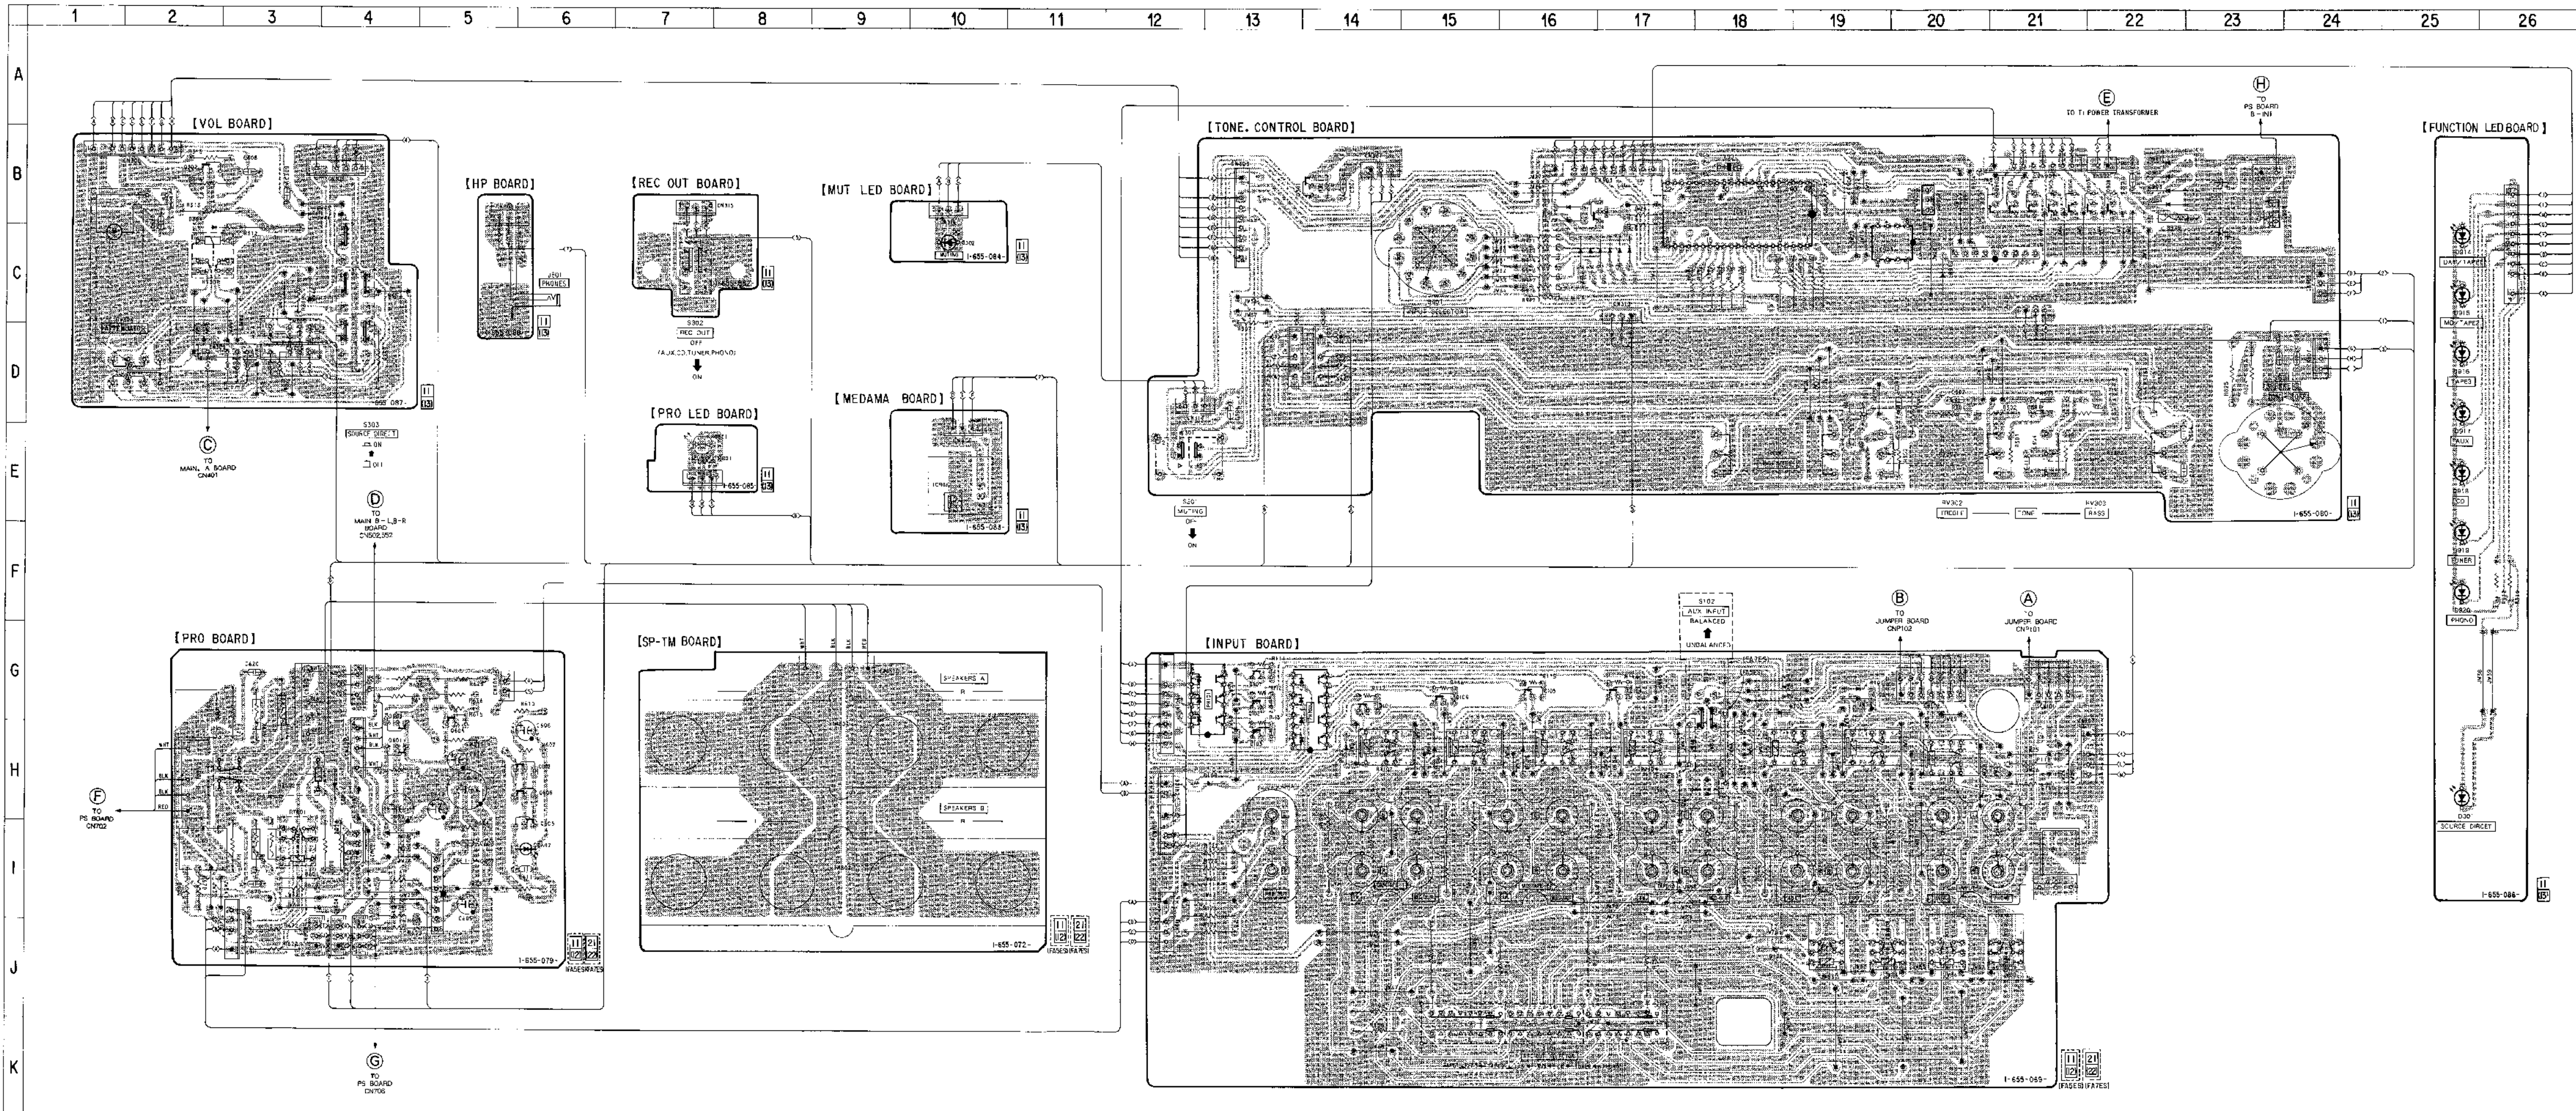


(2) FRONT PANEL SECTION

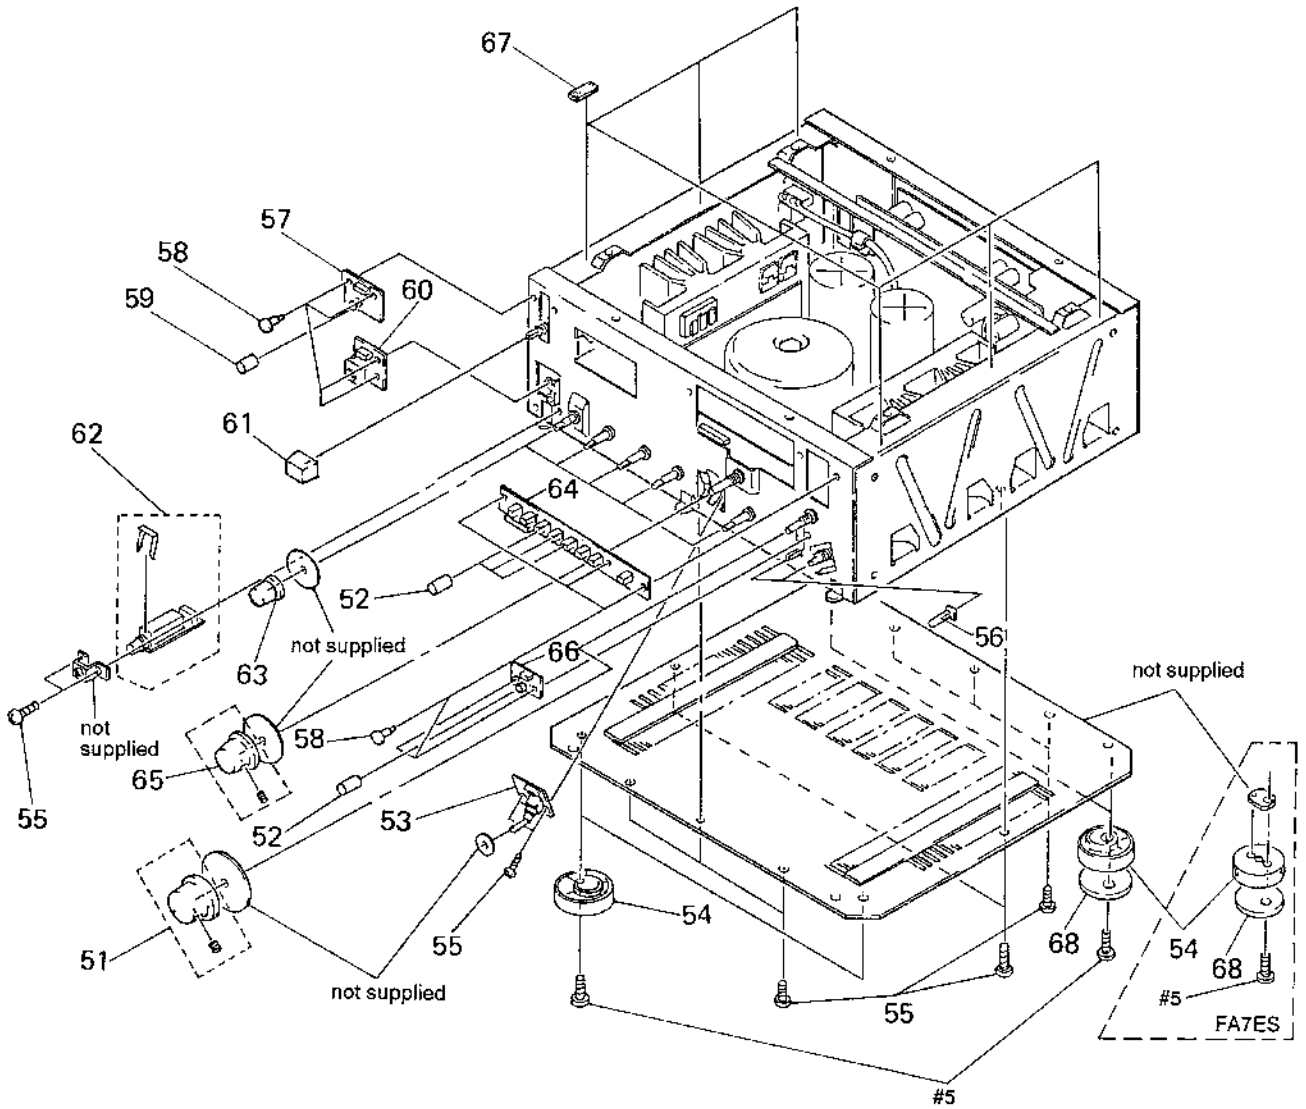

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
51	X-4945-357-1	KNOB (VB) ASSY (BLACK)		* 60	1-655-083-11	MEDAMA BOARD	
51	X-4945-359-1	KNOB (VG) ASSY (GOLD)		61	4-942-032-01	KNOB (POWER) (BLACK)	
* 52	4-971-833-01	TUBE (A), LIGHT INTERCEPTION		61	4-942-032-11	KNOB (POWER) (GOLD)	
* 53	1-655-082-11	REC OUT BOARD		* 62	1-655-088-11	HP BOARD	
54	4-970-123-01	FOOT (F50180S) (FA5ES)		63	4-970-152-01	KNOB (R) (BLACK)	
54	4-970-487-01	FOOT (F50180S) (FA7ES)		63	4-970-152-11	KNOB (R) (GOLD)	
55	4-967-961-01	SCREW (3X8) (SPECIAL)		* 64	1-655-086-11	FUNCTION LED BOARD	
56	4-970-146-01	BUTTON (BLACK)		65	4-970-148-01	KNOB (I) (BLACK)	
56	4-970-146-11	BUTTON (GOLD)		65	4-970-148-11	KNOB (I) (GOLD)	
* 57	1-655-085-11	PRO LED BOARD		* 66	1-655-084-11	MUT LED BOARD	
58	4-812-134-00	RIVET (DIA. 3.5), NYLON		67	4-969-895-01	SPACER	
* 59	4-971-834-01	TUBE (B), LIGHT INTERCEPTION		68	4-972-889-01	CUSHION	

(4) BACK PANEL SECTION

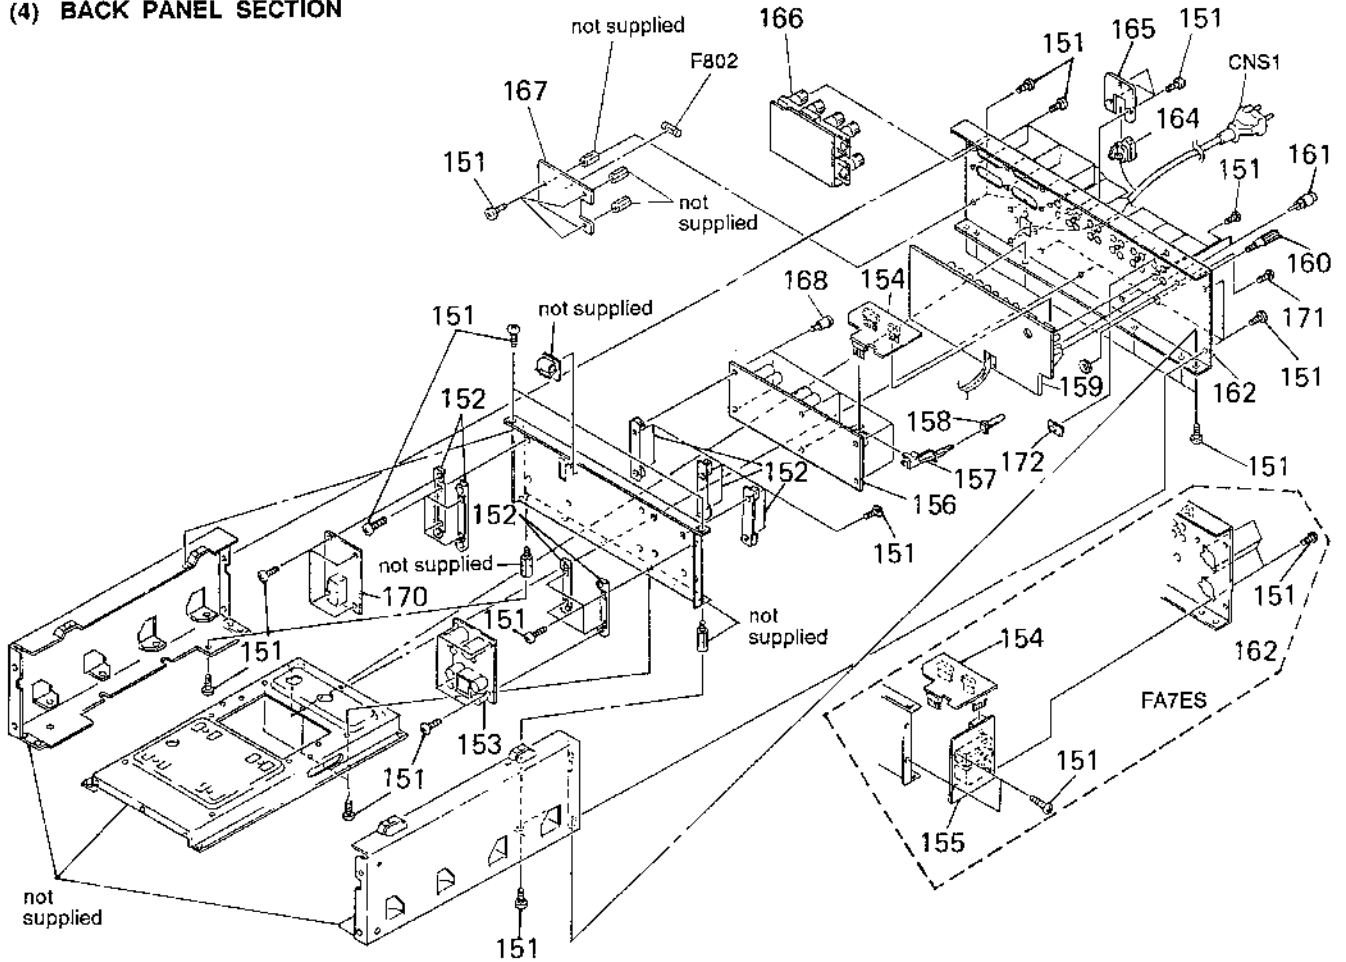

Note: The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
	151	4-967-961-01 SCREW (3X8) (SPECIAL)	
*	152	4-969-344-01 HOLDER (P) (FA7ES)	
*	153	1-655-077-11 PRE PS BOARD (FA5ES)	
*	153	1-655-077-21 PRE PS BOARD (FA7ES)	
*	154	1-655-361-11 JUMPER BOARD (FA5ES)	
*	154	1-655-361-21 JUMPER BOARD (FA7ES)	
*	155	A-4378-510-A BALANCE BOARD, COMPLETE (FA7ES)	
*	156	A-4378-507-A MAIN. A BOARD, COMPLETE (FA5ES)	
*	156	A-4378-519-A MAIN. A BOARD, COMPLETE (FA7ES)	
*	157	4-970-147-01 ROD	
	158	4-970-146-01 BUTTON (BLACK)	
*	159	A-4378-506-A INPUT BOARD, COMPLETE (FA5ES)	
*	159	A-4378-518-A INPUT BOARD, COMPLETE (FA7ES)	
*	160	1-535-691-21 TERMINAL (FA5ES)	
*	160	1-535-691-31 TERMINAL (FA7ES)	
	161	1-506-113-00 SHORT PLUG	

Ref. No.	Part No.	Description	Remark
*	162	4-975-263-01 PANEL, BACK (FA5ES)	
*	162	4-975-263-11 PANEL, BACK (FA7ES)	
	164	2-352-626-01 BUSHING, CORD	
*	165	4-923-873-01 BRACKET, CORD STOPPER	
*	166	1-655-072-11 SP-TM BOARD (FA5ES)	
*	166	1-655-072-21 SP-TM BOARD (FA7ES)	
*	167	1-655-071-11 OUT LET BOARD	
	168	4-973-106-01 SCREW, COLLAR	
*	170	A-4378-503-A PRO BOARD, COMPLETE (FA5ES)	
*	170	A-4378-516-A PRO BOARD, COMPLETE (FA7ES)	
	171	3-703-685-21 SCREW (+BV 3X8)	
	172	4-970-145-01 ESCUTCHEON (P) (BLACK)	
Δ	CNS1	1-575-953-11 CORD, POWER	
Δ	F802	1-532-299-00 FUSE, TIME-LAG (T5A 250V) (FA7ES)	
Δ	F802	1-532-350-00 FUSE, TIME-LAG (T4A 250V) (FA5ES)	

SECTION 6 ELECTRICAL PARTS LIST

AC SW BALANCE FUNCTION LED

NOTE:

- Due to standardization, replacements in the parts list may be different from the parts specified in the diagrams or the components used on the set.
- -XX and -X mean standardized parts, so they may have some difference from the original one.
- RESISTORS
All resistors are in ohms.
METAL: Metal-film resistor.
METAL OXIDE: Metal oxide-film resistor.
F: nonflammable

- Items marked "*" are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- SEMICONDUCTORS
In each case, u: μ , for example:
uA ..: μ A. uPA..: μ PA.
uPB..: μ PB. uPC..: μ PC. uPD..: μ PD.
- CAPACITORS
uF: μ F
- COILS
uH: μ H

The components identified by mark Δ or dotted line with mark Δ are critical for safety. Replace only with part number specified.

When indicating parts by reference number, please include the board.

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
*	1-655-081-11	AC SW BOARD *****				< TRANSISTOR >	
		< CONNECTOR >					
CN4	1-580-629-11	PIN, CONNECTOR 2P					
		< SWITCH >					
Δ S1	1-554-538-00	SWITCH, PUSH (AC POWER) (1 KEY) (POWER) *****					
*	A 4378 510 A	BALANCE BOARD, COMPLETE (FA7ES) *****				< RESISTOR >	
		< CAPACITOR >					
C208	1-110-397-11	ELECT 1000uF 20% 63V		R210	1-249-931-11	CARBON 2.2K 5% 1/4W	
C209	1-110-393-11	ELECT 100uF 20% 63V		R218	1-259-171-21	CARBON 1.5K 5% 1/4W	
C210	1-110-390-11	ELECT 22uF 20% 63V		Δ R220	1-219-022-11	FUSIBLE 100 5% 1/2W F	
C211	1-110-390-11	ELECT 22uF 20% 63V		Δ R221	1-219-022-11	FUSIBLE 100 5% 1/2W F	
C258	1-110-397-11	ELECT 1000uF 20% 63V		Δ R222	1-219-022-11	FUSIBLE 100 5% 1/2W F	
C259	1-110-393-11	ELECT 100uF 20% 63V		Δ R223	1-219-022-11	FUSIBLE 100 5% 1/2W F	
C260	1-110-390-11	ELECT 22uF 20% 63V		R224	1-124-995-11	CARBON 1M 5% 1/4W	
C261	1-110-390-11	ELECT 22uF 20% 63V		R260	1-249-931-11	CARBON 2.2K 5% 1/4W	
		< CONNECTOR >		R268	1-259-171-21	CARBON 1.5K 5% 1/4W	
* CN202	1-565-480-11	CONNECTOR, BOARD TO BOARD 4P		Δ R270	1-219-022-11	FUSIBLE 100 5% 1/2W F	
CN204	1-691-765-21	PLUG (MICRO CONNECTOR) 3P		Δ R271	1-219-022-11	FUSIBLE 100 5% 1/2W F	
CNP201	1-766-803-11	CONNECTOR (CANON)		Δ R272	1-219-022-11	FUSIBLE 100 5% 1/2W F	
CNP251	1-766-803-11	CONNECTOR (CANON)		Δ R273	1-219-022-11	FUSIBLE 100 5% 1/2W F	
		< COMPOSITION CIRCUIT BLOCK >		R274	1-124-995-11	CARBON 1M 5% 1/4W	
CP201	1-233-250-11	ENCAPSULATED COMPONENT		*****			
		< DIODE >		*	1-655-086-11	FUNCTION LED BOARD *****	
D201	8-719-000-93	DIODE UZL-7H1				< CONNECTOR >	
D202	8-719-000-93	DIODE UZL 7H1					
D251	8-719-000-93	DIODE UZI-7H1		CN904	1-691-772-11	PLUG (MICRO CONNECTOR) 10P	
D252	8-719-000-93	DIODE UZL-7H1				< DIODE >	
				D301	8-719-301-49	LED SEL2810A (SOURCE DIRECT)	
				D914	8-719-313-72	LED SEL3810A-CD (DAT/TAPE1)	
				D915	8-719-313-72	LED SEL3810A-CD (MD/TAPE2)	
				D916	8-719-313-72	LED SEL3810A-CD (TAPE3)	
				D917	8-719-313-72	LED SEL3810A-CD (AUX)	

FUNCTION LED

HP

INPUT

Ref. No.	Part No.	Description	Remark
D918	8-719-313-72	LED SEL3810A-CD (CD)	
D919	8-719-313-72	LED SEL3810A-CD (TUNER)	
D920	8-719-313-72	LED SEL3810A-CD (PHONO)	
< RESISTOR >			
R310	1-249-407-11	CARBON 150 5% 1/4W	
R912	1-249-411-11	CARBON 330 5% 1/4W	

*	1-655-088-11	HP BOARD	

< CONNECTOR >			
* CN808	1-564-506-11	PLUG, CONNECTOR 3P	
< JACK >			
J801	1-507-796-71	JACK (PHONES)	

*	A-4378-506-A	INPUT BOARD, COMPLETE (FA5ES)	
*	A-4378-518-A	INPUT BOARD, COMPLETE (FA7ES)	

*	1-535-730-21	LEAD, JUMPER (OFC)	
< CONNECTOR >			
* CN101	1-565-481-11	CONNECTOR, BOARD TO BOARD 5P	
* CN102	1-565-483-11	CONNECTOR, BOARD TO BOARD 7P	
CN103	1-691-766-21	PLUG (MICRO CONNECTOR) 4P	
CN104	1-691-770-11	PLUG (MICRO CONNECTOR) 8P	
CN105	1-691-765-11	PLUG (MICRO CONNECTOR) 3P	
CN106	1 564 505-11	PLUG, CONNECTOR 2P	
CN611	1-691-766-11	PLUG (MICRO CONNECTOR) 4P	
< DIODE >			
D101	8-719-987-63	DIODE 1N4148M	
D102	8-719-987-63	DIODE 1N4148M	
D103	8-719-987-63	DIODE 1N4148M	
D104	8-719-987-63	DIODE 1N4148M	
D105	8-719-987-63	DIODE 1N4148M	
D106	8-719-987-63	DIODE 1N4148M	
D107	8-719-987-63	DIODE 1N4148M	
D108	8-719-987-63	DIODE 1N4148M	
D109	8-719-000-93	DIODE UZL-7H1	
< JACK >			
J101	1-766-895-21	JACK, PIN 4P (PHONO TUNER)	
J102	1-766-895-21	JACK, PIN 4P (AUX CD)	
J103	1-766-895-11	JACK, PIN 4P (TAPE-3) (FA5ES)	
J103	1-766-895-21	JACK, PIN 4P (TAPE-3) (FA7ES)	

Ref. No.	Part No.	Description	Remark
J104	1-766-895-11	JACK, PIN 4P (MD/TAPE-2) (FA5ES)	
J104	1-766-895-21	JACK, PIN 4P (MD/TAPE-2) (FA7ES)	
J105	1-766-895-11	JACK, PIN 4P (DAT/TAPE-1) (FA5ES)	
J105	1-766-895-21	JACK, PIN 4P (DAT/TAPE-1) (FA7ES)	
J106	1-766-894-31	JACK 2P (PRE OUT) (FA5ES)	
J106	1-766-894-41	JACK 2P (PRE OUT) (FA7ES)	
< PHOTO INTERRUPTER >			
PH101	8-719-946-27	DIODE PC837	
PH102	8-719-936-58	PHOTO COUPLER PCB47-BC	
< TRANSISTOR >			
Q101	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q102	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q103	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q104	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q105	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q106	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q107	8-729-281-54	TRANSISTOR 2SC1815-BL	
< RESISTOR >			
R101	1-124-995-11	CARBON 1M 5% 1/4W	
R102	1-124-995-11	CARBON 1M 5% 1/4W	
R103	1-124-995-11	CARBON 1M 5% 1/4W	
R104	1-259-167-21	CARBON 1K 5% 1/4W	
R105	1-124-995-11	CARBON 1M 5% 1/4W	
R106	1-259-167-21	CARBON 1K 5% 1/4W	
R107	1-124-995-11	CARBON 1M 5% 1/4W	
R108	1-259-167-21	CARBON 1K 5% 1/4W	
R109	1-124-995-11	CARBON 1M 5% 1/4W	
R111	1-259-167-21	CARBON 1K 5% 1/4W	
R112	1-259-167-21	CARBON 1K 5% 1/4W	
R113	1-259-167-21	CARBON 1K 5% 1/4W	
R114	1-259-167-21	CARBON 1K 5% 1/4W	
R115	1-259-167-21	CARBON 1K 5% 1/4W	
R116	1-259-167-21	CARBON 1K 5% 1/4W	
R117	1-259-167-21	CARBON 1K 5% 1/4W	
R118	1-259-143-21	CARBON 100 5% 1/4W	
R119	1-124-995-11	CARBON 1M 5% 1/4W	
R120	1 124-995-11	CARBON 1M 5% 1/4W	
R121	1-124-995-11	CARBON 1M 5% 1/4W	
R122	1-249 226-11	CARBON 4.7K 5% 1/3W	
R123	1-249 194-11	CARBON 220 5% 1/3W	
R151	1-124-995-11	CARBON 1M 5% 1/4W	
R152	1-124-995-11	CARBON 1M 5% 1/4W	
R153	1-124-995-11	CARBON 1M 5% 1/4W	
R154	1-259-167-21	CARBON 1K 5% 1/4W	
R155	1-124-995-11	CARBON 1M 5% 1/4W	

INPUT

JUMPER

MAIN. A

Ref. No.	Part No.	Description	Remark		
R156	1-259-167-21	CARBON	1K	5%	1/4W
R157	1-124-995-11	CARBON	1M	5%	1/4W
R158	1-259-167-21	CARBON	1K	5%	1/4W
R159	1-124-995-11	CARBON	1M	5%	1/4W
R168	1-259-143-21	CARBON	100	5%	1/4W
R169	1-124-995-11	CARBON	1M	5%	1/4W
R170	1-124-995-11	CARBON	1M	5%	1/4W
R171	1-124-995-11	CARBON	1M	5%	1/4W
R172	1-249-226-11	CARBON	4.7K	5%	1/3W
R173	1-249-194-11	CARBON	220	5%	1/3W
< RELAY >					
RY101	1-755-060-11	RELAY			
RY102	1-755-060-11	RELAY			
RY103	1-755-060-11	RELAY			
RY104	1-755-060-11	RELAY			
RY105	1-755-060-11	RELAY			
RY106	1-755-060-11	RELAY			
RY107	1-755-060-11	RELAY			
RY108	1-755-060-11	RELAY			
RY109	1-755-060-11	RELAY			
RY110	1-755-060-11	RELAY			
RY111	1-755-060-11	RELAY			
< SWITCH >					
S101	1-570-076-11	SWITCH, SLIDE (REMOTE TYPE) (REC OUT SELECTOR)			
S102	1-762-181-11	SWITCH, SLIDE (AUX INPUT) (FA7ES)			
< BRACKET >					
* YB101	4 946 336-01	BRACKET (GROUND)			

*	1-655-361-11	JUMPER BOARD (FA5ES)			
*	1-655-361-21	JUMPER BOARD (FA7ES)			

< CONNECTOR >					
* CNP101	1-560-531-11	PIN, CONNECTOR 5P			
* CNP102	1-560-532-00	PIN, CONNECTOR 7P			
* CNP103	1-560-509-11	PIN, CONNECTOR 4P (FA7ES)			
* CNP104	1-560-532-00	PIN, CONNECTOR 7P			

*	A-4378-507-A	MAIN. A BOARD, COMPLETE (FA5ES)			
*	A-4378-519-A	MAIN. A BOARD, COMPLETE (FA7ES)			

*	1 535 730 21	LEAD, JUMPER (OFC)			

Ref. No.	Part No.	Description	Remark		
< CAPACITOR >					
C201	1-104-290-11	POLYSTYRENE 330PF	5%		50V
C202	1-130-973-00	FILM 0.022uF	2%		100V
C203	1-130-341-00	FILM 0.056uF	2%		100V
C204	1-130-971-00	FILM 0.016uF	2%		100V
C205	1-124-929-11	ELECT 22uF	20%		100V (FA5ES)
C205	1-110-390-11	ELECT 22uF	20%		63V (FA7ES)
C206	1-124-929-11	ELECT 22uF	20%		100V (FA5ES)
C206	1-110-390-11	ELECT 22uF	20%		63V (FA7ES)
C207	1-124-929-11	ELECT 22uF	20%		100V (FA5ES)
C207	1-110-390-11	ELECT 22uF	20%		63V (FA7ES)
C251	1-104-290-11	POLYSTYRENE 330PF	5%		50V
C252	1-130-973-00	FILM 0.022uF	2%		100V
C253	1-130-341-00	FILM 0.056uF	2%		100V
C254	1-130-971-00	FILM 0.016uF	2%		100V
C255	1-124-929-11	ELECT 22uF	20%		100V (FA5ES)
C255	1-110-390-11	ELECT 22uF	20%		63V (FA7ES)
C256	1-124-929-11	ELECT 22uF	20%		100V (FA5ES)
C256	1-110-390-11	ELECT 22uF	20%		63V (FA7ES)
C257	1-124-929-11	ELECT 22uF	20%		100V (FA5ES)
C257	1-110-390-11	ELECT 22uF	20%		63V (FA7ES)
C401	1-104-274-11	POLYSTYRENE 47PF	10%		50V (FA5ES)
C401	1-104-322-11	POLYSTYRENE 47PF	10%		400V (FA7ES)
C402	1-136-810-11	FILM 220PF	5%		100V
C405	1-126-025-11	ELECT 330uF	20%		25V
C406	1-126-025-11	ELECT 330uF	20%		25V
C408	1-110-390-11	ELECT 22uF	20%		63V
C409	1-110-512-11	FILM 1uF	10%		50V (FA7ES)
C410	1-104-274-11	POLYSTYRENE 47PF	10%		50V (FA5ES)
C410	1-104-322-11	POLYSTYRENE 47PF	10%		400V (FA7ES)
C411	1-126-025-11	ELECT 330uF	20%		25V
C412	1-126-025-11	ELECT 330uF	20%		25V
C413	1-110-390-11	ELECT 22uF	20%		63V
C418	1-110-397-11	ELECT 1000uF	20%		63V
C419	1-110-397-11	ELECT 1000uF	20%		63V
C425	1-128-474-11	ELECT 1000uF	20%		63V
C426	1-128-474-11	ELECT 1000uF	20%		63V
C451	1-104-274-11	POLYSTYRENE 47PF	10%		50V (FA5ES)
C451	1-104-322-11	POLYSTYRENE 47PF	10%		400V (FA7ES)
C452	1-136-810-11	FILM 220PF	5%		100V
C455	1-126-025-11	ELECT 330uF	20%		25V
C456	1-126-025-11	ELECT 330uF	20%		25V
C458	1-110-390-11	ELECT 22uF	20%		63V
C459	1-110-512-11	FILM 1uF	10%		50V (FA7ES)
C460	1-104-274-11	POLYSTYRENE 47PF	10%		50V (FA5ES)
C460	1-104-322-11	POLYSTYRENE 47PF	10%		400V (FA7ES)
C461	1-126-025-11	ELECT 330uF	20%		25V
C462	1-126-025-11	ELECT 330uF	20%		25V

MAIN. A

Ref. No.	Part No.	Description	Remark	Ref. No.	Part No.	Description	Remark
C463	1-110-390-11	ELECT 22uF 20% 63V		Q204	8-729-202-67	TRANSISTOR 2SK246-GR3	
C468	1-110-397-11	ELECT 1000uF 20% 63V		Q205	8-729-281-54	TRANSISTOR 2SC1815-BL	
C469	1-110-397-11	ELECT 1000uF 20% 63V		Q251	8-729-217-04	TRANSISTOR 2SK170-V (FA5ES)	
C475	1-128-474-11	ELECT 1000uF 20% 63V		Q251	8-729-214-71	TRANSISTOR 2SK147-GR (FA7ES)	
C476	1-128-474-11	ELECT 1000uF 20% 63V		Q252	8-729-217-04	TRANSISTOR 2SK170-V (FA5ES)	
< CONNECTOR >				Q252	8-729-214-71	TRANSISTOR 2SK147-GR (FA7ES)	
* CN201	1-565-483-11	CONNECTOR, BOARD TO BOARD 7P		Q253	8-729-203-45	TRANSISTOR 2SC3423-0	
* CN203	1-564-506-11	PLUG, CONNECTOR 3P		Q254	8-729-202-67	TRANSISTOR 2SK246-GR3	
CN401	1-691-766-11	PLUG (MICRO CONNECTOR) 4P		Q255	8-729-281-54	TRANSISTOR 2SC1815-BL	
CN402	1-691-766-31	PLUG (MICRO CONNECTOR) 4P		Q401	8-729-203-21	TRANSISTOR 2SK389-GR	
CN403	1-691-766-21	PLUG (MICRO CONNECTOR) 4P		Q402	8-729-281-54	TRANSISTOR 2SC1815-BL	
CN404	1-564-510-11	PLUG (MICRO CONNECTOR) 6P		Q403	8-729-281-54	TRANSISTOR 2SC1815-BL	
< DIODE >				Q404	8-729-232-00	TRANSISTOR 2SA1349 GRBL	
D401	8-719-933-41	DIODE HZS6C3L		Q405	8-729-018-21	TRANSISTOR 2SJ313-Y	
D402	8-719-987-63	DIODE 1N4148M (FA5ES)		Q406	8-729-104-91	TRANSISTOR 2SA1383-Q	
D402	8-719-200-02	DIODE 10E2 (FA7ES)		Q407	8-729-202-67	TRANSISTOR 2SK246-GR3	
D403	8-719-987-63	DIODE 1N4148M (FA5ES)		Q408	8-729-104-18	TRANSISTOR 2SC3514-Q	
D403	8-719-200-02	DIODE 10E2 (FA7ES)		Q409	8-729-104-18	TRANSISTOR 2SC3514-Q	
D418	8-719-987-63	DIODE 1N4148M (FA5ES)		Q410	8-729-202-67	TRANSISTOR 2SK246-GR3	
D418	8-719-200-02	DIODE 10E2 (FA7ES)		Q411	8-729-202-67	TRANSISTOR 2SK246-GR3	
D419	8-719-987-63	DIODE 1N4148M (FA5ES)		Q412	8-729-202-67	TRANSISTOR 2SK246-GR3	
D419	8-719-200-02	DIODE 10E2 (FA7ES)		Q451	8-729-203-21	TRANSISTOR 2SK389-GR	
D420	8-719-987-63	DIODE 1N4148M (FA5ES)		Q452	8-729-281-54	TRANSISTOR 2SC1815-BL	
D420	8-719-200-02	DIODE 10E2 (FA7ES)		Q453	8-729-281-54	TRANSISTOR 2SC1815-BL	
D451	8-719-933-41	DIODE HZS6C3L		Q454	8-729-232-00	TRANSISTOR 2SA1349-GRBL	
D452	8-719-987-63	DIODE 1N4148M (FA5ES)		Q455	8-729-018-21	TRANSISTOR 2SJ313-Y	
D452	8-719-200-02	DIODE 10E2 (FA7ES)		Q456	8-729-104-91	TRANSISTOR 2SA1383-Q	
D453	8-719-987-63	DIODE 1N4148M (FA5ES)		Q457	8-729-202-67	TRANSISTOR 2SK246-GR3	
D453	8-719-200-02	DIODE 10E2 (FA7ES)		Q458	8-729-104-18	TRANSISTOR 2SC3514-Q	
D468	8-719-987-63	DIODE 1N4148M (FA5ES)		Q459	8-729-104-18	TRANSISTOR 2SC3514-Q	
D468	8-719-200-02	DIODE 10E2 (FA7ES)		Q460	8-729-202-67	TRANSISTOR 2SK246-GR3	
D469	8-719-987-63	DIODE 1N4148M (FA5ES)		Q461	8-729-202-67	TRANSISTOR 2SK246-GR3	
D469	8-719-200-02	DIODE 10E2 (FA7ES)		Q462	8-729-202-67	TRANSISTOR 2SK246-GR3	
D470	8-719-987-63	DIODE 1N4148M (FA5ES)		< RESISTOR >			
D470	8-719-200-02	DIODE 10E2 (FA7ES)		R201	1-249-911-11	CARBON 330 5% 1/4W	
< IC >				R202	1-259-143-21	CARBON 100 5% 1/4W	
IC201	8-759-701-25	IC NJM2068D-D (FA5ES)		R203	1-259-207-21	CARBON 47K 5% 1/4W	
IC201	8-759-259-12	IC OPA2604AP (FA7ES)		R204	1-249-919-11	CARBON 680 5% 1/4W	
< TRANSISTOR >				R205	1-249-919-11	CARBON 680 5% 1/4W	
Q201	8-729-217-04	TRANSISTOR 2SK170-V (FA5ES)		R206	1-249-939-11	CARBON 4.7K 5% 1/4W	
Q201	8-729-214-71	TRANSISTOR 2SK147-GR (FA7ES)		R207	1-259-143-21	CARBON 100 5% 1/4W	
Q202	8-729-217-04	TRANSISTOR 2SK170-V (FA5ES)		R208	1-249-915-11	CARBON 470 5% 1/4W	
Q202	8-729-214-71	TRANSISTOR 2SK147-GR (FA7ES)		R209	1-259-143-21	CARBON 100 5% 1/4W	
Q203	8-729-203-45	TRANSISTOR 2SC3423-0		R210	1-249-485-11	CARBON 8.2 5% 1/3W	
				R211	1-249-887-11	CARBON 33 5% 1/4W	
				R212	1-259-151-21	CARBON 220 5% 1/4W	
				R213	1-259-151-21	CARBON 220 5% 1/4W	
				R214	1-124-995-11	CARBON 1M 5% 1/4W	

MAIN. A

MAIN B-L

Ref. No.	Part No.	Description	Remark
R215	1-249-844-11	CARBON	56K 1% 1/2W
R216	1-249-818-11	CARBON	4.7K 1% 1/2W
R217	1-259-151-21	CARBON	220 5% 1/4W
R251	1-249-911-11	CARBON	330 5% 1/4W
R252	1-259-143-21	CARBON	100 5% 1/4W
R253	1-259-207-21	CARBON	47K 5% 1/4W
R254	1-249-919-11	CARBON	680 5% 1/4W
R255	1-249-919-11	CARBON	680 5% 1/4W
R256	1-249-939-11	CARBON	4.7K 5% 1/4W
R257	1-259-143-21	CARBON	100 5% 1/4W
R258	1-249-915-11	CARBON	470 5% 1/4W
R259	1-259-143-21	CARBON	100 5% 1/4W
R260	1-249-485 11	CARBON	8.2 5% 1/3W
R261	1-249-887 11	CARBON	33 5% 1/4W
R262	1-259-151-21	CARBON	220 5% 1/4W
R263	1-259-151-21	CARBON	220 5% 1/4W
R264	1-124-995-11	CARBON	1M 5% 1/4W
R265	1-249-844-11	CARBON	56K 1% 1/2W
R266	1-249-818-11	CARBON	4.7K 1% 1/2W
R267	1-259-151-21	CARBON	220 5% 1/4W
R401	1-214-937-00	METAL	1M 1% 1/2W
R402	1-249-210-11	CARBON	1K 5% 1/3W
R403	1-249-883-11	CARBON	22 5% 1/4W
R404	1-249-883-11	CARBON	22 5% 1/4W
R405	1-249-931-11	CARBON	2.2K 5% 1/4W
R406	1-249-943-11	CARBON	6.8K 5% 1/4W
R407	1-259-151-21	CARBON	220 5% 1/4W
R408	1-259-151-21	CARBON	220 5% 1/4W
R409	1-259-151-21	CARBON	220 5% 1/4W
R410	1-259-207-21	CARBON	47K 5% 1/4W
R411	1-259-167-21	CARBON	1K 5% 1/4W
△R412	1-219-193-11	FUSIBLE	220 5% 1/2W F
R413	1-249-842-11	CARBON	47K 5% 1/2W
R414	1-259-171-21	CARBON	1.5K 5% 1/4W
R415	1-249-953-11	CARBON	18K 5% 1/4W
R416	1-249-186-11	CARBON	100 5% 1/3W
R417	1-249-234-11	CARBON	10K 5% 1/3W
R418	1-249-234-11	CARBON	10K 5% 1/3W
R419	1-214-937-00	METAL	1M 1% 1/2W
R420	1-259-171-21	CARBON	1.5K 5% 1/4W
R421	1-249-939-11	CARBON	4.7K 5% 1/4W
△R422	1-219-022-11	FUSIBLE	100 5% 1/2W F
△R444	1-219-022-11	FUSIBLE	100 5% 1/2W F
△R445	1-219-022-11	FUSIBLE	100 5% 1/2W F
R451	1-214-937-00	METAL	1M 1% 1/2W
R452	1-249-210-11	CARBON	1K 5% 1/3W
R453	1-249-883-11	CARBON	22 5% 1/4W
R454	1-249-883-11	CARBON	22 5% 1/4W

Ref. No.	Part No.	Description	Remark
R455	1-249-931-11	CARBON	2.2K 5% 1/4W
R456	1-249-943-11	CARBON	6.8K 5% 1/4W
R457	1-259-151-21	CARBON	220 5% 1/4W
R458	1-259-151-21	CARBON	220 5% 1/4W
R459	1-259-151-21	CARBON	220 5% 1/4W
R460	1-259-207-21	CARBON	47K 5% 1/4W
R461	1-259-167-21	CARBON	1K 5% 1/4W
△R462	1-219-193-11	FUSIBLE	220 5% 1/2W F
R463	1-249-842-11	CARBON	47K 5% 1/2W
R464	1-259-171-21	CARBON	1.5K 5% 1/4W
R465	1-249-953-11	CARBON	18K 5% 1/4W
R466	1-249-186-11	CARBON	100 5% 1/3W
R467	1-249-234-11	CARBON	10K 5% 1/3W
R468	1-249-234-11	CARBON	10K 5% 1/3W
R469	1-214-937-00	METAL	1M 1% 1/2W
R470	1-259-171-21	CARBON	1.5K 5% 1/4W
R471	1-249-939-11	CARBON	4.7K 5% 1/4W
△R472	1-219-022-11	FUSIBLE	100 5% 1/2W F
△R494	1-219-022-11	FUSIBLE	100 5% 1/2W F
△R495	1-219-022-11	FUSIBLE	100 5% 1/2W F

< SWITCH >

S201 1 572 642 11 SWITCH, PUSH (1 KEY) (CARTRIDGE)

* 1-655-074-11 MAIN B-L BOARD (FA5ES)

* 1-655-074-21 MAIN B-L BOARD (FA7ES)

< CAPACITOR >

C516	1-137-163-11	FILM	0.33uF	10%	63V
C517	1-137-163-11	FILM	0.33uF	10%	63V
C520	1-124-920-11	ELECT	330uF	20%	63V (FA5ES)
C520	1-110-391-11	ELECT	33uF	20%	63V (FA7ES)
C570	1-110-391-11	ELECT	33uF	20%	63V (FA7ES)

< CONNECTOR >

* CN501	1-564-506-11	PLUG, CONNECTOR	3P
* CN502	1-564-506-11	PLUG, CONNECTOR	3P
CN503	1-766-897-21	PIN, CONNECTOR (PC BOARD)	4P

< DIODE >

D505	8-719-987-63	DIODE	1N4148M
D506	8-719-985-53	DIODE	HZS4ALL
D507	8-719-310-60	LED	SEL1510C-C
D511	8-719-987-63	DIODE	1N4148M
D512	8-719-985-53	DIODE	HZS4ALL
D513	8-719-987-63	DIODE	1N4148M
D514	8-719-987-63	DIODE	1N4148M

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

MAIN B-L **MAIN B-R** **MEDAMA** **MUT LED** **OUT LET**

Ref. No.	Part No.	Description	Remark
< TRANSISTOR >			
Q514	8-729-201-53	TRANSISTOR 2SA1015-GR	
Q521	8-729-140-82	TRANSISTOR 2SA988-PAFAEA	
< RESISTOR >			
R523	1-249-941-11	CARBON 5.6K 5% 1/4W	
R524	1-259-167-21	CARBON 1K 5% 1/4W	
R525	1-259-171-21	CARBON 1.5K 5% 1/4W	
△R526	1-202-954-11	FUSIBLE 470 5% 1/2W F	
△R527	1-202-954-11	FUSIBLE 470 5% 1/2W F	
△R528	1-219-193-11	FUSIBLE 220 5% 1/2W F	
△R529	1-219-185-11	FUSIBLE 47 5% 1/2W F	
△R532	1-219-185-11	FUSIBLE 47 5% 1/2W F	
R534	1-219-392-11	RES. WIREWOUND	
R535	1-249-951-11	CARBON 15K 5% 1/4W	
R536	1-259-191-21	CARBON 10K 5% 1/4W	
△R537	1-247-717-11	CARBON 2.2K 5% 1/4W F	
△R538	1-247-717-11	CARBON 2.2K 5% 1/4W F	
< VARIABLE RESISTOR >			
RT501	1-224-490-11	RES. ADJ. METAL FILM 4.7K	

*	1-655-075-11	MAIN B-R BOARD (FA5ES)	
*	1-655-075-21	MAIN B-R BOARD (FA7ES)	

< CAPACITOR >			
C566	1-137-163-11	FILM 0.33uF 10% 63V	
C567	1-137-163-11	FILM 0.33uF 10% 63V	
C570	1-124-920-11	ELECT 330uF 20% 63V (FA5ES)	
< CONNECTOR >			
* CN551	1-564-506-11	PLUG. CONNECTOR 3P	
* CN552	1-564-506-11	PLUG. CONNECTOR 3P	
CN553	1-766-897-11	PIN. CONNECTOR (PC BOARD) 4P	
< DIODE >			
D555	8-719-987-63	DIODE 1N4148M	
D556	8-719-985-53	DIODE 1N4148M	
D557	8-719-310-60	LED SEL1510C-C	
D561	8-719-987-63	DIODE 1N4148M	
D562	8-719-985-53	DIODE 1N4148M	
D564	8-719-987-63	DIODE 1N4148M	
D565	8-719-987-63	DIODE 1N4148M	
< TRANSISTOR >			
Q564	8-729-201-53	TRANSISTOR 2SA1015-GR	

Ref. No.	Part No.	Description	Remark
Q571	8-729-140-82	TRANSISTOR 2SA988-PAFAEA	
< RESISTOR >			
R573	1-249-941-11	CARBON 5.6K 5% 1/4W	
R574	1-259-167-21	CARBON 1K 5% 1/4W	
R575	1-259-171-21	CARBON 1.5K 5% 1/4W	
△R576	1-202-954-11	FUSIBLE 470 5% 1/2W F	
△R577	1-202-954-11	FUSIBLE 470 5% 1/2W F	
△R578	1-219-193-11	FUSIBLE 220 5% 1/2W F	
△R579	1-219-185-11	FUSIBLE 47 5% 1/2W F	
△R582	1-219-185-11	FUSIBLE 47 5% 1/2W F	
R584	1-219-392-11	RES. WIREWOUND	
R585	1-249-951-11	CARBON 15K 5% 1/4W	
R586	1-259-191-21	CARBON 10K 5% 1/4W	
△R587	1-247-717-11	CARBON 2.2K 5% 1/4W F	
△R588	1-247-717-11	CARBON 2.2K 5% 1/4W F	
< VARIABLE RESISTOR >			
RT551	1-224-490-11	RES. ADJ. METAL FILM 4.7K	

*	1-655-083-11	MEDAMA BOARD	

< IC >			
IC906	8-749-923-43	IC GPU57XB	

*	1-655-084-11	MUT LED BOARD	

< CONNECTOR >			
* CN316	1-564-506-11	PLUG. CONNECTOR 3P	
< DIODE >			
D302	8-719-301-49	LED SEL2810A (MUTING)	

*	1-655-090-11	OUT LET BOARD	

*	1-533-185-11	HOLDER, FUSE	
< CAPACITOR >			
△C802	1-161-742-00	CERAMIC 0.0022uF 20% 400V	
< CONNECTOR >			
CN100	1-564-321-00	PIN. CONNECTOR 2P	
* CN101	1-564-321-21	PIN. CONNECTOR 2P	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

OUT LET**PRE PS****PRO**

Ref.No.	Part No.	Description	Remark
---------	----------	-------------	--------

CN102	1-580-629-21	PIN, CONNECTOR 2P	
-------	--------------	-------------------	--

< FUSE >

△F802	1-532-299-00	FUSE, TIME-LAG (T5A/250V) (FA7ES)	
-------	--------------	-----------------------------------	--

△F802	1-532-350-00	FUSE, TIME-LAG (T4A/250V) (FA5ES)	
-------	--------------	-----------------------------------	--

*	1-655-077-11	PRE PS BOARD (FA5ES)	
---	--------------	----------------------	--

*	1-655-077-21	PRE PS BOARD (FA7ES)	
---	--------------	----------------------	--

< CAPACITOR >

C801	1-124-922-11	ELECT	1000uF	20%	63V (FA5ES)
------	--------------	-------	--------	-----	-------------

C801	1-110-397-11	ELECT	1000uF	20%	63V (FA7ES)
------	--------------	-------	--------	-----	-------------

C802	1-124-922-11	ELECT	1000uF	20%	63V (FA5ES)
------	--------------	-------	--------	-----	-------------

C802	1-110-397-11	ELECT	1000uF	20%	63V (FA7ES)
------	--------------	-------	--------	-----	-------------

C808	1-126-066-11	ELECT	470uF	20%	63V (FA5ES)
------	--------------	-------	-------	-----	-------------

C808	1-110-397-11	ELECT	1000uF	20%	63V (FA7ES)
------	--------------	-------	--------	-----	-------------

C809	1-110-393-11	ELECT	100uF	20%	63V
------	--------------	-------	-------	-----	-----

C851	1-124-922-11	ELECT	1000uF	20%	63V (FA5ES)
------	--------------	-------	--------	-----	-------------

C851	1-110-397-11	ELECT	1000uF	20%	63V (FA7ES)
------	--------------	-------	--------	-----	-------------

C852	1-124-922-11	ELECT	1000uF	20%	63V (FA5ES)
------	--------------	-------	--------	-----	-------------

C852	1-110-397-11	ELECT	1000uF	20%	63V (FA7ES)
------	--------------	-------	--------	-----	-------------

C858	1-126-066-11	ELECT	470uF	20%	63V (FA5ES)
------	--------------	-------	-------	-----	-------------

C858	1-110-397-11	ELECT	1000uF	20%	63V (FA7ES)
------	--------------	-------	--------	-----	-------------

C859	1-110-393-11	ELECT	100uF	20%	63V
------	--------------	-------	-------	-----	-----

< CONNECTOR >

CN801	1-691-768-11	PLUG (MICRO CONNECTOR) 6P	
-------	--------------	---------------------------	--

CN802	1-564-510-11	PLUG (MICRO CONNECTOR) 6P	
-------	--------------	---------------------------	--

* CN803	1-564-506-11	PLUG, CONNECTOR 3P	
---------	--------------	--------------------	--

* CN804	1-564-506-11	PLUG, CONNECTOR 3P (FA7ES)	
---------	--------------	----------------------------	--

< DIODE >

D801	8-719-000-93	DIODE	UZL-7H1
------	--------------	-------	---------

D802	8-719-000-93	DIODE	UZL-7H1
------	--------------	-------	---------

D851	8-719-000-93	DIODE	UZL-7H1
------	--------------	-------	---------

D852	8-719-000-93	DIODE	UZL-7H1
------	--------------	-------	---------

< TRANSISTOR >

Q806	8-729-030-18	TRANSISTOR	2SD2525
------	--------------	------------	---------

Q807	8-729-281-54	TRANSISTOR	2SC1815-BL
------	--------------	------------	------------

Q808	8-729-202-67	TRANSISTOR	2SK246-GR3
------	--------------	------------	------------

Q809	8-729-030-18	TRANSISTOR	2SD2525
------	--------------	------------	---------

Q810	8-729-030-18	TRANSISTOR	2SD2525
------	--------------	------------	---------

Q856	8-729-030-19	TRANSISTOR	2SB1640
------	--------------	------------	---------

Q857	8-729-201-53	TRANSISTOR	2SA1015-GR
------	--------------	------------	------------

Q858	8-729-202-67	TRANSISTOR	2SK246-GR3
------	--------------	------------	------------

Q859	8-729-030-19	TRANSISTOR	2SB1640
------	--------------	------------	---------

Q860	8-729-030-19	TRANSISTOR	2SB1640
------	--------------	------------	---------

Ref.No.	Part No.	Description	Remark
---------	----------	-------------	--------

< RESISTOR >

R818	1-259-171-21	CARBON	1.5K 5% 1/4W
------	--------------	--------	--------------

R819	1-249-931-11	CARBON	2.2K 5% 1/4W
------	--------------	--------	--------------

△R820	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R820	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

△R821	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R821	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

△R822	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R822	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

△R823	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R823	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

R868	1-259-171-21	CARBON	1.5K 5% 1/4W
------	--------------	--------	--------------

R869	1-249-931-11	CARBON	2.2K 5% 1/4W
------	--------------	--------	--------------

△R870	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R870	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

△R871	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R871	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

△R872	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R872	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

△R873	1-219-189-11	FUSIBLE	100 5% 1/2W F (FA5ES)
-------	--------------	---------	-----------------------

△R873	1-219-022-11	FUSIBLE	100 5% 1/2W F (FA7ES)
-------	--------------	---------	-----------------------

< TRANSFORMER >

T801	1-427-648-11	TRANSFORMER (CHOKE)	
------	--------------	---------------------	--

*	A-4378-503-A	PRO BOARD, COMPLETE (FA5ES)	
---	--------------	-----------------------------	--

*	A-4378-516 A	PRO BOARD, COMPLETE (FA7ES)	
---	--------------	-----------------------------	--

< CAPACITOR >

C603	1-136-157-00	FILM	0.022uF 5% 50V
------	--------------	------	----------------

C604	1-124-120-11	ELECT	220uF 20% 25V
------	--------------	-------	---------------

C605	1-124-910-11	ELECT	47uF 20% 50V
------	--------------	-------	--------------

C607	1-136-157-00	FILM	0.022uF 5% 50V
------	--------------	------	----------------

C608	1-126-058-11	ELECT	4.7uF 20% 63V
------	--------------	-------	---------------

C609	1-124-918-11	ELECT	47uF 20% 63V
------	--------------	-------	--------------

C610	1-126-058-11	ELECT	4.7uF 20% 63V
------	--------------	-------	---------------

C611	1-136-157-00	FILM	0.022uF 5% 50V
------	--------------	------	----------------

C612	1-126-059-11	ELECT	10uF 20% 63V
------	--------------	-------	--------------

C620	1-130-973-00	FILM	0.022uF 2% 100V
------	--------------	------	-----------------

C670	1-130-973-00	FILM	0.022uF 2% 100V
------	--------------	------	-----------------

< CONNECTOR >

CN601	1-766-897-11	PIN, CONNECTOR (PC BOARD) 4P	
-------	--------------	------------------------------	--

CN602	1-691-766-11	PLUG (MICRO CONNECTOR) 4P	
-------	--------------	---------------------------	--

* CN603	1-564-506-11	PLUG, CONNECTOR 3P	
---------	--------------	--------------------	--

* CN604	1-564-506-11	PLUG, CONNECTOR 3P	
---------	--------------	--------------------	--

CN605	1-564-505-11	PLUG, CONNECTOR 2P	
-------	--------------	--------------------	--

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

PRO **PRO LED** **PS**

Ref. No.	Part No.	Description	Remark
* CN606	1-564-506-11	PLUG, CONNECTOR 3P	
* CN607	1-564-506 11	PLUG, CONNECTOR 3P	
* CN608	1-564-506-11	PLUG, CONNECTOR 3P	
CN609	1-691-766-21	PLUG (MICRO CONNECTOR) 4P	
CN610	1-766-897-21	PIN, CONNECTOR (PC BOARD) 4P	
< DIODE >			
D601	8-719-987-63	DIODE 1N4148M	
D602	8-719-310-60	LED SEL1510C-C	
D603	8-719-987-63	DIODE 1N4148M	
< IC >			
IC601	8-759-111-68	IC uPC1237HA	
< COIL >			
L601	1-422-009-21	COIL, AIR-CORE	
L651	1-422-009-21	COIL, AIR-CORE	
< TRANSISTOR >			
Q601	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q602	8-729-030-18	TRANSISTOR 2SD2525	
Q603	8-729-201-53	TRANSISTOR 2SA1015-GR	
Q604	8-729-201-53	TRANSISTOR 2SA1015-GR	
Q605	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q606	8-729-030-18	TRANSISTOR 2SD2525	
< RESISTOR >			
R604	1-259-223-21	CARBON 220K 5% 1/4W	
R606	1 259-191-21	CARBON 10K 5% 1/4W	
R607	1-249-885-11	CARBON 27 5% 1/4W	
R608	1-249-725-11	CARBON 150K 5% 1/4W	
R609	1-249-951-11	CARBON 15K 5% 1/4W	
R610	1-260-322-11	CARBON 330 5% 1/2W	
R612	1-249-939-11	CARBON 4.7K 5% 1/4W	
R613	1-259-191-21	CARBON 10K 5% 1/4W	
R614	1-259-207-21	CARBON 47K 5% 1/4W	
R615	1-249-955-11	CARBON 22K 5% 1/4W	
R616	1-259-207-21	CARBON 47K 5% 1/4W	
R617	1 249-955 11	CARBON 22K 5% 1/4W	
R620	1-249 733 11	CARBON 330K 5% 1/4W	
R621	1-249-754-11	CARBON 10 5% 1/2W	
R622	1-249-798-11	CARBON 680 5% 1/2W	
△R624	1-217-989-11	FUSIBLE 4.7 5% 1/2W F (FA5ES)	
△R624	1-260-072-11	FUSIBLE 4.7 5% 1/2W F (FA7ES)	
△R625	1-217-989-11	FUSIBLE 4.7 5% 1/2W F (FA5ES)	
△R625	1-260-072-11	FUSIBLE 4.7 5% 1/2W F (FA7ES)	
R626	1-259-167-21	CARBON 1K 5% 1/4W	
R628	1-260-322-11	CARBON 330 5% 1/2W	

Ref. No.	Part No.	Description	Remark
R629	1-260-322-11	CARBON 330 5% 1/2W	
R670	1-249-733-11	CARBON 330K 5% 1/4W	
R671	1-249-754-11	CARBON 10 5% 1/2W	
R672	1-249-798-11	CARBON 680 5% 1/2W	
△R674	1-217-989-11	FUSIBLE 4.7 5% 1/2W F (FA5ES)	
△R674	1-260-072-11	FUSIBLE 4.7 5% 1/2W F (FA7ES)	
△R675	1-217-989-11	FUSIBLE 4.7 5% 1/2W F (FA5ES)	
△R675	1-260-072-11	FUSIBLE 4.7 5% 1/2W F (FA7ES)	
R677	1-249 794 11	CARBON 470 5% 1/2W	
R678	1-249-794-11	CARBON 470 5% 1/2W	
< RELAY >			
RY601	1-755-061-11	RELAY	
RY602	1-515-676-11	RELAY	

*	1-655-085-11	PRO LED BOARD	

< CONNECTOR >			
* CN806	1-564-506-11	PLUG, CONNECTOR 3P	
< DIODE >			
D801	8-719-313-40	LED SEL1516W (POWER)	
< RESISTOR >			
R801	1-249-407-11	CARBON 150 5% 1/4W	

*	1-655-078-11	PS BOARD (FA5ES)	
*	1-655-078-21	PS BOARD (FA7ES)	

*	3-555 872 21	SPACER	
< TERMINAL >			
* BP701	1-535-117-00	TERMINAL	
* BP702	1-535-117-00	TERMINAL	
* BP703	1-535-115-00	TERMINAL	
* BP704	1-535-115-00	TERMINAL	
< CAPACITOR >			
C703	1-124-920-11	ELECT 330uF 20% 63V	
C704	1 124 920 11	ELECT 330uF 20% 63V	
C705	1-124-791-11	ELECT 1.0uF 20% 100V	
C706	1-124-920-11	ELECT 330uF 20% 63V	
C707	1-136-880-11	FILM 2.2uF 10% 160V	
C708	1-124-920-11	ELECT 330uF 20% 63V (FA7ES)	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

PS

PS JUMPER

REC OUT

SP-TM

TONE. CONTROL

Ref. No. Part No. Description Remark

< CONNECTOR >

- * CN701 1-564-241-11 PIN, CONNECTOR (B4P-VH) 4P
- CN703 1-691-766-31 PLUG (MICRO CONNECTOR) 4P
- CN705 1-691-768-11 PLUG (MICRO CONNECTOR) 6P
- * CN706 1-564-506-11 PLUG, CONNECTOR 3P

< DIODE >

- D701 8-719-210-25 DIODE C25P20F
- D702 8-719-210-25 DIODE C25P20F
- D703 8-719-210-26 DIODE C25P20FR
- D704 8-719-210-26 DIODE C25P20FR
- D705 8-719-200-82 DIODE 11ES2

- D706 8-719-200-82 DIODE 11ES2
- D707 8-719-200-82 DIODE 11ES2
- D708 8-719-200-82 DIODE 11ES2
- D709 8-719-200-82 DIODE 11ES2
- D710 8-719-200-82 DIODE 11ES2

- D711 8-719-200-82 DIODE 11ES2

< PLATE GROUND >

- * EPT701 4-916-791-01 PLATE, GROUND, 5P
- * EPT702 3-346-266-21 PLATE, GROUND
- * EPT703 3-346-266-21 PLATE, GROUND
- * EPT704 3-346-266-21 PLATE, GROUND
- * EPT705 3-346-266-21 PLATE, GROUND

< RESISTOR >

△R701 1-219-165-11 FUSIBLE 1 5% 1/2W F

- * 1-655-076-11 PS JUMPER BOARD (FA5ES)
- * 1-655-076-21 PS JUMPER BOARD (FA7ES)

- * 1-655-082-11 REC OUT BOARD

< CONNECTOR >

- * CN315 1-564-506-11 PLUG, CONNECTOR 3P

< SWITCH >

S302 1-762-186-11 SWITCH, TOGGLE (REC OUT)

- * 1-655-072-11 SP-TM BOARD (FA5ES)
- * 1-655-072-21 SP-TM BOARD (FA7ES)

Ref. No. Part No. Description Remark

< TERMINAL >

- TM801 1-537-930-11 TERMINAL BOARD (SP) 4P (FA5ES)
- TM801 1-537-931-11 TERMINAL BOARD (SP) 4P (FA7ES)
- TM802 1-537-930-11 TERMINAL BOARD (SP) 4P (FA5ES)
- TM802 1-537-931-11 TERMINAL BOARD (SP) 4P (FA7ES)

- * A-4371-831-A TONE CONTROL BOARD, COMPLET

- * 1-535-730-21 LEAD, JUMPER (OFC)

< CAPACITOR >

- C301 1-130-475-00 MYLAR 0.0022uF 5% 50V
- C302 1-130-483-00 MYLAR 0.01uF 5% 50V
- C303 1-130-485-00 MYLAR 0.015uF 5% 50V
- C304 1-136-165-00 FILM 0.1uF 5% 50V
- C306 1-136-165-00 FILM 0.1uF 5% 50V

- C307 1-136-165-00 FILM 0.1uF 5% 50V
- C351 1-130-475-00 MYLAR 0.0022uF 5% 50V
- C352 1-130-483-00 MYLAR 0.01uF 5% 50V
- C353 1-130-485-00 MYLAR 0.015uF 5% 50V
- C354 1-136-165-00 FILM 0.1uF 5% 50V

- C805 1-106-343-00 MYLAR 1000PF 5% 200V
- C806 1-106-343-00 MYLAR 1000PF 5% 200V
- C901 1-126-376-11 ELECT 470uF 20% 25V
- C902 1-164-159-11 CERAMIC 0.1uF 50V
- C903 1-126-023-11 ELECT 100uF 20% 16V

- C904 1-162-207-31 CERAMIC 22PF 5% 50V
- C905 1-162-207-31 CERAMIC 22PF 5% 50V
- C906 1-162-282-31 CERAMIC 100PF 10% 50V
- C907 1-164-159-11 CERAMIC 0.1uF 50V
- C908 1-164-159-11 CERAMIC 0.1uF 50V

- C909 1-136-165-00 FILM 0.1uF 5% 50V

< CONNECTOR >

- * CN301 1-564-506-11 PLUG, CONNECTOR 3P
- CN302 1-691-766-41 PLUG (MICRO CONNECTOR) 4P
- CN303 1-691-770-11 PLUG (MICRO CONNECTOR) 8P
- * CN310 1-564-506-11 PLUG, CONNECTOR 3P
- * CN313 1-564-506-11 PLUG, CONNECTOR 3P

- * CN314 1-564-506-11 PLUG, CONNECTOR 3P
- CN352 1-691-766-31 PLUG (MICRO CONNECTOR) 4P
- * CN807 1-564-506-11 PLUG, CONNECTOR 3P
- CN901 1-564-320-00 PIN, CONNECTOR (B2P-VH) 2P
- CN902 1-564-505-11 PLUG, CONNECTOR 2P

- CN903 1-691-772-11 PLUG (MICRO CONNECTOR) 10P
- * CN905 1-564-506-11 PLUG, CONNECTOR 3P
- * CN906 1-564-506-11 PLUG, CONNECTOR 3P

The components identified by mark △ or dotted line with mark. △ are critical for safety. Replace only with part number specified.

STONE CONTROL

VOL

Ref. No.	Part No.	Description	Remark
CN907	1-691-770-11	PLUG (MICRO CONNECTOR) 8P	
< DIODE >			
D901	8-719-200-02	DIODE 10E2	
D902	8-719-200-02	DIODE 10E2	
D903	8-719-200-02	DIODE 10E2	
D904	8-719-200-02	DIODE 10E2	
D905	8-719-987-63	DIODE 1N4148M	
D906	8-719-987-63	DIODE 1N4148M	
D907	8-719-987-63	DIODE 1N4148M	
D908	8-719-987-63	DIODE 1N4148M	
D909	8-719-987-63	DIODE 1N4148M	
D910	8-719-987-63	DIODE 1N4148M	
D911	8-719-987-63	DIODE 1N4148M	
D912	8-719-987-63	DIODE 1N4148M	
D913	8-719-200 02	DIODE 10E2	
< IC >			
IC901	8-759-325-18	IC TMP47C200BN-H327	
IC902	8-759-635-63	IC M51943BSL	
IC903	8-759-188-67	IC X24C01P-S	
IC904	8-759-962-08	IC BA6208	
IC905	8-759-231-53	IC TA7805S	
< TRANSISTOR >			
Q301	8-729-281-54	TRANSISTOR 2SC1815-BL	
Q901	8-729-900-63	TRANSISTOR DTA124ES	
Q902	8-729-900-63	TRANSISTOR DTA124ES	
Q903	8-729-900-63	TRANSISTOR DTA124ES	
Q904	8-729-900-63	TRANSISTOR DTA124ES	
Q905	8-729-900-63	TRANSISTOR DTA124ES	
Q906	8-729-900-63	TRANSISTOR DTA124ES	
Q907	8-729-900-63	TRANSISTOR DTA124ES	
Q908	8-729-900-63	TRANSISTOR DTA124ES	
< RESISTOR >			
R301	1-247-721-11	CARBON 4.7K 5% 1/4W	
R302	1-249-556-11	CARBON 1.5K 5% 1/4W	
R303	1-259-502-11	CARBON 4.7M 5% 1/4W	
R304	1-259-502-11	CARBON 4.7M 5% 1/4W	
R305	1-249-462-11	CARBON 22K 5% 1/4W	
R306	1-247-721-11	CARBON 4.7K 5% 1/4W	
R307	1-249-425-11	CARBON 4.7K 5% 1/4W	
R311	1 249 425-11	CARBON 4.7K 5% 1/4W	
R351	1-247-721-11	CARBON 4.7K 5% 1/4W	
R352	1-249-556-11	CARBON 1.5K 5% 1/4W	
R353	1-259-502-11	CARBON 4.7M 5% 1/4W	
R354	1-259-502-11	CARBON 4.7M 5% 1/4W	
R355	1-249-462-11	CARBON 22K 5% 1/4W	

Ref. No.	Part No.	Description	Remark
R356	1-247-721-11	CARBON 4.7K 5% 1/4W	
R824	1-247-747-11	CARBON 470 5% 1/2W	
R825	1 247 747 11	CARBON 470 5% 1/2W	
R901	1-249-433-11	CARBON 22K 5% 1/4W	
R902	1-249-433-11	CARBON 22K 5% 1/4W	
R903	1-249-433-11	CARBON 22K 5% 1/4W	
R904	1-249-433-11	CARBON 22K 5% 1/4W	
R905	1-249-433-11	CARBON 22K 5% 1/4W	
R906	1-249-433-11	CARBON 22K 5% 1/4W	
R907	1-249-425-11	CARBON 4.7K 5% 1/4W	
R908	1-249-425-11	CARBON 4.7K 5% 1/4W	
R909	1-249-425-11	CARBON 4.7K 5% 1/4W	
R910	1-249-429-11	CARBON 10K 5% 1/4W	
R911	1-249-429-11	CARBON 10K 5% 1/4W	
R913	1-249-433-11	CARBON 22K 5% 1/4W	
R914	1-249-433-11	CARBON 22K 5% 1/4W	
R915	1-249-429-11	CARBON 10K 5% 1/4W	
R916	1-247-807-31	CARBON 100 5% 1/4W	
R917	1-247-807-31	CARBON 100 5% 1/4W	
R918	1-247-807-31	CARBON 100 5% 1/4W	
R919	1-247-807-31	CARBON 100 5% 1/4W	
R920	1-247-807-31	CARBON 100 5% 1/4W	
R921	1-247-807-31	CARBON 100 5% 1/4W	
R922	1-247-807-31	CARBON 100 5% 1/4W	
R923	1-249-425-11	CARBON 4.7K 5% 1/4W	
R924	1-249-413-11	CARBON 470 5% 1/4W	
△R925	1-217-981-11	FUSIBLE 2.2 5% 1/2W F	
< VARIABLE RESISTOR >			
RV301	1-223-789-11	RES. VAR, CARBON 250K/250K (BALANCE)	
RV302	1-223-768-11	RES. VAR, CARBON 250K/250K (TREBLE)	
RV303	1-223-767-11	RES. VAR, CARBON 900K/900K (BASS)	
< SWITCH >			
S301	1-762-203-11	SWITCH, PUSH (1 KEY) (MUTING)	
S801	1-762-184-11	SWITCH, ROTARY (SPEAKERS)	
S901	1-762-183-11	SWITCH, ROTARY (INPUT SELECTOR)	
< VIBRATOR >			
X901	1-579-223-11	OSCILLATOR, CERAMIC (8.19MHZ)	

*	1-655-087-11	VOL BOARD	

< CAPACITOR >			
C308	1-136-165-00	FILM 0.1uF 5% 50V	
C309	1-136-165-00	FILM 0.1uF 5% 50V	
C310	1-136-165-00	FILM 0.1uF 5% 50V	

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

Ref. No.	Part No.	Description	Remark
< CONNECTOR >			
CN305	1-691-766-41	PLUG (MICRO CONNECTOR) 4P	
CN306	1-691-770-11	PLUG (MICRO CONNECTOR) 8P	
CN308	1-691-766-21	PLUG (MICRO CONNECTOR) 4P	
CN309	1-691-766-11	PLUG (MICRO CONNECTOR) 4P	
CN355	1-691-766-31	PLUG (MICRO CONNECTOR) 4P	
< DIODE >			
D304	8-719-987-63	DIODE 1N4148M	
< TRANSISTOR >			
Q302	8-729-184-53	TRANSISTOR 2SC1845-EA	
< RESISTOR >			
R309	1-249-469-11	CARBON 100K 5% 1/4W	
R312	1-249-677-11	CARBON 1.5K 5% 1/2W	
R313	1-249-677-11	CARBON 1.5K 5% 1/2W	
R314	1-247-725-11	CARBON 10K 5% 1/4W	
R315	1-249-465-11	CARBON 47K 5% 1/4W	
R359	1 249 469-11	CARBON 100K 5% 1/4W	
< VARIABLE RESISTOR >			
RV304	1-223-765-11	RES, VAR, CARBON 120K/120K (ATTENUATOR) (FA5ES)	
RV304	1-223-765-21	RES, VAR, CARBON 120K/120K (ATTENUATOR) (FA7ES)	
< RELAY >			
RY301	1-755-062-11	RELAY	
< SWITCH >			
S303	1 762 190-11	SWITCH, PUSH (1 KEY) (SURGE DIRECT)	

MISCELLANEOUS			

* 160	1-535-691-21	TERMINAL (FA5ES)	
* 160	1-535-691-31	TERMINAL (FA7ES)	
161	1-506-113-00	SHORT PLUG	
C701	1-104-902-11	CAP, ELECT 15000uF (FA7ES)	
C701	1 107 845 12	CAP, ELECT 12000uF (FA5ES)	
C702	1-104-902-11	CAP, ELECT 15000uF (FA7ES)	
C702	1-107-845-12	CAP, ELECT 12000uF (FA5ES)	
△CNS1	1-575-953-11	CORD, POWER	
△F802	1-532-299-00	FUSE, TIME-LAG (T5A/250V) (FA7ES)	
△F802	1-532-350-00	FUSE, TIME-LAG (T4A/250V) (FA5ES)	
Q513	8 729-203-45	TRANSISTOR 2SC3423-0	

Ref. No.	Part No.	Description	Remark
Q515	8-729-018-19	TRANSISTOR 2SK2013-Y	
Q516	8-729-018-21	TRANSISTOR 2SJ313-Y	
Q518	8-729-018-11	TRANSISTOR 2SK1530A-Y (FA7ES)	
Q518	8-729-030-14	TRANSISTOR 2SK1530B-Y (FA5ES)	
Q520	8-729-018-13	TRANSISTOR 2SJ201A-Y (FA7ES)	
Q520	8-729-030-15	TRANSISTOR 2SJ201B-Y (FA5ES)	
Q563	8-729-203-45	TRANSISTOR 2SC3423-0	
Q565	8-729-018-19	TRANSISTOR 2SK2013-Y	
Q566	8-729-018-21	TRANSISTOR 2SJ313-Y	
Q568	8-729-018-11	TRANSISTOR 2SK1530A-Y (FA7ES)	
Q568	8-729-030-14	TRANSISTOR 2SK1530B-Y (FA5ES)	
Q570	8-729-018-13	TRANSISTOR 2SJ201A-Y (FA7ES)	
Q570	8-729-030-15	TRANSISTOR 2SJ201B-Y (FA5ES)	
S001	1-762-185-11	SWITCH, ROTARY SLIDE (REC OUT SELECTOR)	

△T1	1-429-111-11	TRANSFORMER, POWER (FA5ES)
△T1	1-429-112-11	TRANSFORMER, POWER (FA7ES)

ACCESSORIES & PACKING MATERIALS

- 1-465-801-11 REMOTE COMMANDER (RM-S703)
- 3-707-584-21 LID, BATTERY (for RM-S703)
- 3-800-210-11 MANUAL, INSTRUCTION (ENGLISH, FRENCH, SPANISH, PORTUGUESE)
- 3-800-210-21 MANUAL, INSTRUCTION (GERMAN, DUTCH, SWEDISH, ITALIAN)

- * 4-970-079-01 CUSHION
- * 4-977-437-01 INDIVIDUAL CARTON (FA5ES)
- * 4-977-438-01 INDIVIDUAL CARTON (FA7ES)

HARDWARE LIST

- #1 7-682-148-15 SCREW, TR
- #2 7-682-246-09 SCREW +K 3X5
- #3 7-682-548-09 SCREW (3X8)
- #4 7-682-564-09 SCREW +B 4X14
- #5 7-682-565-09 SCREW +B 4X16 (FA5ES)
- #5 7-682-566-09 SCREW +B 4X20 (FA7ES)
- #6 7-684-024-04 N 4, TYPE 2

The components identified by mark △ or dotted line with mark △ are critical for safety. Replace only with part number specified.

TA-FA5ES/FA7ES

SONY®

AEP Model

SERVICE MANUAL

CORRECTION-1

Please correct your service manual.

Subject: Correction of the connection in Electrical Adjustment

(SPM-98014)

✎: indicates corrected portion.

