


# ARVIN CAR RADIO CHASSIS RE 5B

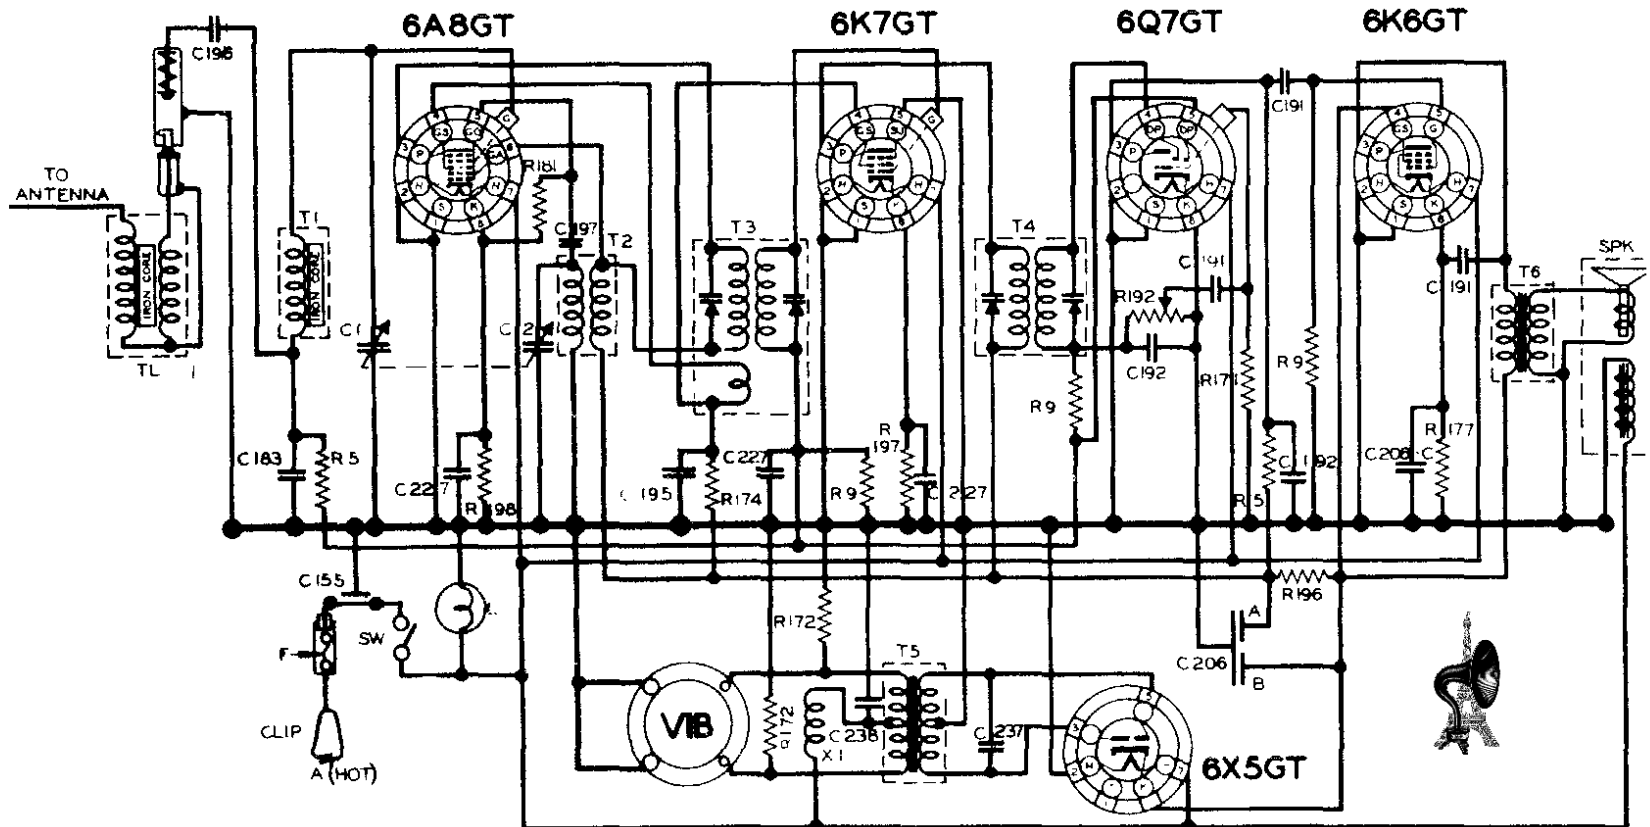

I.F. PEAK 455 K C  
 FREQUENCY RANGE 1575 TO 540 K C  
 NOBILITT-SPARKS INDUSTRIES, INC.

RESISTORS				CONDENSERS				CHOKES & TRANSFORMERS			
R	OHMS	W	PART NO.	C	CAPACITY	VOLTS	PART NO.	T-X	TYPE	PART NO.	
5	500K	1/4	17-2070	1	TWO	100V	7-164	1	ANTENNA COIL	00-10441	
6	1M	1/4	17-2080	2	VARIABLE			2	OSCILLATOR COIL	00-8442	
171	15M	1/4	17-14288	155	0.002	50	7-27	3	FIRST I.F. COIL	00-8443	
172	100	1/4	17-14289	237	0.05	200V	1-4345	4	SECOND I.F. COIL	00-16444	
174	20K	1/4	17-14291	208A	0.002	50	17-14287	5	POWER TRANS.	00-8444	
177	250	1/4	17-14298	208B	0.002	50		6	OUTPUT TRANS.	00-16445	
181	100K	1/4	17-14303	208C	20M	25					
182	1M	1/4	17-14304	191	.01	40	4272				
194	500	1	17-14340	182	0.0025	80	7-14273	X	CHOKE		
197	500	1/4	17-14342	183	0.01	800	17-4294		SUPPRESSION COIL	20-16457	
198	50	1/4	17-14343	195	0.01	400	17-14276				
				196	0.01	200	17-14277				
				197	0.001	600	17-14278				
				238	.5	150	17-4348				
				227	.05	200	7-4323				

MISCELLANEOUS UNITS		
SYMBOL	DESCRIPTION	PART NO.
F	FUSE - 4" AMP	17-2228
L	DIAL LIGHT BULB MAZDA NO 44	17-13805
SPK	SPEAKER ASSEMBLY	17-16456
SW	POWER SWITCH	17-16458
TL	TRANSFORMER LINE	00-16458
VIB	VIBRATOR	17-14747