


ARVIN HOME RADIO - CHASSIS RE-78

12SA7

12SK7

12SQ7

50L6GT

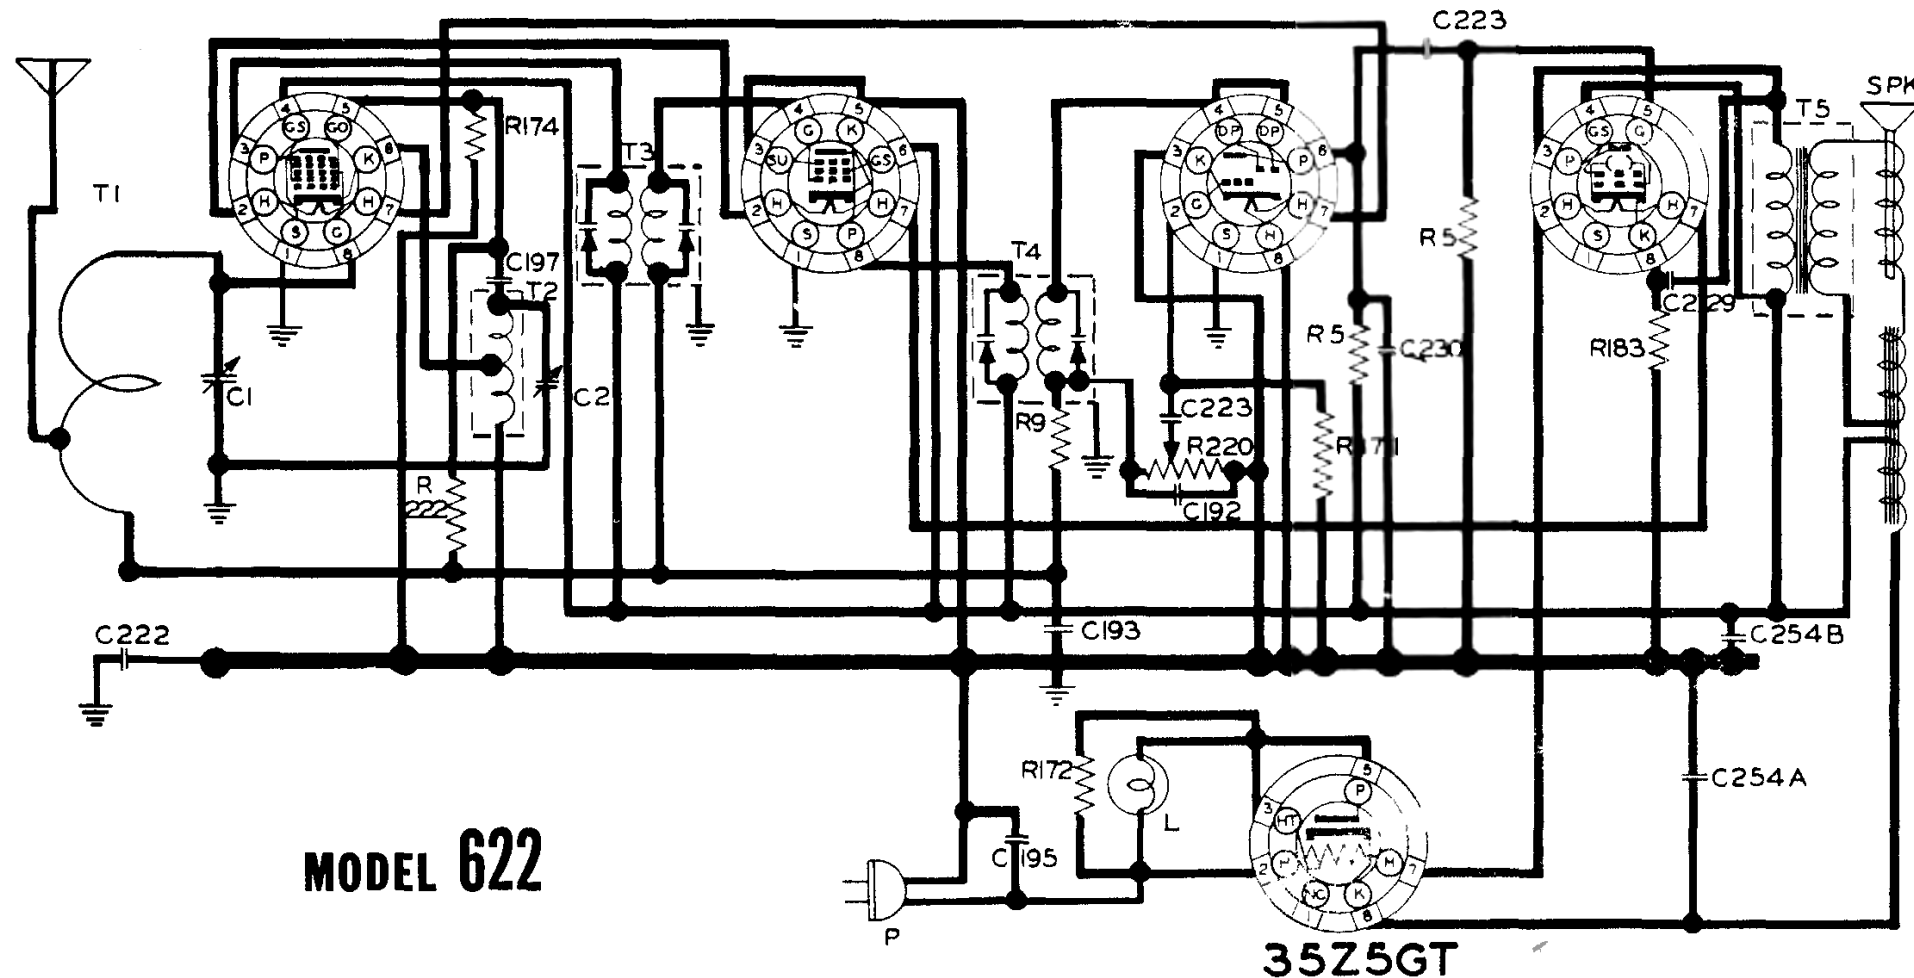

MODEL 622

35Z5GT

RESISTORS				CONDENSERS				TRANSFORMERS				MISCELLANEOUS UNITS			
R	OHM	W	PART NO	C	CAPACITY	VOLT	PART NO	T	TYPE	PART NO		SYMBOL	DESCRIPTION	PART NO	
220	1 M	V.C	17-16876	1	TWO GANG		17-16884	1	ANTENNA LOOP	00-16882		L	DIAL LIGHT BULB MAZDA #47	17-16378	
5	500K	1/4	17-2070	2	VARIABLE			2	OSCILLATOR COIL	00-16891		P	LINE CORD & PLUG ASSY	17-16874	
183	150	1/4	17-14316	254A	20 MFD.	150	17-14376	3	FIRST I.F. COIL	00-16885		SPK	SPEAKER ASSY.	17-16867	
174	20 K	1/4	17-14291	254B	10 MFD.	150		4	SECOND I.F. COIL	00-16886					
172	100	1/4	17-14289	192	.00025	600	17-14273	5	OUTPUT TRANSF.	00-16883					
222	10 M	1/4	17-14377	195	.05	400	17-14276								
9	1 M	1/4	17-2080	222	2	400	17-14317								
				229	.02	400	17-14327								
				223	.002	400	17-14318								
				193	.05	200	17-14274								
				197	.0001	600	17-14278								
				230	.0005	400	17-14328								

IF PEAK 455 KC.
BALANCE 1400 KC.- CHECK AT 600 KC.
NOBLITT-SPARKS INDUSTRIES, INC.
COLUMBUS, INDIANA

