


ARVIN HOME RADIO CHASSIS RE-82

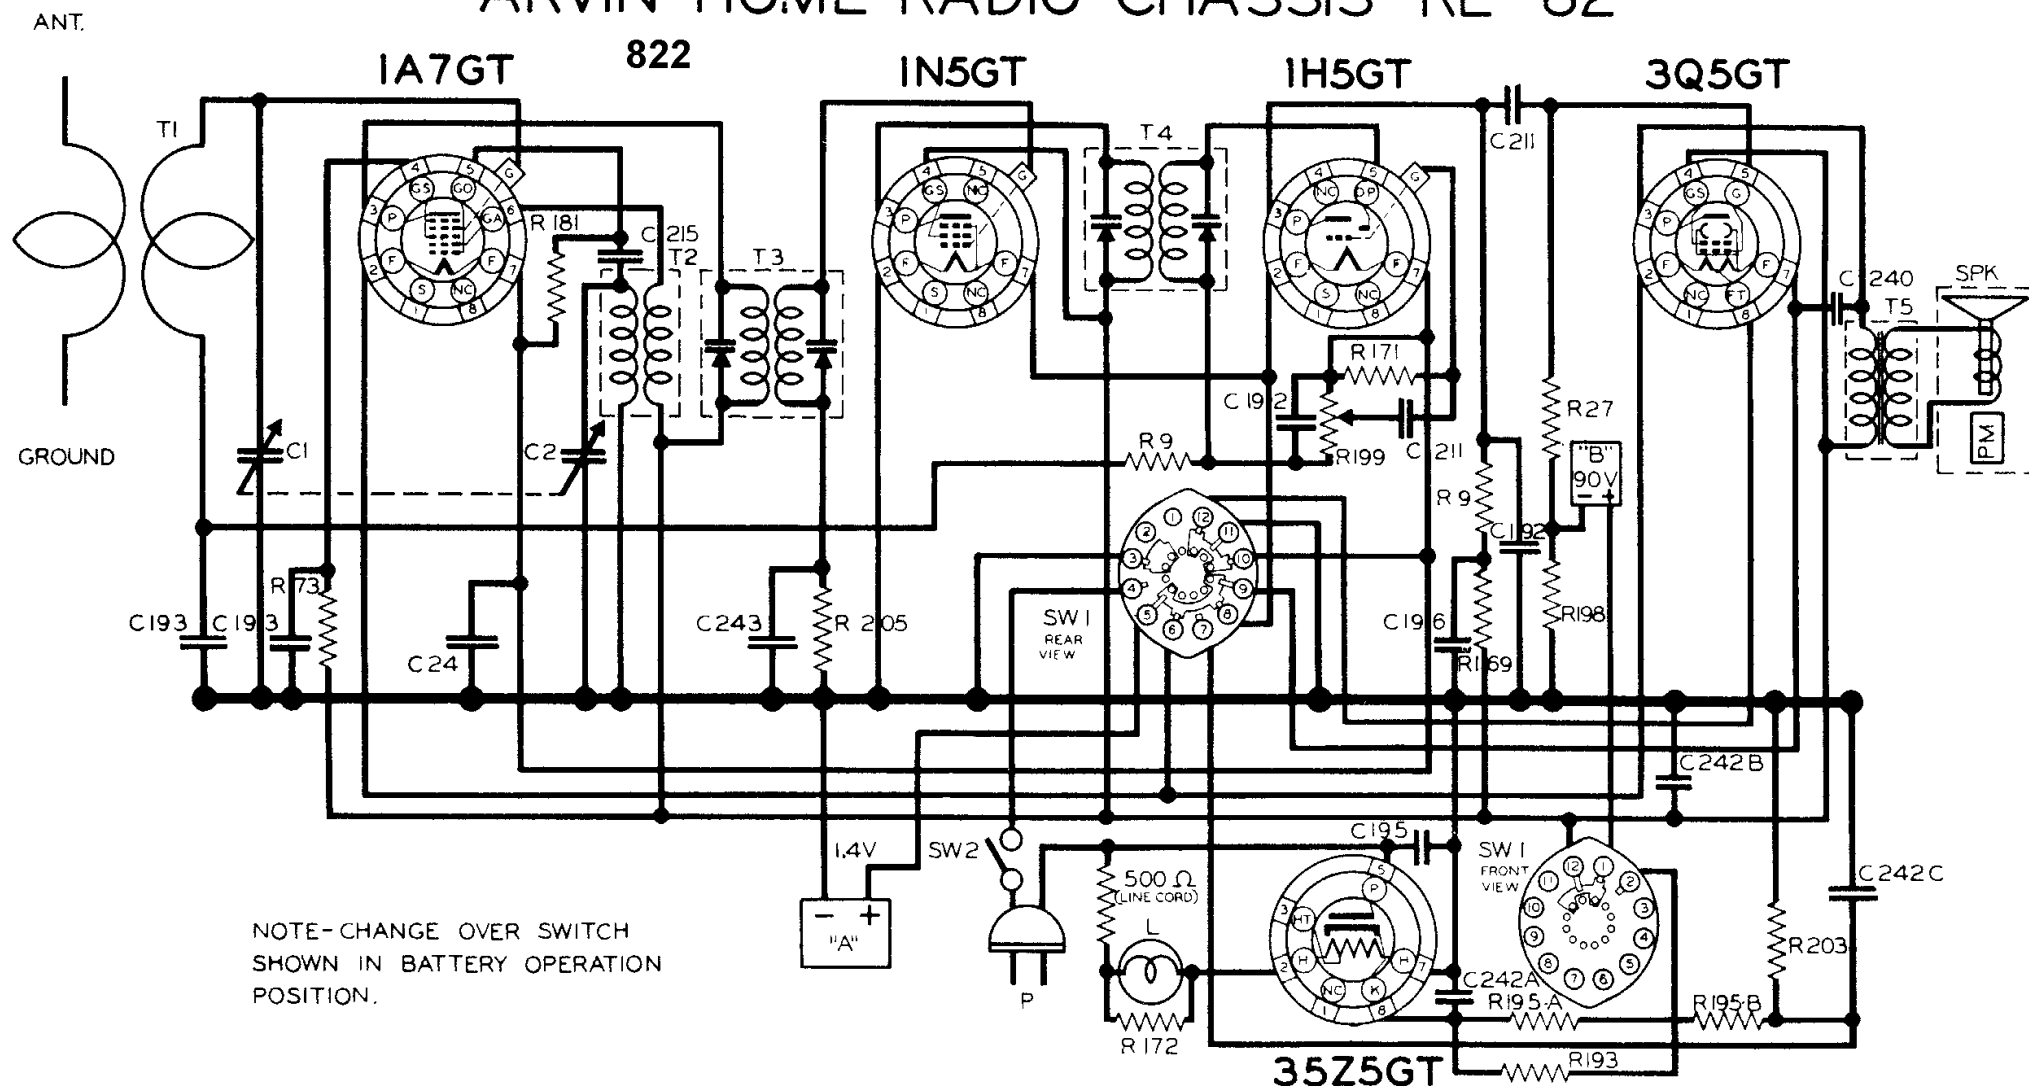

RESISTORS				CONDENSERS				TRANSFORMERS				MISCELLANEOUS UNITS			
R	OHM	W	PART NO.	C	CAPACITY	VOLT	PART NO.	T	TYPE	PART NO.	SYMBOL	DESCRIPTION	PART NO.		
9	1M	1/4	17-2080	1	TWO-GANG		17-16549	1	ANTENNA LOJP	00-16973	A	1.5 VOLT "A" BATTERY	17-16563		
27	2M	1/4	17-4788	2	VARIABLE			2	OSCILLATOR COIL	00-16404	B	TWO 45 VOLT B BATTERIES	17-16562		
73	30K	1/4	17-4276	192	.00025	600	17-14273	3	FIRST I.F	00-16578	L	DIAL LIGHT BULB MAZDA 47	17-16378		
169	150K	1/4	17-14282	193	.05	200	17-14274	4	SECOND I.F. COIL	00-16579	P	LINE CORD & P JG. ASSEMBLY	17-16492		
171	15M	1/4	17-14288	195	.05	400	17-14276	5	OUTPUT TRANS.	00-16566	SPK	SPEAKER ASSEMBLY - 5 PERMANENT MAGNET	17-16613		
172	100	1/4	17-14289	196	.1	200	17-14277				SW1	AC DC - BATTERY SWITCH	17-16564		
181	100K	1/4	17-14303	211	.01	200	17-14306				SW2	VOLUME CONTROL & LINE SWITCH	17-14350		
195A	460	2 3/4	17-14351	215	.0001	600	17-14310								
195B	1500	5 1/4		24	.5	200	17-14040A								
198	400	1/4	17-14343												
199	1M	V.C.	17-14350	240	.003	400	17-14348								
203	450	1/4	17-14354	242A	40	150									
193	2K	1/4	17-14337	242B	20	150	17-14353								
205	3M	1/4	17-14356	242C	100	25									
				243	.002	200	17-14357								

IF PEAK 455 K.C.

BALANCE 1400 K.C. - CHECK AT 600 K.C.

NOBLITT-SPARKS INDUSTRIES, INC.,
COLUMBUS, INDIANA.

I F PEAK 455 K.C.
BALANCE 1400 K.C. - CHECK AT 600 K.C.
NOBLITT-SPARKS INDUSTRIES, INC.,
COLUMBUS, INDIANA.