


PHILIPS

Service

RADIO

22RB382/00

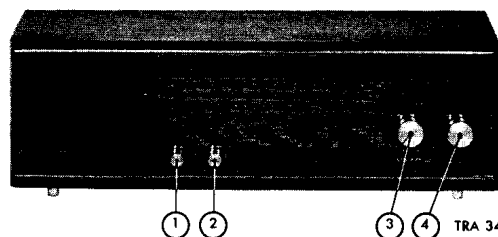

Volume control +
mains switch
Volume regelaar +
netschakelaar
Contrôle de volume +
comm. secteur
Lautstärkeregler +
Netzschalter
Control de volumen +
interruptor de red

R25
+
SK-1

Tone control
Toonregeling
Tonalité
Tonregelung
Regulación de tono

R29

Tuning
Afstemming
Syntonisation
Abstimmung
Sintonfa

C16/23 AM
C7/12 FM



SK-2/3

I FM-FM-FM-UKW-FM
II SW-KG-OC-KW-OC
III LW-LG-GO-LW-OL
IV MW-MG-PO-MW-OM
V PU-PU-PU-TA/TB-PU

Mains voltages	110-125-220-240 V	Netspanningen	Tensions de secteur	Netspanningen	110-125-220-240 V	Tensiones de red
Loudspeaker	4 Ω	Luidspreker	Haut parleur	Lautsprecher	4 Ω	Altavoz
IF AM	452 kHz	MF AM	FI AM	ZF AM	452 kHz	FI AM
IF FM	10,7 MHz	MF FM	FI FM	ZF UKW	10,7 MHz	FI FM
Consumption	40 W	Verbruik	Consommation	Verbrauch	40 W	Consumo
Output	3 W (10 %)	Uitgangsvermogen	Puissance de sortie	Ausgangsleistung	3 W (10 %)	Potencia de salida
Dimensions	175x140x515 mm	Afmetingen	Dimensions	Abmessungen	175x140x515 mm	Dimensiones

Wave ranges - Golfgebieden - Gammas d'ondes - Wellenbereiche - Margenes de ondas

LW - LG - GO - LW - OL	: 920 - 2050 m (325 - 145 kHz)
MW - MG - OP - MW - OM	: 185 - 580 m (1625 - 520 kHz)
SW - KG - OC - KW - OC	: 39 - 52 m (7,7 - 5,8 MHz)
FM - FM - FM - UKW - FM	: 87 - 108 MHz

Valves - Buizen - Tubes - Röhren - Válvulas

B1 - ECC85
B2 - ECH81
B3 - EF89
B4 - ECL86

Diodes

D1-2 - 2-AA119
D3 - OA91
D4 - BY123

Index: CS21455-CS21458

SERVICE INFORMATION										
------------------------	--	--	--	--	--	--	--	--	--	--

HFD/RV

CS21455

Copyright Central Service N.V. PHILIPS' GLOEILAMPENFABRIEKEN, Eindhoven

4822 725.1.0353

Printed in the Netherlands

