


Crosley

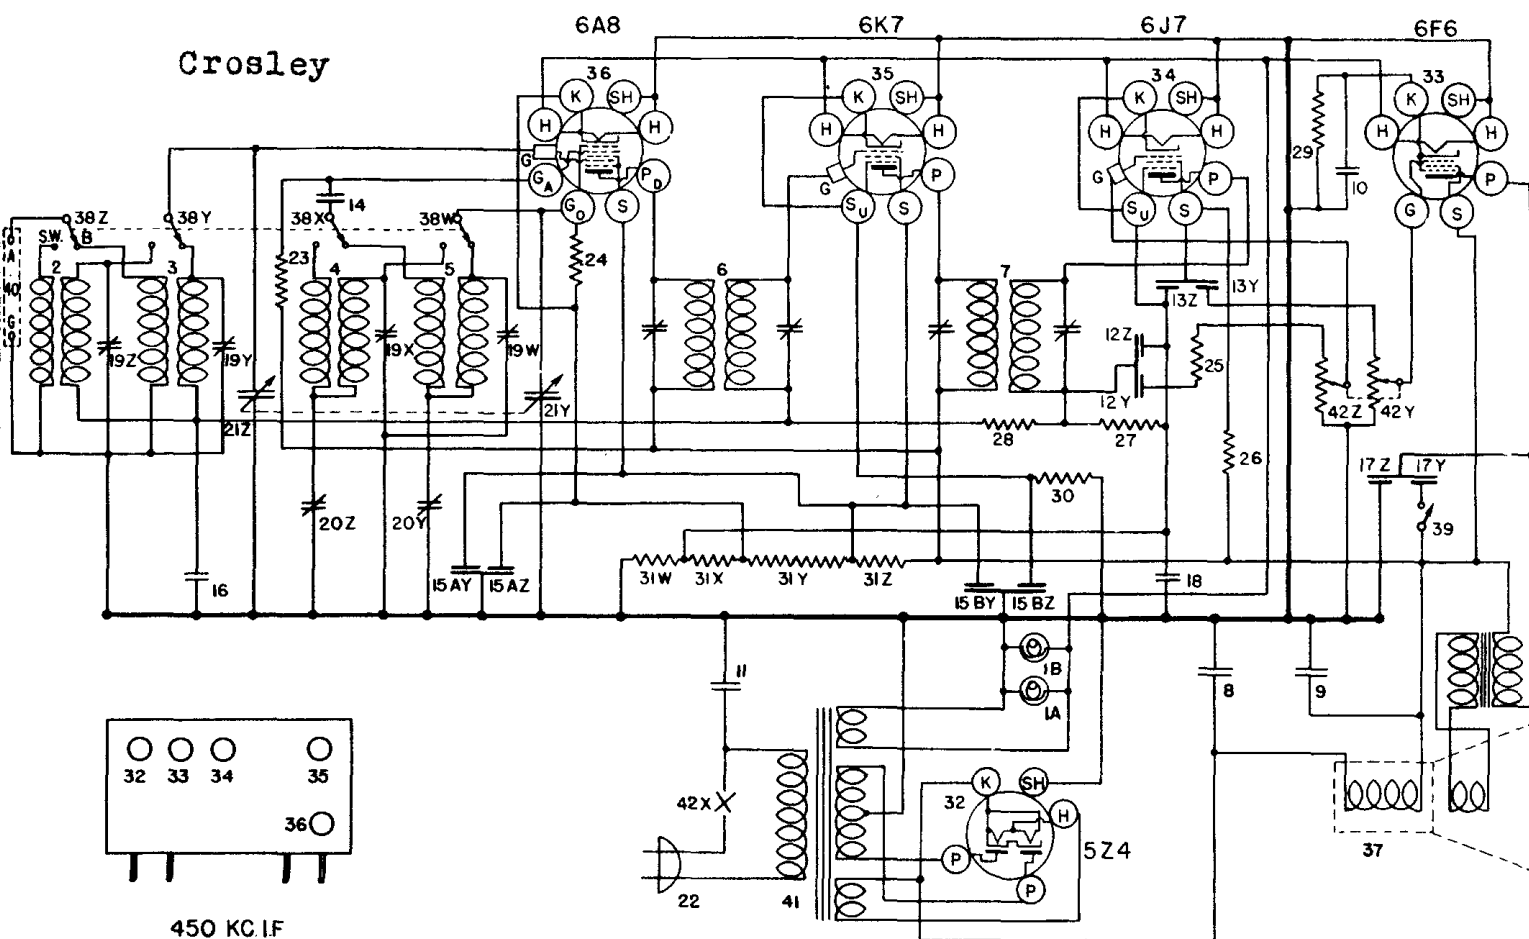

450 KC IF

The Crosley Corp.

WIRING DIAGRAMS—MODELS 555 AND 555S

Item No.	Part No.	Description	Item No.	Part No.	Description
1A	G6 —27134	Dial Light Assm.	22	B —37354	Dial Face only
1B	G6 —27134	Dial Light Assm.	23	B —33906A	A. C. Cord & Plug
2	G82 —32000	Ant. Coil, S. W. B.	24	—5370A	Resistor, 20,000 Ohm
3	G81 —32000	Ant. Coil, B. C. B.	25	—21237	Resistor, 60,000 Ohm
4	G65 —32002	Osc. Coil, S. W. B.	26	—21875	Resistor, 100,000 Ohm
5	G66 —32002	Osc. Coil, B. C. B.	27	—21455	Resistor, 300,000 Ohm
6	G71 —32004	1st I. F. Assm.	28	—33344	Resistor, 400,000 Ohm
7	G72 —32004	2nd I. F. Assm.	29	—37245	Resistor, 1.5 Megohm
8	W —36055	Condenser, 35. Mfd. 400 Volt	30	W —25291	Resistor, 500 Ohm 1 1/2 W. (Flex)
9	W —36057	Condenser, 40. Mfd. 300 V.	31Z	W —28106	Resistor, 500 Ohm 1/2 W. (Flex)
10	W —36931	Condenser, 12 Mfd. 25 V.	31Y	W —37246A	Resistor, 10,000 Ohm Candohm
11	W —30805	Condenser, 0.01 Mfd. 400 V.	31X		Resistor, 25,000 Ohm Candohm
12Z	W —30322A	Condenser, 0.00017 Mfd. 200 V.	31W		Resistor, 185. Ohm Candohm
12Y	W —25537A	Condenser, 0.006 Mfd. 200 V.	32	G154—36400	Socket, 5Z4
13Z		Condenser, 0.001 Mfd. 400 V.	33	G153—36400	Socket, 6F6
13Y		Condenser, 0.03 Mfd. 400 V.	34	G157—36400	Socket, 6J7
14	W —23191A	Condenser, 0.01 Mfd. 400 V.	35	G151—36400	Socket, 6K7
15AZ	W —28623	Condenser, 0.02 Mfd. 200 V.	36	G156—36400	Socket, 6A8
15AY		Condenser, 0.02 Mfd. 200 V.	37	331—CL—9	Speaker, (555)
15BZ		Condenser, 0.02 Mfd. 200 V.		432—CJ—3M	Speaker, (555S) Console
15BY	W —28623	Condenser, 0.02 Mfd. 200 V.		G3 —35696	Speaker Cable (555S)
16	W —27216	Condenser, 0.05 Mfd. 200 V.	38W	—37247	Band Change Switch
17Z	W —35011	Condenser, 0.006 Mfd. 400 V.	To		
17Y	W —35011	Condenser, 0.03 Mfd. 400 V.	38Z		
18	W —36541	Condenser, 0.02 Mfd. 160 V.	39	W —36184A	Tone Control Switch
19Z	W —37241A	4 Section Trimmer Cond.	40	G1 —26719	Ant. & Grd. Terminal
19Y			41	G12 —28500	Power Trans. 60 Cy. 110 V.
19V				G13 —28500	Power Trans. 25 Cy. 110 V.
20Z	G29 —33006	S. W. Osc. Series Padder		G14 —28500	Power Trans. 25 Cy. 220 V.
20Y			42Z	—37395	Volume Control A. F. Grid
21Z	G17 —33001	Var. Tuning Cond. Gang	42Y		Volume Control Output Grid
21Y			42X		On-Off Switch
	—37353C	Dial Assm. Complete			
	—37158	Dial Glass			
	—37156	Dial Pointer			
	—37157	Pointer Screw			