
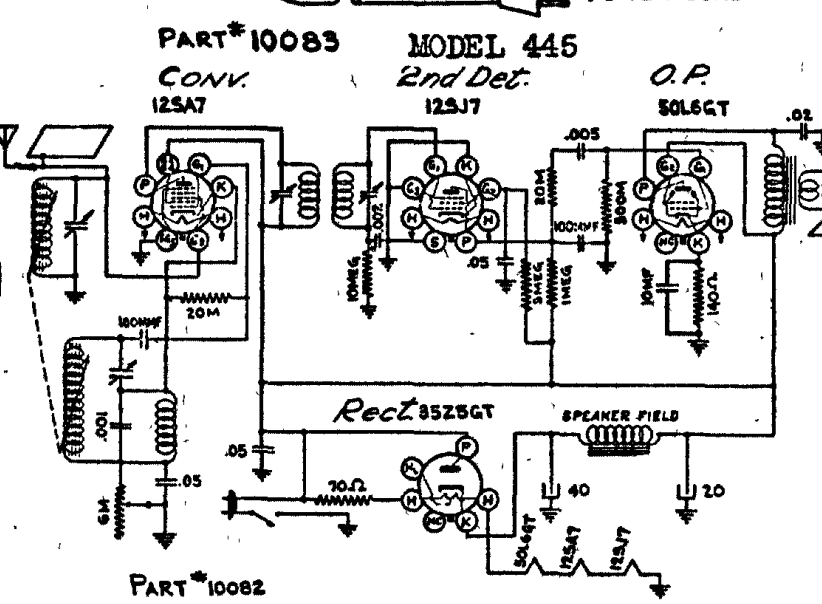
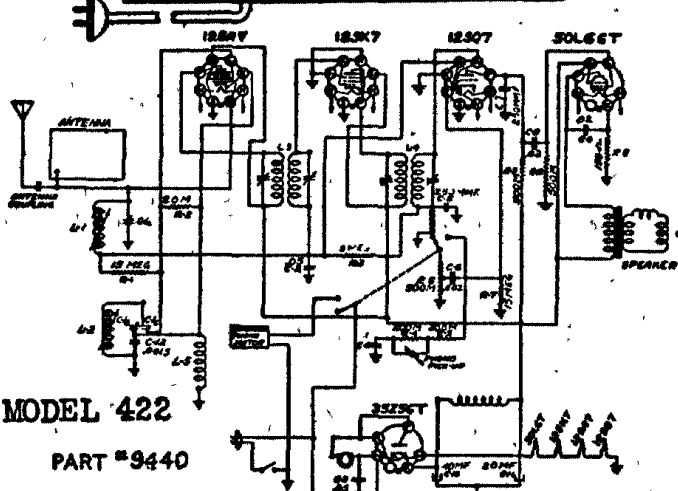
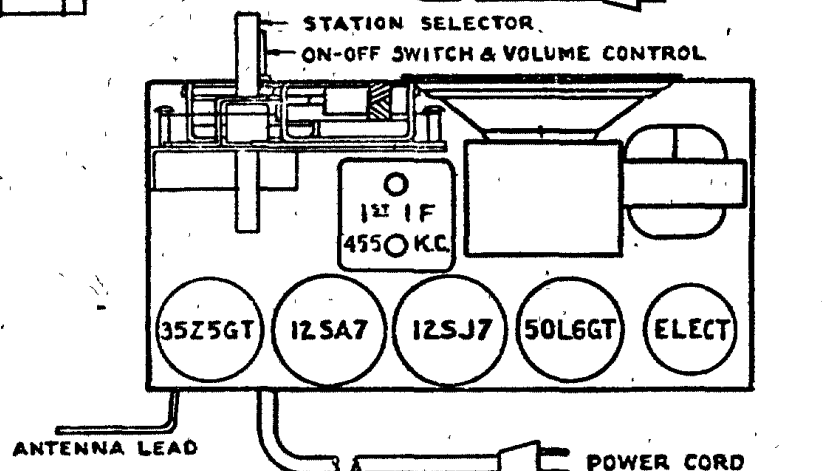
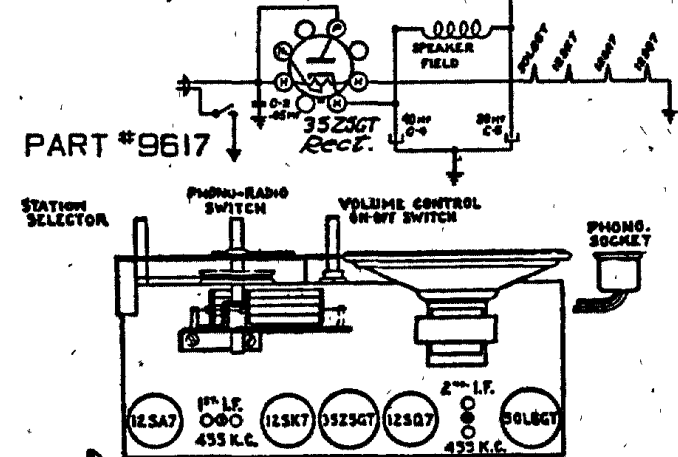
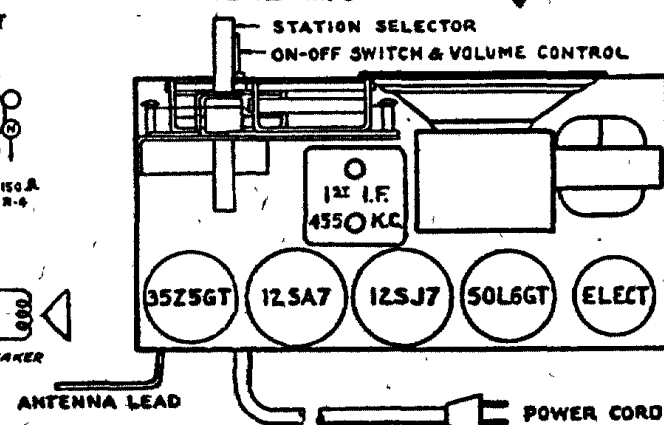
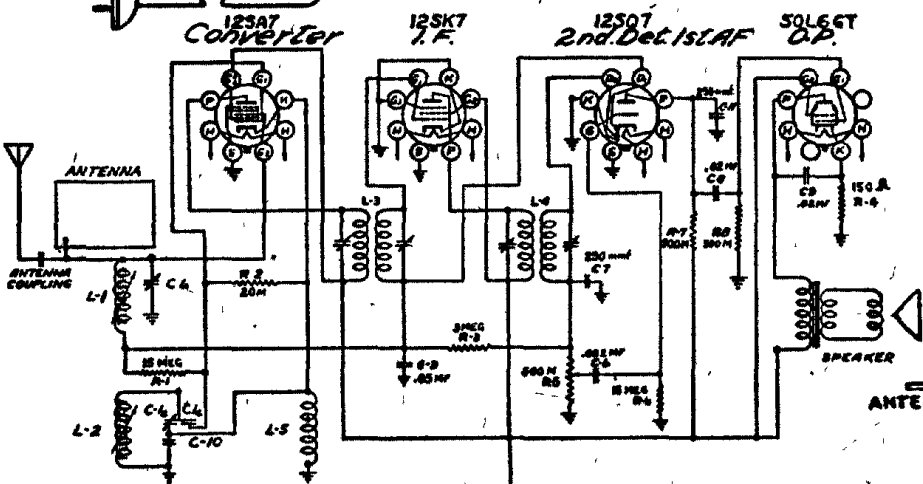
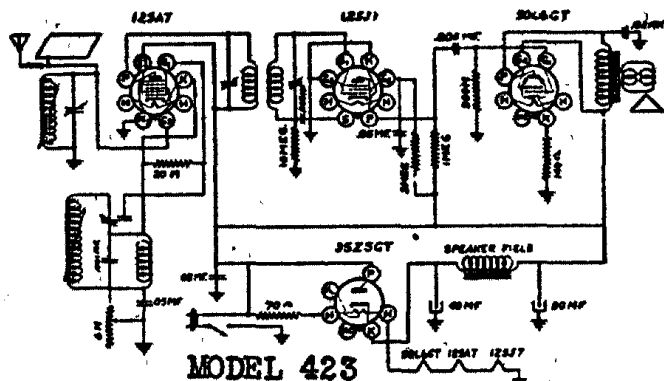


MODEL 441 MODEL 445
MODEL 423

DETROLA CORP.

MODEL 422

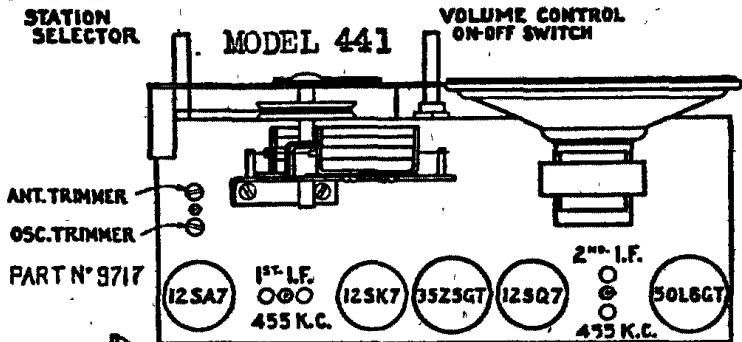

ALIGNMENT FOR MODELS 441 and 445

GENERATOR	CONNECTION AT RADIO	DUMMY ANTENNA	DIAL	TRIMMER TO TUNE	REMARKS
I.F. 455 kc.	12SA7 Grid	.1 mfd.	H. F. end	I.F. Transformers	Tune to Max.
1720 kc	Ext. Ant. Wire	200 mmf.	H. F. end	Oscillator Trimmer	Set Limit of band
1400 kc	Ext. Ant. Wire	Dummy antennae—200 mmf.	1400	Antenna Trimmer	Tune to Max.