

**TYPE
CK1006***Excellence in Electronics*

The CK1006 is a full-wave gas-filled rectifier with an ionically or directly heater emitter designed for use where a relatively high current and voltage are desired to supply the requirements of transmitters, receivers or other equipment.

MECHANICAL DATAENVELOPE: ST-14 GlassBASE: Medium 4-PinTERMINAL CONNECTIONS:

Pin 1 Filament

Pin 3 Plate-Left

Pin 2 Plate-Right

Pin 4 Filament



MOUNTING POSITION: Any**ELECTRICAL DATA**DESIGN CENTER MAXIMUM RATINGS:

	<u>Condenser Input</u>		<u>Square Wave</u>
Filament Voltage	0	1.75	0 or 1.75 volts
Peak Inverse Plate Voltage	1600	1600	1600 volts
Peak Plate Current, per Plate	600	600	320 ma.
Absolute Minimum Peak Starting Voltage, per Plate (Half-Wave)	650	450	---- volts
Absolute Minimum Peak Starting Voltage, per Plate (Full-Wave)	550	420	---- volts
DC Output Current	200	200	225 ma.
Absolute Minimum DC Output Current	70	0	---- ma.

CHARACTERISTICS AND TYPICAL OPERATION - FULL-WAVE RECTIFIER:

	<u>Condenser Input</u>		<u>Square Wave</u>
Filament Voltage	0	1.75	0 or 1.75 volts
Filament Current	0	2.00	---- amps.
Peak Plate Voltage, per Plate ♦	800	800	800 volts
Average Dynamic Voltage Drop	30	25	--- volts
DC Output Voltage	550	550	630 volts

♦ No Load.

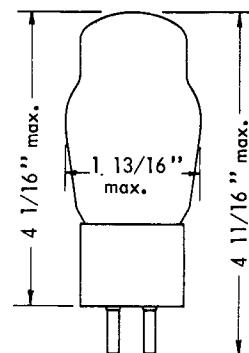

BOTTOM VIEW

4C

Tentative Data

RAYTHEON MANUFACTURING COMPANY

RECEIVING AND CATHODE RAY TUBE OPERATIONS