


ARVIN HOME RADIO CHASSIS RE 37.

6K8

6K7

6Q7G

6K6G

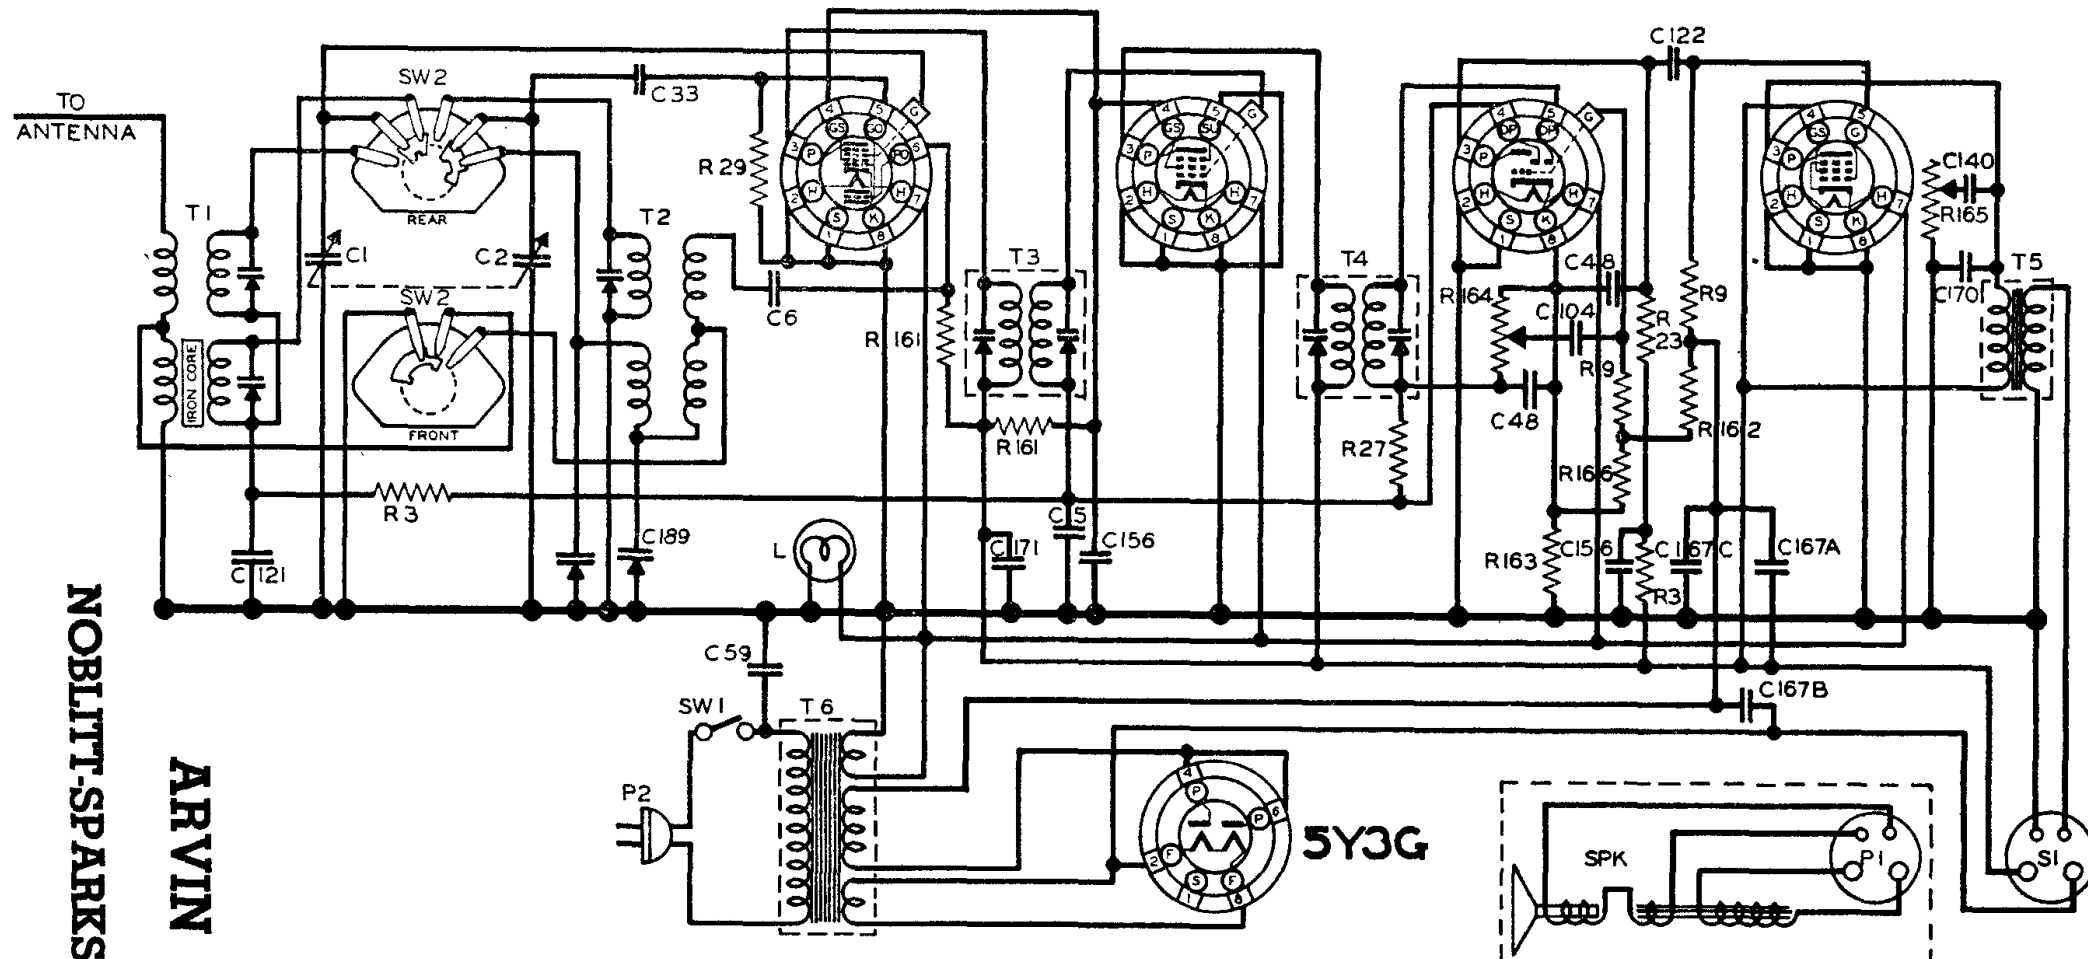

NOBLITT-SPARKS INDUSTRIES, INC.

ARVIN MODEL 78.

RESISTORS				CONDENSERS				TRANSFORMERS				MISCELLANEOUS UNITS			
R	OHMS	W	PART NO.	C	CAPACITY	VOLT	PART NO.	T	TYPE	PART NO.	SYMBOL	DESCRIPTION	PART NO.		
3	100K	1/4	17-2068	1	TWO-GANG			1	ANTENNA COILS	00-18094	L	DIAL LIGHT BULB - MAZDA 44	17-13905		
9	1M	1/4	17-2080	2	VARIABLE		17-15990	2	OSCILLATOR COILS		P1	SPEAKER PLUG (PART OF SPEAKER)			
23	250K	1/4	17-3011	5	.05	200	17-14015	3	FIRST I.F. COIL	00-18095	P2	LINE CORD & PLUG ASSEMBLY	17-15791E		
27	2M	1/4	17-4788	6	.002	800	17-2083	4	SECOND I.F. COIL	00-18096	S1	SPEAKER SOCKET	17-13249		
29	50K	1/4	17-2060	33	.00005	600	17-14047	5	OUTPUT TRANS.	00-18093	SPK	SPEAKER	17-15980		
161	15K	1/2	17-14267	48	.00025	800	17-4207	6	POWER TRANS.	00-18099	SW1	AC LINE SWITCH (PART OF NO.17-18098)			
162	280	1/2	17-14268	59	.01	400	17-14615				SW2	BAND SWITCH	17-18088		
163	30	1/4	17-14269	104	.01	200	17-4206								
164	500K	VC	17-18097	121	.02	200	17-14257								
165	100K	VC	17-18098	122	.01	400	17-2189								
166	40	1/4	17-14270	140	.02	400	17-2214								
				156	.05	400	17-4397								
				167A	10 MFD.	450									
				167B	10 MFD.	450	17-14233								
				167C	20 MFD	25									
				170	.005	400	17-14237								
				171	.1	400	17-14238								
				189	.0004-.0008	PAD.	17-14266								

I.F. PEAK 455 K.C.
BROADCAST BALANCE AT 1400 K.C.
PAD AT 600 K.C.
SHORT WAVE BALANCE AT 15 M.C.
CHECK AT 7 M.C.

NOBLITT-SPARKS INDUSTRIES, INC.,
COLUMBUS, INDIANA.

I.F. PEAK 455 K.C.
BROADCAST BALANCE AT 1400 K.C.
PAD AT 600 K.C.
SHORT WAVE BALANCE AT 15 M.C.
CHECK AT 7 M.C.

NOBLITT-SPARKS INDUSTRIES, INC.,
COLUMBUS, INDIANA.