

FULL WAVE RECTIFIER

FW4-500

Directly-heated power rectifier
for outputs up to 500 V at 250mA.

HEATER

V_f	4.0	V
I_f	3.0	A

TYPICAL OPERATING CONDITIONS



Anode Voltage <u>V.rms.</u>	Capacitance of Reservoir Condenser <u>(μF)</u>	Minimum Value of Series Protective Resistance. <u>(ohms)</u>
2x500	16	200
2x350	32	150

LIMITING VALUES


Max. Anode Voltage (rms)	2x500	V.rms
Max. Rectified Current	250	mA
Max. Peak Inverse Voltage	1600	V

DIMENSIONS

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS

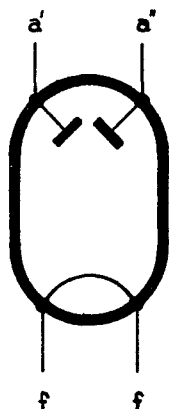

4-PIN BASE

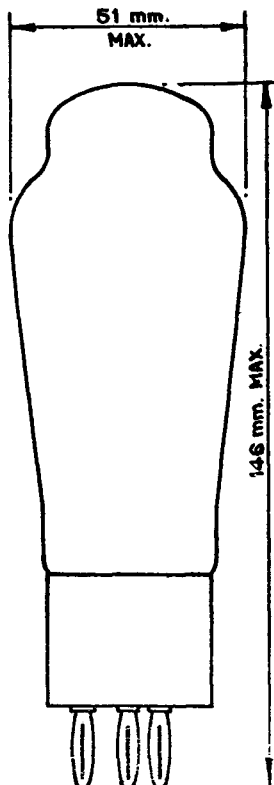

FW4-500

FULL WAVE RECTIFIER

Directly-heated power rectifier
for outputs up to 500 V at 250mA.

