

MODEL 56TP

TUBE COMPLEMENT:

FREQUENCY RANGE: American Broadcast Band: 540 to 1600 kc. (Selector switch at A.)

Overseas Short-wave Band: 5.8 to 15 mc. (Selector switch at 0.)

INTERMEDIATE FREQUENCY: 455 kc.

POWER SUPPLY: 60 cycle a.c. only.

VOLTAGE RATING: 105-125 volts.


POWER CONSUMPTION: 35 watts nominal.

POWER OUTPUT: 1.5 watts minimum.


DIAL BULB: Type 47, 6.3 volts, .15 amp.

NOTE: 9


OSCILLATOR GRID VOLTAGES		
BAND	FREQUENCY	VOLTS
AMERICAN	540 KC	- 4.9
OVERSEAS	5.7 MC	- 3.8

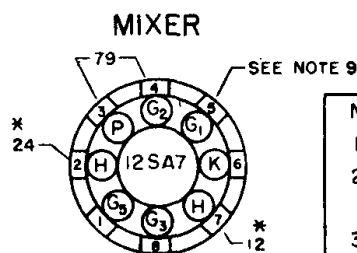



I.F. AMPLIFIER



DET. - A.V.C. - 1st. A.F.



RECTIFIER

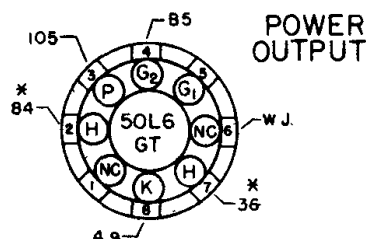

VOLTAGE CHART

NOTES:

1. TUBE SOCKETS ARE BOTTOM VIEWS.
2. MEASURE VOLTAGES FROM SOCKET LUG TO -B (PIN 3 ON THE 12SK7).
3. VOLTAGES AS MEASURED WITH AN ELECTRONIC VOLTMETER.
4. WJ - WIRING JUNCTION.
5. NC - NO CONNECTION
6. * - AC VOLTAGES
7. VOLTAGE TOLERANCE, 10 %
8. LINE VOLTAGE 117V, 60 ~ AC

The material presented on this page has been prepared by and is printed through the courtesy of THE CROSLY CORP.

