


CROSLY RADIO CORP.

MODEL 123

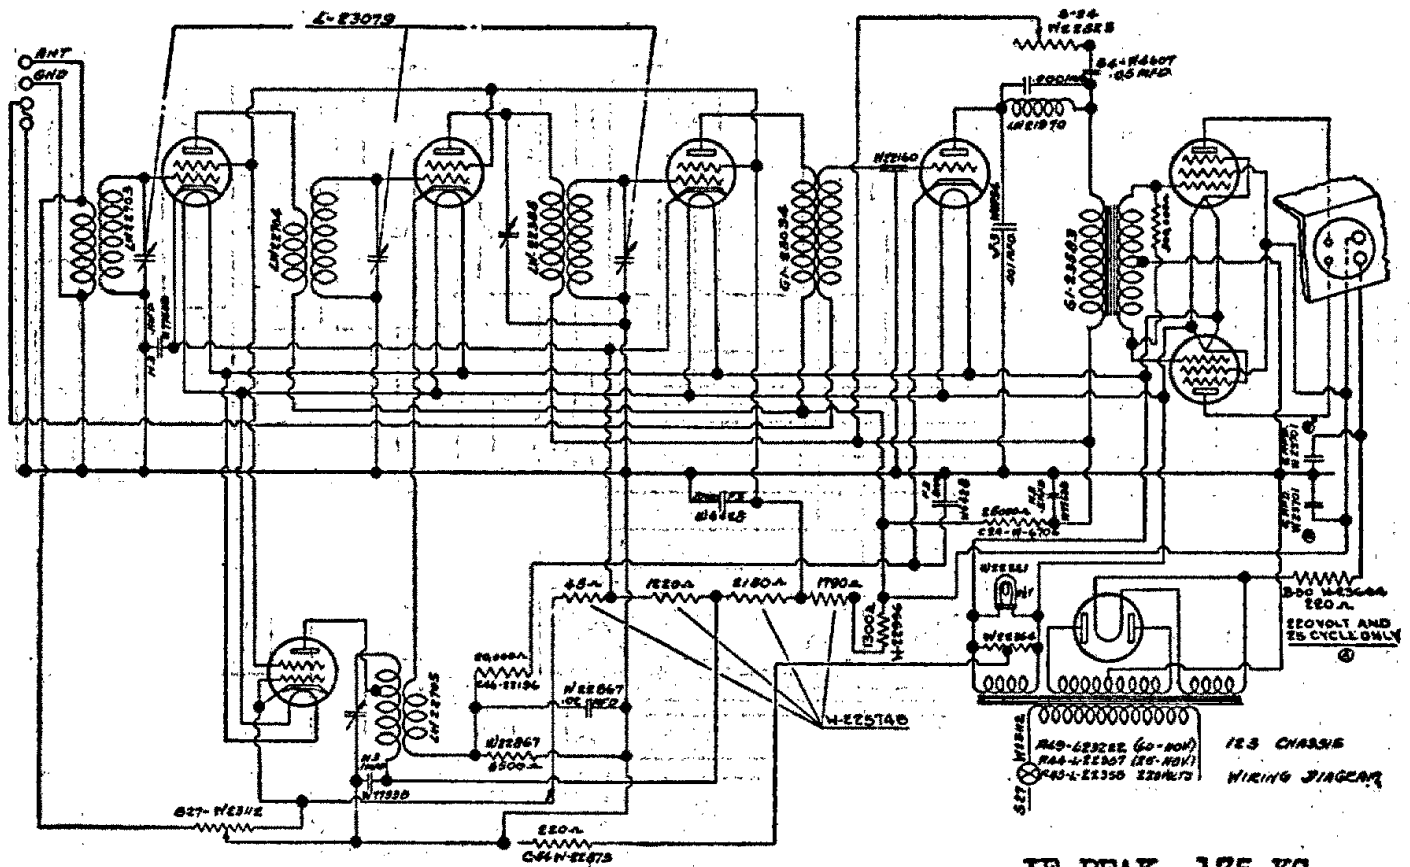




-Circuit Diagram Model 123

IF PEAK 175 KC

Voltage Limits

Filament Voltages	
R. F., First Detector, Oscillator and Second Detector	2.2 to 2.4
I. F. Amplifier	2.2 to 2.5
Output	2.3 to 2.6
Rectifier	4.9 to 5.3
Plate Voltages	
R. F. and I. F. Amplifiers	215 to 245
First Detector	170 to 190
Oscillator	32 to 42
Second Detector	160 to 180
Output	190 to 230
Rectifier, D. C. voltage	290 to 330
Screen Grid Voltages	
Oscillator, R. F. and I. F. Amplifiers	90 to 110
First Detector	80 to 100
Output	200 to 240
Control Grid Voltages	
R. F. and I. F. Amplifiers	1.5 to 2.5
First Detector	7 to 9
Second Detector	18 to 22
Output	13 to 16

Model 123

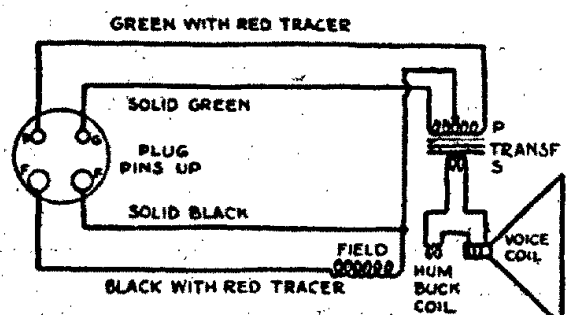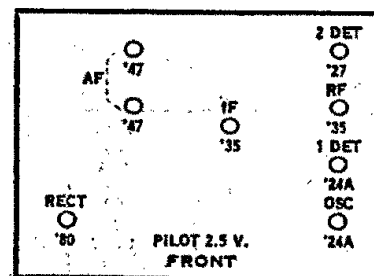

SPEAKER 287 FOR CHASSIS 123: