



**MODEL 10**  
**MODELS 25 to 28 incl.**

ALIGNMENT-SAME AS FOR MODEL K-25(below)

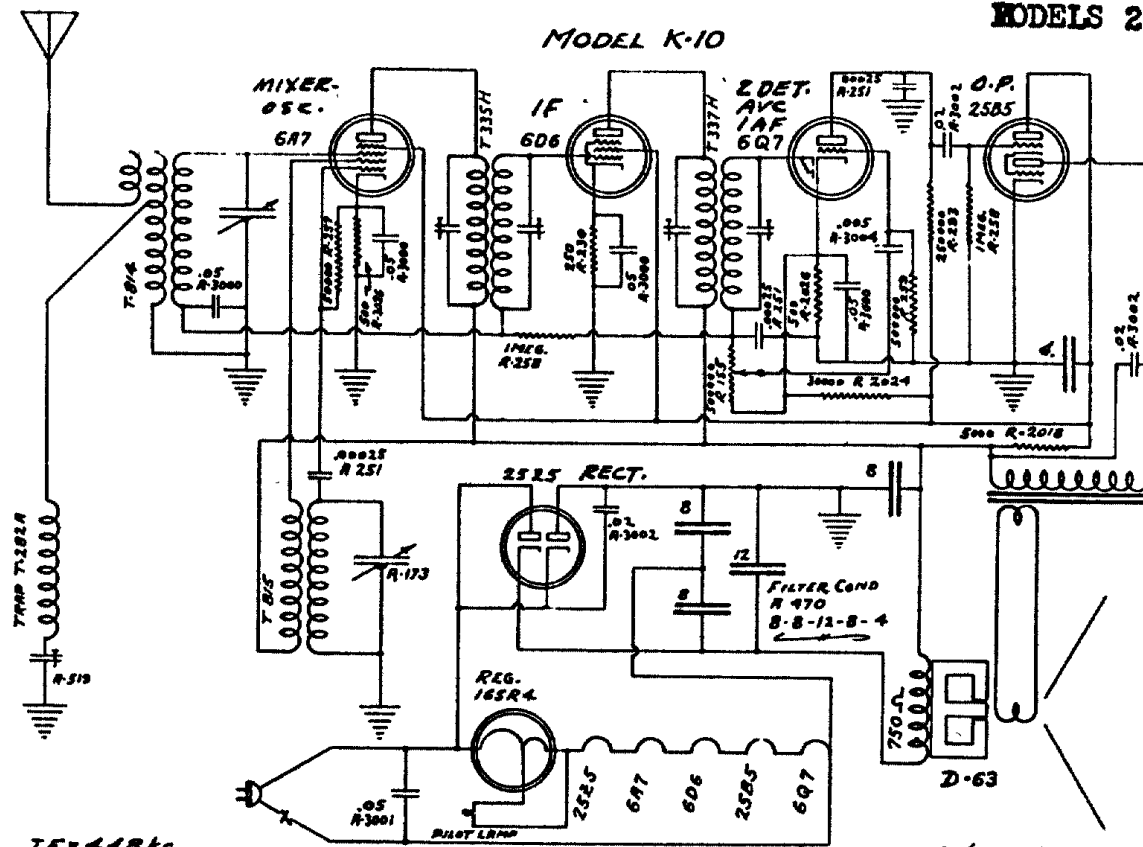

<u>TUBE</u>	<u>POSITION</u>	<u>EK</u>	<u>ESU</u>	<u>EGS</u>	<u>EGA</u>	<u>EP</u>	<u>EP INPUT</u>
6A7	Mixer-Osc.	4		90	150	150	
6D6	I.F.	2.5	2.5	90		150	
6Q7M	2nd Det. AVC-AF	1.3				*-50 <sup>THRU</sup> <sub>250A</sub>	
25B5	Output	0				150	90
25Z5	Rectifier	200				118AC	

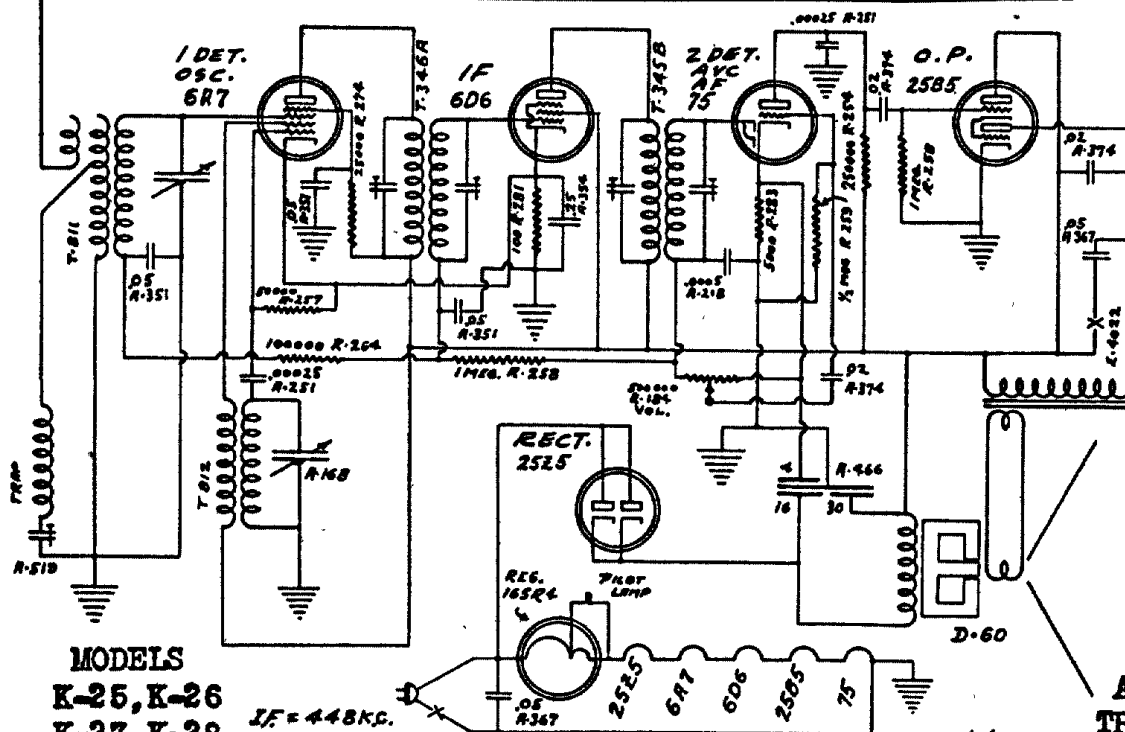

<u>TUBE</u>	<u>POSITION</u>	<u>EK</u>	<u>IGA</u>	<u>ESU</u>	<u>EGS</u>	<u>EP</u>	<u>EP INPUT</u>
6A7	Det.-Osc.	*-1.8	100		60	100	
6D6	I.F.	*-1.8		*-1.8	100	100	
75	2nd Det.	*-.6				-40	
	A.V.C.-A.F.						
25B5	Output	0				90	1--
25Z5	Rectifier	100				118 AC	

ADJUST I.F. AND WAVE  
TRAP AT 448 KC.  
ALIGN BROADCAST-BAND  
TRIMMERS AT 1400 KC.  
NO PADDER AT 600 KC,  
bend plates if ad-  
justment is needed.