

JEWEL RADIO CORP.

PORTABLE RADIO


Model 5310

OSC. CONVERTER

I. F. AMP.

DET.-A.V.C. AUDIO

AUDIO OUTPUT

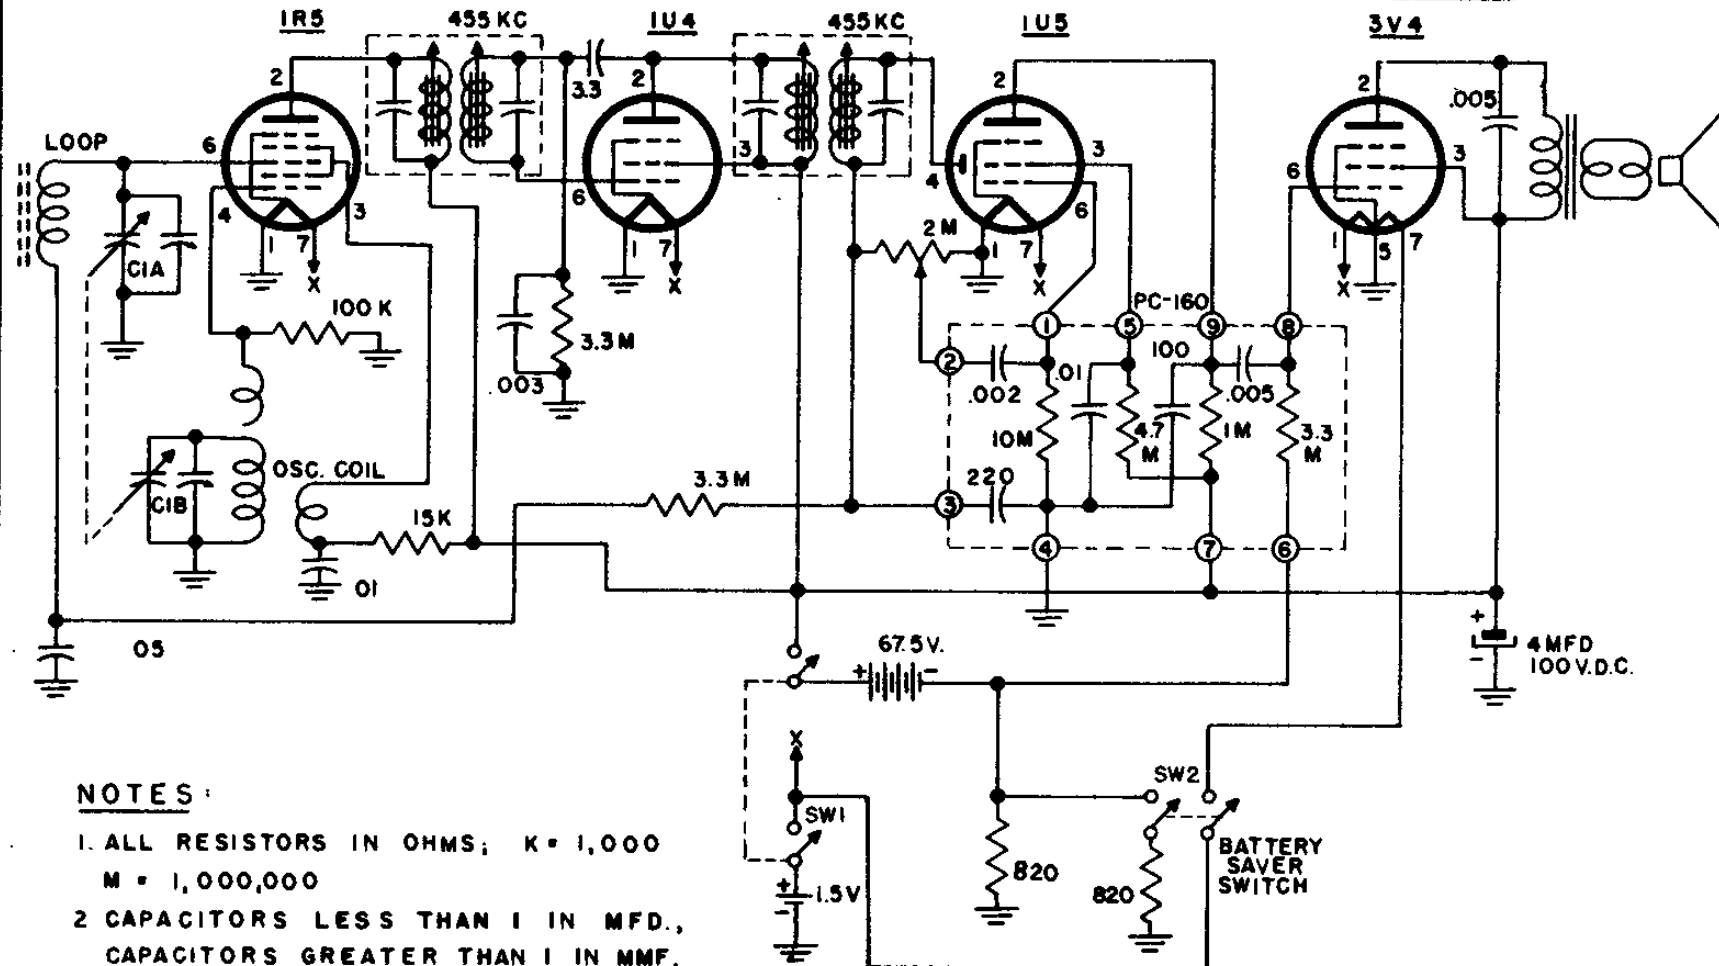

Signal Generator	Frequency	455 Kc	1680 Kc	1500 Kc
	Coupling Capacitor	0.1 Mfd	0.1 Mfd	
	Connection to Receiver	IR5 Pin 6 Grid	IR5 Pin 6 Grid	Radiating Loop
	Ground Connection	Chassis	Chassis	
Capacitor Setting		Full Capacitance	Minimum Capacitance	1500 Kc
Adjust Trimmers to Maximum Output		Input and Output I. F. Slugs	Oscillator Trimmer	Antenna Trimmer