

GENERAL ELECTRIC CO.

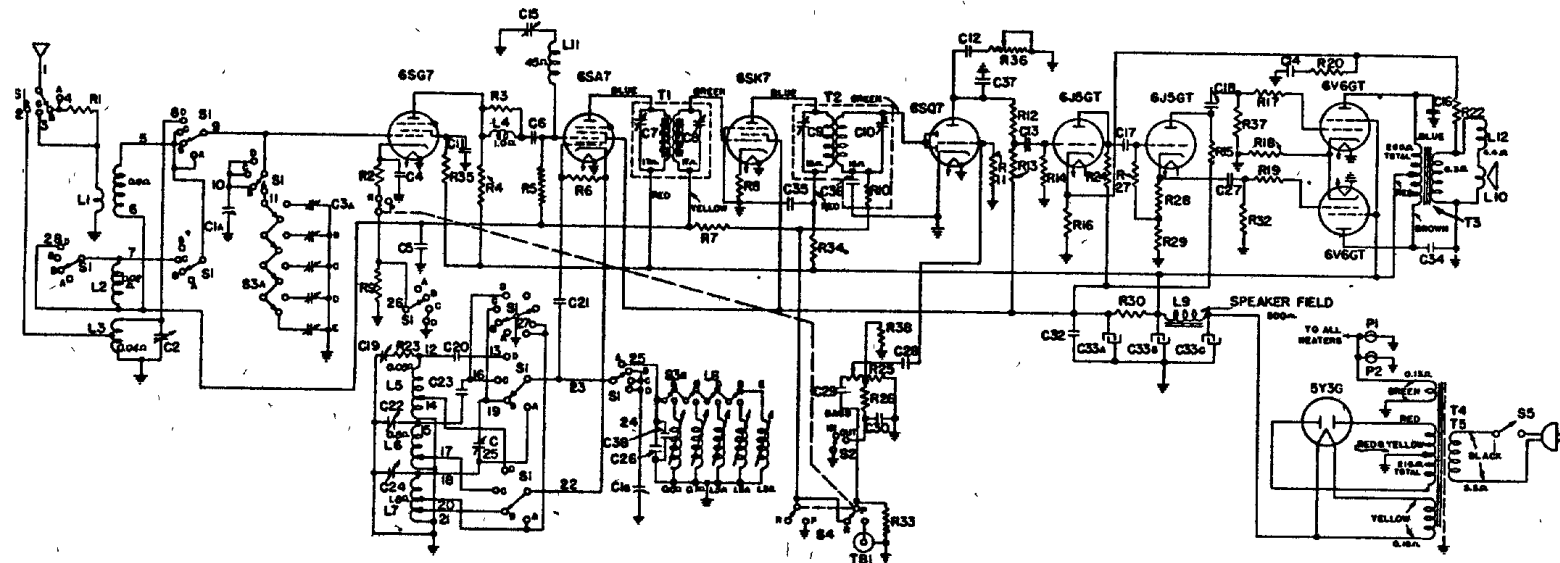


Fig. 1. Schematic Diagram

MODELS L-915W, L-916

IF 455 K.C.

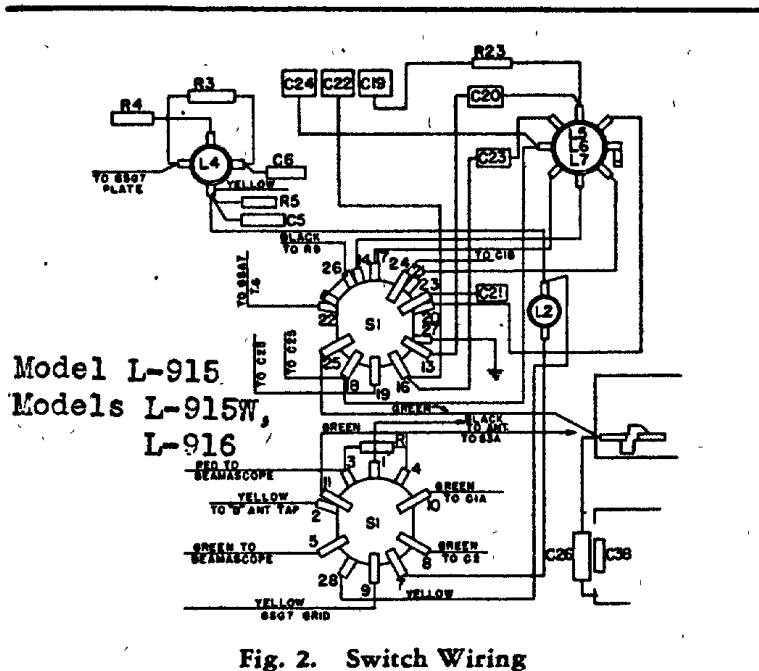


Fig. 2. Switch Wiring

Stock No.	Symbol	Description	List Price
*RC-7063	C1a, 1b	CONDENSER—Tuning condenser...	\$2.00
*RC-6537	C2	CAPACITOR—"D" band trimmer...	.25
*RT-886	C-3a, b, c, d, e	TRIMMER STRIP—Station selector trimmer strip...	.95
*RC-092	C-4	CAPACITOR—.05 mfd. 600V paper...	.30
*RC-096	C-5	CAPACITOR—.01 mfd. 200-V paper...	.30
*RC-235	C-6	CAPACITOR—100 mmf. mica...	.25
*RC-048	C-11	CAPACITOR—.02 mfd. 600-V paper...	.30
*RC-023	C-12	CAPACITOR—.005 mfd. 600-V paper...	.25
*RC-048	C-13, 14	CAPACITOR—.02 mfd. 600-V paper...	.30
*RC-191	C-16	CAPACITOR—.002 mfd. 1000-V paper...	.35
*RC-060	C-17, 18	CAPACITOR—.03 mfd. 600-V paper...	.25
*RT-887	C-19	TRIMMER STRIP—"D" band osc. trimmer (Part of C-22, 24)...	.40
*RC-396	C-20	CAPACITOR—5600 mmf. mica...	.45
*RC-216	C-21	CAPACITOR—47 mmf. mica...	.25
*RT-887	C-22	TRIMMER STRIP—"C" band osc. trimmer (Part of C-19, 24)...	.40
*RC-349	C-23	CAPACITOR—2000 mmf. mica...	.30
*RT-887	C-24	TRIMMER STRIP—"B" band osc. trimmer (Part of C-19, 22)...	.40
*RC-6556	C-25	CAPACITOR—"B" band padder...	.30
*RC-304	C-26	CAPACITOR—720 mmf. silvered mica...	.30
*RC-060	C-27	CAPACITOR—.03 mfd. 600-V paper...	.25
*RC-048	C-28	CAPACITOR—.02 mfd. 600-V paper...	.30

* Used on previous receivers.

Stock No.	Symbol	Description	List Price
*RC-023	C-29	CAPACITOR—.005 mfd. 600-V paper	\$0.25
*RC-011	C-30	CAPACITOR—.002 mfd. 600-V paper	.25
*RC-039	C-32	CAPACITOR—.01 mfd. 600-V paper...	.25
RC-5204	C-33a	CAPACITOR—10 mfd. 300 V dry electrolytic	1.30
	C-33b	CAPACITOR—15 mfd. 400 V dry electrolytic	
	C-33c	CAPACITOR—15 mfd. 400 V dry electrolytic	
*RC-191	C-34	CAPACITOR—.002 mfd. 1000-V paper	.35
*RC-039	C-35	CAPACITOR—.01 mfd. 600-V paper...	.25
*RC-252	C-36	CAPACITOR—200 mmf. mica...	.30
*RC-249	C-37	CAPACITOR—220 mmf. mica...	.25
*RC-327	C-38	CAPACITOR—82 mmf., compensating cap.	.25
*RQ-1259	R-1	RESISTOR—1000 ohm 1/4-W carbon	.70-5
*RQ-1243	R-2	RESISTOR—220 ohm 1/4-W carbon	.70-5
*RQ-1283	R-3	RESISTOR—10,000 ohm 1/4-W carbon	.70-5
*RQ-1275	R-4	RESISTOR—4700 ohm 1/4-W carbon...	.70-5
*RQ-1299	R-5	RESISTOR—47,000 ohm 1/4-W carbon	.70-5
*RQ-1291	R-6	RESISTOR—22,000 ohm 1/4-W carbon	.70-5
*RQ-1339	R-7	RESISTOR—2.2 megohms 1/4-W carbon	.70-5
*RQ-1239	R-8	RESISTOR—150 ohm 1/4-W carbon...	.70-5
*RQ-1251	R-9	RESISTOR—470 ohm 1/4-W carbon...	.70-5
*RQ-1299	R-10	RESISTOR—47,000 ohm 1/4-W carbon	.70-5
*RQ-1355	R-11	RESISTOR—10 megohm 1/4-W carbon	.70-5
*RQ-1308	R-12	RESISTOR—100,000 ohm 1/4-W carbon	.70-5
*RQ-1317	R-13	RESISTOR—270,000 ohm 1/4-W carbon	.70-5
*RQ-1323	R-14	RESISTOR—470,000 ohm 1/4-W carbon	.70-5
*RQ-1295	R-15	RESISTOR—33,000 ohm 1/4-W carbon	.70-5
*RQ-1283	R-16	RESISTOR—10,000 ohm 1/4-W carbon	.70-5
*RQ-1259	R-17	RESISTOR—1000 ohm 1/4-W carbon...	.70-5
*RQ-1435	R-18	RESISTOR—200 ohm 1-W carbon...	.15
*RQ-1259	R-19	RESISTOR—1000 ohm 1/4-W carbon...	.70-5
*RQ-1265	R-20	RESISTOR—1800 ohm 1/4-W carbon...	.70-5
*RQ-1283	R-22	RESISTOR—10,000 ohm 1/4-W carbon	.70-5
*RQ-1221	R-23	RESISTOR—27 ohm 1/4-W carbon...	.70-5
*RQ-1309	R-24	RESISTOR—120,000 ohm 1/4-W carbon	.70-5
*RV-137	R-25	VOLUME CONTROL—2 meg. volume control	.95
*RQ-1311	R-26	RESISTOR—150,000 ohm 1/4-W carbon	.70-5
*RQ-1323	R-27	RESISTOR—470,000 ohm 1/4-W carbon	.70-5
*RQ-1269	R-28	RESISTOR—2700 ohm, 1/4-W carbon	.70-5
*RQ-1295	R-29	RESISTOR—30,000 ohm, 1/4-W carbon	.70-5
*RQ-685	R-30	RESISTOR—12,000 ohm 2-W carbon	.25
*RQ-1323	R-32	RESISTOR—470,000 ohm 1/4-W carbon	.70-5
*RQ-1315	R-33	RESISTOR—220,000 ohm 1/4-W carbon	.70-5
*RQ-1259	R-34	RESISTOR—1000 ohm 1/4-W carbon...	.70-5
*RQ-1299	R-35	RESISTOR—47,000 ohm 1/4-W carbon	.70-5
*RT-724	R-36, S5	TONE CONTROL—Treble tone control and power switch...	1.45