


MODEL LC648W GENERAL ELECTRIC CO.

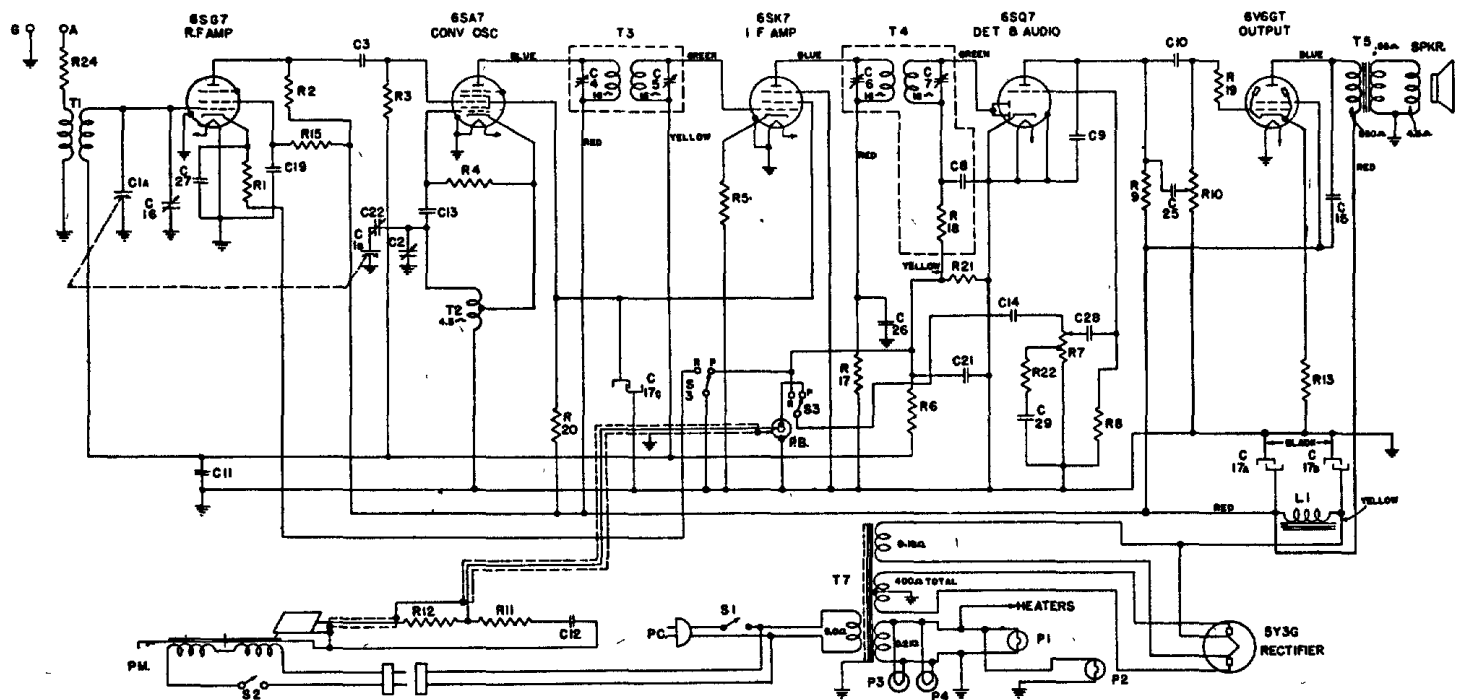

FOR G.E. LRP-162 and LRP-170 RECORD CHANGERS, SEE RIDER'S "AUTOMATIC RECORD CHANGERS AND RECORDERS"

Our Cat. No.	Symbol	Description	List Price
*RC-7061 RT-891	C-1a, 1b C-2	CONDENSER—Tuning condenser TRIMMER STRIP—"B" Osc. Trimmer strip (combined with C-16, 22)	\$2.00 .55
*RC-235	C-3	CAPACITOR—100 mmf. mica	.25
*RC-252	C-8	CAPACITOR—200 mmf. mica	.30
*RC-242	C-9	CAPACITOR—150 mmf. mica	.25
*RC-048	C-10	CAPACITOR—.02 mfd. 600 V paper	.30
*RC-072	C-11	CAPACITOR—.05 mfd. 200 V paper	.25
*RC-011	C-12	CAPACITOR—.002 mfd. 600 V paper (Used only with LRP-170 record player)	.25
*RC-216	C-13	CAPACITOR—47 mmf. mica	.25
*RC-023	C-14	CAPACITOR—.005 mfd. 600 V paper	.25
*RC-055	C-15	CAPACITOR—.003 mfd. 600 V paper	.25
*RT-891	C-16	TRIMMER STRIP—Ant. trimmer (Part of C-2, 22)	.55
RC-5212	C17a, 17b, 17c	CAPACITOR—10-15-10 mfd. electrolytic	1.10
*RC-039	C-19	CAPACITOR—.01 mfd. 600 V paper	.25
*RC-235	C-21	CAPACITOR—100 mmf. mica	.25
*RT-891	C-22	TRIMMER STRIP—"B" Band padder (Combined with C 2, C-16)	.55
*RC-023	C-25	CAPACITOR—.005 mfd. 600 V paper	.25
*RC-047	C-26, 27, 28	CAPACITOR—.01 mfd. 400 V paper	.20
*RC-017	C-29	CAPACITOR—.0042 mfd. 600 V paper	.25
*RQ-1247	R-1	RESISTOR—330 ohm, 1/4-W carbon	.70-5
*RQ-1271	R-2	RESISTOR—3300 ohm, 1/4-W carbon	.70-5
*RQ-1299	R-3	RESISTOR—47,000 ohm, 1/4-W carbon	.70-5
*RQ-1291	R-4	RESISTOR—22,000 ohm, 1/4-W carbon	.70-5
*RQ-1239	R-5	RESISTOR—150 ohm, 1/4-W carbon	.70-5
*RQ-1339	R-6	RESISTOR—2.2 megohm, 1/4-W carbon	.70-5
*RV-135	R-7	VOL. CONTROL—2 meg. volume control	.95
*RQ-1355	R-8	RESISTOR—10.0 megohm, 1/4-W carbon	.70-5
*RQ-1323	R-9	RESISTOR—470,000 ohm, 1/4-W carbon	.70-5
*RT-722	R-10, S1	TONE CONTROL—0.5 meg. control and power switch	1.45
*RQ-1299	R-11, 12	RESISTOR—47,000 ohm, 1/4-W carbon (Used only with record player LRP-170)	.70-5
*RQ-1313	R-11	RESISTOR—180,000 ohm, 1/4-W carbon (Used only with record player LRP-162)	.70-5
*RQ-1315	R-12	RESISTOR—220,000 ohm, 1/4-W carbon (Used only with record player LRP-162)	.70-5
*RQ-1247	R-13	RESISTOR—330 ohm, 1/4-W carbon	.70-5
*RQ-1299	R-15	RESISTOR—47,000 ohm, 1/4-W carbon	.70-5
*RQ-1259	R-17	RESISTOR—1000 ohm, 1/4-W carbon	.70-5
*RQ-1299	R-18	RESISTOR—47,000 ohm, 1/4-W carbon	.70-5
*RQ-1259	R-19	RESISTOR—1000 ohm, 1/4-W carbon	.70-5
*RQ-687	R-20	RESISTOR—15,000 ohm, 2-W carbon	.35
*RQ-1323	R-21	RESISTOR—470,000 ohm, 1/4-W carbon	.70-5
*RQ-1303	R-22	RESISTOR—88,000 ohm, 1/4-W carbon	.70-5
*RQ-1259	R-24	RESISTOR—1000 ohm, 1/4-W carbon	\$0.70-5
*RL-590	T-1	BEAM-A-SCOPE—Built-in loop antenna	1.25
*RL-2072	T-2	COIL—Osc. coil, Band "B"	.30
*RT-3005	T-3	TRANSFORMER—1st IF transformer	.90
*RT-3006	T-4	TRANSFORMER—2nd IF transformer	1.15
RT-4033	T-5	TRANSFORMER—Output transformer	1.25
RT-0629	T-7	TRANSFORMER—60-cycle power transformer	5.05
*RS-3141	S-3	SWITCH—Phono-radio switch	.85
RS-1096	SPKR	SPEAKER—12-in. EM speaker	8.05

Electrical Rating

Rating "A6"—110-125 volts, 60 cycles, 80 watts.
Rating "A5"—110-125 volts, 50 cycles, 80 watts.

Tuning Frequency Range

"BC" Band.....540-1720 KC

Intermediate Frequency

.....455 KC

Electrical Power Output



Undistorted.....2.5 watts
Maximum.....4.5 watts

Loudspeaker—EM Dynamic

Outside cone diameter.....12 inches
Voice coil impedance (400 cycles).....5.0 ohms

Phonograph Mechanism

Type changer.....Models LRP-162 or LRP-170
Type pickup.....Crystal
Turntable speed.....78 R/P/M

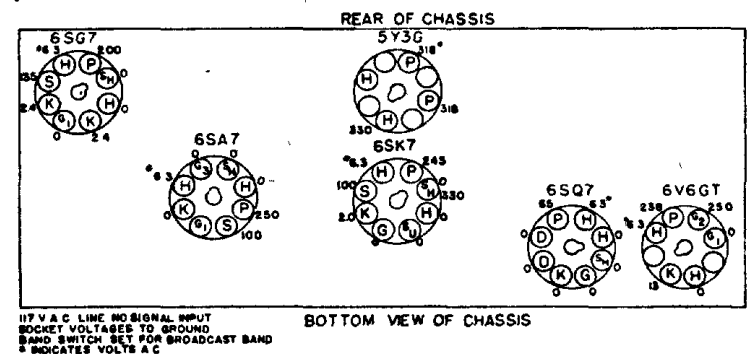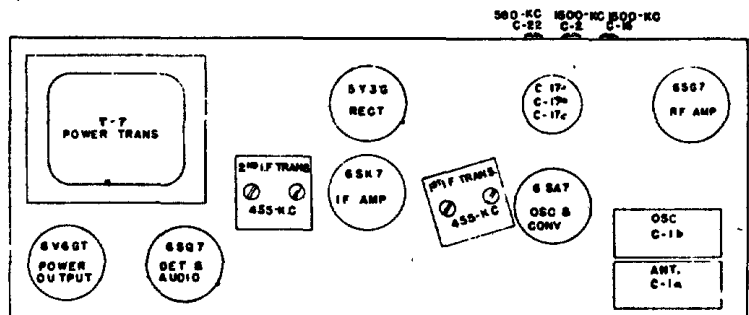

* Used on previous receiver.