
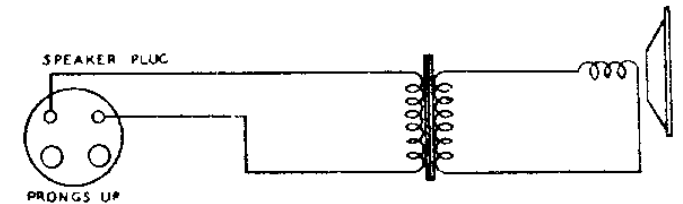
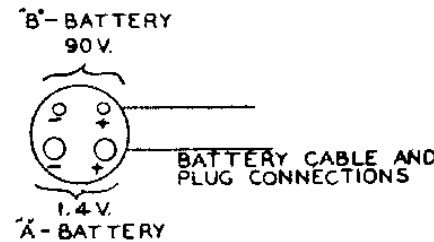
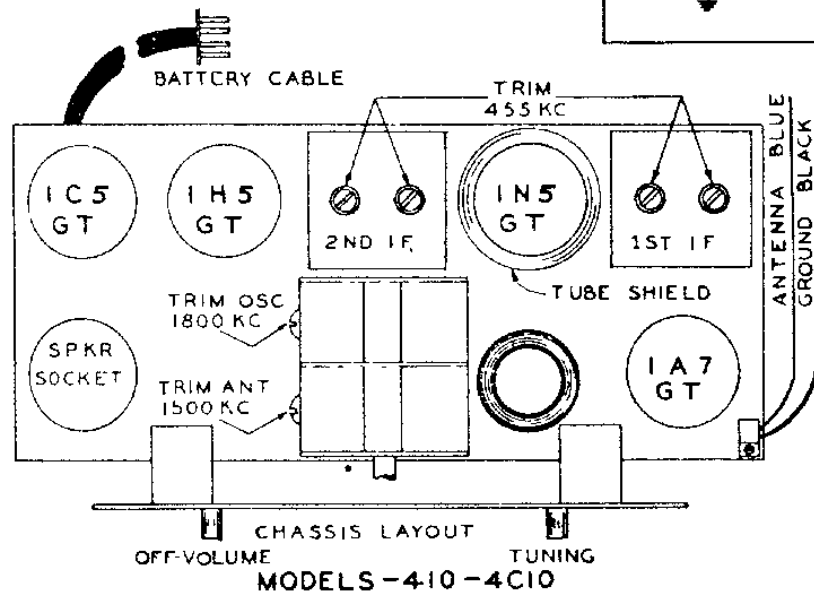


SCHEMATIC DIAGRAM MODELS-410-4C10

GRISBY-GRUNOW MAJESTIC

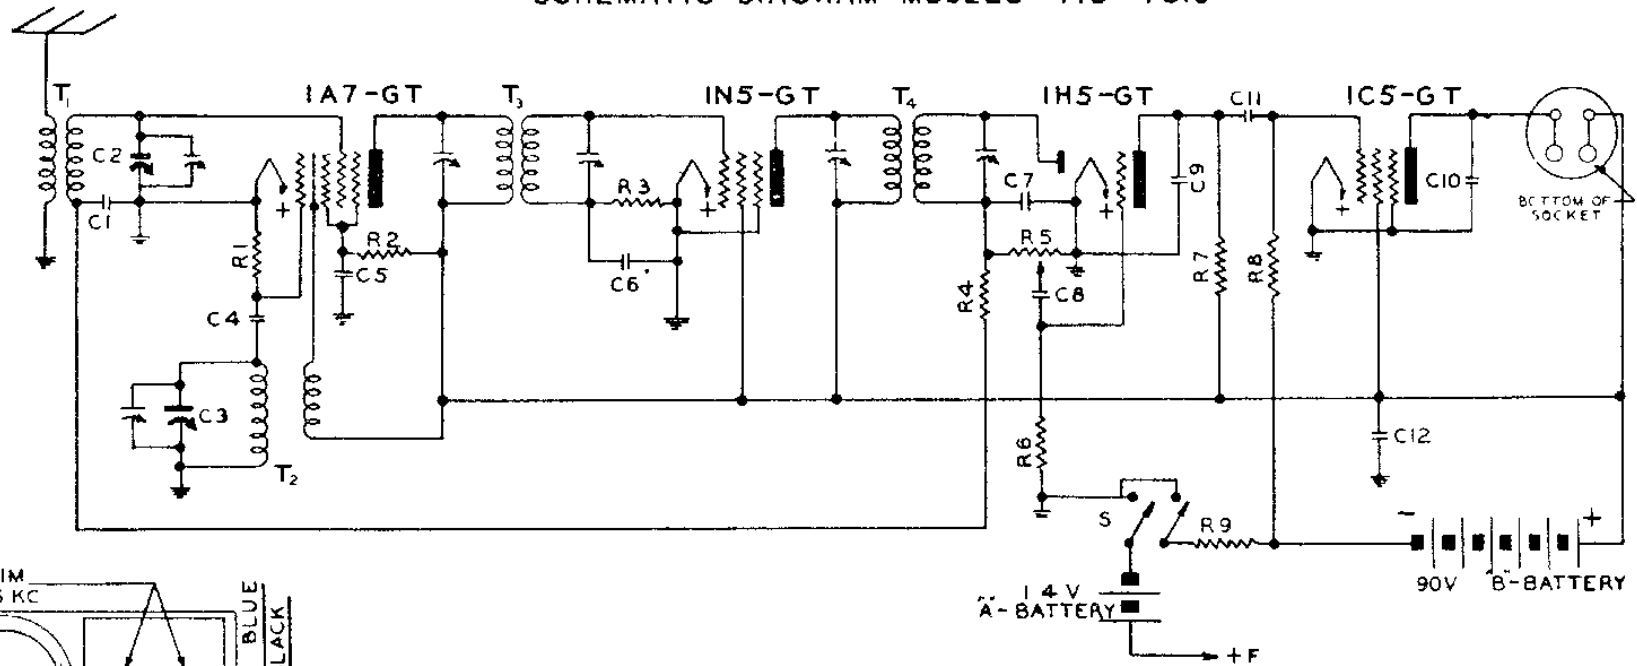

Schematic Location

Part No.	Description
C2,C3	Y-CV-26 Variable Condenser
C1,C5	C-15752 Tubular cond. .05 mfd. 200V
C6,C8,C11	C-15763 Tubular cond. .01 mfd. 200V
C10	C-15774 Tubular cond. .002 mfd. 400V
C12	CE-35 8 mfd. 150V Electrolytic cond.
C4,C7,C9	CM-31 Mica cond. 100 mmfd. 30%
T1	Y-CS 62 Antenna Coil
T2	Y-OSA-11 Oscillator Assembly
T3	Y-CI-29 1st I. F. Assembly
T4	Y-CI-30 2nd I. F. Assembly

Schematic Location

Part No.	Description
R1	R-15523 Carbon res. 200Kohm 1/4 W 20%
R2	R-44 Carbon res. 70K ohm 1/4 W 10%
R3,R4	R-15500 Carbon resistor 2meg 1/4 W 20%
R6	R-15559 Carbon resistor 3meg 1/4 W 20%
R7	R-15520 Carbon res. 500Kohm 1/4 W 20%
R8	R-15517 Carbon resistor 1meg 1/4 W 20%
R9	R-72 Carbon res. 600 ohm 1/4 W 20%
R5	Y-VC-43 Volume Control