
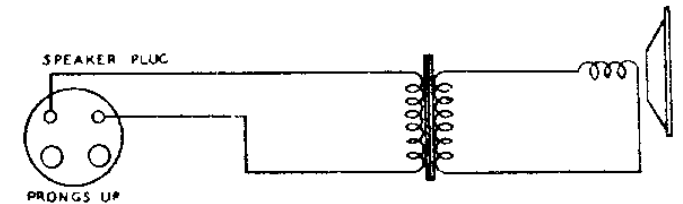
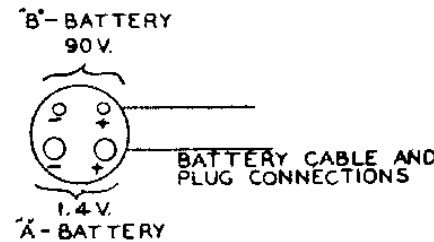
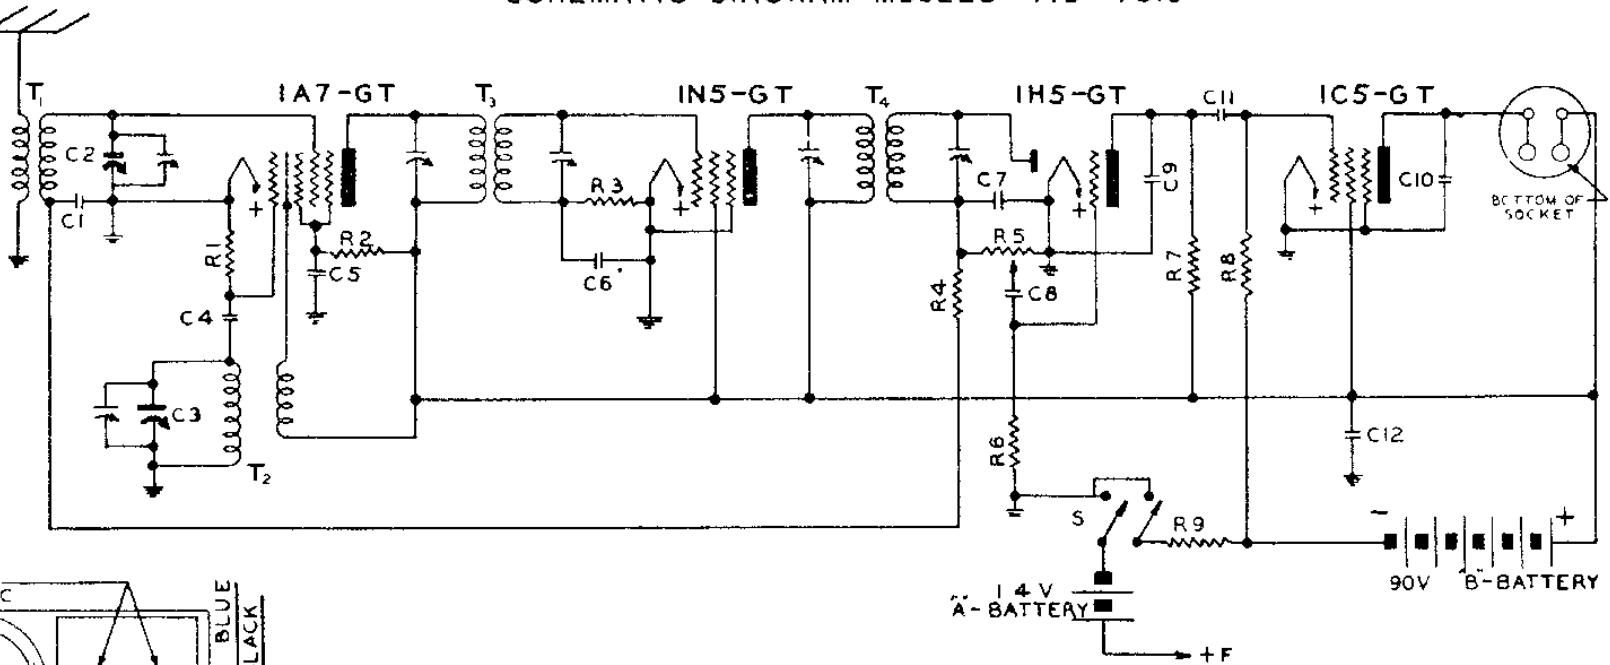


# SCHEMATIC DIAGRAM MODELS-410-4C10

## GRISBY-GRUNOW MAJESTIC

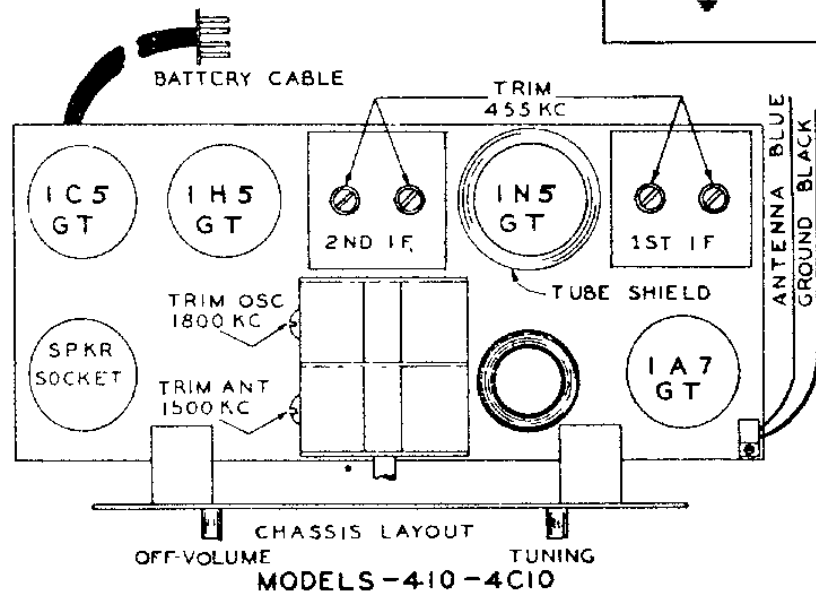

### Schematic Location

### Part No.

### Description

C2,C3	Y-CV-26	Variable Condenser
C1,C5	C-15752	Tubular cond. .05 mfd. 200V
C6,C8,C11	C-15763	Tubular cond. .01 mfd. 200V
C10	C-15774	Tubular cond. .002 mfd. 400V
C12	CE-35	8 mfd. 150V Electrolytic cond.
C4,C7,C9	CM-31	Mica cond. 100 mmfd. 30%
T1	Y-CS 62	Antenna Coil
T2	Y-OSA-11	Oscillator Assembly
T3	Y-CI-29	1st I. F. Assembly
T4	Y-CI-30	2nd I. F. Assembly

### Schematic Location

### Part No.

### Description

R1	R-15523	Carbon res. 200Kohm 1/4 W 20%
R2	R-44	Carbon res. 70K ohm 1/4 W 10%
R3,R4	R-15500	Carbon resistor 2meg 1/4 W 20%
R6	R-15559	Carbon resistor 3meg 1/4 W 20%
R7	R-15520	Carbon res. 500Kohm 1/4 W 20%
R8	R-15517	Carbon resistor 1meg 1/4 W 20%
R9	R-72	Carbon res. 600 ohm 1/4 W 20%
R5	Y-VC-43	Volume Control