
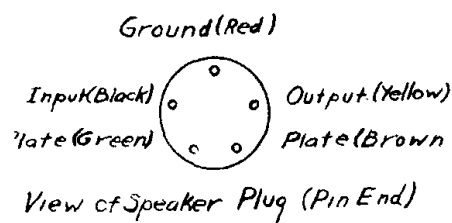


I.F. 456 KC.

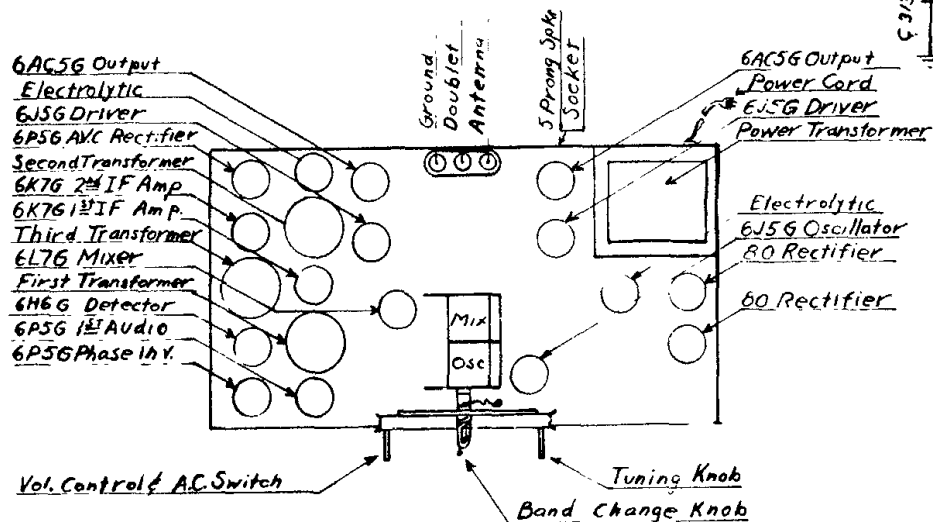

In long wave sets,
the coverage of B
Band is from 125 to
350 KC.

Model 14-Z-9
Midwest Radio Corp.
909 Broadway
Cincinnati, Ohio

OPERATING VOLTAGES

No Signal, Volume Control Turned Off

Line Voltage 117 Volts 60 Cycles
Meter Used 20000 Ohms per Volt

TUBE	PLATE	SCREEN	SUP.	CATH.	HEATER
6L7 Mixer	245	85		2.4	6.0
6V5 Osc.	140			0	6.0
6K7 1st IF	245	85	4.4	4.4	6.0
6K7 2nd IF	245	85	4.4	4.4	6.0
6P5 AVC RECT.	0				6.0
6H6 2nd DET.	0				6.0
6P5 1st AF	150			9.2	6.0
6V5 Drivers	245			10	6.0
6P5 Inverter	150			9.2	6.0
6AC5 Drivers	335			0	6.0
80 Rectifiers	340 (AC)			350	4.8

A9 Antenna Strip
C26 Cable Plug (AC)
C211 36 Gang Trimmer
C226 IF Padder
C232 Osc Padder
C268 24 MFD 300 V.
C269 40 MFD 350 V.
C291 250 Mica Dual
C277 25 MFD Mica
C286 3000 ..
C287 200 ..
C289 1200 ..
C302 .05 MFD 200 V.
C309 .02 MFD 400 V.
C313 .25 ..
C314 .05 ..
C349 2 Gang Variable
C363 Control Volume WS
C401 Fish Line Cord
K24 Knob 1 inch
P46 Pilot Lite 68K
R11 200 Ohm 1/2 Watt
R12 500 ..
R15 5000 ..
R17 25000 ..

R18 3000 Ohm 1/2 Watt
R19 100M ..
R21 500M ..
R22 1 Meg Ohm ..
R23 3 ..
R25 40M Ohm 1/2 W.
R72 15M .. 1 W
S319 Spring Belt Ten.
S301 Speaker 8"
S333 Pointer
S407 Coil Switch
T73 Power Trans.
T161 1st IF Trans.
T162 2nd ..
T165 3rd ..
C285 2000 MMfd
C280 100 ..