


SEARS-ROEBUCK & CO.

Model 40	RF1	RF2	Det.	1st Audio	251
Plate Voltage D.C.	135	135	80	90	130
Screen Voltage D.C.	67	67	25		
Filament Voltage D.C.	2.0	2.0	2.0	2.0	2.0
Control Grid Voltage D.C.	3	3		4.5	22.5

MODEL 1290,1300
MODEL 1292,1302

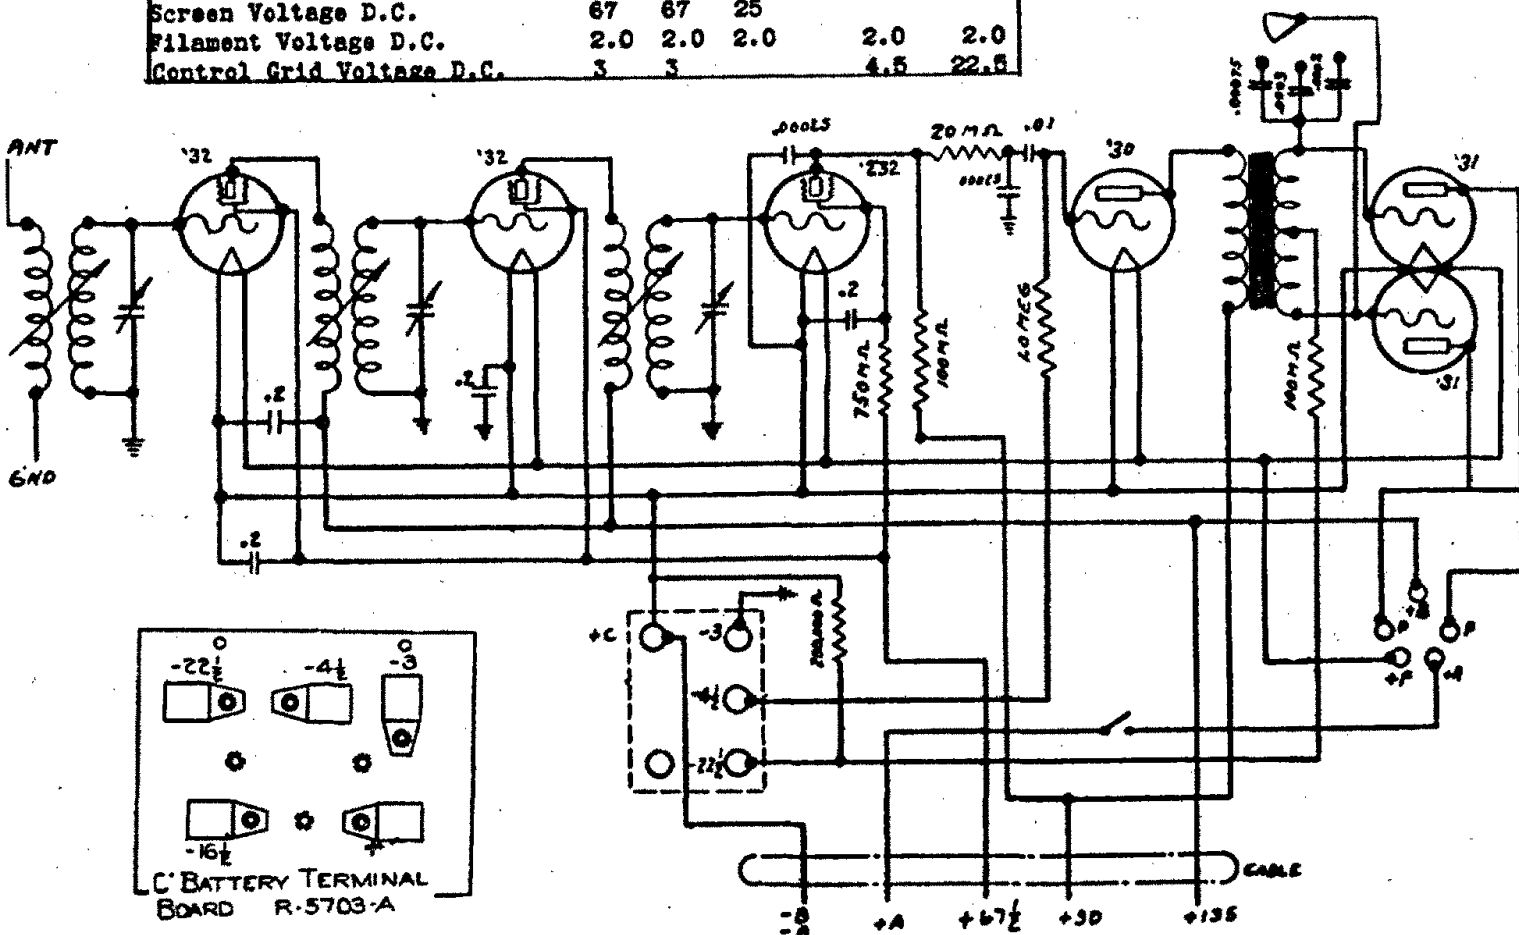



GREEN LEAD - PP GRID
BLUE LEAD - STAF PLATE
BLACK LEAD - 100M RESISTOR
RED LEAD - +B90
ORANGE LEAD - PR GRID

A.F. INPUT TRANSFORMER
R-5916-A Mod 40
R-5937-A Mod 43

TO STATOR TERMINAL ON
VARIABLE CONDENSER


SECONDARY COIL
DET SEC COIL - D-2084-SA (YELLOW SPOT)
RF SEC COIL - D-2047-SA (PLAIN)

RF SEC COIL D-2047-SA
TO GND.
DET SEC COIL D-2084-SA
TO GND.

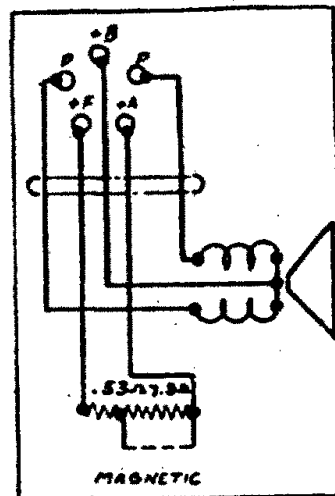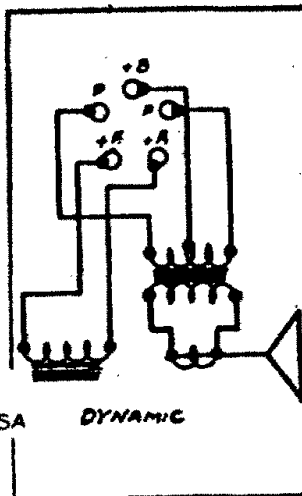

1290,1300

1292,1302



ANT PRIM COIL D-2059-SA
TO ANT
R.F. PRIM COIL D-2078-SA
TO 251 PLATE

PRIMARY COIL
ANT PPIM COIL - D-2059-SA (YELLOW SPOT)
R.F. PPIM COIL - D-2078-SA (PLAIN)

ANT PRIM COIL D-2059-SA
TO GND
R.F. PRIM COIL D-2078-SA
TO +B TERM.

