


Silvertone

Sears, Roebuck & Co.
Set Catalog No. 4,
Chassis 478.233



| Position of Tuner | SIGNAL GENERATOR | | | | Trimmer Adjustments (In order shown) |
|--------------------------------------|------------------|-----------------|------------------------|-------------------|---|
| | Frequency | Coupling Factor | Connection to Receiver | Ground Connection | |
| Rotor Full Open (Plates out of mesh) | 455 kc. | .1 mfd | Grid of 12BE6 (Pin 7) | Chassis | Input and Output Trimmers on I.F. Can T3 and T4 |
| Rotor Full Open (Plates out of mesh) | 1620 kc. | .1 mfd | Grid of 12BE6 (Pin 7) | Chassis | Oscillator Trimmer T2 |
| 1400 kc. | 1400 kc. | 75 mmf | Antenna Hank | Chassis | Antenna Trimmer T1 |
| 600 kc. | 600 | 75 mmf | Antenna Hank | Chassis | (Check Point)* |

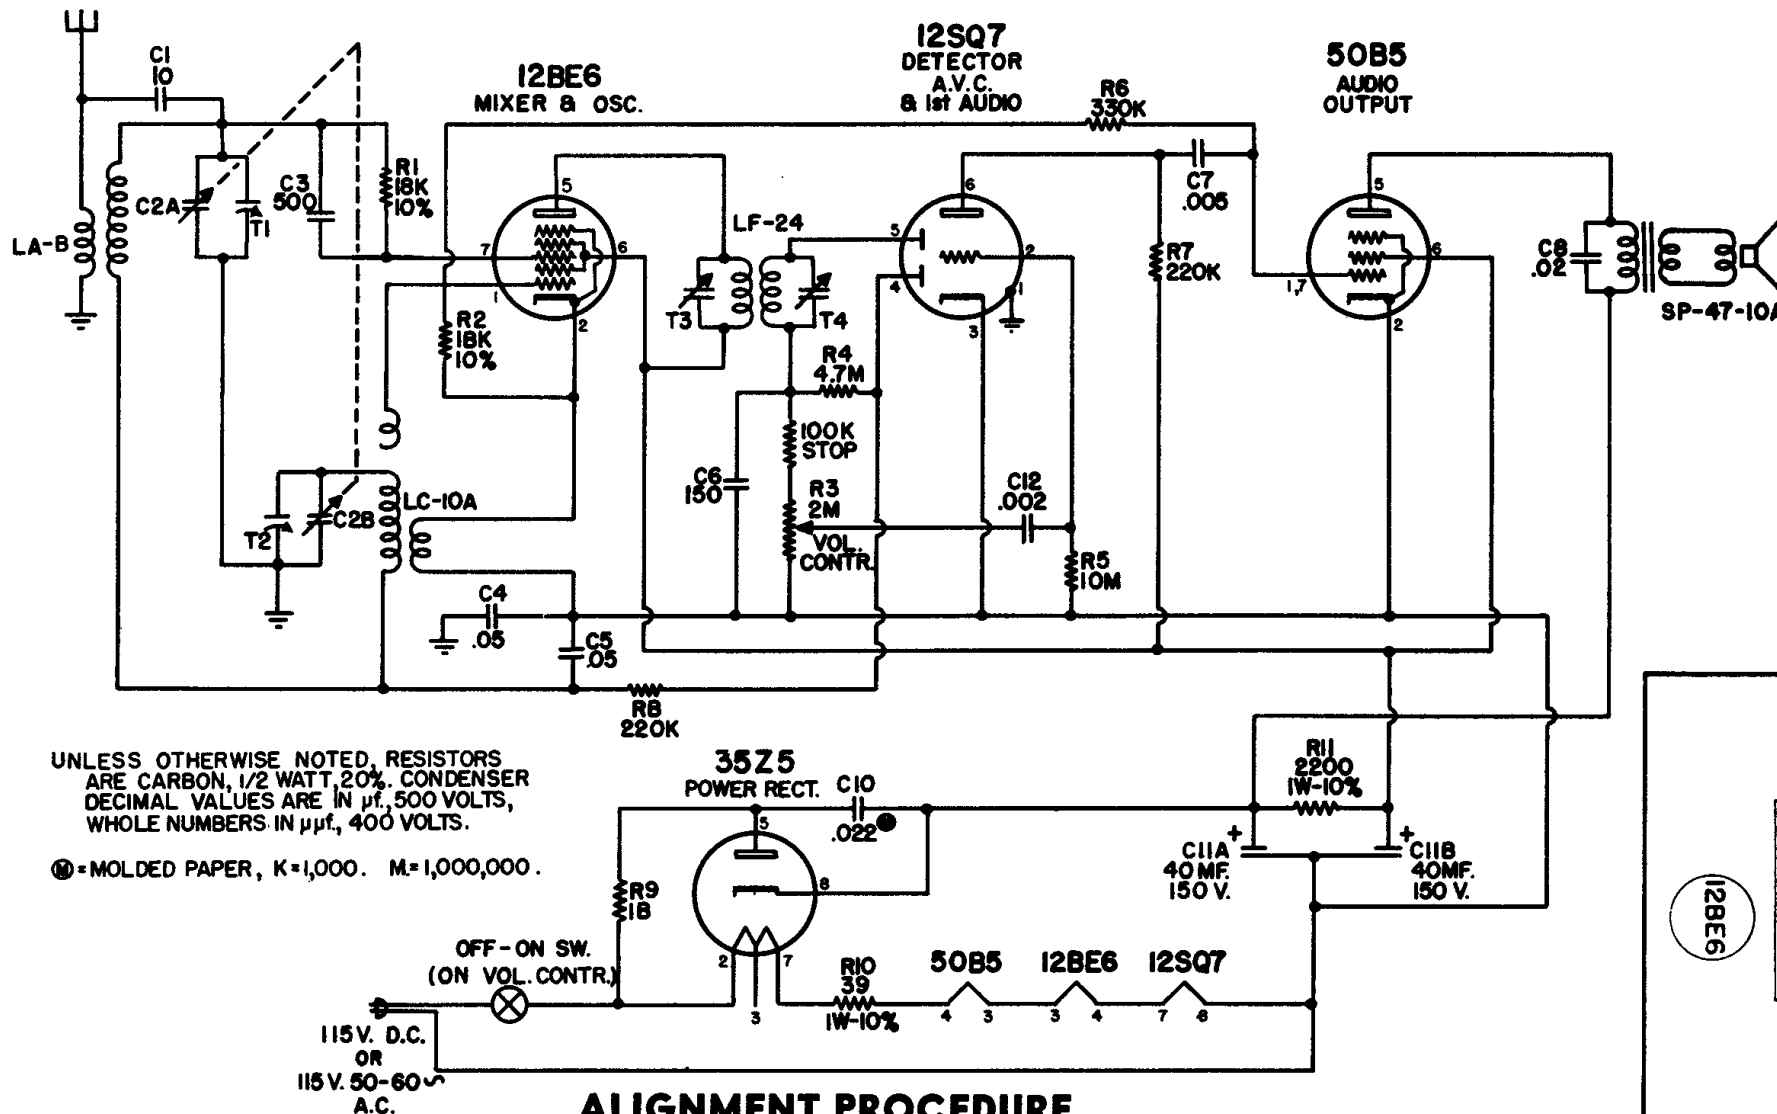