


INTERMEDIATE FREQUENCY 456 KC. BOTTOM VIEWS OF ALL SOCKET CONNECTIONS

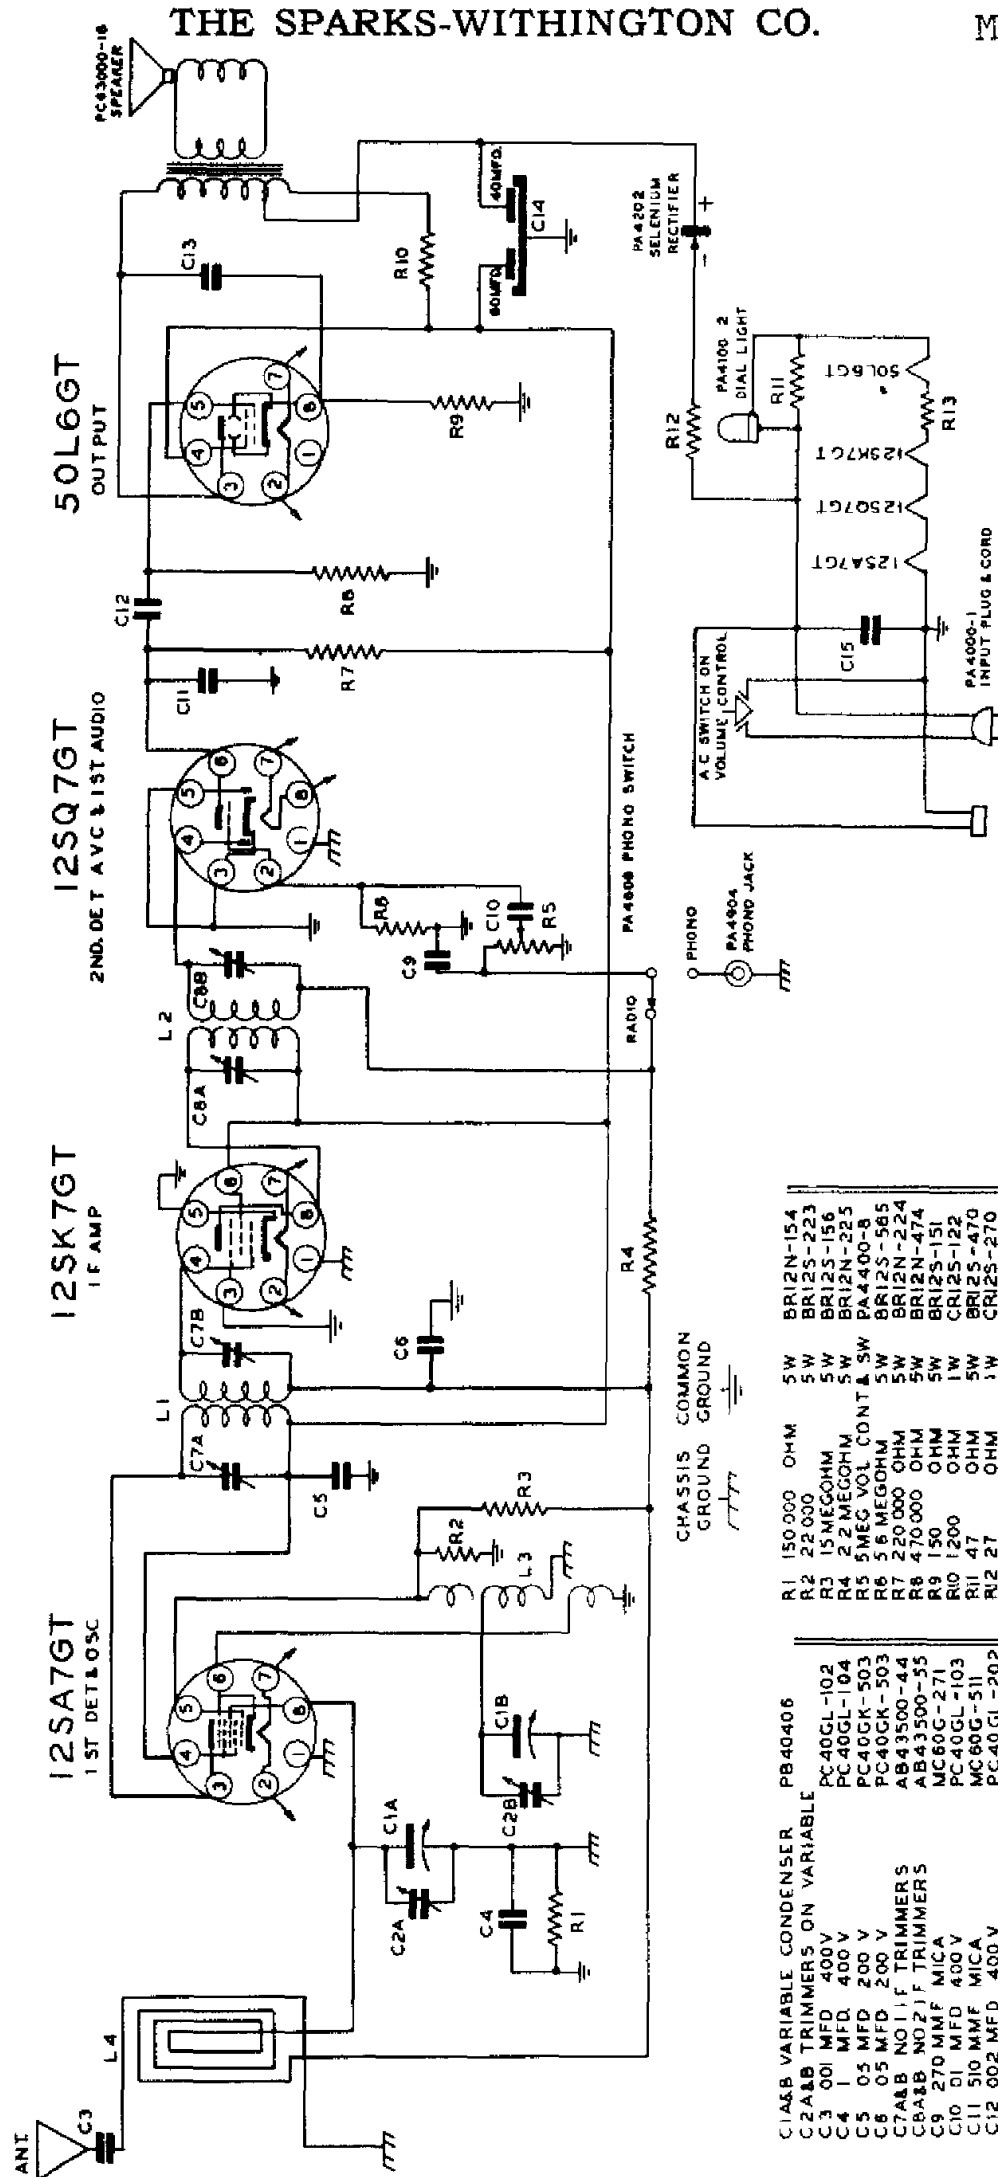

C1A & B VARIABLE CONDENSER PB40406
C2A & B TRIMMERS ON VARIABLE PC40GL-102
C3 0.01 MFD 400V PC40GL-104
C4 1 MFD 400V PC40GL-104
C5 0.5 MFD 200V PC40GL-104
C6 0.5 MFD 200V PC40GL-104
C7A & B NO. 1, F. TRIMMERS AB43500-44
C8A & B NO. 2, F. TRIMMERS AB43500-55
C9 270 MMF MICA MC60G-271
C10 0.1 MFD 400V PC40GL-103
C11 510 MMF MICA MC60G-511
C12 0.02 MFD 400V PC40GL-202
C13 0.1 MFD 400V PC40GL-103
C14 ELECTROLYTIC PA4306
C15 0.5 MFD 400V PC40GL-503

R1 150,000 OHM 5W BR12N-154
R2 22,000 OHM 5W BR12S-223
R3 15 MEG OHM 5W BR12S-156
R4 2.2 MEG OHM 5W BR12N-225
R5 5 MEG VOL. CONT. 5W PA4400-8
R6 5.6 MEG OHM 5W BR12S-585
R7 220,000 OHM 5W BR12N-224
R8 470,000 OHM 5W BR12N-474
R9 150 OHM 5W BR12S-151
R10 1200 OHM 1W CR12S-122
R11 47 OHM 5W BR12S-470
R12 27 OHM 1W CR12S-270
R13 185 OHM 5W PA4200-6

L1 NO. 1 F. COIL ASSEM. AA6800-1
L2 NO. 2 F. COIL ASSEM. AA6800-2
L3 BC OSC COIL ASSEM. AA6797-1
L4 LOOP ASSEM. AB43508-1