

- C1A&B VARIABLE CONDENSER
C2 .05 MFD. 200 V.
C3 .05 MFD. 400 V.
C4 ANT. TRIMMER
C5 .01 MFD. 200 V.
C6 I.F. REJECTOR TRIMMER
C7 OSC. PADDER
C8 OSC. TRIMMER
C9 51 MMF. MICA
C10 100 MMF. MICA
C11A&B NO. 1 I.F. TRIMMER
C12 150 MMF. MICA
C13A&B NO. 2 I.F. TRIMMER
C14 510 MMF. MICA
C15 .01 MFD. 200 V.
C16 .01 MFD. 200 V.
C17 .001 MFD. 400 V.
C18 .1 MFD. 200 V.
C19 .05 MFD. 400 V.
C20 .03 MFD. 400 V.
C21 40-30 MFD. ELECT. COND.

- PB 40410
PC 40GK-503
PC 40HL-503
PA 4352-1
PC 40HK-103
PA 4352-4
PA 4359
MC 60F-510
MC 60F-101
AB 43500-44
MC 60F-151
AB 43500-45
MC 60G-511
PC 40HK-103
PC 40HK-103
PC 40GL-102
PC 40HK-104
PC 40HL-503
PC 40GL-303
PA 4304-1



- R1 470 OHMS .5 W
R2 10 MEG. .5 W
R3 68000 OHMS .5 W
R4 22000 OHMS .5 W
R5 500000 OHMS .5 W
R6 5100 OHMS .5 W
R7 1 MEG. .5 W
R8 56000 OHMS .5 W
R9 VOL. CONT.
R10 10 MEG. .5 W
R11 270000 OHMS .5 W
R12 82 OHMS .5 W
R13 TONE CONT. & SW
R14 1200 OHMS 1 W
R15 180 OHMS .5 W

- BR 12G-471
BR 12S-106
BR 12S-683
BR 12S-223
BR 12S-504
BR 12G-512
BR 12S-105
BR 12G-563
PA 4402-3
BR 12S-106
BR 12S-274
BR 12S-820
PA 4400-2
CR 12S-122
BR 12S-181


- L1 LOOP ANT.
L2 ANT. CHOKE
L3 OSC. COIL ASSEM.
L4 I.F. REJECT COIL
L5 NO. 1 I.F. COIL
L6 NO. 2 I.F. COIL

- AC 67018-1
AA 6888-1
AA 6797-2
AA 6787-1
AA 6800-1
AA 6800-4

INPUT PLUG & CORD
PA 4000-1

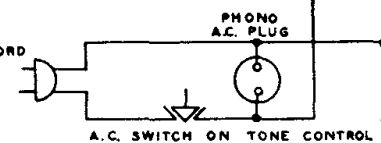

RECT.
35Z 5GT



SPARKS-WITHINGTON COMPANY

SPARTON SUPERHETERODYNE MODEL 6L8
INTERMEDIATE FREQUENCY 456 KC.
BOTTOM VIEW OF ALL SOCKET CONNECTIONS

MODEL - 1030 & 1030A

