


# SPARTON MODEL 5A3 & 5A3C

Chassis types 5A3 and 5A3C are used in Models 311C, 312C, 315C, and 319C. Chassis 5A10 used in Models 230, 232, 239, use practically the identical circuit, but do not employ a clock.

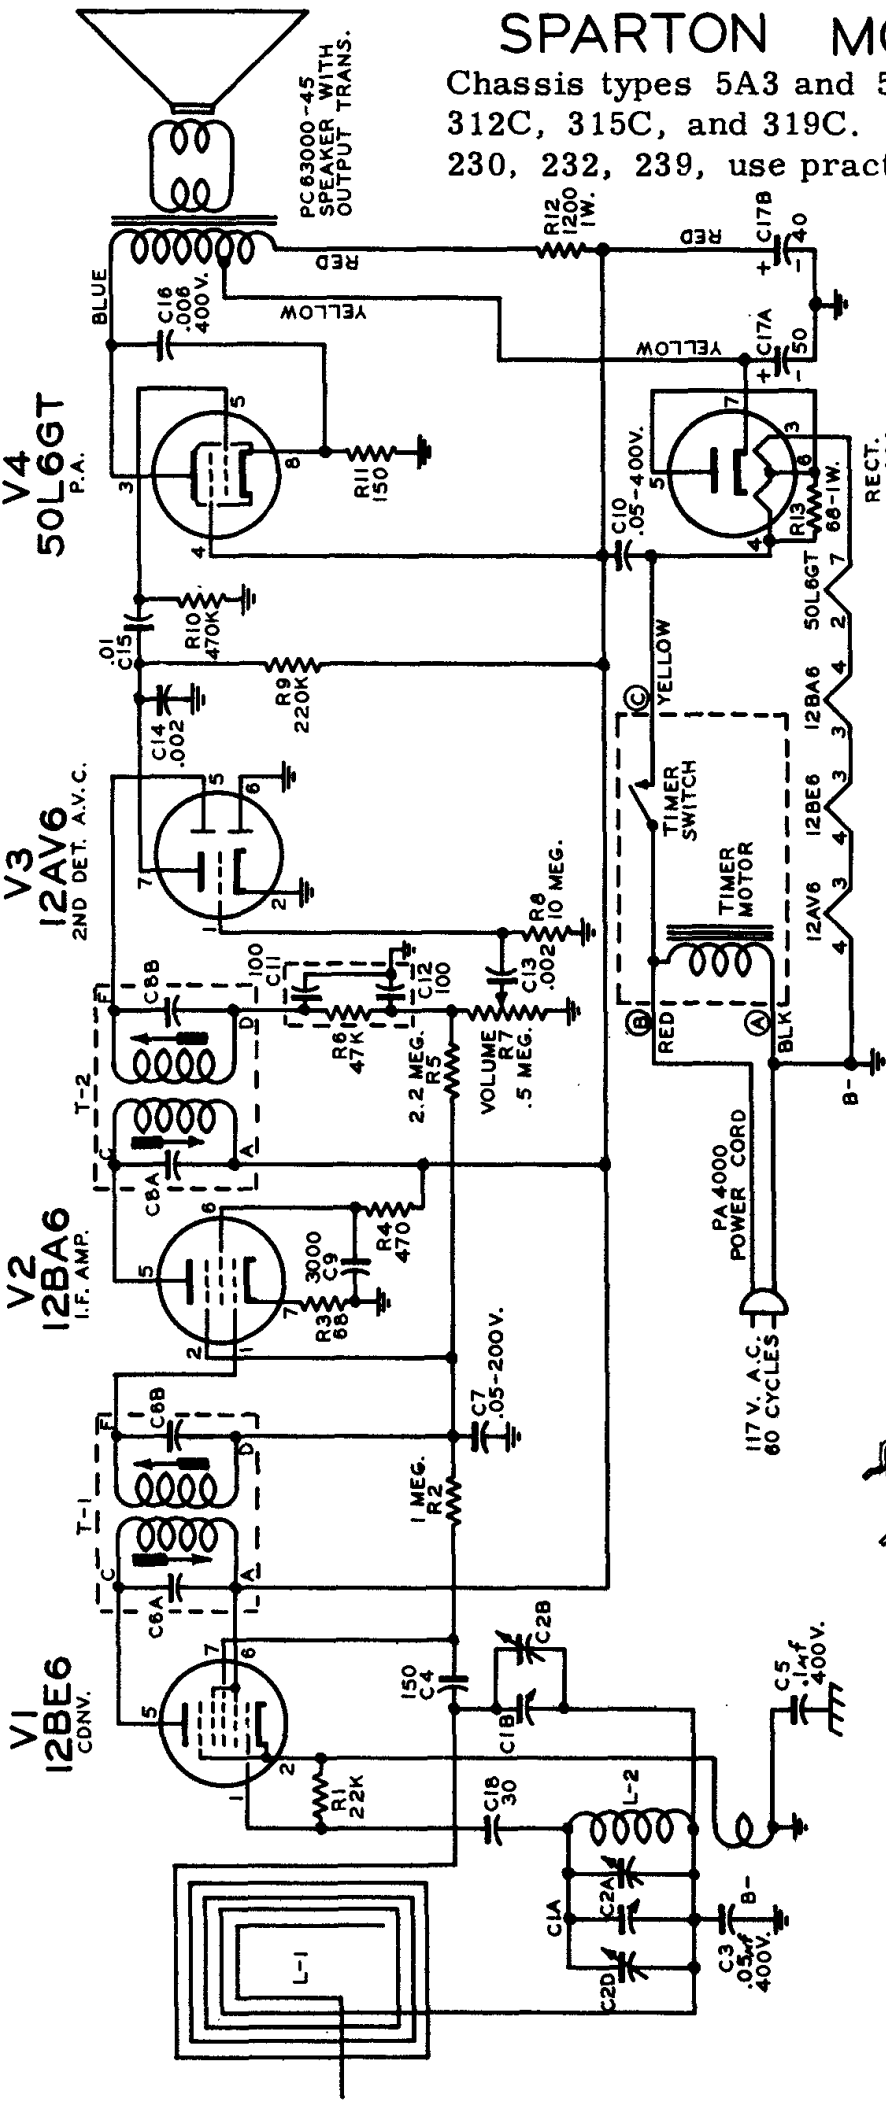


⊥ INDICATES CONNECTION TO B- BUSS, NOT CHASSIS.

\*\*\* INDICATES CHASSIS CONNECTION.

\* SPECIAL SERVICE NOTE: THESE TRANSFORMERS SUPPLIED IN COMPLETE ASSEMBLIES ONLY.

DESCRIPTION	PART NO.
C1A,B GANG CONDENSER	PB40414
C2A,B,D TRIMMERS ON GANG	
C3 .05 MFD. 400V. TUBULAR	PC40GL-503
C4 .150 MFD. CERAMIC	CC30G-151F
C5 .1 MFD. 400V. TUBULAR	PC40FL-104
C6A,B I.F. CAPACITORS	*
C7 .05 MFD. 200V. TUBULAR	PC40GK-503
C8A,B I.F. CAPACITORS	*
C9 .3000 MFD. CERAMIC	HK35F-302
C10 .05 MFD. 400V. TUBULAR	PC40HL-503
C11 .100 MFD. C & R UNIT	PA4329-1
C12 .100 MFD. C & R UNIT	HK35E-202
C13 2K MMF. CERAMIC	HK35E-203
C14 2K MMF. CERAMIC	PC40GK-103
C15 .01 MFD. 200V. TUBULAR	PC40HL-602
C16 .008 MFD. 400V. TUBULAR	PC40HL-503
C17A,B 40-50 MFD. ELECTROLYTIC	PA4310
C18 30 MFD. CERAMIC	CC30H-300K

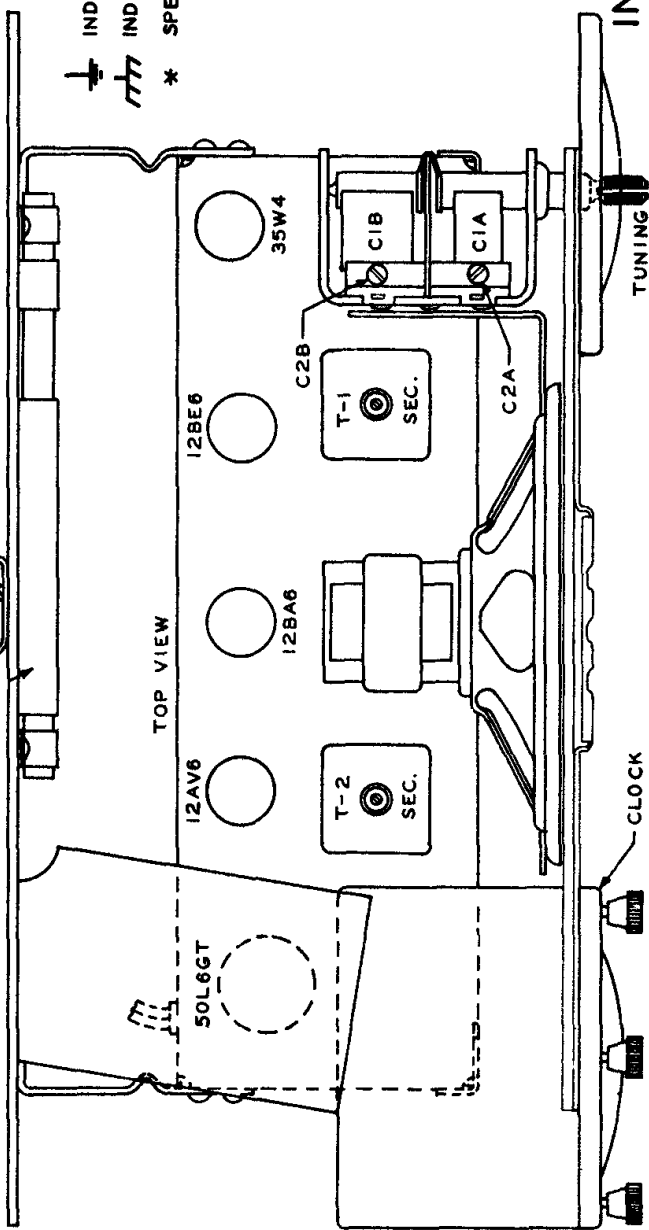

INTERMEDIATE FREQUENCY 456KC.